Vijay(Book36) 04/08/2023

```
In [1]: 1 import numpy as np
2 import pandas as pd
3 import matplotlib.pyplot as plt
4 import seaborn as sns
5 from sklearn.linear_model import LogisticRegression
6 from sklearn.preprocessing import StandardScaler
7 import re
8 from sklearn.datasets import load_digits
9 from sklearn.model_selection import train_test_split
In [2]: 1 a=pd.read_csv(r"C:\Users\user\Downloads\Book36.csv")
2 a
```

Out[2]:

	index	SUBDIVISION	YEAR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	С
0	1242	UTTARAKHAND	1901	134.5	81.4	44.5	5.9	60.8	33.6	381.1	612.3	167.1	1
1	1243	UTTARAKHAND	1902	0.0	17.0	52.2	63.7	52.1	113.1	444.1	327.5	220.4	3
2	1244	UTTARAKHAND	1903	68.0	7.9	87.6	10.3	37.5	83.0	251.6	442.7	249.3	5
3	1245	UTTARAKHAND	1904	40.0	5.2	78.3	13.6	61.1	180.1	449.6	417.2	174.1	
4	1246	UTTARAKHAND	1905	115.4	80.7	99.8	26.1	70.3	111.5	299.9	349.5	129.5	
110	1352	UTTARAKHAND	2011	30.9	65.2	18.0	30.9	84.2	223.1	433.3	523.7	148.4	
111	1353	UTTARAKHAND	2012	38.8	11.9	28.1	39.2	9.1	46.0	387.1	419.5	220.6	
112	1354	UTTARAKHAND	2013	73.0	188.3	22.0	24.7	18.2	488.9	413.4	359.4	111.3	2
113	1355	UTTARAKHAND	2014	45.9	99.9	68.4	37.6	52.9	62.9	462.7	264.2	107.9	4
114	1356	UTTARAKHAND	2015	54.5	62.6	127.3	57.3	38.0	186.6	337.0	305.3	52.6	1

115 rows × 20 columns

```
In [3]: 1 a.info()
```

<class 'pandas.core.frame.DataFrame'>
RangeIndex: 115 entries, 0 to 114
Data columns (total 20 columns):

#	Column	Non-Null Count	Dtype					
0	index	115 non-null	int64					
1	SUBDIVISION	115 non-null	object					
2	YEAR	115 non-null	int64					
3	JAN	115 non-null	float64					
4	FEB	115 non-null	float64					
5	MAR	115 non-null	float64					
6	APR	115 non-null	float64					
7	MAY	115 non-null	float64					
8	JUN	115 non-null	float64					
9	JUL	115 non-null	float64					
10	AUG	115 non-null	float64					
11	SEP	115 non-null	float64					
12	OCT	115 non-null	float64					
13	NOV	115 non-null	float64					
14	DEC	115 non-null	float64					
15	ANNUAL	115 non-null	float64					
16	Jan-Feb	115 non-null	float64					
17	Mar-May	115 non-null	float64					
18	Jun-Sep	115 non-null	float64					
19	Oct-Dec	115 non-null	float64					
dtyp	es: float64(1	7), int64(2), d	bject(1)					
memory usage: 18 1+ KR								

memory usage: 18.1+ KB

In [4]: 1 b=a.fillna(method='ffill')
2 b


Out[4]:

	index	SUBDIVISION	YEAR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	c
0	1242	UTTARAKHAND	1901	134.5	81.4	44.5	5.9	60.8	33.6	381.1	612.3	167.1	1
1	1243	UTTARAKHAND	1902	0.0	17.0	52.2	63.7	52.1	113.1	444.1	327.5	220.4	3
2	1244	UTTARAKHAND	1903	68.0	7.9	87.6	10.3	37.5	83.0	251.6	442.7	249.3	Ę
3	1245	UTTARAKHAND	1904	40.0	5.2	78.3	13.6	61.1	180.1	449.6	417.2	174.1	
4	1246	UTTARAKHAND	1905	115.4	80.7	99.8	26.1	70.3	111.5	299.9	349.5	129.5	
110	1352	UTTARAKHAND	2011	30.9	65.2	18.0	30.9	84.2	223.1	433.3	523.7	148.4	
111	1353	UTTARAKHAND	2012	38.8	11.9	28.1	39.2	9.1	46.0	387.1	419.5	220.6	
112	1354	UTTARAKHAND	2013	73.0	188.3	22.0	24.7	18.2	488.9	413.4	359.4	111.3	2
113	1355	UTTARAKHAND	2014	45.9	99.9	68.4	37.6	52.9	62.9	462.7	264.2	107.9	4
114	1356	UTTARAKHAND	2015	54.5	62.6	127.3	57.3	38.0	186.6	337.0	305.3	52.6	1

115 rows × 20 columns


```
In [5]: 1 b.plot.bar(legend=None)
```

Out[5]: <AxesSubplot:>

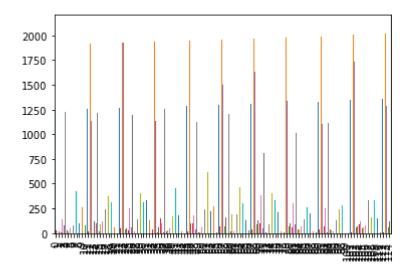


In [6]: 1 b.plot.line(legend=None)

Out[6]: <AxesSubplot:>

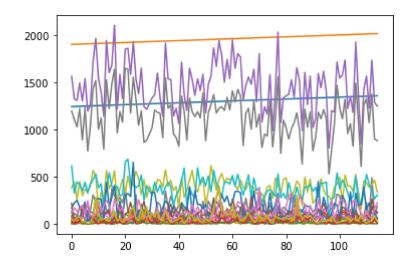


In [7]: 1 b.plot.area(legend=None)

Out[7]: <AxesSubplot:>

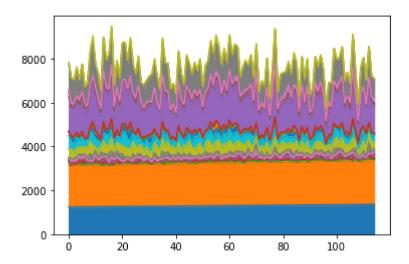


In [8]: 1 b.plot.hist(legend=None)

Out[8]: <AxesSubplot:ylabel='Frequency'>

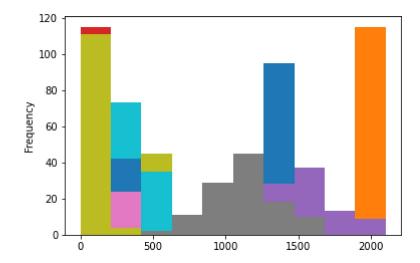

In [10]: 1 b.plot.pie(y='ANNUAL',figsize=(8,8),labels=None,legend=None)

Out[10]: <AxesSubplot:ylabel='ANNUAL'>

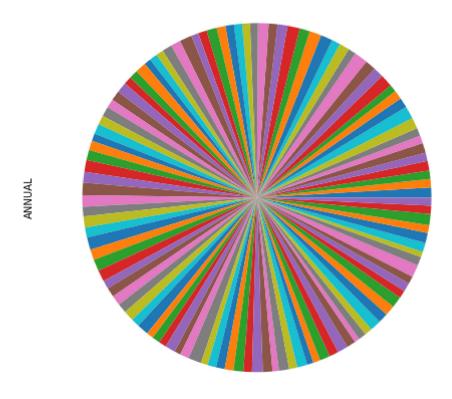

In []: 1