Vijay(Book31) 04/08/2023

In [1]:

- 1 import numpy as np
- 2 import pandas as pd
- 3 import matplotlib.pyplot as plt
- 4 **import** seaborn **as** sns
- 5 **from** sklearn.linear_model **import** LogisticRegression
- 6 **from** sklearn.preprocessing **import** StandardScaler
- 7 **import** re
- 8 from sklearn.datasets import load_digits
- 9 from sklearn.model_selection import train_test_split

Out[2]:

	index	SUBDIVISION	YEAR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	ос
0	552	GANGETIC WEST BENGAL	1901	37.1	58.4	3.9	64.1	121.7	198.0	280.8	275.7	313.5	51.
1	553	GANGETIC WEST BENGAL	1902	0.0	1.2	44.2	103.8	161.6	140.9	347.8	264.8	230.5	32.
2	554	GANGETIC WEST BENGAL	1903	17.5	24.6	37.3	30.6	78.5	201.7	179.6	277.6	300.7	198.
3	555	GANGETIC WEST BENGAL	1904	0.1	23.9	35.6	17.5	160.2	286.7	435.3	241.7	142.8	35.
4	556	GANGETIC WEST BENGAL	1905	30.9	49.6	84.7	84.9	156.8	70.9	525.5	263.6	287.6	107.
110	662	GANGETIC WEST BENGAL	2011	2.5	2.7	40.5	75.0	132.6	434.5	219.9	443.2	295.9	36.
111	663	GANGETIC WEST BENGAL	2012	40.7	15.3	4.4	57.7	44.2	146.6	315.0	261.4	246.9	64.
112	664	GANGETIC WEST BENGAL	2013	2.5	10.0	4.8	45.6	195.9	233.4	263.2	401.4	254.0	353.
113	665	GANGETIC WEST BENGAL	2014	0.9	42.2	19.9	1.9	124.4	193.6	298.7	292.6	229.5	56.
114	666	GANGETIC WEST BENGAL	2015	12.9	5.5	19.3	88.7	57.6	247.2	633.1	260.6	164.0	32.

115 rows × 20 columns

```
In [3]:
         1 a.info()
```

<class 'pandas.core.frame.DataFrame'> RangeIndex: 115 entries, 0 to 114 Data columns (total 20 columns):

Ducu	COTAMILE (COC	ar 20 coramiis).	
#	Column	Non-Null Count	Dtype
0	index	115 non-null	int64
1	SUBDIVISION	115 non-null	object
2	YEAR	115 non-null	int64
3	JAN	115 non-null	float64
4	FEB	115 non-null	float64
5	MAR	115 non-null	float64
6	APR	115 non-null	float64
7	MAY	115 non-null	float64
8	JUN	115 non-null	float64
9	JUL	115 non-null	float64
10	AUG	115 non-null	float64
11	SEP	115 non-null	float64
12	OCT	115 non-null	float64
13	NOV	115 non-null	float64
14	DEC	115 non-null	float64
1 5	ANNUAL	115 non-null	float64
16	Jan-Feb	115 non-null	float64
17	Mar-May	115 non-null	float64
18	Jun-Sep	115 non-null	float64
19	Oct-Dec	115 non-null	float64
dtype	es: float64(1	7), int64(2), ob	ject(1)

dtypes: float64(17), int64(2), object(1)

memory usage: 18.1+ KB

In [4]: 1 b=a.fillna(method='ffill')
2 b


Out[4]:

	index	SUBDIVISION	YEAR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	ос
0	552	GANGETIC WEST BENGAL	1901	37.1	58.4	3.9	64.1	121.7	198.0	280.8	275.7	313.5	51.
1	553	GANGETIC WEST BENGAL	1902	0.0	1.2	44.2	103.8	161.6	140.9	347.8	264.8	230.5	32.
2	554	GANGETIC WEST BENGAL	1903	17.5	24.6	37.3	30.6	78.5	201.7	179.6	277.6	300.7	198.
3	555	GANGETIC WEST BENGAL	1904	0.1	23.9	35.6	17.5	160.2	286.7	435.3	241.7	142.8	35.
4	556	GANGETIC WEST BENGAL	1905	30.9	49.6	84.7	84.9	156.8	70.9	525.5	263.6	287.6	107.
110	662	GANGETIC WEST BENGAL	2011	2.5	2.7	40.5	75.0	132.6	434.5	219.9	443.2	295.9	36.
111	663	GANGETIC WEST BENGAL	2012	40.7	15.3	4.4	57.7	44.2	146.6	315.0	261.4	246.9	64.
112	664	GANGETIC WEST BENGAL	2013	2.5	10.0	4.8	45.6	195.9	233.4	263.2	401.4	254.0	353.
113	665	GANGETIC WEST BENGAL	2014	0.9	42.2	19.9	1.9	124.4	193.6	298.7	292.6	229.5	56.
114	666	GANGETIC WEST BENGAL	2015	12.9	5.5	19.3	88.7	57.6	247.2	633.1	260.6	164.0	32.

115 rows × 20 columns


In [5]: 1 b.plot.bar(legend=None)

Out[5]: <AxesSubplot:>

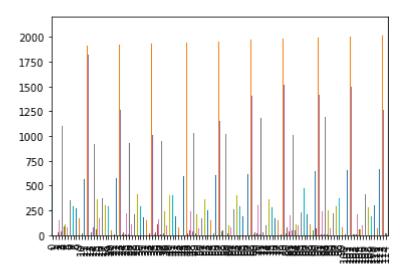


In [6]: 1 b.plot.line(legend=None)

Out[6]: <AxesSubplot:>

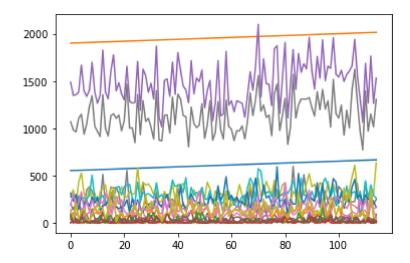


In [7]: 1 b.plot.area(legend=None)

Out[7]: <AxesSubplot:>

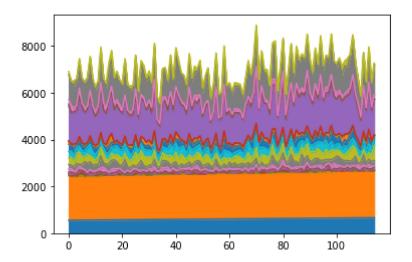

In [8]: 1 b.plot.hist(legend=None)

Out[8]: <AxesSubplot:ylabel='Frequency'>

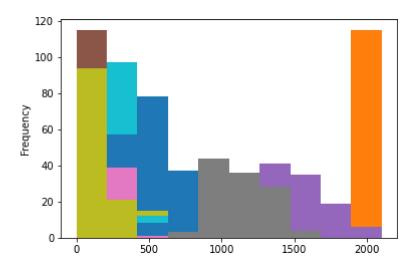

In [10]: 1 b.plot.pie(y='APR',figsize=(8,8),labels=None,legend=None)

Out[10]: <AxesSubplot:ylabel='APR'>



In []: 1