Vijay(Book32) 04/08/2023

```
In [1]:   1  import numpy as np
          2  import pandas as pd
          3  import matplotlib.pyplot as plt
          4  import seaborn as sns
          5  from sklearn.linear_model import LogisticRegression
          6  from sklearn.preprocessing import StandardScaler
          7  import re
          8  from sklearn.datasets import load_digits
          9  from sklearn.model_selection import train_test_split
```

```
In [2]:   1  a=pd.read_csv(r"C:\Users\user\Downloads\Book32.csv")
          2  a
```

Out[2]:

	index	SUBDIVISION	YEAR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OC
0	667	ORISSA	1901	39.5	65.1	16.1	51.6	79.0	78.2	288.4	307.7	185.3	76.
1	668	ORISSA	1902	3.4	0.2	14.2	101.1	56.7	108.3	437.4	349.1	202.7	33.
2	669	ORISSA	1903	19.7	18.9	10.5	34.6	73.3	154.3	410.4	295.2	265.6	228.
3	670	ORISSA	1904	0.2	12.2	20.6	10.1	100.2	342.9	336.7	350.4	227.8	111.
4	671	ORISSA	1905	24.3	17.2	66.3	56.9	107.5	92.0	330.1	281.4	344.1	36.
...	...	...	...	...	...	...	...	...	...	...	...	...	.
110	777	ORISSA	2011	3.7	16.2	4.9	58.2	75.6	210.1	199.6	358.6	398.7	20.
111	778	ORISSA	2012	50.8	3.6	0.9	34.8	21.3	169.6	324.3	417.0	242.4	66.
112	779	ORISSA	2013	3.3	7.8	2.1	53.6	57.7	272.6	380.0	254.9	208.1	391.
113	780	ORISSA	2014	0.0	17.6	25.1	11.7	111.9	92.2	496.2	386.3	281.1	111.
114	781	ORISSA	2015	15.1	3.3	10.5	67.6	32.6	238.6	294.8	264.0	237.0	24.

115 rows × 20 columns

```
In [3]:   1  a.info()
```

```
<class 'pandas.core.frame.DataFrame'>
RangeIndex: 115 entries, 0 to 114
Data columns (total 20 columns):
 #   Column       Non-Null Count   Dtype
---  ------       --------------   -----
 0   index        115 non-null     int64
 1   SUBDIVISION  115 non-null     object
 2   YEAR         115 non-null     int64
 3   JAN          115 non-null     float64
 4   FEB          115 non-null     float64
 5   MAR          115 non-null     float64
 6   APR          115 non-null     float64
 7   MAY          115 non-null     float64
 8   JUN          115 non-null     float64
 9   JUL          115 non-null     float64
 10  AUG          115 non-null     float64
 11  SEP          115 non-null     float64
 12  OCT          115 non-null     float64
 13  NOV          115 non-null     float64
 14  DEC          115 non-null     float64
 15  ANNUAL       115 non-null     float64
 16  Jan-Feb      115 non-null     float64
 17  Mar-May      115 non-null     float64
 18  Jun-Sep      115 non-null     float64
 19  Oct-Dec      115 non-null     float64
dtypes: float64(17), int64(2), object(1)
memory usage: 18.1+ KB
```

```
In [4]:   1  b=a.fillna(method='ffill')
          2  b
```

Out[4]:

|	index	SUBDIVISION	YEAR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OC
0	667	ORISSA	1901	39.5	65.1	16.1	51.6	79.0	78.2	288.4	307.7	185.3	76.
1	668	ORISSA	1902	3.4	0.2	14.2	101.1	56.7	108.3	437.4	349.1	202.7	33.
2	669	ORISSA	1903	19.7	18.9	10.5	34.6	73.3	154.3	410.4	295.2	265.6	228.
3	670	ORISSA	1904	0.2	12.2	20.6	10.1	100.2	342.9	336.7	350.4	227.8	111.
4	671	ORISSA	1905	24.3	17.2	66.3	56.9	107.5	92.0	330.1	281.4	344.1	36.
...	...	...	...	...	...	...	...	...	...	...	...	...	.
110	777	ORISSA	2011	3.7	16.2	4.9	58.2	75.6	210.1	199.6	358.6	398.7	20.
111	778	ORISSA	2012	50.8	3.6	0.9	34.8	21.3	169.6	324.3	417.0	242.4	66.
112	779	ORISSA	2013	3.3	7.8	2.1	53.6	57.7	272.6	380.0	254.9	208.1	391.
113	780	ORISSA	2014	0.0	17.6	25.1	11.7	111.9	92.2	496.2	386.3	281.1	111.
114	781	ORISSA	2015	15.1	3.3	10.5	67.6	32.6	238.6	294.8	264.0	237.0	24.

115 rows × 20 columns
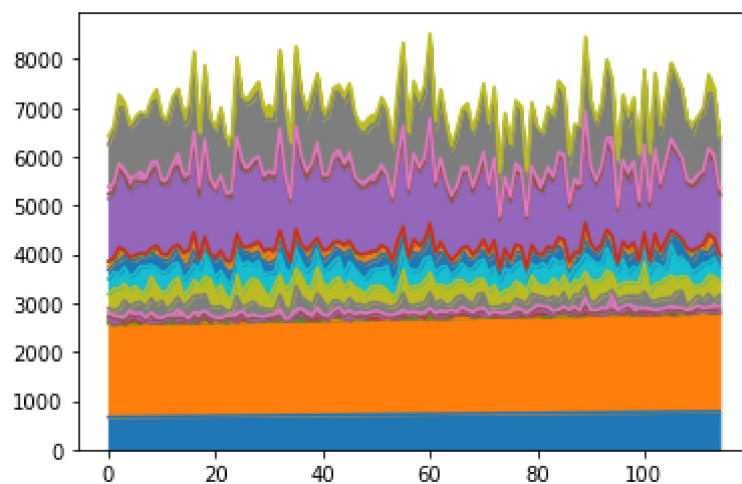
In [5]:
```
1  b.plot.bar(legend=None)
```

Out[5]: <AxesSubplot:>
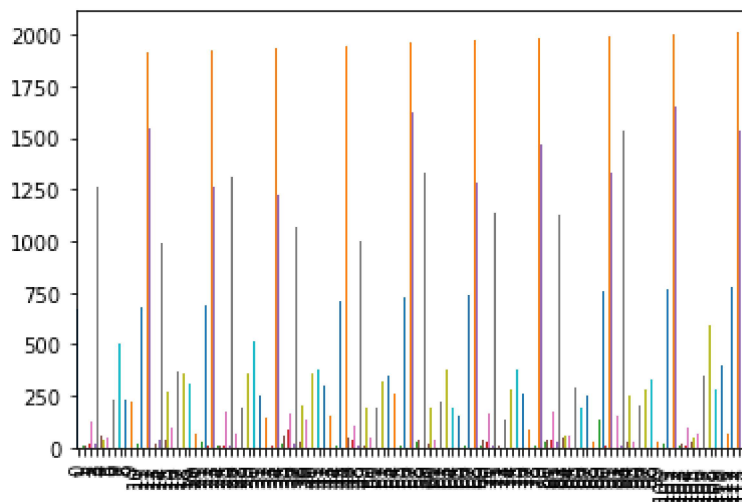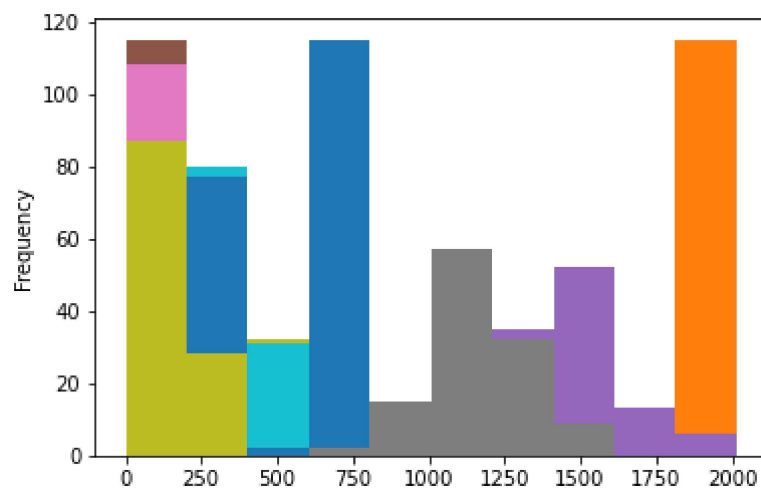

In [6]:
```
1  b.plot.line(legend=None)
```

Out[6]: <AxesSubplot:>
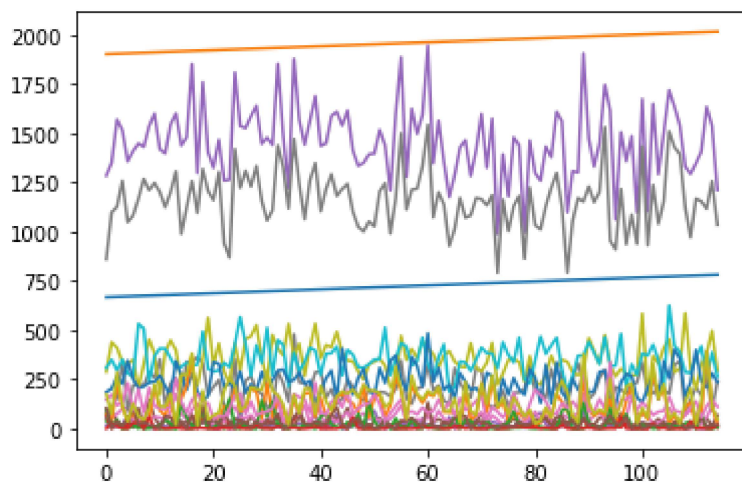
In [7]:   1 b.plot.area(legend=None)

Out[7]:   <AxesSubplot:>

In [8]:   1 b.plot.hist(legend=None)

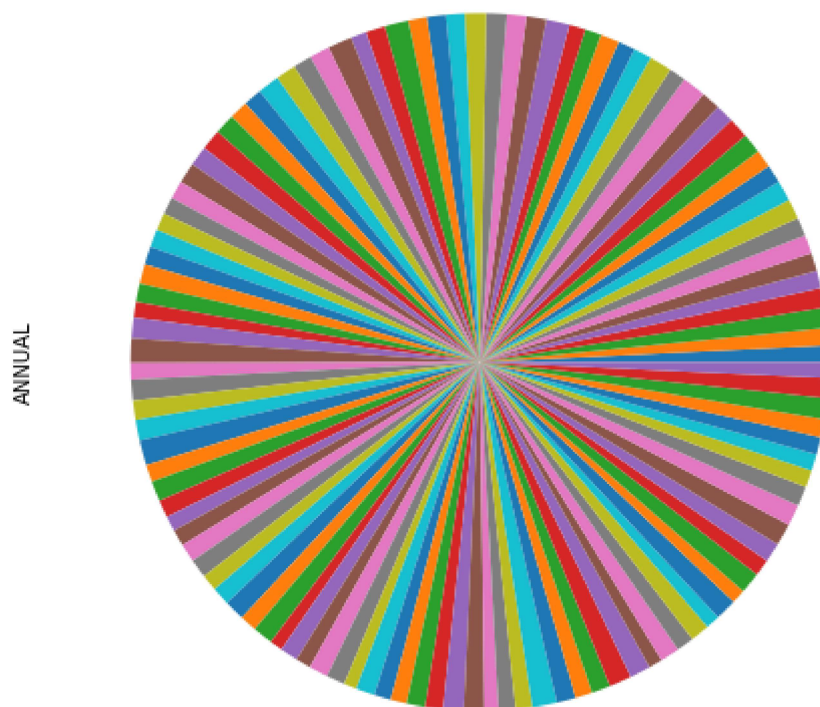Out[8]:   <AxesSubplot:ylabel='Frequency'>

In [10]: 1 b.plot.pie(y='ANNUAL',figsize=(8,8),labels=None,legend=None)

Out[10]: <AxesSubplot:ylabel='ANNUAL'>

In [ ]: 1