Vijay(Book3) 04/08/2023

In [1]:

import numpy as np
import pandas as pd
import matplotlib.pyplot as plt
import seaborn as sns
from sklearn.linear_model import LogisticRegression
from sklearn.preprocessing import StandardScaler
import re
from sklearn.datasets import load_digits

9 from sklearn.model_selection import train_test_split

1 a=pd.read_csv(r"C:\Users\user\Downloads\Book3.csv") In [2]: 2 a

Out[2]:

	index	SUBDIVISION	YEAR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	ост
0	3657	NORTH INTERIOR KARNATAKA	1901	3.5	18.8	7.1	67.2	65.5	120.5	151.9	115.1	128.8	80.0
1	3658	NORTH INTERIOR KARNATAKA	1902	0.0	0.0	0.3	22.5	34.4	111.3	83.2	78.1	146.7	118.8
2	3659	NORTH INTERIOR KARNATAKA	1903	3.5	0.0	0.1	6.9	53.4	102.8	209.4	146.4	189.3	166.4
3	3660	NORTH INTERIOR KARNATAKA	1904	0.2	0.3	8.5	11.0	46.3	120.6	91.6	48.5	165.1	86.5
4	3661	NORTH INTERIOR KARNATAKA	1905	0.0	6.0	2.6	16.0	51.2	99.6	60.1	139.2	42.2	85.0
110	3767	NORTH INTERIOR KARNATAKA	2011	0.5	7.2	7.2	41.2	46.8	101.3	150.8	152.0	69.0	73.4
111	3768	NORTH INTERIOR KARNATAKA	2012	28.5	6.2	0.4	35.4	19.5	60.0	114.5	105.5	79.2	85.2
112	3769	NORTH INTERIOR KARNATAKA	2013	1.2	6.1	3.0	25.4	47.4	99.4	160.7	73.9	201.0	101.0
113	3770	NORTH INTERIOR KARNATAKA	2014	0.0	6.1	29.2	26.4	93.0	50.4	136.8	205.2	90.2	80.3
114	3771	NORTH INTERIOR KARNATAKA	2015	2.4	0.0	27.5	50.8	45.3	89.6	38.5	78.4	150.8	61.2
115 r	OWE X	20 columns											
1131	115 rows × 20 columns												
4													

```
In [3]: 1 a.info()
```

<class 'pandas.core.frame.DataFrame'>
RangeIndex: 115 entries, 0 to 114
Data columns (total 20 columns):

#	Column	Non-Null Count	Dtype
0	index	115 non-null	int64
1	SUBDIVISION	115 non-null	object
2	YEAR	115 non-null	int64
3	JAN	115 non-null	float64
4	FEB	115 non-null	float64
5	MAR	115 non-null	float64
6	APR	115 non-null	float64
7	MAY	115 non-null	float64
8	JUN	115 non-null	float64
9	JUL	115 non-null	float64
10	AUG	115 non-null	float64
11	SEP	115 non-null	float64
12	OCT	115 non-null	float64
13	NOV	115 non-null	float64
14	DEC	115 non-null	float64
15	ANNUAL	115 non-null	float64
16	Jan-Feb	115 non-null	float64
17	Mar-May	115 non-null	float64
18	Jun-Sep	115 non-null	float64
19	Oct-Dec	115 non-null	float64
dtype	es: float64(1	7), int64(2), ob	ject(1)

memory usage: 18.1+ KB


In [4]: 1 b=a.fillna(method='ffill')
2 b

Out[4]:

	index	SUBDIVISION	YEAR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	ОСТ
0	3657	NORTH INTERIOR KARNATAKA	1901	3.5	18.8	7.1	67.2	65.5	120.5	151.9	115.1	128.8	80.0
1	3658	NORTH INTERIOR KARNATAKA	1902	0.0	0.0	0.3	22.5	34.4	111.3	83.2	78.1	146.7	118.8
2	3659	NORTH INTERIOR KARNATAKA	1903	3.5	0.0	0.1	6.9	53.4	102.8	209.4	146.4	189.3	166.4
3	3660	NORTH INTERIOR KARNATAKA	1904	0.2	0.3	8.5	11.0	46.3	120.6	91.6	48.5	165.1	86.5
4	3661	NORTH INTERIOR KARNATAKA	1905	0.0	6.0	2.6	16.0	51.2	99.6	60.1	139.2	42.2	85.0
110	3767	NORTH INTERIOR KARNATAKA	2011	0.5	7.2	7.2	41.2	46.8	101.3	150.8	152.0	69.0	73.4
111	3768	NORTH INTERIOR KARNATAKA	2012	28.5	6.2	0.4	35.4	19.5	60.0	114.5	105.5	79.2	85.2
112	3769	NORTH INTERIOR KARNATAKA	2013	1.2	6.1	3.0	25.4	47.4	99.4	160.7	73.9	201.0	101.0
113	3770	NORTH INTERIOR KARNATAKA	2014	0.0	6.1	29.2	26.4	93.0	50.4	136.8	205.2	90.2	80.3
114	3771	NORTH INTERIOR KARNATAKA	2015	2.4	0.0	27.5	50.8	45.3	89.6	38.5	78.4	150.8	61.2
115 rows × 20 columns													


In [5]: 1 b.plot.bar(legend=None)

Out[5]: <AxesSubplot:>

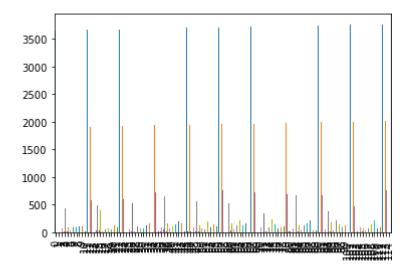


In [6]: 1 b.plot.line(legend=None)

Out[6]: <AxesSubplot:>

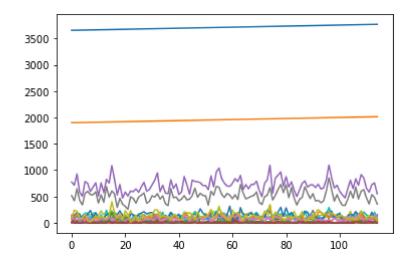


In [7]: 1 b.plot.area(legend=None)

Out[7]: <AxesSubplot:>

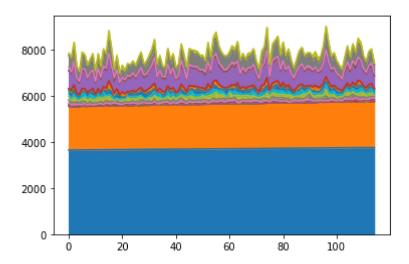

In [8]: 1 b.plot.hist(legend=None)

Out[8]: <AxesSubplot:ylabel='Frequency'>

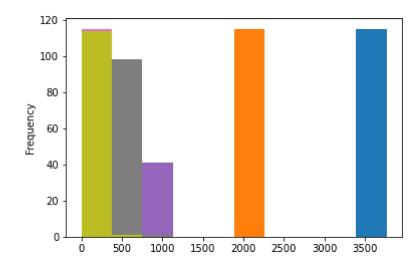

In [9]: 1 b.plot.pie(y='JAN',figsize=(8,8),labels=None,legend=None)

Out[9]: <AxesSubplot:ylabel='JAN'>

