




Exercise 1

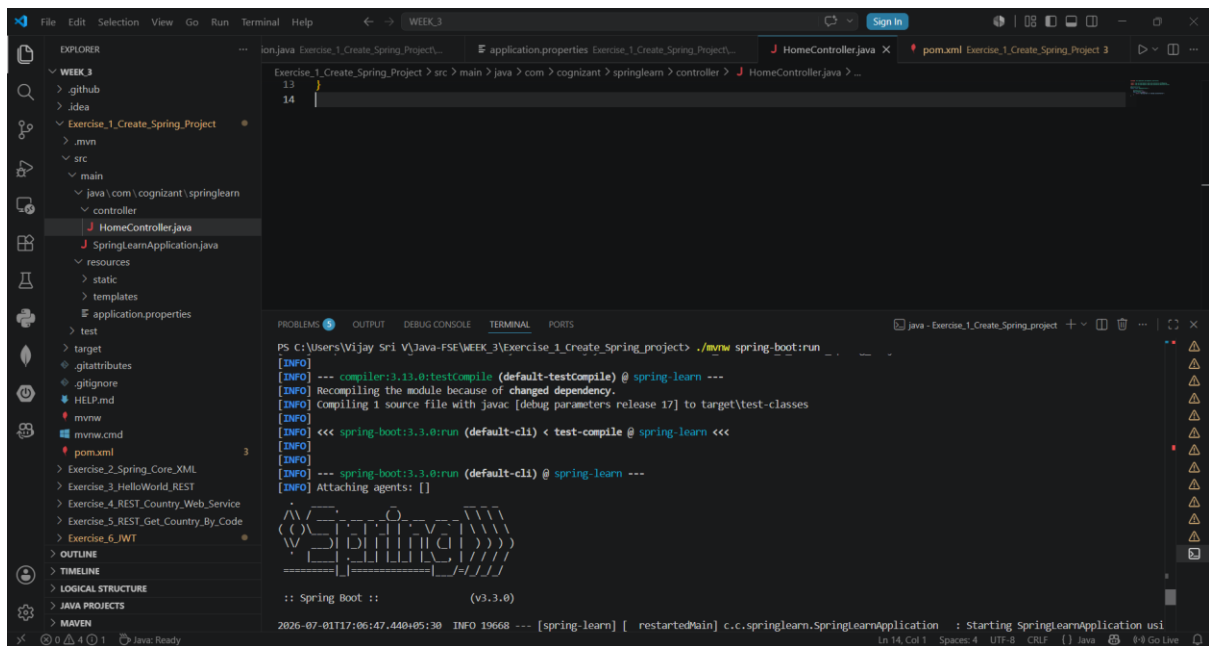

```
PS C:\Users\Vijay Sri V\Java-FSE\WEEK_3\Exercise_1_Create_Spring_project> ./mvnw spring-boot:run
[INFO] --- compiler:3.13.0:testCompile (default-testCompile) @ spring-learn ---
[INFO] Recompiling the module because of changed dependency.
[INFO] Compiling 1 source file with javac [debug parameters release 17] to target\test-classes
[INFO] --- spring-boot:3.3.0:run (default-cli) < test-compile @ spring-learn ---
[INFO] --- spring-boot:3.3.0:run (default-cli) @ spring-learn ---
[INFO] Attaching agents: []
:: Spring Boot ::
(v3.3.0)
2026-07-01T17:06:47.448+05:30 INFO 19668 --- [spring-learn] [ restartedMain] c.c.springlearn.SpringLearnApplication : Starting SpringLearnApplication usi
```


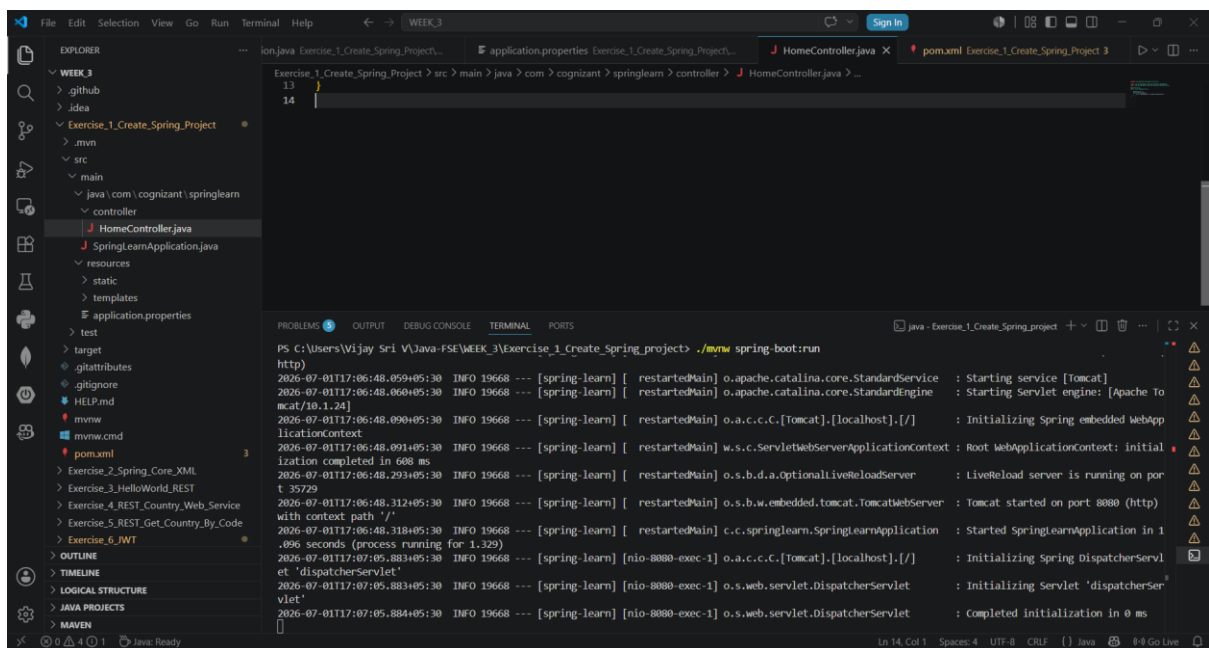


```
PS C:\Users\Vijay Sri V\Java-FSE\WEEK_3\Exercise_1_Create_Spring_project> ./mvnw spring-boot:run
http)
2026-07-01T17:06:48.059+05:30 INFO 19668 --- [spring-learn] [ restartedMain] o.apache.catalina.core.StandardService : Starting service [Tomcat]
2026-07-01T17:06:48.060+05:30 INFO 19668 --- [spring-learn] [ restartedMain] o.apache.catalina.core.StandardEngine : Starting Servlet engine: [Apache To
mat/10.1.24]
2026-07-01T17:06:48.090+05:30 INFO 19668 --- [spring-learn] [ restartedMain] o.a.c.c.C.[Tomcat].[localhost].[/] : Initializing Spring embedded WebApp
licationContext
2026-07-01T17:06:48.091+05:30 INFO 19668 --- [spring-learn] [ restartedMain] w.s.c.ServletWebServerApplicationContext : Root WebApplicationContext: initial
ization completed in 608 ms
2026-07-01T17:06:48.293+05:30 INFO 19668 --- [spring-learn] [ restartedMain] o.s.b.d.a.OptionalLiveReloadServer : LiveReload server is running on por
t 35729
2026-07-01T17:06:48.312+05:30 INFO 19668 --- [spring-learn] [ restartedMain] o.s.b.w.embedded.tomcat.TomcatWebServer : Tomcat started on port 8080 (http
with context path '/')
2026-07-01T17:06:48.318+05:30 INFO 19668 --- [spring-learn] [ restartedMain] c.c.springlearn.SpringLearnApplication : Started SpringLearnApplication in 1
.096 seconds (process running for 1.329)
2026-07-01T17:07:05.883+05:30 INFO 19668 --- [spring-learn] [nio-8080-exec-1] o.a.c.c.C.[Tomcat].[localhost].[/] : Initializing Spring DispatcherServl
et 'dispatcherServlet'
2026-07-01T17:07:05.883+05:30 INFO 19668 --- [spring-learn] [nio-8080-exec-1] o.s.web.servlet.DispatcherServlet : Initializing Servlet 'dispatcherSer
vlet'
2026-07-01T17:07:05.884+05:30 INFO 19668 --- [spring-learn] [nio-8080-exec-1] o.s.web.servlet.DispatcherServlet : Completed initialization in 0 ms
```

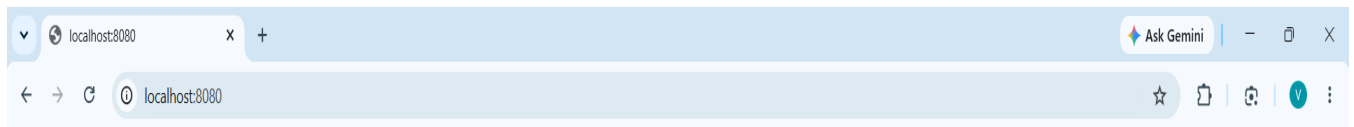

Spring Boot is running successfully!

Exercise 2

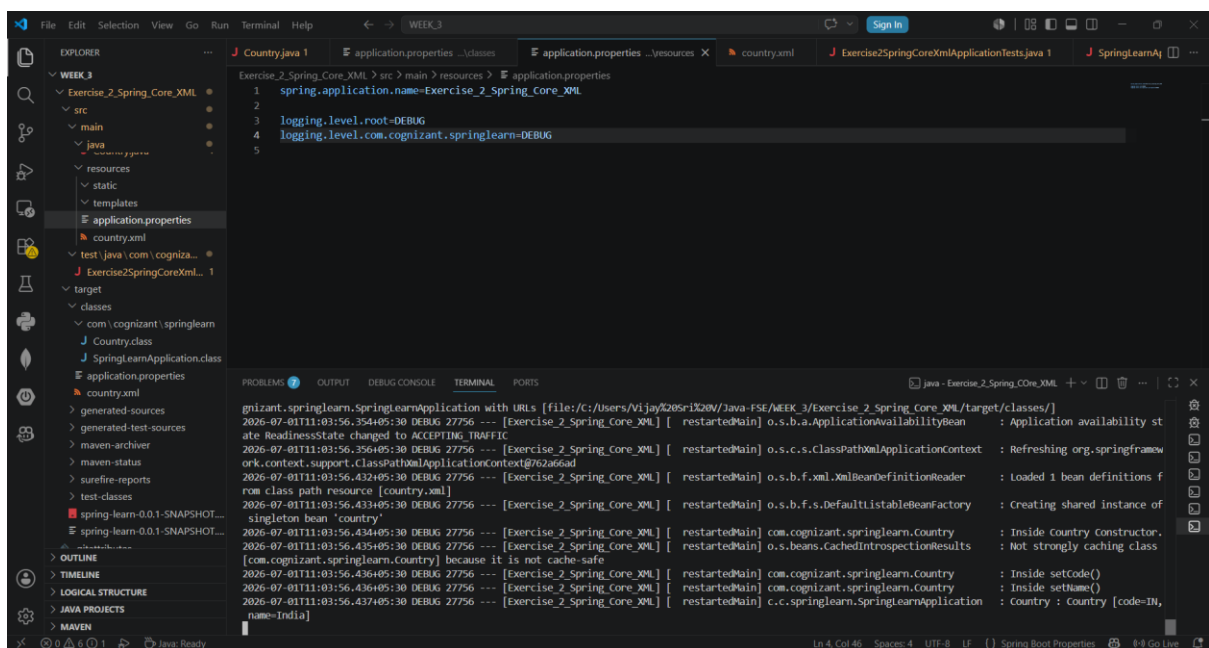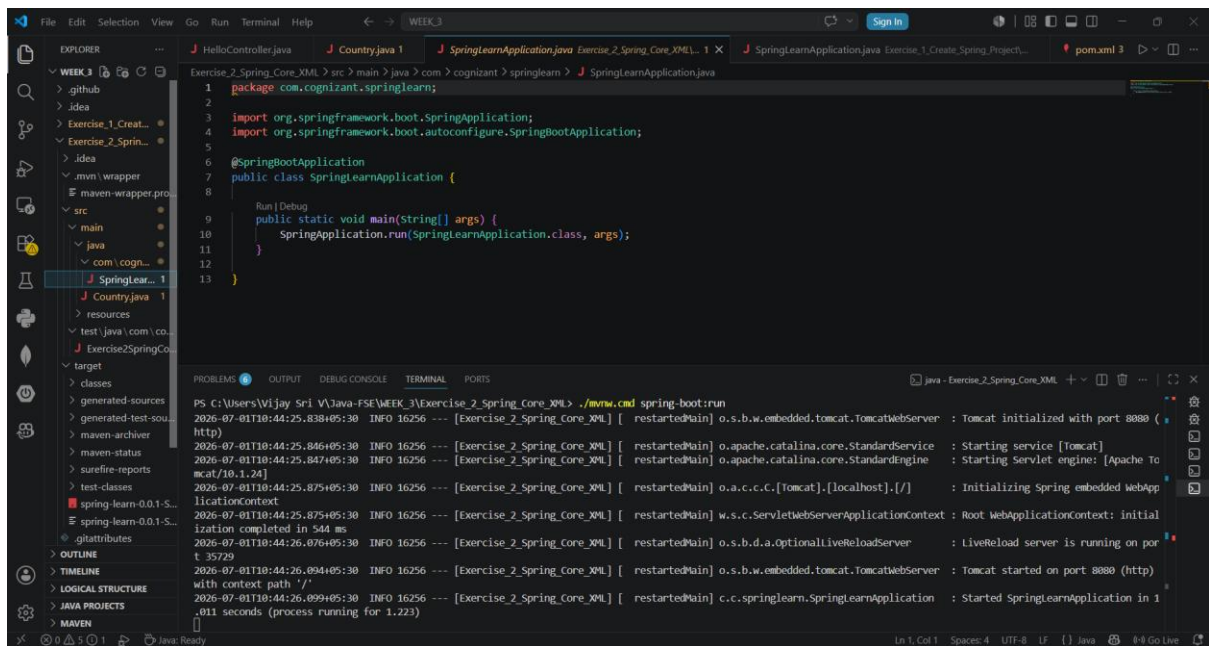

Exercise 3

The screenshot shows an IDE with the following components:

- EXPLORER:** A project structure for 'WEEK_3' containing files like 'AppConfig.java', 'Country.java', and 'SpringLearnApplication.java'.
- Source Code:** The file 'Country.java' is open, showing a class with a logger, a code field, a name field, and a constructor that logs 'Inside Country Constructor.'.
- Terminal:** The terminal shows the output of a Spring Boot application. It includes logs for 'Initializing Spring', 'Root WebApplication', 'Inside Country Constructor', 'Started SpringLearn', and 'Country : country'.

The screenshot shows an IDE with the following components:

- EXPLORER:** A project structure for 'WEEK_3' containing files like 'AppConfig.java', 'Country.java', and 'SpringLearnApplication.java'.
- Source Code:** The file 'Country.java' is open, showing a class with a logger, a code field, a name field, and a constructor that logs 'Inside Country Constructor.'.
- Terminal:** The terminal shows the output of a Spring Boot application. It includes logs for 'Context: initialization completed in 618 ms', 'Tomcat started on p', 'Started SpringLearn', and 'BUILD SUCCESS'.

The screenshot shows a web browser with the address bar set to 'localhost:8083/hello'. The page content displays 'Hello World!!'.

Exercise 4

The screenshot shows an IDE with the following components:

- EXPLORER:** A project tree for 'WEEK_3' containing folders like 'idea', 'src', 'main', and 'test'. The 'pom.xml' file is selected under 'main'.
- Editor:** Displays the content of 'pom.xml' for 'Exercise_4_Spring_Core_ComponentScan'. The XML content is as follows:

```
<?xml version="1.0" encoding="UTF-8"?>
<project xmlns="http://maven.apache.org/POM/4.0.0"
  <build>
    <plugins>
      <plugin>
        <artifactId>spring-boot-maven-plugin</artifactId>
      </plugin>
    </plugins>
  </build>
</project>
```
- Terminal:** Shows the command `PS C:\Users\Vijay Sri V\Java-FSE\WEEK_3\Exercise_4_Spring_Core_ComponentScan> ./mvnw spring-boot:run` and its output. The output indicates that the application is running on port 8080 (http) and that the Spring Boot application context is initialized.

The screenshot shows an IDE with the following components:

- EXPLORER:** A project tree for 'WEEK_3' containing folders like 'idea', 'src', 'main', and 'test'. The 'CountryController.java' file is selected under 'main'.
- Editor:** Displays the content of 'CountryController.java'. The Java code is as follows:

```
import org.springframework.web.bind.annotation.GetMapping;
import org.springframework.web.bind.annotation.RestController;

@RestController
public class CountryController {

    @GetMapping("/country")
    public Country getCountry() {
        ApplicationContext context =
            new ClassPathXmlApplicationContext("country.xml");

        Country country = (Country) context.getBean("country");

        return country;
    }
}
```
- Terminal:** Shows the command `PS C:\Users\Vijay Sri V\Java-FSE\WEEK_3\Exercise_4_Spring_Core_ComponentScan> ./mvnw spring-boot:run` and its output. The output indicates that the application is running on port 8080 (http) and that the Spring Boot application context is initialized.


localhost:8083/country

localhost:8083/country


Pretty-print ☐

```
{ "code": "IN", "name": "India" }
```

Exercise 5

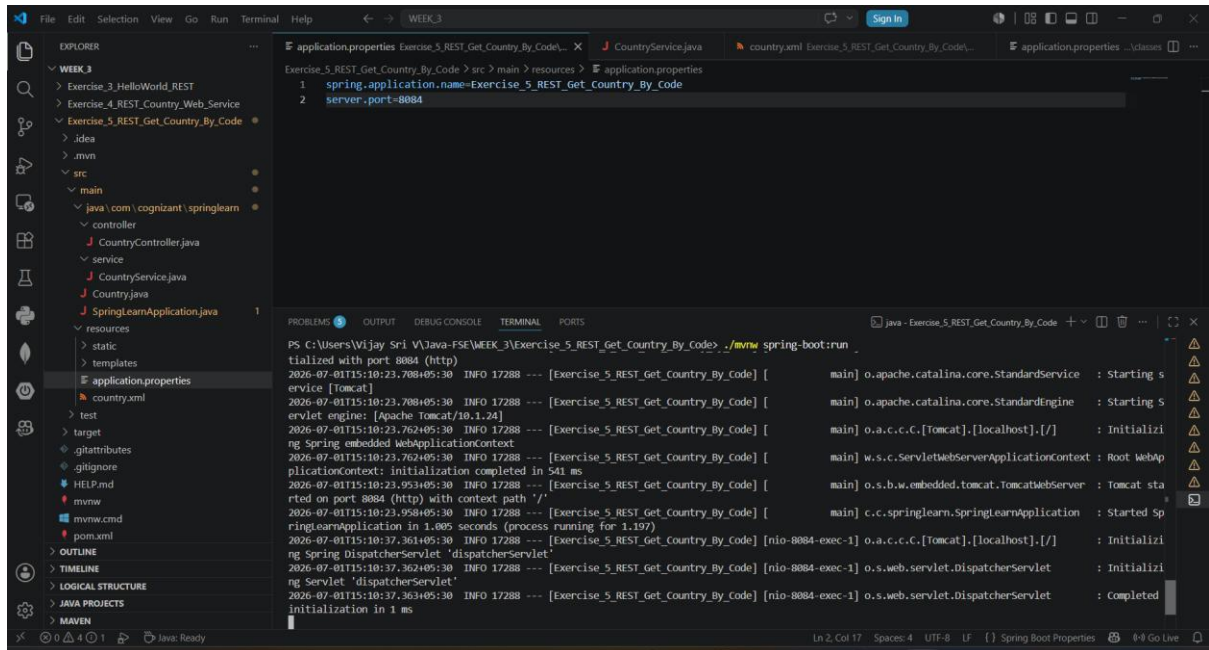

Exercise 6

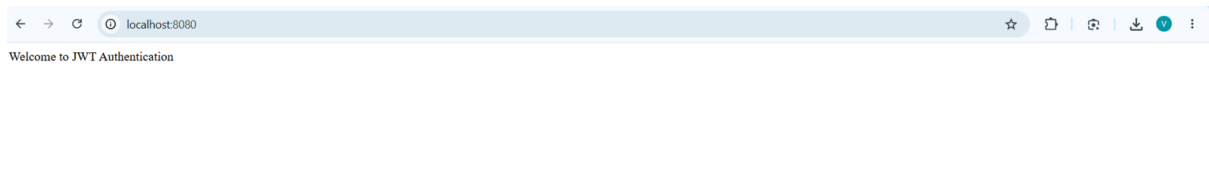

Postman interface showing a GET request to `http://localhost:8080/user` with a Bearer token in the Authorization header. The response is a 200 OK status with a body containing `1 Welcome User`.

Query Params:

Key	Value	Description
Key Value -> Authorization	Bearer eyJhbGciOiJIUzI1NiJ9.eyJzdWIIOUhzG1pbilslmhdCi6MTc4MjkwM...	
Key	Value	Description

Body: `1 Welcome User`

Postman interface showing a GET request to `http://localhost:8080/user` with a Bearer token in the Authorization header. The response is a 200 OK status with a body containing `1 Welcome User`.

Query Params:

Key	Value	Description
Authorization	Bearer eyJhbGciOiJIUzI1NiJ9.eyJzdWIIOUJ1c2VylwiWF0loxNzgyOTA0NDQxLCJleHAiOiE3ODISMDgwNDF9.qyFWmO1UD_0p9oHwn6zx Czse3nsIR9y3g_AhhF	
Key	Value	Description

Body: `1 Welcome User`