>>

# **ER Model**

- Entity-Relationship Data Modelling
- Entity-Relationship (ER) Diagrams
- Entity Sets
- Keys
- Example: Identifying Keys
- Relationship Sets
- Example: Relationship Semantics
- Weak Entity Sets
- Subclasses and Inheritance
- Design Using the ER Model
- Large ER Diagrams
- Summary of ER

COMP3311 21T1 ♦ ER Model ♦ [0/19]

^

>>

## Entity-Relationship Data Modelling

The world is viewed as a collection of inter-related entities.

ER has three major modelling constructs:

- attribute: data item describing a property of interest
- entity: collection of attributes describing object of interest
- relationship: association between entities (objects)

The ER model is not a standard, so notational variations exist

Lecture notes use notation from SKS and GUW books (simple)

COMP3311 21T1 ♦ ER Model ♦ [1/19]

# Entity-Relationship (ER) Diagrams

ER diagrams are a graphical tool for data modelling.


### An ER diagram consists of:

- a collection of entity set definitions
- a collection of relationship set definitions
- attributes associated with entity and relationship sets
- connections between entity and relationship sets

#### Terminology abuse:

- we say "entity" when we mean "entity set"
- we say "relationship" when we mean "relationship sets"
- we say "entity instance" ro refer to a particular entity

COMP3311 21T1 ♦ ER Model ♦ [2/19]

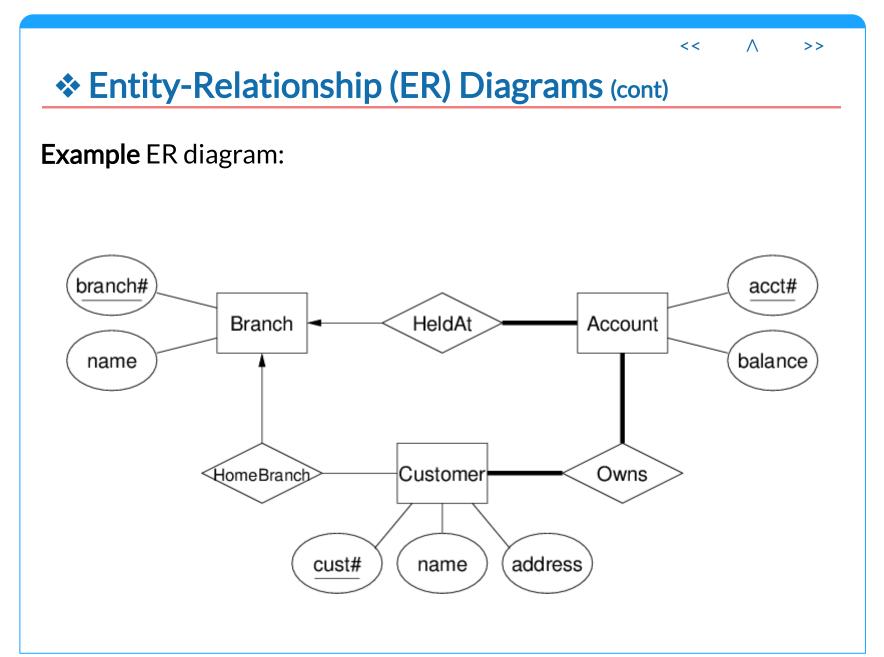


COMP3311 21T1 ♦ ER Model ♦ [3/19]



# Entity-Relationship (ER) Diagrams (cont)

### **Example** of attribute notations:

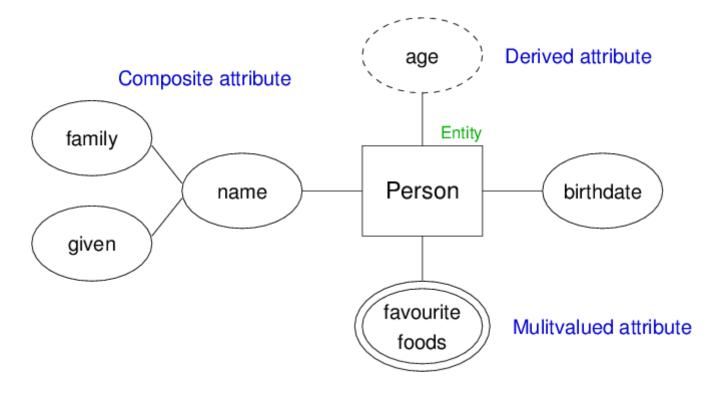

COMP3311 21T1 ♦ ER Model ♦ [4/19]

## Entity Sets

An entity set can be viewed as either:

- a set of entities with the same set of attributes (extensional)
- an abstract description of a class of entities (intensional)

Key (superkey): any set of attributes


- whose set of values are distinct over entity set
- natural (e.g., name+address+birthday) or artificial (e.g., SSN)

Candidate key = minimal superkey (no subset is a key)

Primary key = candidate key chosen by DB designer

Keys are indicated in ER diagrams by underlining


COMP3311 21T1 ♦ ER Model ♦ [5/19]

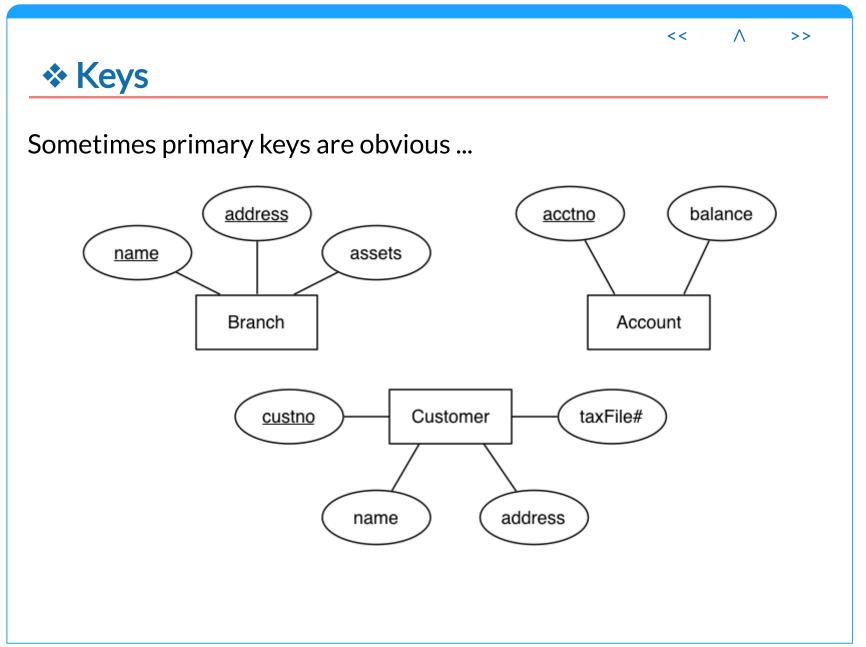

COMP3311 21T1 ♦ ER Model ♦ [6/19]

# Example: Identifying Keys

Candidate keys in the following ER diagram ...

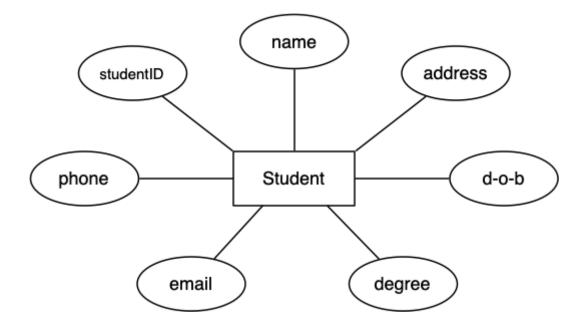

Possibilities: {studentID}, {phone}, {email}, {name,address,d-o-b}?

COMP3311 21T1  $\Diamond$  ER Model  $\Diamond$  [7/19]

# Relationship Sets

Relationship: an association among several entities

• e.g., Customer(9876) is the owner of Account(12345)

Relationship set: collection of relationships of the same type

Degree = # entities involved in reln (in ER model, ≥ 2)


Cardinality = # associated entities on each side of reln

Participation = must every entity be in the relationship


**Example:** relationship participation



COMP3311 21T1  $\Diamond$  ER Model  $\Diamond$  [8/19]

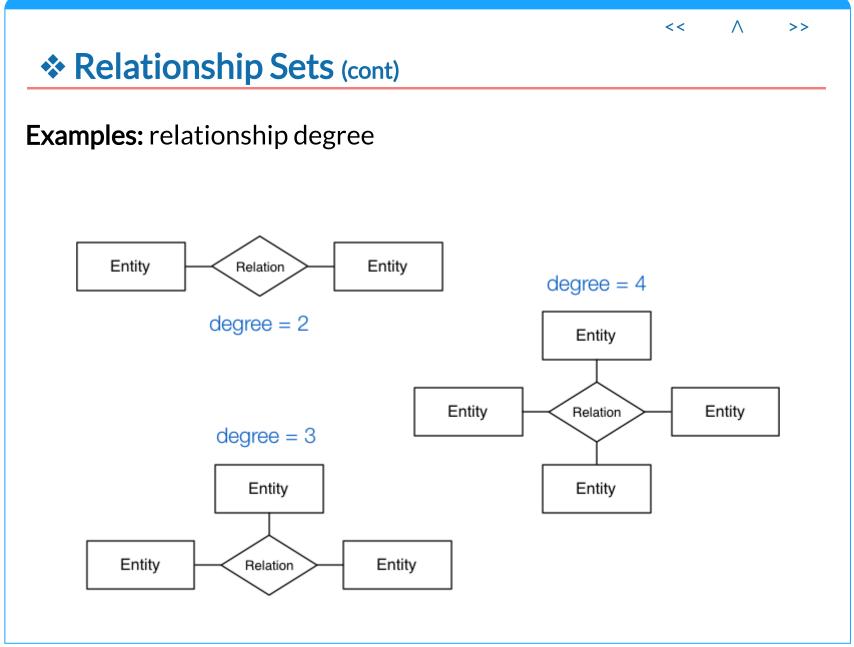

COMP3311 21T1 ♦ ER Model ♦ [9/19]

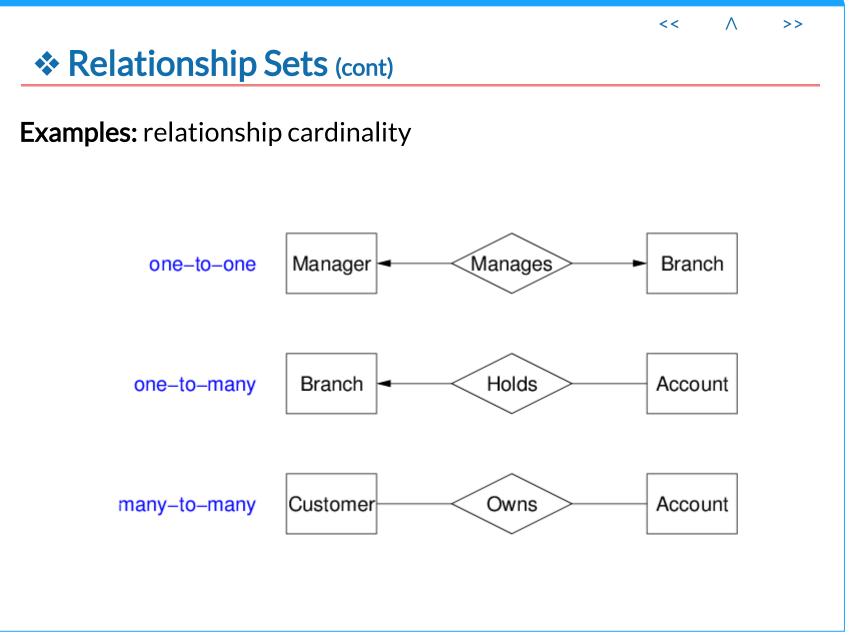


COMP3311 21T1 ♦ ER Model ♦ [10/19]

<< >> **Example:** Relationship Semantics Semantics of the following relationships ... A lecturer may teach one course Lecturer Teaches Course Every course is taught by 1 or more lecturers Every lecturer teaches one or more courses Lecturer Course Teaches Every course is taught by 1 or more lecturers Every lecturer may teach one course Course Lecturer Teaches Every course is taught by one lecturer

COMP3311 21T1 ♦ ER Model ♦ [11/19]

# **Example: Relationship Semantics (cont)**

In some cases, a relationship needs associated attributes.

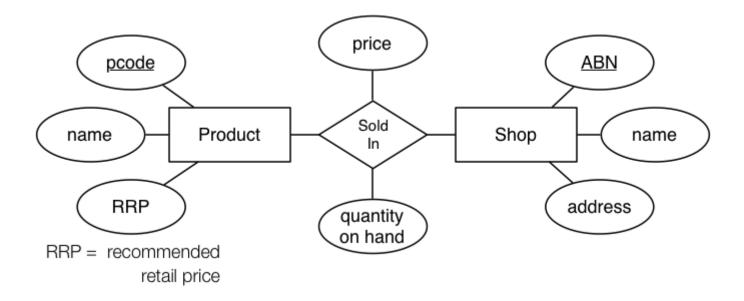

(Price and quantity are related to products in a particular shop)


COMP3311 21T1 ♦ ER Model ♦ [12/19]

# Weak Entity Sets

#### Weak entities

- exist only because of association with strong entities.
- have no key of their own; have a discriminator

### Example:

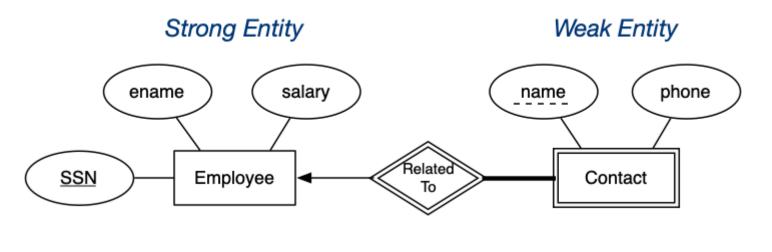

COMP3311 21T1 ♦ ER Model ♦ [13/19]

## Subclasses and Inheritance


A subclass of an entity set A is a set of entities:

- with all attributes of A, plus (usually) it own attributes
- that is involved in all of A's relationships, plus its own


### Properties of subclasses:

- overlapping or disjoint (can an entity be in multiple subclasses?)
- total or partial (does every entity have to also be in a subclass?)

Special case: entity has one subclass ("B is-a A" specialisation)



COMP3311 21T1 ♦ ER Model ♦ [14/19]

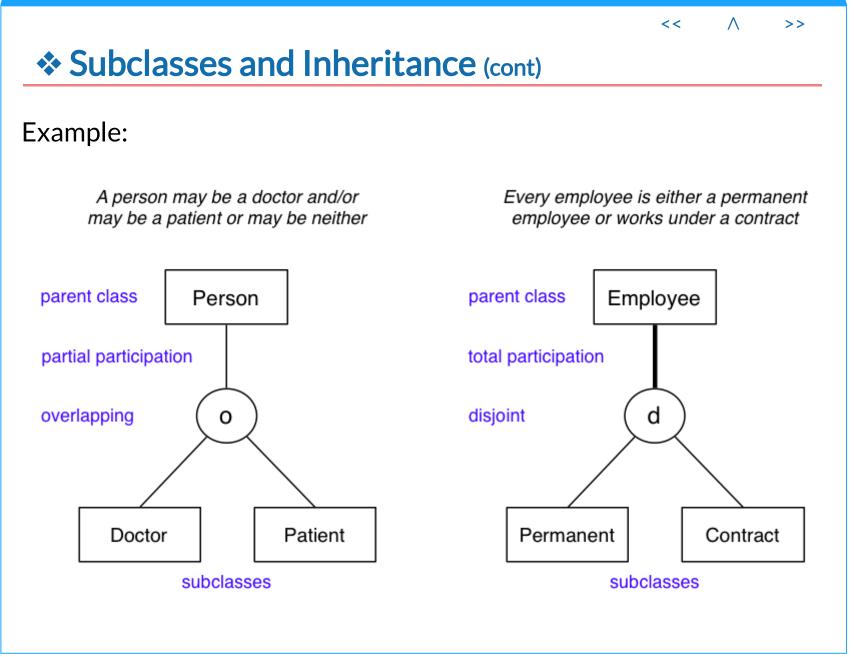

COMP3311 21T1 ♦ ER Model ♦ [15/19]

# Design Using the ER Model

ER model: simple, powerful set of data modelling tools

Some considerations in designing ER models:

- should an "object" be represented by an attribute or entity?
- is a "concept" best expressed as an entity or relationship?
- should we use n-way relationship or several 2-way relationships?
- is an "object" a strong or weak entity? (usually strong)
- are there subclasses/superclasses within the entities?

Answers to above are worked out by thinking about the application domain.

COMP3311 21T1 ♦ ER Model ♦ [16/19]


# Large ER Diagrams

ER diagrams are typically too large to fit on a single screen (or a single sheet of paper, if printing)

One commonly used strategy:

- define entity sets separately, showing attributes
- combine entitities and relationships on a single diagram (but without showing entity attributes)
- if very large design, may use several linked diagrams

COMP3311 21T1 ♦ ER Model ♦ [17/19]

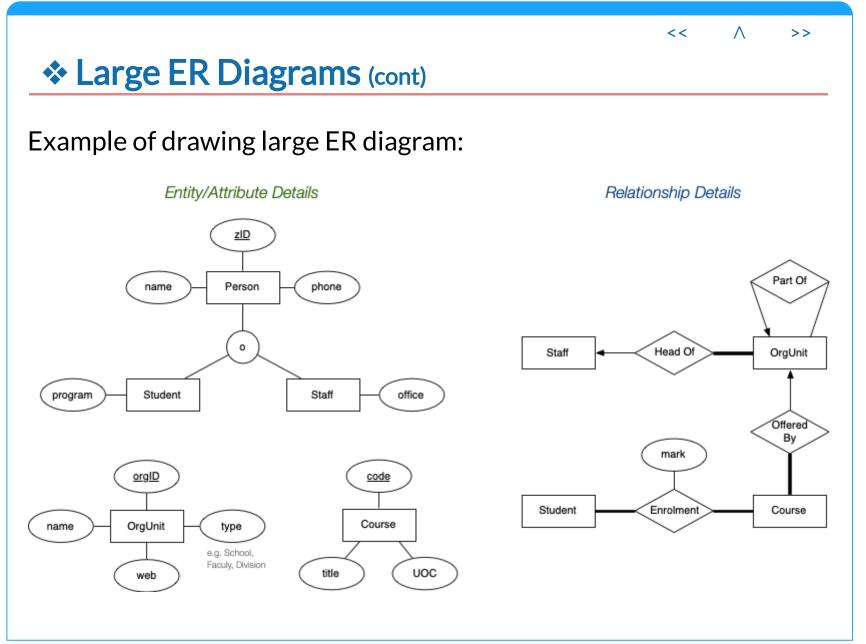

COMP3311 21T1 ♦ ER Model ♦ [18/19]

<<

Λ

# **❖** Summary of ER

ER model is popular for doing conceptual design

- high-level, models relatively easy to understand
- good expressive power, can capture many details

Basic constructs: entities, relationships, attributes

Relationship constraints: total / partial, n:m / 1:n / 1:1

Other constructs: inheritance hierarchies, weak entities

Many notational variants of ER exist (especially in the expression of constraints on relationships)

COMP3311 21T1 ♦ ER Model ♦ [19/19]

Produced: 10 Feb 2021