

ASYNCHRONOUS NETWORKING


Networking with XMLHttpRequest()

OVERVIEW


- Client-Server Model + AJAX
- Concurrency & JS
- Networking with `XMLHttpRequest()`
- Networking with Promises & `fetch()`
- Networking with `async/await` & `fetch()`

RECAP

Client

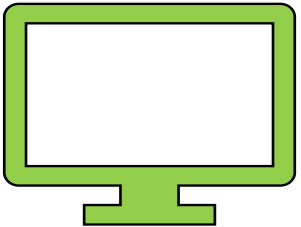


Servers



Latest News API


Super cool cats API



The JS event loop lets us perform asynchronous execution.

Still uncertain about how to do that.

`XMLHttpRequest()` is one way

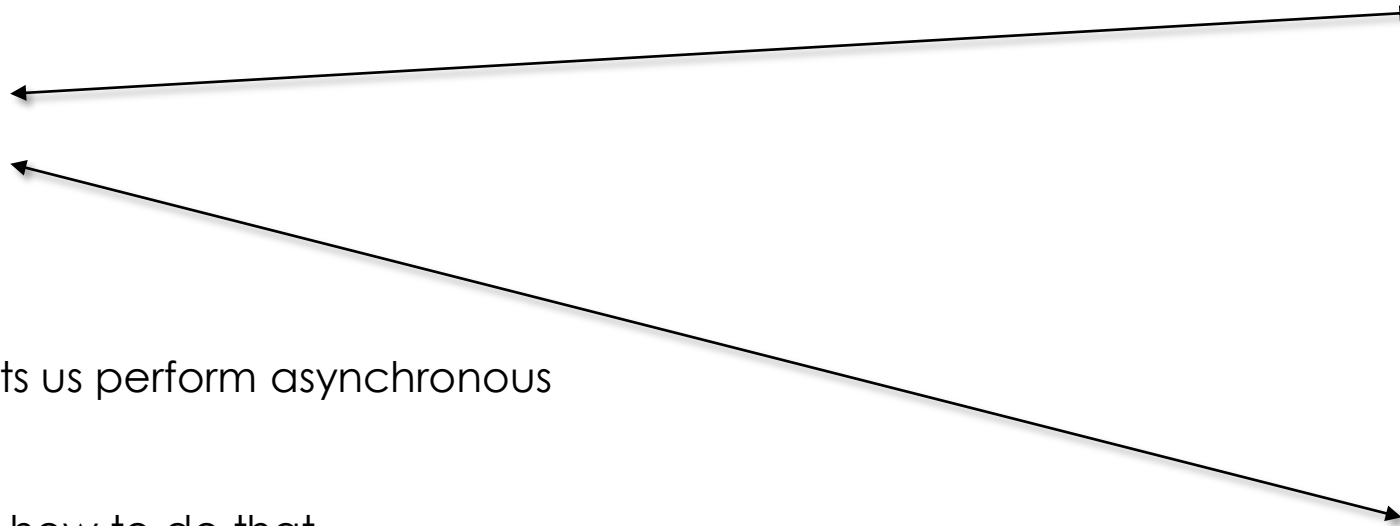

XML HTTP

```

1 // Create a new potential XML HTTP request
2 const xhr = new XMLHttpRequest();
3
4 // Initialise the request with the HTTP verb and URL
5 xhr.open( method: "GET", url: "https://developer.mozilla.org/en-US/docs/Web/API/XMLHttpRequest");
6
7 // An event handler to run when the request has received its response
8 xhr.onload = (ev : ProgressEvent) => {
9     // xhr.status contains the HTTP status code
10     if (xhr.status === 200) {
11         // xhr.statusText is a DOM string indicating the result. For 200, it will be "OK"
12         console.log(xhr.statusText);
13     } else {
14         console.error("Response didn't complete successfully :(");
15     }
16 }
17
18 // Sometimes a request will fail to even send. This will throw an exception we need to catch
19 try {
20     xhr.send();
21 } catch(e) {
22     console.error("Unable to send request: " + e);
23 }

```

A minimal example

- Built-in API
 - Allows creation of a handle representing a request
 - Asynchronous by default
 - Many knobs and dials (see the [docs](#) for a full discussion)
- Error-Handling through exceptions and status codes
 - Network errors, failure-to-send errors are exceptions
 - Normal HTTP errors communicated through `xhr.status`
- Customisation via callbacks
 - Main callbacks: `xhr.onload`, `xhr.onerror`
- Fallen out of favour
 - Need to know for legacy codebases

BASIC XMLHTTPREQUEST DEMO

See [examples/basic-xmlhttprequest](#)



HANDLING PROBLEMS

Expected Errors

- Authentication errors
- Bad parameter errors
- Non-existent domain errors
- All checked through HTTP status codes
 - 4xx for not using an API correctly
 - 5xx for internal server errors
- HTTP 200 means no error

Unexpected Errors

- Network connectivity issues
- Remote connection suddenly dropped
- Timeouts
- Need to be handled by try/catch blocks
- Often the best strategy is to retry (with exponential back-off)

XMLHTTP ERROR-HANDLING DEMO

See [examples/xmlhttp-error-handling](#)



AVOIDING CALLBACK HELL


- Callback Hell: deep nesting of callbacks
- Often a result of:
 - Many different people working on code
 - Ad-hoc decision making
- Software Engineering Principles still apply:
 - SRP - functions do a single thing only
 - DRY – repetitive actions placed into a function
 - Let bundlers minimise your code for you
- Flat > Nested:
 - Callbacks should be named functions
 - Lambdas for easy one-liners

```
1 get('api/allusers', (allUsers) => {
2   allUsers.map(user => {
3     get('api/user/${user.id}/posts', (posts) => {
4       posts.map(post => {
5         get('api/post/${post.id}/comments', (cmnts) => {
6           // ...
7         });
8       });
9     });
10  });
11 });
```


```
1 function processUsers(allUsers) {
2   for (user of allUsers) {
3     get('api/user/${user.id}/posts', processPosts);
4   }
5 }
6 function processPosts(posts) {
7   for (post of posts) {
8     get('api/post/${post.id}/comments', processCmnts);
9   }
10 }
11 function processCmnts(comments) {
12   for (comment of comments) {
13     // ...
14   }
15 }
16
17 get('api/allusers', processUsers);
```


IMPROVING

Client

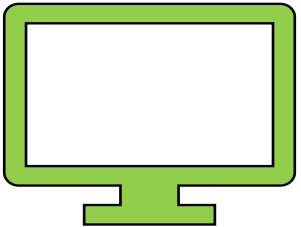


Servers



Latest News API

Super cool cats API



Finally have a method of making an AJAX webapp

Setting up an XMLHttpRequest seems tedious and error-prone

Can we do better?

SUMMARY

- Today:
 - Making asynchronous network requests with `XMLHttpRequest()`
 - Error-handling strategies
 - Avoiding callback hell
- Coming Up Next:
 - Promises
 - Networking with `fetch()`