


# GeeksforGeeks

A computer science portal for geeks

Placements Practice GATE CS IDE Q&A  
GeeksQuiz

## Tree Traversals

Unlike linear data structures (Array, Linked List, Queues, Stacks, etc) which have only one logical way to traverse them, trees can be traversed in different ways. Following are the generally used ways for traversing trees.

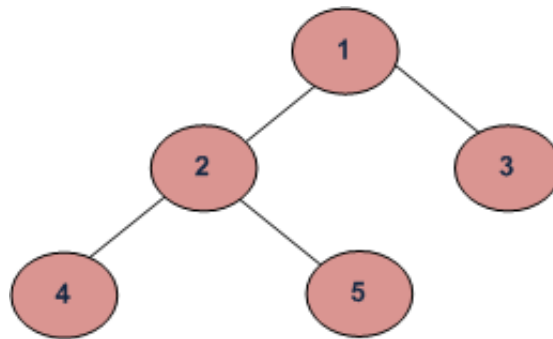

*Example Tree*

Depth First Traversals:

- (a) Inorder
- (b) Preorder
- (c) Postorder

Breadth First or Level Order Traversal

Please see [this](#) post for Breadth First Traversal.

**Inorder Traversal:**

Algorithm Inorder(tree)

1. Traverse the left subtree, i.e., call Inorder(left-subtree)
2. Visit the root.
3. Traverse the right subtree, i.e., call Inorder(right-subtree)

Uses of Inorder

In case of binary search trees (BST), Inorder traversal gives nodes in non-decreasing order. To get nodes of BST in non-increasing order, a variation of Inorder traversal where Inorder traversal is reversed, can be used.

Example: Inorder traversal for the above given figure is 4 2 5 1 3.

### Preorder Traversal:

Algorithm Preorder(tree)

1. Visit the root.
2. Traverse the left subtree, i.e., call Preorder(left-subtree)
3. Traverse the right subtree, i.e., call Preorder(right-subtree)

#### Uses of Preorder

Preorder traversal is used to create a copy of the tree. Preorder traversal is also used to get prefix expression on of an expression tree. Please see [http://en.wikipedia.org/wiki/Polish\\_notation](http://en.wikipedia.org/wiki/Polish_notation) to know why prefix expressions are useful.

Example: Preorder traversal for the above given figure is 1 2 4 5 3.

### Postorder Traversal:

Algorithm Postorder(tree)

1. Traverse the left subtree, i.e., call Postorder(left-subtree)
2. Traverse the right subtree, i.e., call Postorder(right-subtree)
3. Visit the root.

#### Uses of Postorder

Postorder traversal is used to delete the tree. Please see [the question for deletion of tree](#) for details. Postorder traversal is also useful to get the postfix expression of an expression tree. Please see [http://en.wikipedia.org/wiki/Reverse\\_Polish\\_notation](http://en.wikipedia.org/wiki/Reverse_Polish_notation) to for the usage of postfix expression.

Example: Postorder traversal for the above given figure is 4 5 2 3 1.

## C

```
// C program for different tree traversals
#include <stdio.h>
#include <stdlib.h>

/* A binary tree node has data, pointer to left child
and a pointer to right child */
struct node
{
    int data;
    struct node* left;
    struct node* right;
};

/* Helper function that allocates a new node with the
given data and NULL left and right pointers. */
struct node* newNode(int data)
{
    struct node* node = (struct node*)
        malloc(sizeof(struct node));
    node->data = data;
```

```
node->left = NULL;
node->right = NULL;

return(node);
}

/* Given a binary tree, print its nodes according to the
"bottom-up" postorder traversal. */
void printPostorder(struct node* node)
{
    if (node == NULL)
        return;

    // first recur on left subtree
    printPostorder(node->left);

    // then recur on right subtree
    printPostorder(node->right);

    // now deal with the node
    printf("%d ", node->data);
}

/* Given a binary tree, print its nodes in inorder*/
void printInorder(struct node* node)
{
    if (node == NULL)
        return;

    /* first recur on left child */
    printInorder(node->left);

    /* then print the data of node */
    printf("%d ", node->data);

    /* now recur on right child */
    printInorder(node->right);
}

/* Given a binary tree, print its nodes in preorder*/
void printPreorder(struct node* node)
{
    if (node == NULL)
        return;

    /* first print data of node */
    printf("%d ", node->data);

    /* then recur on left subtree */
    printPreorder(node->left);

    /* now recur on right subtree */
    printPreorder(node->right);
}

/* Driver program to test above functions*/
int main()
{
    struct node *root = newNode(1);
    root->left = newNode(2);
    root->right = newNode(3);
    root->left->left = newNode(4);
    root->left->right = newNode(5);

    printf("\nPreorder traversal of binary tree is \n");
}
```

```
printPreorder(root);

printf("\nInorder traversal of binary tree is \n");
printInorder(root);

printf("\nPostorder traversal of binary tree is \n");
printPostorder(root);

getchar();
return 0;
}
```

[Run on IDE](#)

## Python

```
# Python program to for tree traversals

# A class that represents an individual node in a
# Binary Tree
class Node:
    def __init__(self, key):
        self.left = None
        self.right = None
        self.val = key

# A function to do inorder tree traversal
def printInorder(root):

    if root:

        # First recur on left child
        printInorder(root.left)

        # then print the data of node
        print(root.val),

        # now recur on right child
        printInorder(root.right)

# A function to do postorder tree traversal
def printPostorder(root):

    if root:

        # First recur on left child
        printPostorder(root.left)

        # the recur on right child
        printPostorder(root.right)

        # now print the data of node
        print(root.val),

# A function to do postorder tree traversal
def printPreorder(root):

    if root:
```

```

# First print the data of node
print(root.val),

# Then recur on left child
printPreorder(root.left)

# Finally recur on right child
printPreorder(root.right)

# Driver code
root = Node(1)
root.left = Node(2)
root.right = Node(3)
root.left.left = Node(4)
root.left.right = Node(5)
print "Preorder traversal of binary tree is"
printPreorder(root)

print "\nInorder traversal of binary tree is"
printInorder(root)

print "\nPostorder traversal of binary tree is"
printPostorder(root)

```

[Run on IDE](#)

## Java

```

// Java program for different tree traversals

/* Class containing left and right child of current
   node and key value*/
class Node
{
    int key;
    Node left, right;

    public Node(int item)
    {
        key = item;
        left = right = null;
    }
}

class BinaryTree
{
    // Root of Binary Tree
    Node root;

    BinaryTree()
    {
        root = null;
    }

    /* Given a binary tree, print its nodes according to the
       "bottom-up" postorder traversal. */
    void printPostorder(Node node)
    {
        if (node == null)
            return;
    }
}

```

```

    // first recur on left subtree
    printPostorder(node.left);

    // then recur on right subtree
    printPostorder(node.right);

    // now deal with the node
    System.out.print(node.key + " ");
}

/* Given a binary tree, print its nodes in inorder*/
void printInorder(Node node)
{
    if (node == null)
        return;

    /* first recur on left child */
    printInorder(node.left);

    /* then print the data of node */
    System.out.print(node.key + " ");

    /* now recur on right child */
    printInorder(node.right);
}

/* Given a binary tree, print its nodes in preorder*/
void printPreorder(Node node)
{
    if (node == null)
        return;

    /* first print data of node */
    System.out.print(node.key + " ");

    /* then recur on left subtree */
    printPreorder(node.left);

    /* now recur on right subtree */
    printPreorder(node.right);
}

// Wrappers over above recursive functions
void printPostorder() { printPostorder(root); }
void printInorder() { printInorder(root); }
void printPreorder() { printPreorder(root); }

// Driver method
public static void main(String[] args)
{
    BinaryTree tree = new BinaryTree();
    tree.root = new Node(1);
    tree.root.left = new Node(2);
    tree.root.right = new Node(3);
    tree.root.left.left = new Node(4);
    tree.root.left.right = new Node(5);

    System.out.println("Preorder traversal of binary tree is ");
    tree.printPreorder();

    System.out.println("\nInorder traversal of binary tree is ");
    tree.printInorder();

    System.out.println("\nPostorder traversal of binary tree is ");

```

```

        tree.printPostorder();
    }
}

```

[Run on IDE](#)

Output:

```

Preorder traversal of binary tree is
1 2 4 5 3
Inorder traversal of binary tree is
4 2 5 1 3
Postorder traversal of binary tree is
4 5 2 3 1

```

**Time Complexity:**  $O(n)$

Let us prove it:

Complexity function  $T(n)$  — for all problem where tree traversal is involved — can be defined as:

$$T(n) = T(k) + T(n - k - 1) + c$$

Where  $k$  is the number of nodes on one side of root and  $n-k-1$  on the other side.

Let's do analysis of boundary conditions

Case 1: Skewed tree (One of the subtrees is empty and other subtree is non-empty )

$k$  is 0 in this case.

$$T(n) = T(0) + T(n-1) + c$$

$$T(n) = 2T(0) + T(n-2) + 2c$$

$$T(n) = 3T(0) + T(n-3) + 3c$$

$$T(n) = 4T(0) + T(n-4) + 4c$$

.....  
 .....

$$T(n) = (n-1)T(0) + T(1) + (n-1)c$$

$$T(n) = nT(0) + (n)c$$

Value of  $T(0)$  will be some constant say  $d$ . (traversing a empty tree will take some constants time)

$$T(n) = n(c+d)$$

$$T(n) = \Theta(n) \text{ (Theta of } n)$$

Case 2: Both left and right subtrees have equal number of nodes.

$$T(n) = 2T(\lfloor n/2 \rfloor) + c$$

This recursive function is in the standard form  $(T(n) = aT(n/b) + (-)(n))$  for master method [http://en.wikipedia.org/wiki/Master\\_theorem](http://en.wikipedia.org/wiki/Master_theorem). If we solve it by master method we get  $(-)(n)$

**Auxiliary Space :** If we don't consider size of stack for function calls then  $O(1)$  otherwise  $O(n)$ .



65 Comments Category: Trees Tags: Inorder Traversal, PostOrder Traversal, Preorder Traversal, Tree Traversal, Trees, Tutorial

## Related Posts:

- Check if removing an edge can divide a Binary Tree in two halves
- Check sum of Covered and Uncovered nodes of Binary Tree
- Lowest Common Ancestor in a Binary Tree | Set 2 (Using Parent Pointer)
- Construct a Binary Search Tree from given postorder
- BFS vs DFS for Binary Tree
- Maximum difference between node and its ancestor in Binary Tree
- Inorder Non-threaded Binary Tree Traversal without Recursion or Stack
- Check if leaf traversal of two Binary Trees is same?

(Login to Rate and Mark)

**1.5** Average Difficulty : **1.5/5.0**  
Based on **25** vote(s)

☐  
☐

Add to TODO List

Mark as DONE

Like Share 11 people like this.

Writing code in comment? Please use [code.geeksforgeeks.org](http://code.geeksforgeeks.org), generate link and share the link here.



@geeksforgeeks, Some rights reserved

[Contact Us!](#)

[About Us!](#)

[Advertise with us!](#)