

Web Technology

CLA-4(b)

NAME-VIKASH KUMAR

SECTION-"B"

REG-201FA07078

```
<!DOCTYPE html><html><body>

<p>Add two click events to the same button.</p>

<button id="myBtn">Try it</button>

<p id="demo" style="color: red;"></p>

<!--mouse Events--><br>

<h1>mouse Action</h1>

<p>This example uses the addEventListener() method to add many events on the same
    button.</p><br>

<button id="myBt">kkkk</button>

<p id="d" style="color: green;background-color:red;"></p>


<!--mouuse event end-->

<script>

const element = document.getElementById("myBtn");
element.addEventListener("click", myFunction1);
element.addEventListener("click", myFunction2);
function myFunction1() {
    document.getElementById("demo").innerHTML += "First function was executed! "
}
function myFunction2() {
    document.getElementById("demo").innerHTML += "Second function was executed!"
}
```

```
// -----mouse Events-----
```

```
const k = document.getElementById("myBt");
```

```
k.addEventListener("mouseover", myFunction3);
```

```
function myFunction3() {
```

```
    document.getElementById("d").innerHTML += "Moused over!<br>"
```


```
}
```

```
</script>
```

```
</body>
```

```
</html>
```

OUTPUT:-

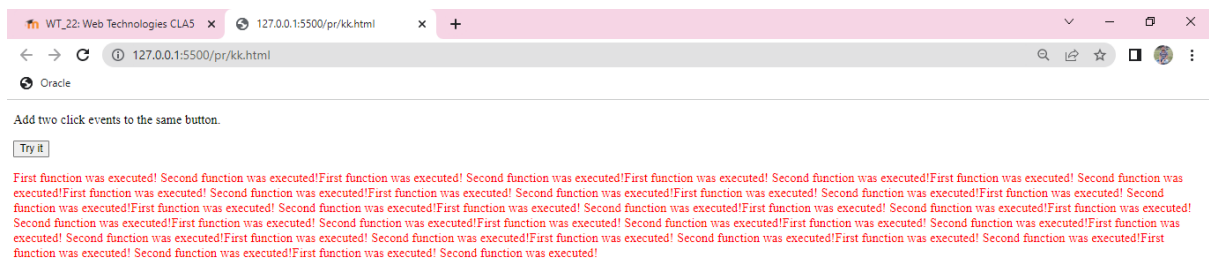

mouse Action

This example uses the `addEventListener()` method to add many events on the same button.

