ACKNOWLEDGMENT

It gives us immense pleasure for presenting this report for the project **“Second Hand Book Store”**.

We profoundly thank our principal **Dr Ajay S. Bhoir** for giving us support throughout the course and thus made us capable of being worthy of recognition and extended every facility to us for making and completing this project smoothly.

We would like to express our sincere thanks to **Mr. Mahesh Pimpalkar** (Head of IF Department) for his constant encouragement, which made this project a success. We owe our deep gratitude to, **Mr. Mahesh Pimpalkar.** Our Project Guide for rendering her valuable guidance with a touch of inspiration and motivation. he has guided us quite a lot in negotiating through the hurdles by giving plenty of early ideas and which resulted in the present fine work

We would like to thanks the all the Faculties, lecturers and non teaching staff of **Navjeevan Education Soceity’s Polytechnic College ,Bhandup** for providing us sufficient information which helped us to complete our project successfully. Their guidance has always inculcated confidence in us.

We also thank our family members for their continued support in completing this project work. And last but not the least , we wish to thank all my friends and wellwishers who are directly or indirectly linked with success of our project. And to the almighty God, who made all things possible.

Chapter 1. Introduction Page No.

1) Introduction to the System 4
2) Problem Definition 4
3) Aim 4
4) Objective 4
5) Goal 5
6) Need of System 5

Chapter 2. Hardware and Software requirement

1) Introduction 7
2) System environment 7
3) Software requirement 8
4) Hardware requirements 8

Chapter 3. System Analysis

1) Project Scope 9
2) Existing System 9
3) Proposed System 9
4) System Description 10

Chapter 4. Implementation issues

1) HTML 11
2) CSS 13
3) Python 16
4) Sqlite 17

Chapter 5. System Design

1) Introduction 21
2) Conceptual Design 22
3) ER-Diagram 23
4) Logical Design 23
5) Physical Design 24
6) Data Flow Diagram of **"Second Hand Book Store"** 24

Chapter 6. User Screens 25-32

Chapter 7. Coding 33-77

Chapter 8. Conclusion

7) Features of "**Second Hand Book Store**" 78
8) Benefits Accrued from "**Second Hand Book Store**" 79
9) Limitations of "**Second Hand Book Store**" 80

Bibliography

CHAPTER # 1

Introduction

Contents:

- Introduction
- Problem Definition
- Aim
- Objective
- Goal
- Need of System

Introduction to the System:

- It is an online website where customer can buy second hand books.
- Through this web project customer can search for the book, later add to the cart and finally purchase it.
- The books are divided into categories to make the search easier.
- The users give feedback about the books.

Problem Definition:

Managing your Second Hand Book Store System may seem tricky, but this is a part of Ecommerce Service System (Application support direct contact with users).

Aim:

To provide an old book selling and purchasing platform.

Objective:

- The main objective is to provide a second hand book at convenient price.
- To save the time of the users by providing books online.
- To provide service to distant areas.
- User can buy used book according to their need.

Goal:

The project is basically targeted at those people who would like to purchase and learn books and have an internet access.

Finally book lovers curious in comparing the price of books for their selected category.

To make a database that is consistent, reliable and secure.

To provide correct, complete and ongoing information.

To develop a well-organized information storage system.

To make good documentation so as to facilitate possible future enhancements.

Need of the System:

There is always a need of a system that will perform to online book search and purchase, according categories and subcategories. The Books can be add to cart, recalculate total or can delete from cart using simple and user friendly interface.

Thus, there is a big need of an Online Second Hand Bookshop, which provides all the Above-mentioned facilities and many more.

CHAPTER # 2

Hardware and Software Requirements

Contents:

- Introduction
- System environment
- Software requirement
- Hardware requirements

Introduction:

In this chapter we mentioned the software and hardware requirements, which are necessary for successfully running this system. The major element in building systems is selecting compatible hardware and software. The system analyst has to determine what software package is best for the **"Online Second Hand Book Store System"** and, where software is not an issue, the kind of hardware and peripherals needed for the final conversion.

System Environment:

After analysis, some resources are required to convert the abstract system into the real one. All the resources, which accomplish a robust

The hardware and software selection begins with requirement analysis, followed by a request for proposal and vendor evaluation.

Software and real system are identified. According to the provided functional specification all the technologies and its capacities are identified. Basic functions and procedures and methodologies are prepared to implement. Some of the Basic requirements such as hardware and software are described as follows: -

Hardware and Software Specification

Software Requirements:

- Technology: Python Django
- IDE : Pycharm/Atom
- Client Side Technologies: HTML, CSS, JavaScript , Bootstrap
- Server Side Technologies: Python
- Data Base Server: Sqlite
- Operating System: Microsoft Windows/Linux

Hardware Requirements:

- Processor: Pentium-III (or) Higher
- Ram: 64MB (or) Higher
- Hard disk: 80GB (or) Higher

CHAPTER # 3

System Analysis

Contents:

- Purpose
- Project Scope
- Existing System
- Proposed System
- System Overview

Purpose:

The main purpose of this web based project is to manage the online shopping of second hand books. It helps to customers to search book via category, subcategory, book title and author name from anywhere and anytime. Also make payment online for it. It helps to people to find and purchase books online

Project Scope:

The project has a wide scope, as it is not intended to a particular organization. This project is going to develop generic software, which can be applied by any businesses organization. More over it provides facility to its customers. Also the software is going to provide a huge amount of description of every book.

Proposed System:

The development of the new system contains the following activities, which try to automate the entire process keeping in view of the database integration approach.

1. User friendliness is provided in the application with various controls.
2. The system makes the overall project management much easier and flexible.
3. There is no risk of data mismanagement at any level while the project development is under process.
4. It provides high level of security with different level of authentication.

System Overview:

It allows registered users to do the following:

- Login
- Browse and query books based on price, title, and category
- Add books to shopping cart.
- Update quantity in shopping cart
- Remove books from shopping cart
- Finalize order for books in shopping cart
- See the status of orders placed in the past - orders history.
- Cancel an order, if status of the order is new.

CHAPTER # 4

Implementation Issues

Python

Python is a widely used general-purpose, high level programming language. It was initially designed by Guido van Rossum in 1991 and developed by Python Software Foundation. It was mainly developed for emphasis on code readability, and its syntax allows programmers to express concepts in fewer lines of code.

Python is a programming language that lets you work quickly and integrate systems more efficiently.

Python is dynamically typed and garbage-collected. It supports multiple programming paradigms, including procedural, object-oriented, and functional programming. Python is often described as a "batteries included" language due to its comprehensive standard library.

HTML

HTML (Hypertext Markup Language) is the set of markup symbols or codes inserted in a file intended for display on a World Wide Web browser page. The markup tells the Web browser how to display a Web page's words and images for the user. Each individual markup code is referred to as an element (but many people also refer to it as a tag). Some elements come in pairs that indicate when some display effect is to begin and when it is to end.

CASCADING STYLE SHEET (CSS)

Cascading Style Sheets (CSS) are a collection of rules we use to define and modify web pages. CSS are similar to styles in Word. CSS allow Web designers to have much more control over their pages look and layout. For instance, you could create a style that defines the body text to be Verdana, 10 point. Later on, you may easily change the body text to Times New Roman, 12 point by just changing the rule in the CSS. Instead of having to change the font on each page of your website, all you need to do is redefine the style on the style sheet, and it will instantly change on all of the pages that the style sheet has been applied to. With HTML styles, the font change would be applied to each instance of that font and have to be changed in each spot.

CSS can control the placement of text and objects on your pages as well as the look of those objects.

HTML information creates the objects (or gives objects meaning), but styles describe how the objects should appear. The HTML gives your page structure, while the CSS creates the "presentation". An external CSS is really just a text file with a .css extension. These files can be created with Dreamweaver, a CSS editor, or even Notepad.

The best practice is to design your web page on paper first so you know where you will want to use styles on your page. Then you can create the styles and apply them to your page.

Javascript

JavaScript is a programming language commonly used in web development. It was originally developed by Netscape as a means to add dynamic and interactive elements to websites. While JavaScript is influenced byJava, the syntax is more similar to C and is based on ECMAScript, a scripting language developed by Sun Microsystems.

JavaScript is a client-side scripting language, which means the source code is processed by the client's web browser rather than on the web server. This means JavaScript functions can run after a webpage has loaded without COMMUNICATING with the server. For example, a JavaScript function may check a web form before it is submitted to make sure all the required fields have been filled out. The JavaScript code can produce an error message before any information is actually transmitted to the server.

Like server-side scripting languages, such as PHP and ASP, JavaScript code can be inserted anywhere within the HTML of a webpage. However, only the output of server-side code is displayed in the HTML, while JavaScript code remains fully visible in the source of the webpage. It can also be referenced in a separate .JS file, which may also be viewed in a browser.

Django

Django is a web application framework written in Python programming language. It is based on MVT (Model View Template) design pattern. The Django is very demanding due to its rapid development feature. It takes less time to build application after collecting client requirement.

This framework uses a famous tag line: The web framework for perfectionists with deadlines.

5. Testing

5.1 Testing Objectives

Testing meets 3 objectives:

1. **Identification of Errors**:

These are obvious anomalies that show up in the behavior of a program or a unit or a component. Such behavior as the following is considered an error:

- Wrong totals
- Misalignments
- Messages that say the wrong thing
- Actions that do not execute as promised: the Delete button does not delete, the update menu does not update properly, etc.

2.Conformance to requirements:

These errors are the result of testing the functions in the software against the Requirement Definition Document to ensure that every requirement, functional or non-functional is in the system and that it operates properly. This is often called an Operational Qualification. However, note that even if some of the requirements do not seem to be "Operational", this is an operational test. For example, the software may be required to display copyright message on all acquired components.

3. Performance Qualification:

These are not “errors” as such but failures to
Conform to performance requirements. Technically, they can be part of the second type. However, **Performance Qualification (PQ)** became a standard way of testing for historical reasons. Some systems will perform differently under different loads and conditions. For example, a citizen lookup application may need to operate within a specific time response for a load of up to 300 queries an hour. The software application may be designed properly, ie, may pass the Operational Qualification, but may fail to meet the required loads because of poor programming or too many database calls.

5.2 Types of Testing

Software testing is a process of running with intent of finding errors in software. Software testing assures the quality of software and represents final review of other phases of software like specification, design, code generation etc.

Unit Testing

Unit testing emphasizes the verification effort on the smallest unit of software design i.e.; a software component or module. Unit testing is a dynamic method for verification, where program is actually compiled and executed. Unit testing is performed in parallel with the coding phase. Unit testing tests units or modules not the whole software.

I have tested each view/module of the application individually. As the modules were built up testing was carried out simultaneously, tracking out each and every kind of input and checking the corresponding output until module is working correctly. The functionality of the modules was also tested as separate units. Each of the three modules was tested as separate units. In each module all the functionalities were tested in isolation.

In the Shop Products Module when a product has been added to cart it has been made sure that if the item already exists in the shopping cart then the quantity is increased by one else a new item is created in the shopping cart. Also the state of the system after a product has been dragged in to the shopping cart is same as the state of the system if it was added by clicking the add to cart button. Also it has been ensured that all the images of the products displayed in the shop products page are drag gable and have the product property so that they can be dropped in the cart area.

In the Product Description Module it has been tested that all the images are displayed properly. Users can add review and the as soon as a user adds a review it is updated in the view customer review tab. It has been checked to see if the whole page refreshes or a partial page update happens when a user writes a review.

In the Cart Details it has been tested that when a user edits a quantity or removes a product from the cart, the total price is updated accordingly. It has been checked to see

if the whole page refreshes or a partial page update happens when a user edits the cart. Visual Studio 2008 has in built support for testing the application. The unit testing can be done using visual studio 2008 without the need of any external application. Various methods have been created for the purpose of unit testing. Test cases are automatically generated for these methods. The tests run under the ASP.NET context which means settings from Web.config file are automatically picked up once the test case starts running.

Methods were written to retrieve all the manufacturers from the database, strings that match a certain search term, products that match certain filter criteria, all images that belong to a particular product etc.

Integration Testing

In integration testing a system consisting of different modules is tested for problems arising from component interaction. Integration testing should be developed from the system specification. Firstly, a minimum configuration must be integrated and tested. In my project I have done integration testing in a bottom up fashion i.e. in this project I have started construction and testing with atomic modules. After unit testing the modules are integrated one by one and then tested the system for problems arising from component interaction.

Validation Testing

It provides final assurances that software meets all functional, behavioral & performance requirement. Black box testing techniques are used.

There are three main components

- Validation test criteria (no. in place of no. & char in place of char)
- Configuration review (to ensure the completeness of s/w configuration.) - Alpha & Beta testing-Alpha testing is done at developer's site i.e. at home & Beta testing once it is deployed. Since I have not deployed my application, I could not do the Beta testing.

Test Cases- I have used a number of test cases for testing the product. There were different cases for which different inputs were used to check whether desired output is produced or not.

1. Addition of a new product to the cart should create a new row in the shopping cart.
2. Addition of an existing product to the cart has to update the quantity of the product.
3. Any changes to items in the cart have to update the summary correctly.
4. Because same page is inserting data into more than one table in the database atomicity of the transaction is tested

5.3 Testing Methods Used

BLACK BOX TESTING

Also known as functional testing. Software testing technique whereby the internal workings of the item being tested are not known by the tester. For example, in a black box test on software design the tester only knows the inputs and what the expected outcomes should be and not how the program arrives at those outputs. The tester does not ever examine the programming code and does not need any further knowledge of the program other than its specifications.

The advantages of this type of testing include:

a. The test is unbiased because the designer and the tester are independent of each other.
b. The test is done from the point of view of the user, not the designer.
c. Test cases can be designed as soon as the specifications are complete.

The disadvantages of this type of testing include:

a. The test can be redundant if the software designer has already run a test case.
b. The test cases are difficult to design.
c. Testing every possible input stream is unrealistic because it would take an inordinate amount of time; therefore, many program paths will go untested.

WHITE BOX TESTING

The purpose of any security testing method is to ensure the robustness of a system in the face of malicious attacks or regular software failures. White box testing is performed based on the knowledge of how the system is implemented. White box testing includes analyzing data flow, control flow, information flow, coding practices, and exception and error handling within the system, to test the intended and unintended software behavior. White box testing can be performed to validate whether code implementation follows intended design, to validate implemented security functionality, and to uncover exploitable vulnerabilities.

White box testing requires access to the source code. Though white box testing can be performed any time in the life cycle after the code is developed, it is a good practice to perform white box testing during the unit testing phase.

White box testing requires knowing what makes software secure or insecure, how to think like an attacker, and how to use different testing tools and techniques. The first step in white box testing is to comprehend and analyze source code, so knowing what makes software secure is a fundamental requirement. Second, to create tests that exploit software, a tester must think like an attacker. Third, to perform testing effectively, testers need to know the different tools and techniques available for white box testing.

GREY BOX TESTING

Gray box testing is a software testing technique that uses a combination of black box testing and white box testing. Gray box testing is not black box testing, because the tester does know some of the internal workings of the software under test. In gray box testing, the tester applies a limited number of test cases to the internal workings of the software under test. In the remaining part of the gray box testing, one takes a black box approach in applying inputs to the software under test and observing the outputs.

Gray box testing is a powerful idea. The concept is simple; if one knows something about how the product works on the inside, one can test it better, even from the outside. Gray box testing is not to be confused with white box testing; i.e. a testing approach that attempts to cover the internals of the product in detail. Gray box testing is a test strategy based partly on internals. The testing approach is known as gray box testing, when one does have some knowledge, but not the full knowledge of the internals of the product one is testing. In gray box testing, just as in black box testing, you test from the outside of a product, just as you do with black box, but you make better-informed testing choices because you're better informed; because you know how the underlying software components operate and interact.

5.4 Testing Results and analysis

The application can be used for any Ecommerce application. It is easy to use, since it uses the GUI provided in the user dialog. User friendly screens are provided. The application is easy to use and interactive making online shopping a recreational activity for users. It has been thoroughly tested and implemented.

CHAPTER # 5


System Design

Contents:

- Use case diagram
- Class Diagram
- Sequence Diagram
- Data flow diagram

Use Case Diagram:

- Use case diagram consists of use cases and actors and shows the interaction between them. The key points are:
- The main purpose is to show the interaction between the use cases and the actor.
- To represent the system requirement from user's perspective.
- The use cases are the functions that are to be performed in the module.

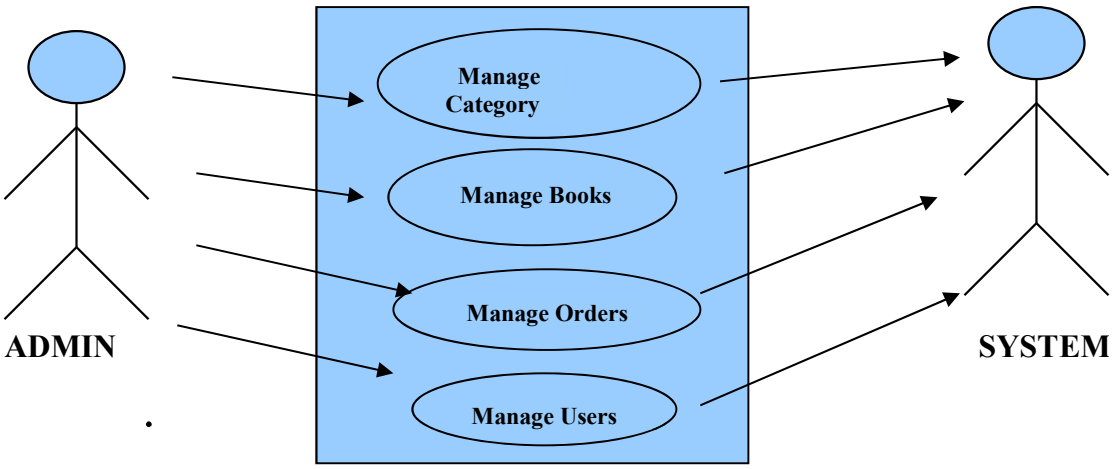

Use Case Diagram between ADMIN and SYSTEM:

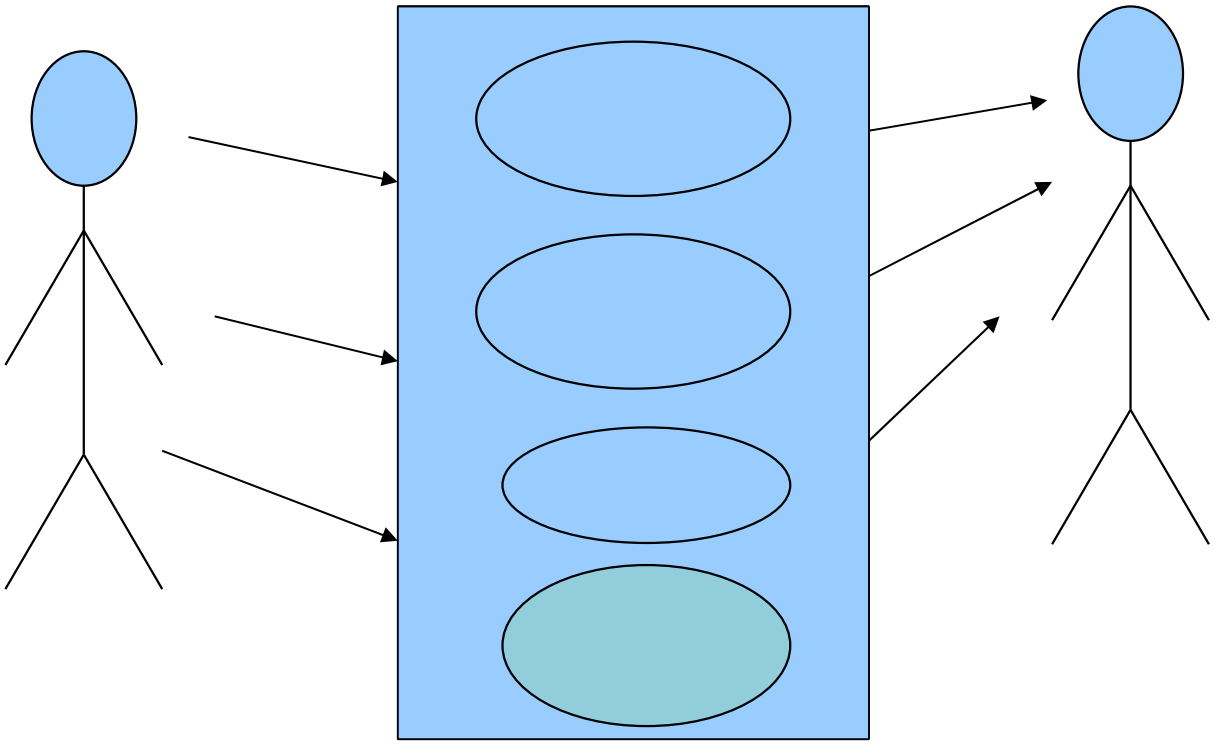


Fig.5.1

Use Case Diagram between USER and SYSTEM:

Class Diagram:

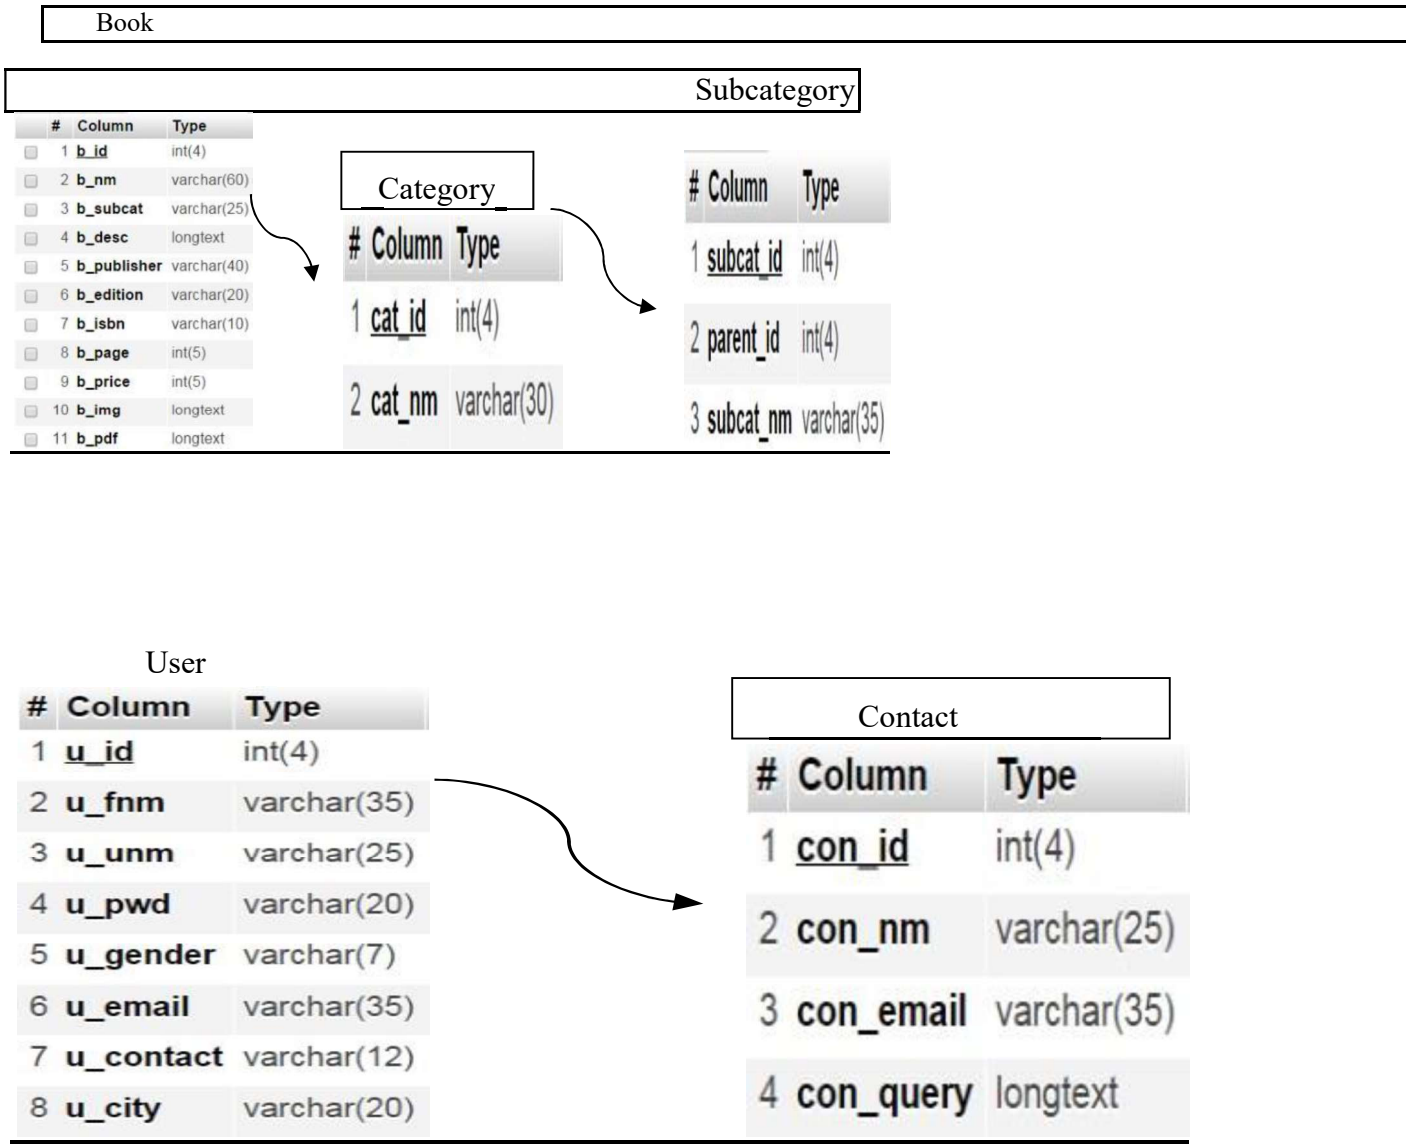


Fig.5.3

Sequence Diagram For Administrator:-


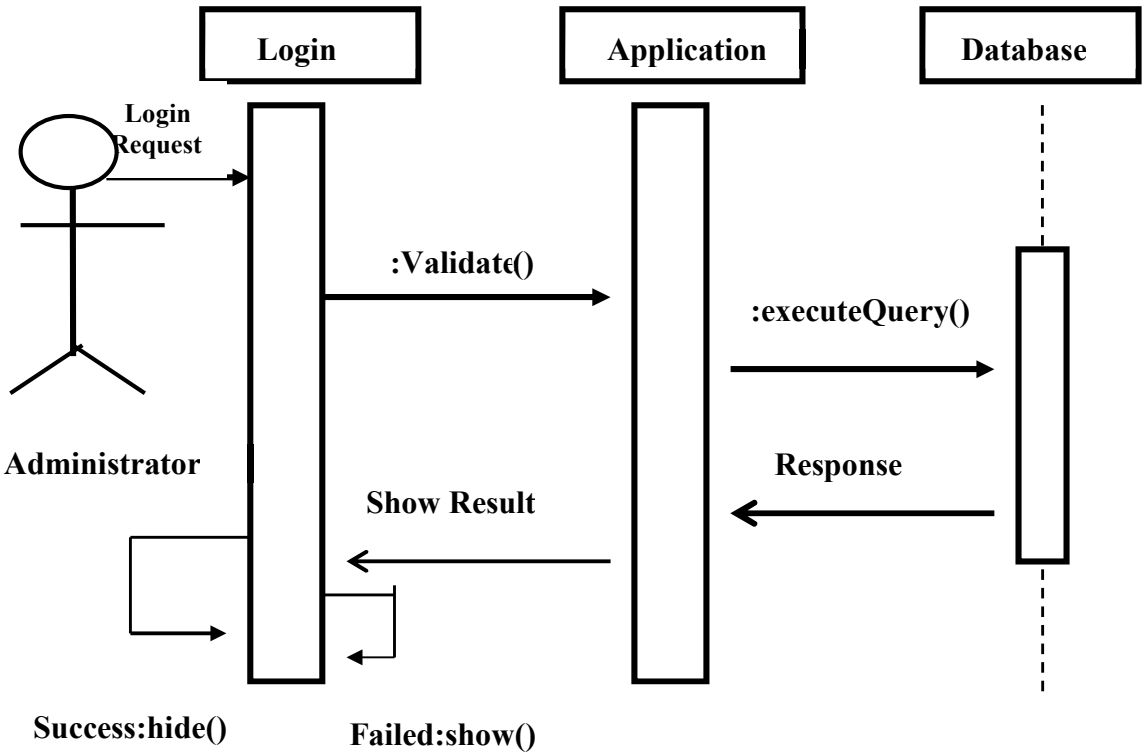


Fig.5.4

Sequence Diagram For User:-

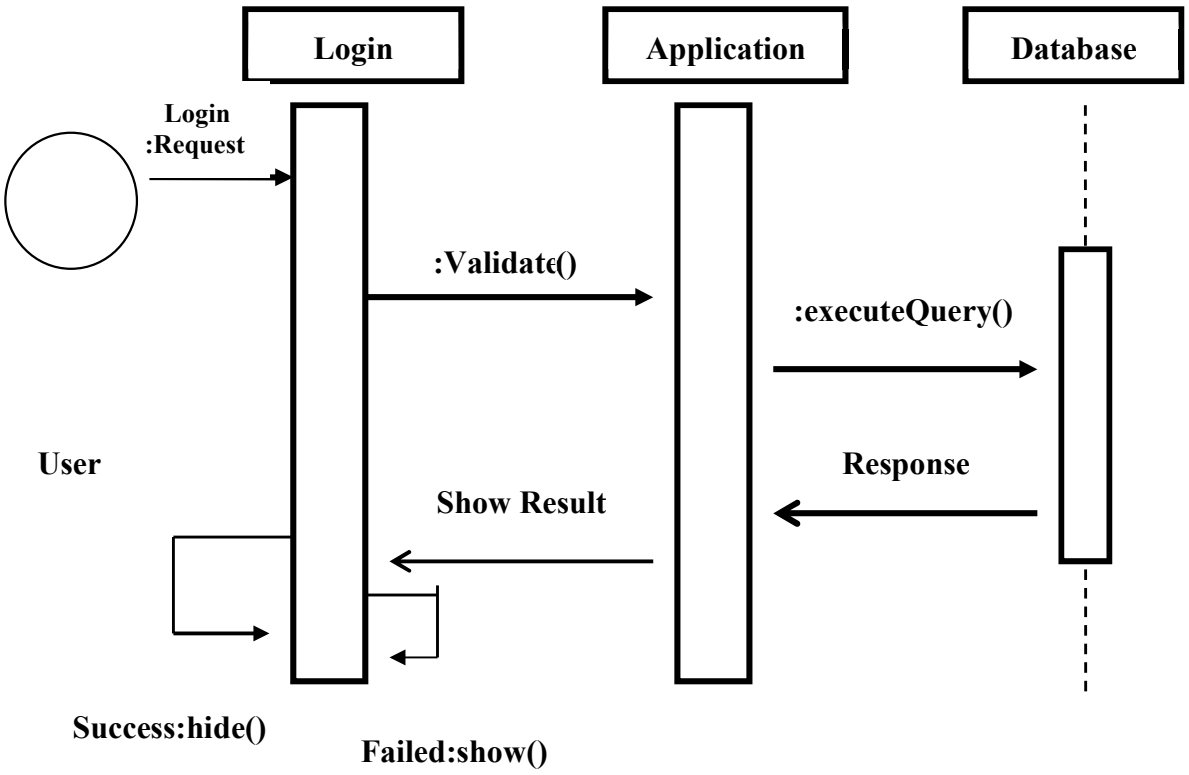

:

Fig.5.5

Entity Relationship Diagrams (ER-Diagrams):

An entity-relationship (ER) diagram is a specialized graphic that illustrates the interrelationships between entities in a database. ER diagrams often use symbols to represent three different types of information. Boxes are commonly used to represent entities. Diamonds are normally used to represent relationships and ovals are used to represent attributes


An **entity-relationship model** (ERM) in software engineering is an abstract and conceptual representation of data. Entity-relationship modeling is a relational schema database modeling method, used to produce a type of conceptual schema or semantic data model of a system, often a relational database, and its requirements in a top-down fashion.

Symbols used in this E-R Diagram:


Entity: Entity is a "thing" in the real world with an independent existence. An entity may be an object with a physical existence such as person, car or employee. Entity symbol is as follows




Attribute: Attribute is a particular property that describes the entity. Attribute symbol is



Relationship: Relationship will be several implicit relationships among various entity types whenever an attribute of one entity refers to another entity type some relationship exits. Relationship symbol is:



Key attributes: An entity type usually has an attribute whose values are distinct for each individual entity in the collection. Such an attribute is called key attribute. Key attribute symbol is as follows

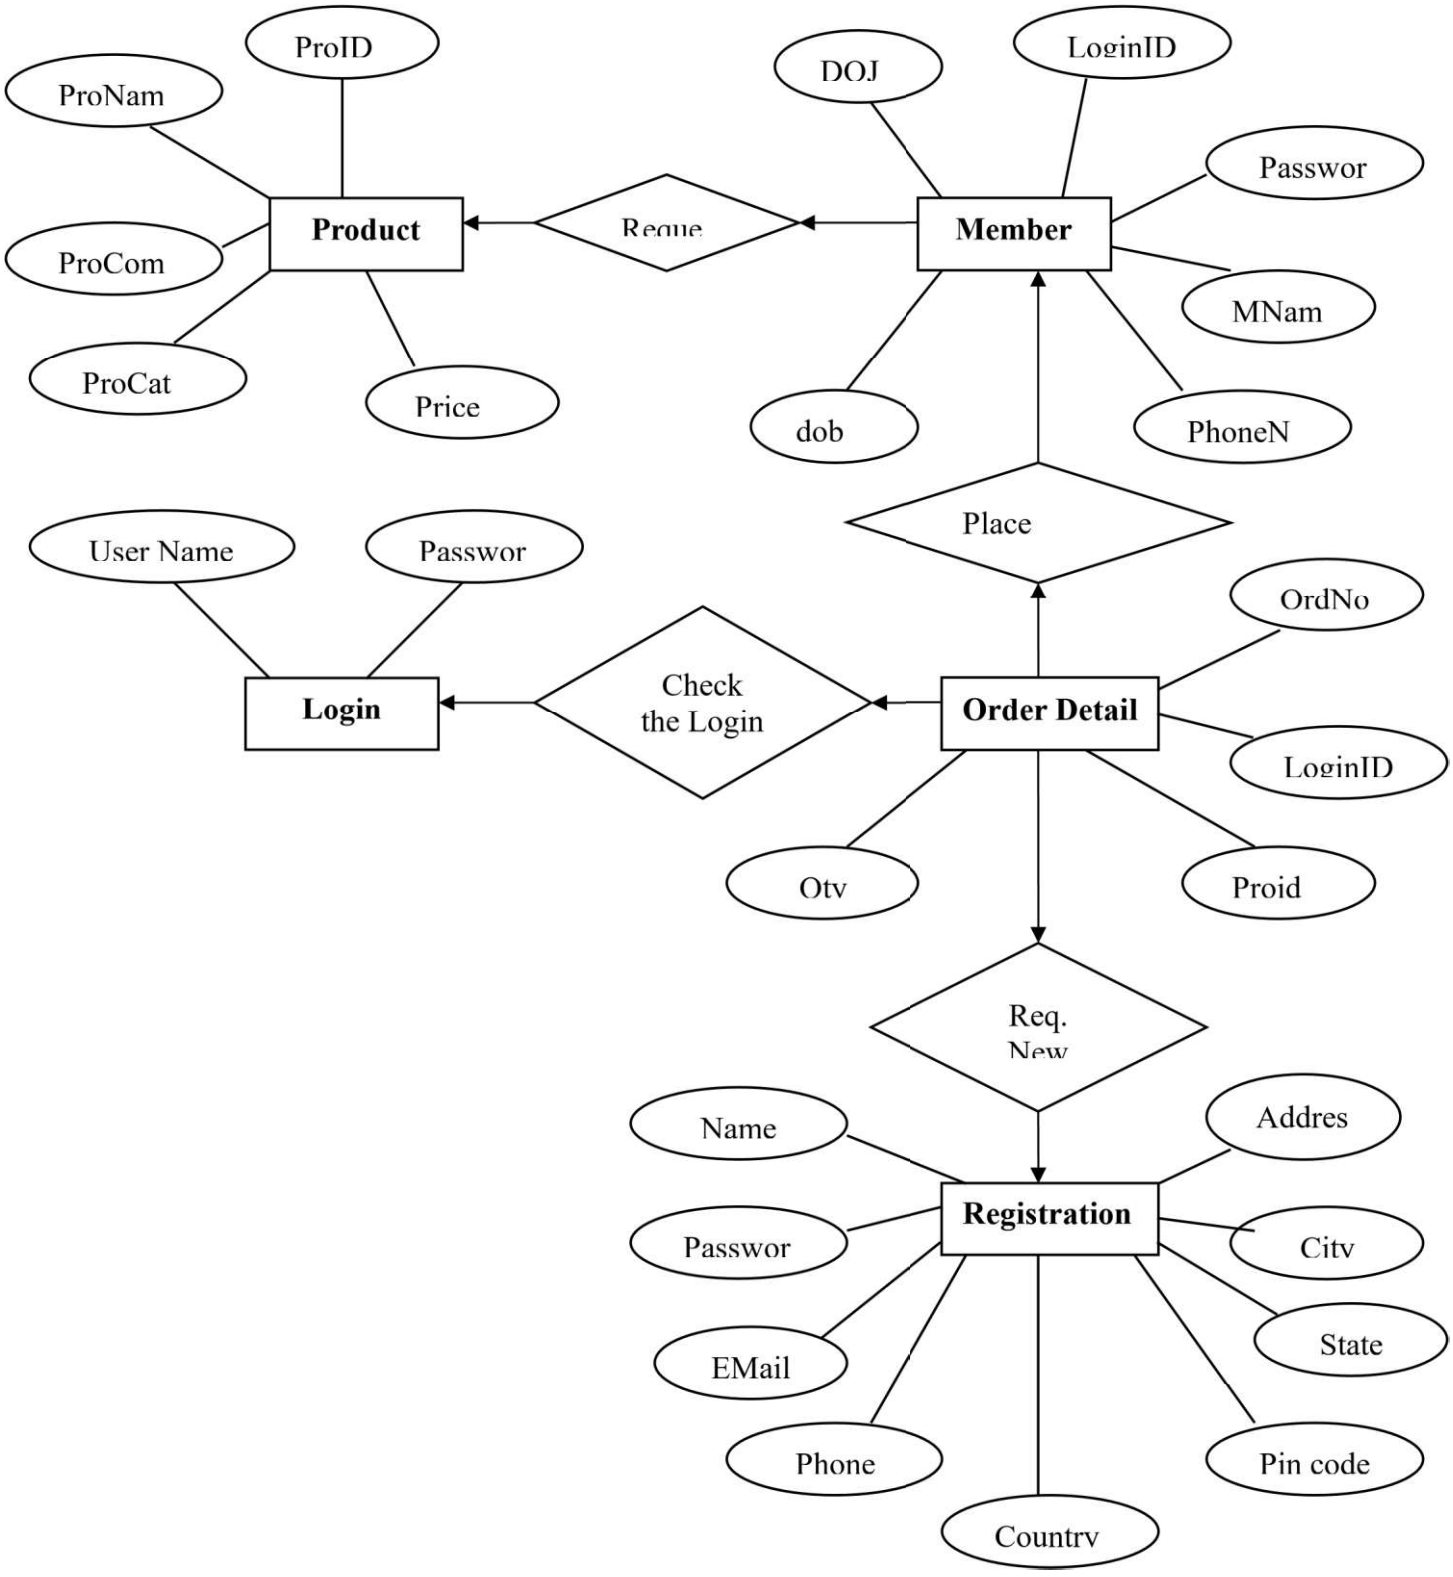

ProID
ProNam
ProCom
ProCat
Price
Product
Reque
DOJ
LoginID
Passwor
MNam
dob
PhoneN
Member
Place
User Name
Passwor
Login
Check
the Login
OrdNo
LoginID
Order Detail
Otv
Proid
Req.
New
Name
Addres
Passwor
Registration
Citv
State
EMail
Phone
Pin code
Countrv

CHAPTER # 6


User Screens

Output screens


HOME PAGE

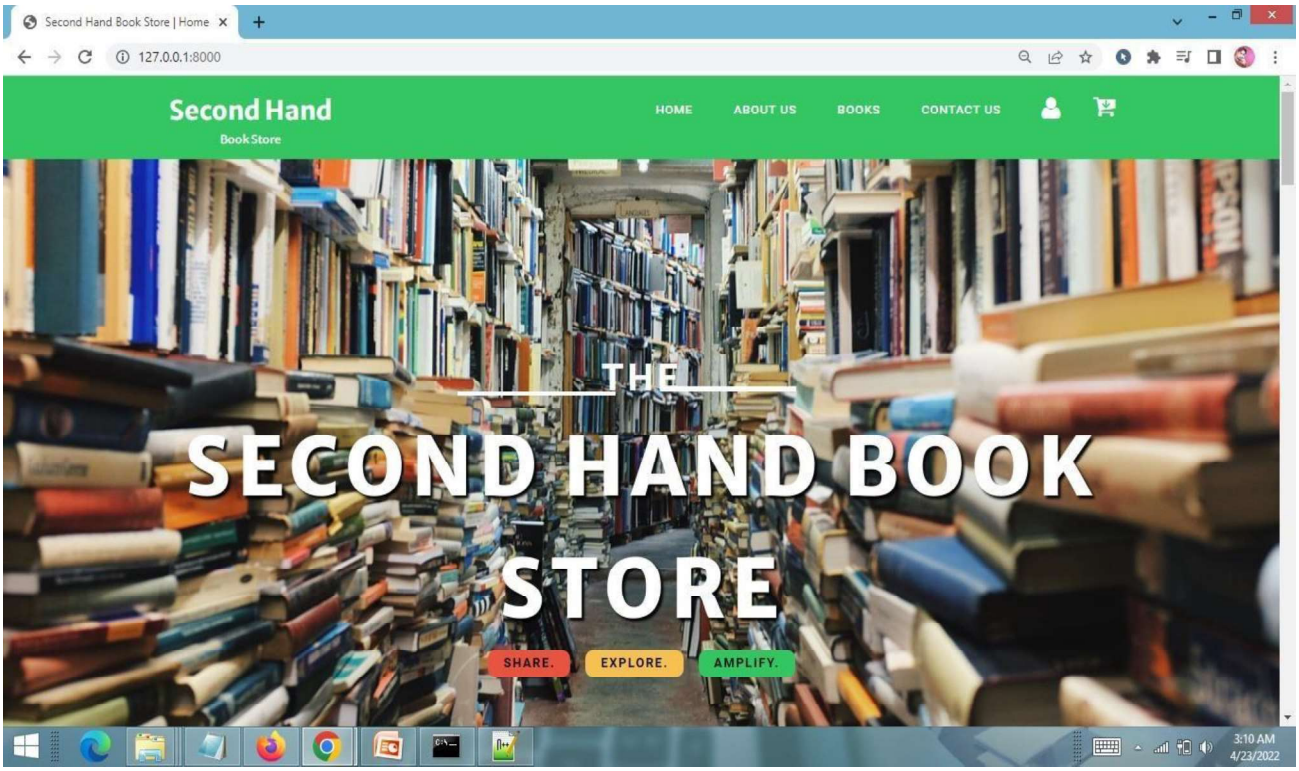


SIGNUP PAGE

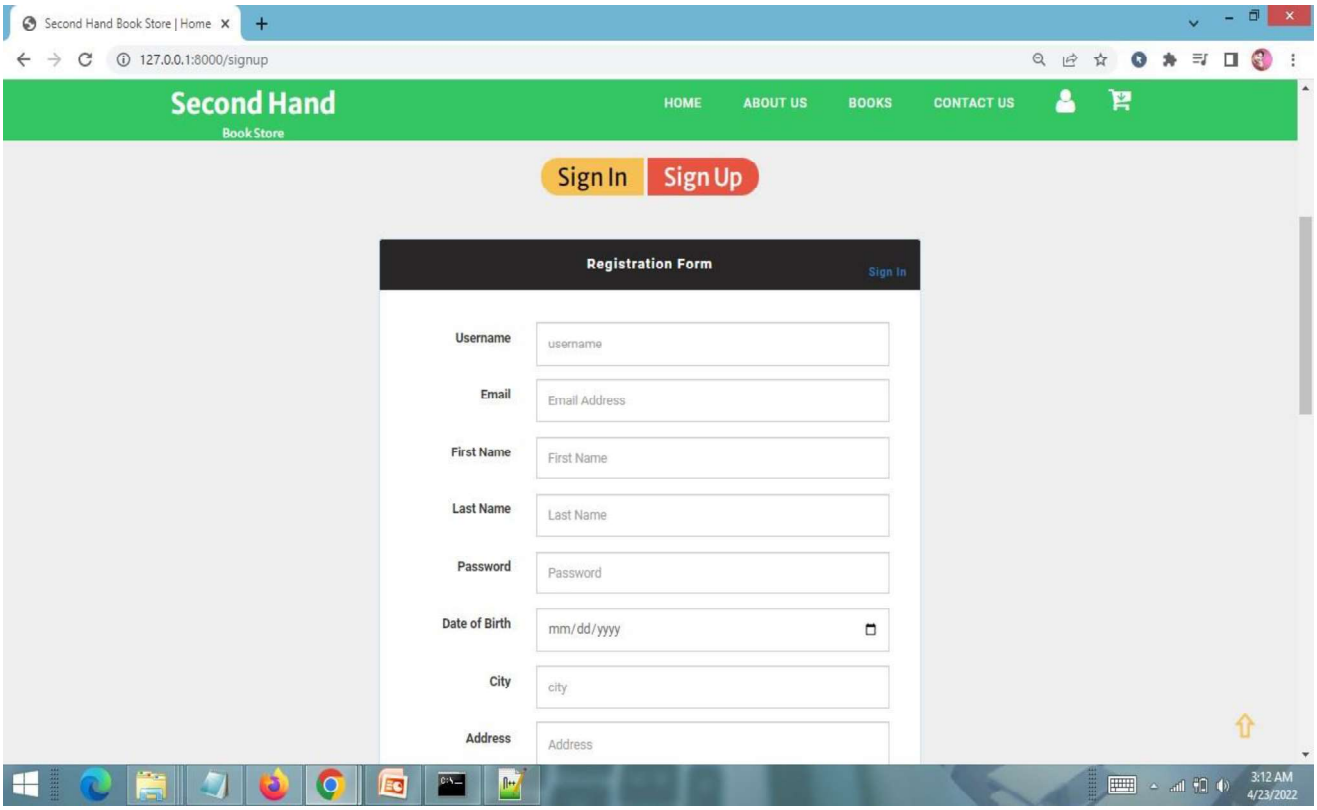


USER LOGIN PAGE

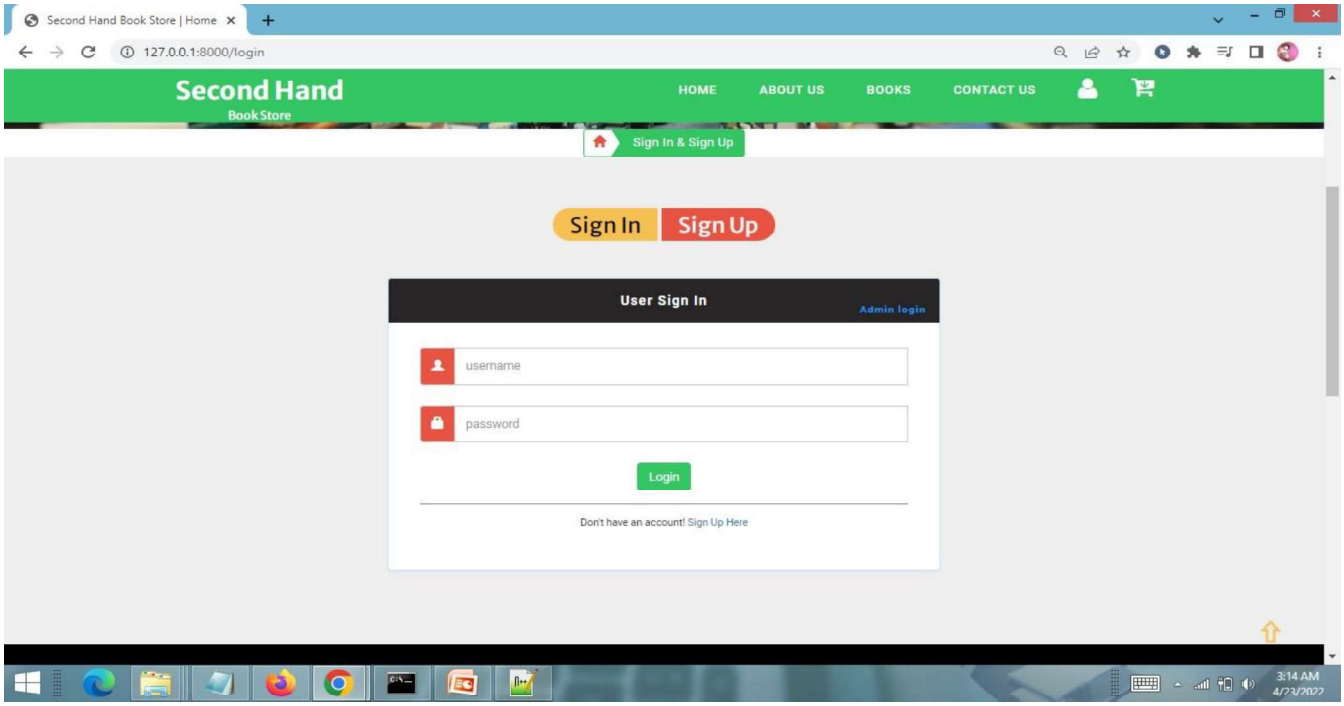


USER PROFILE PAGE

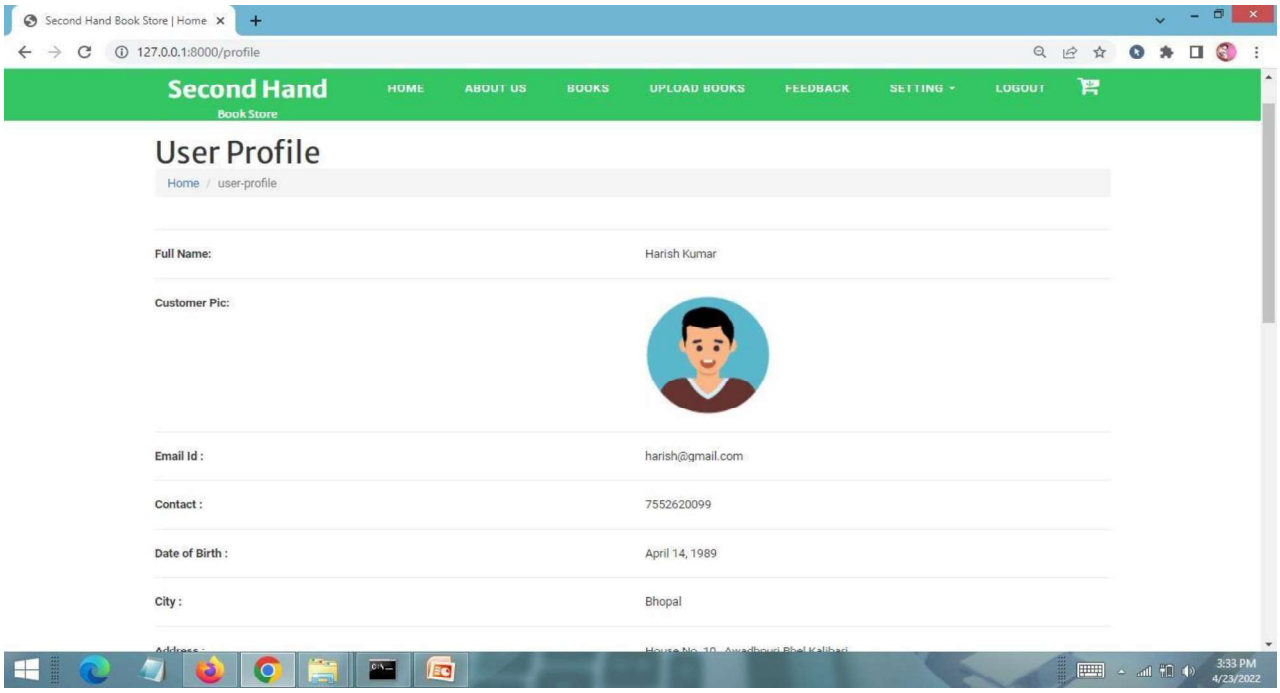


VIEW PRODUCTS PAGE

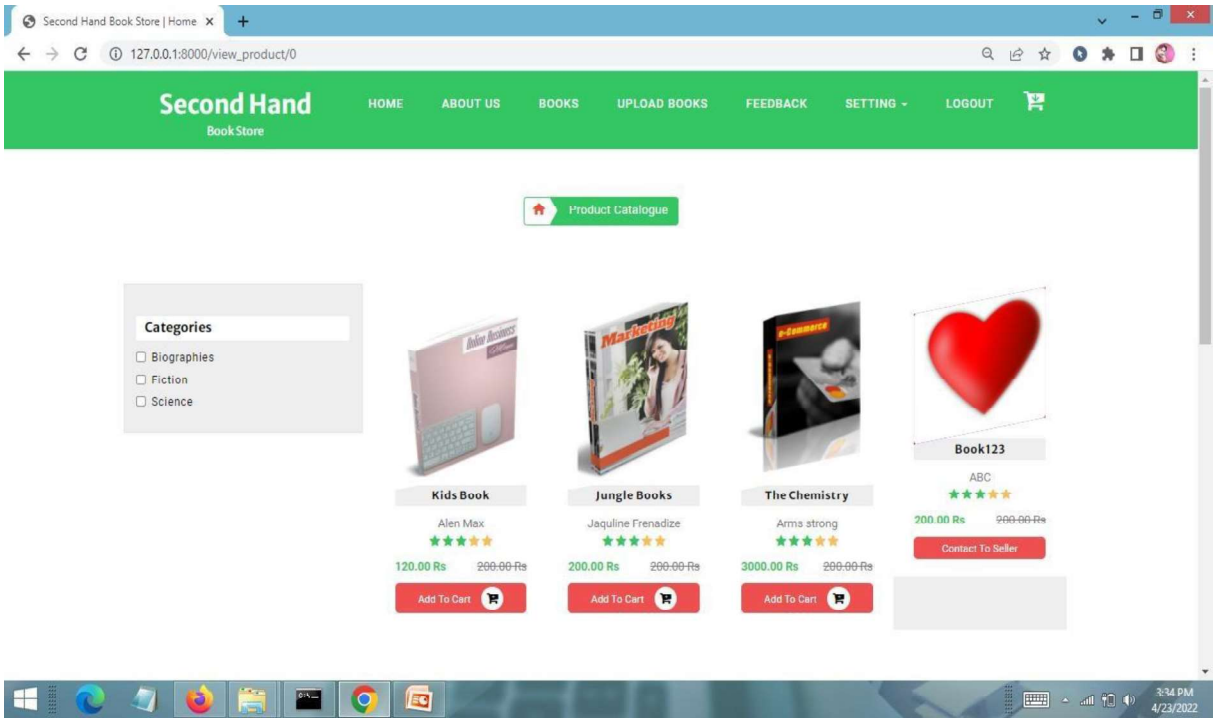


VIEW CART PAGE

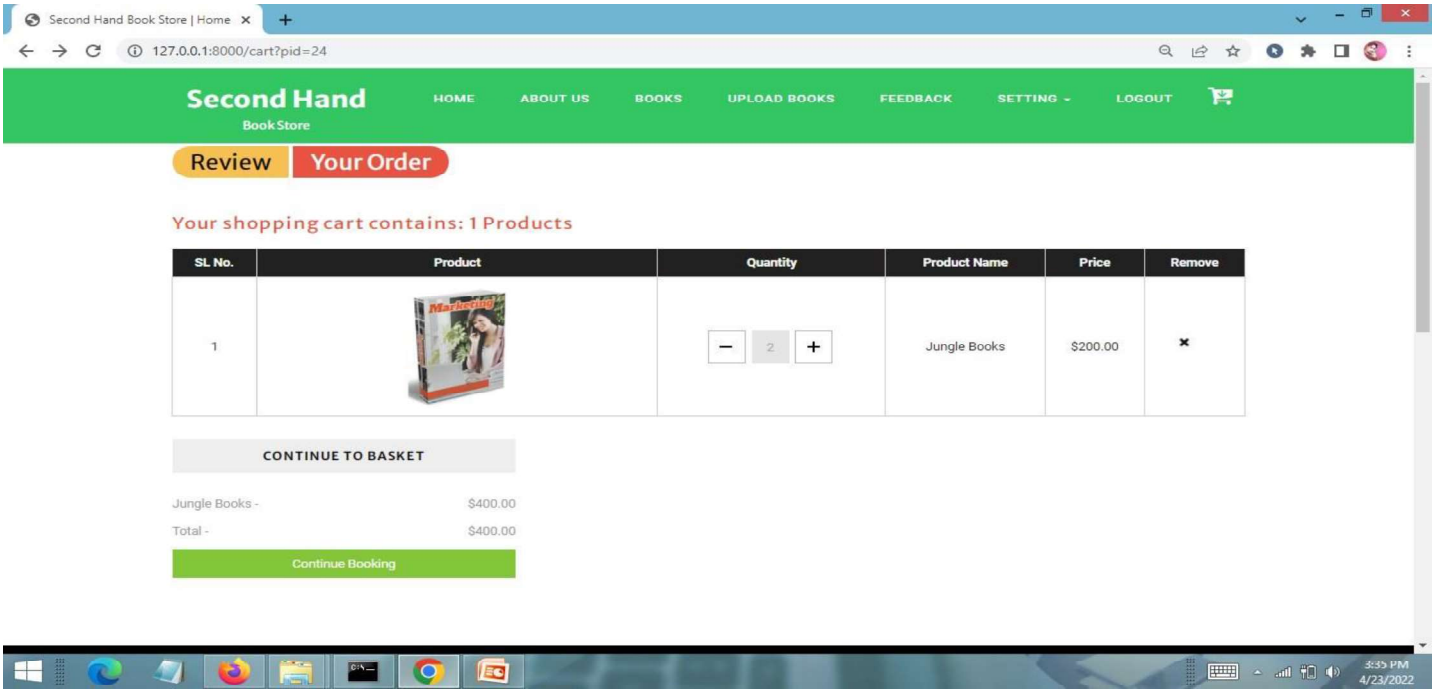


CONFIRM BOOKING PAGE

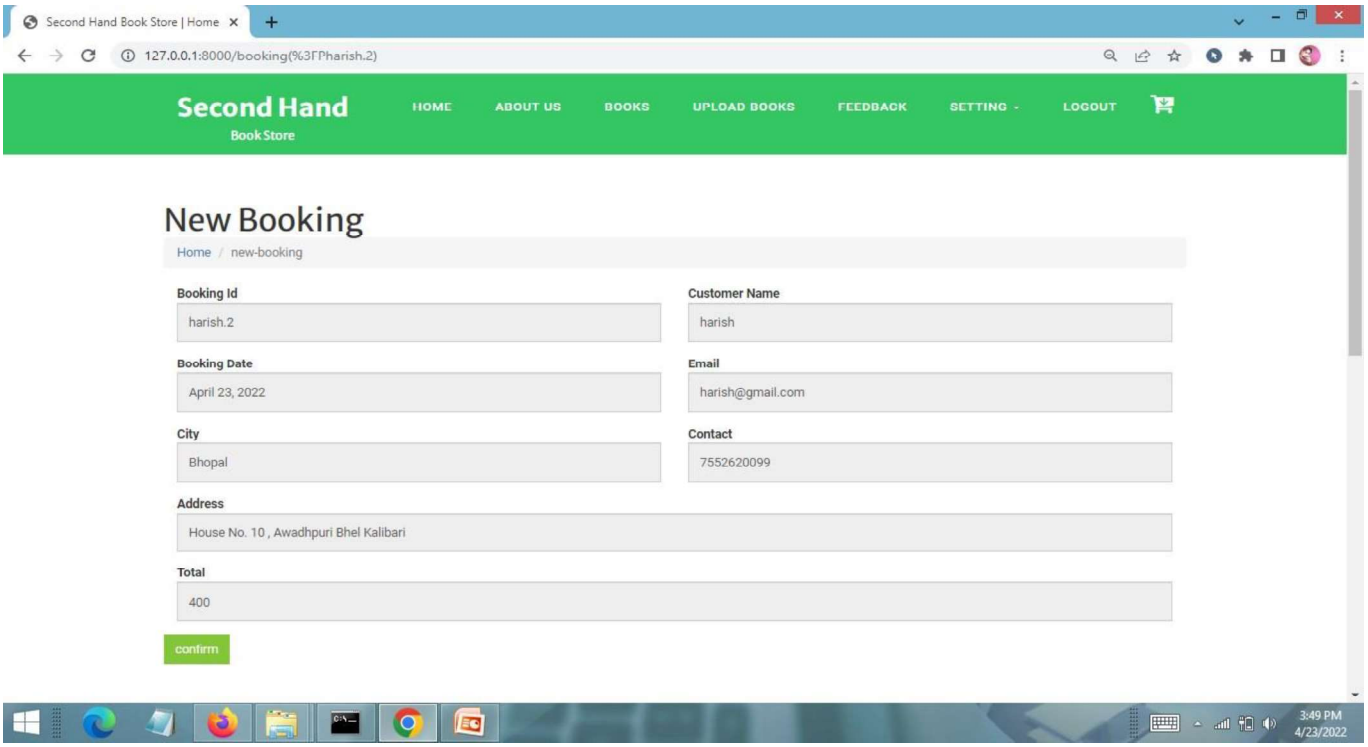


VIEW BOOKING HISTORY PAGE

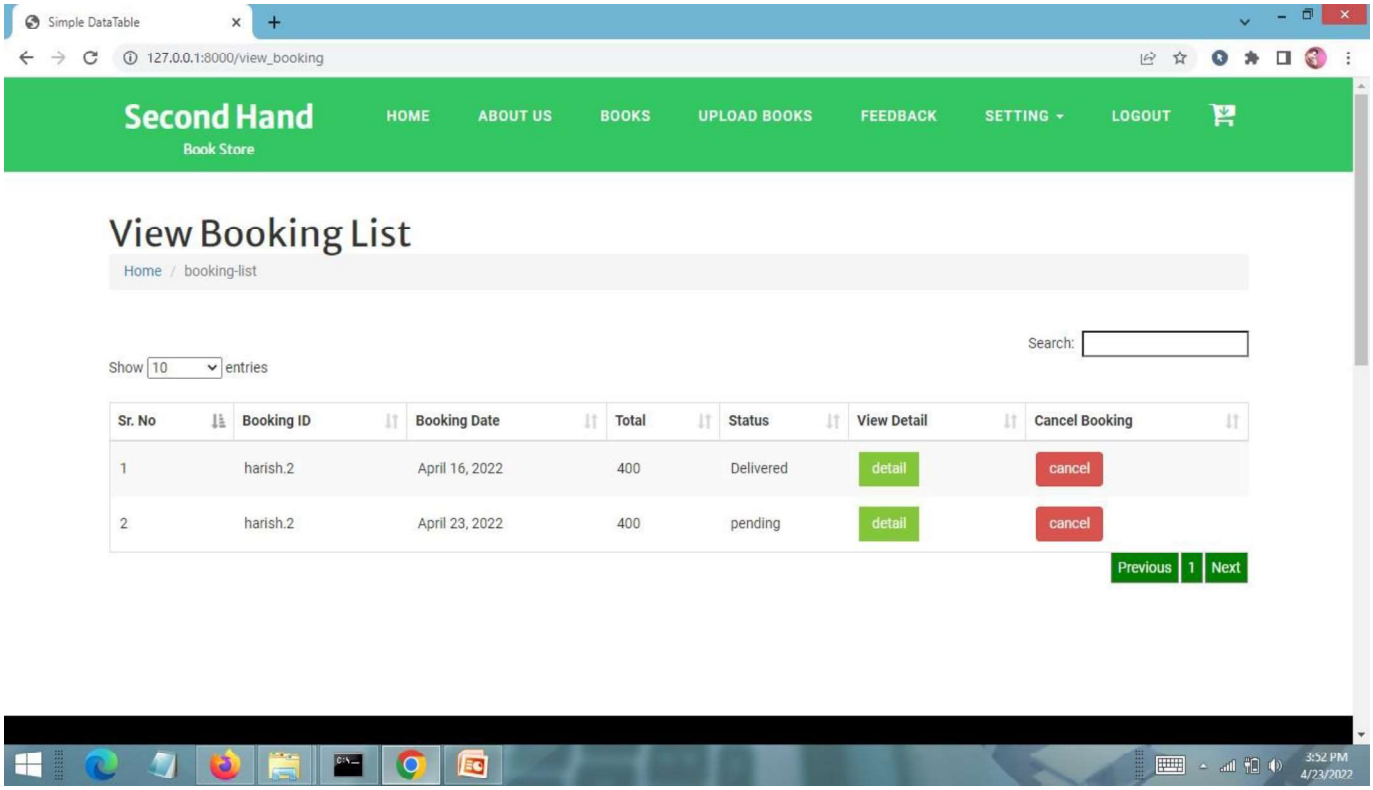


ADMIN LOGIN PAGE

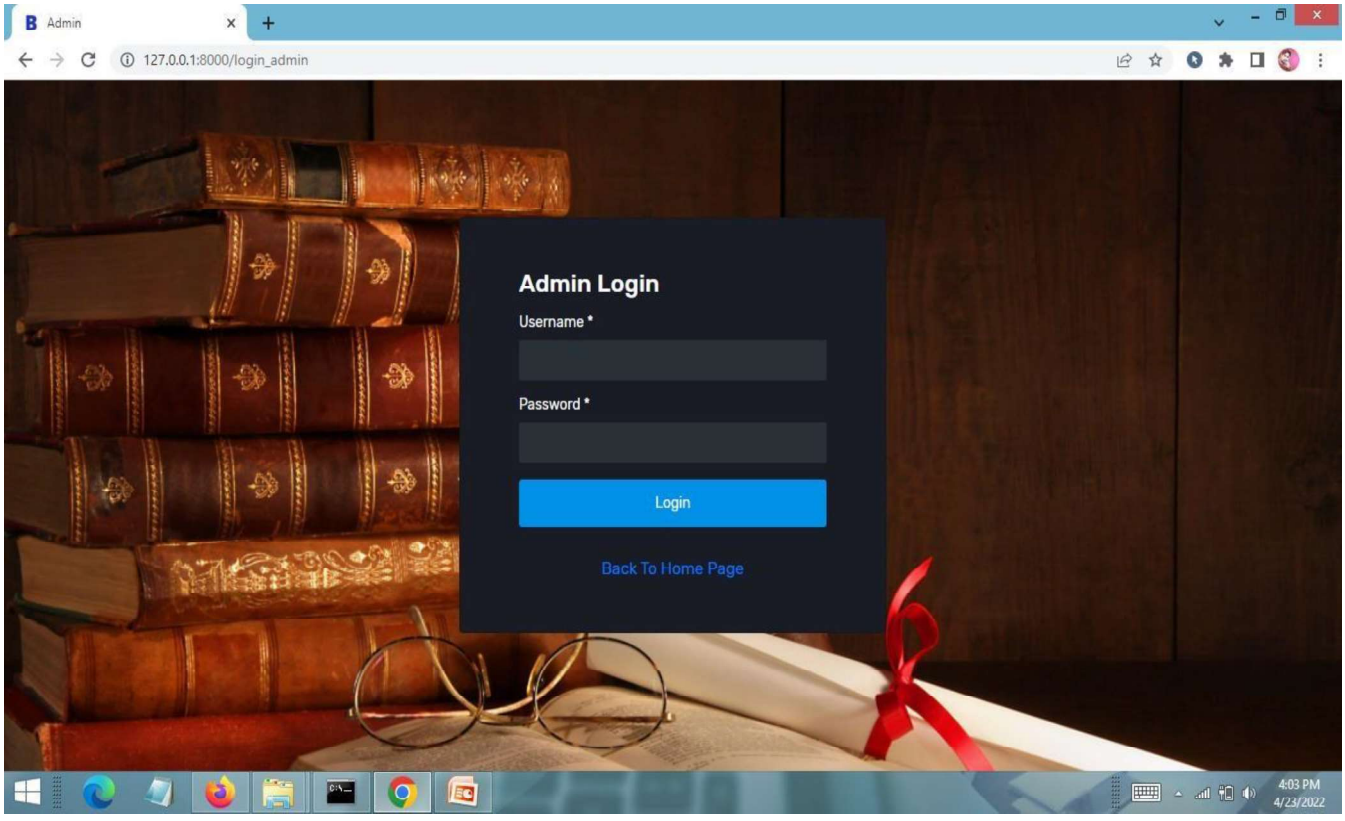


ADMIN HOME PAGE

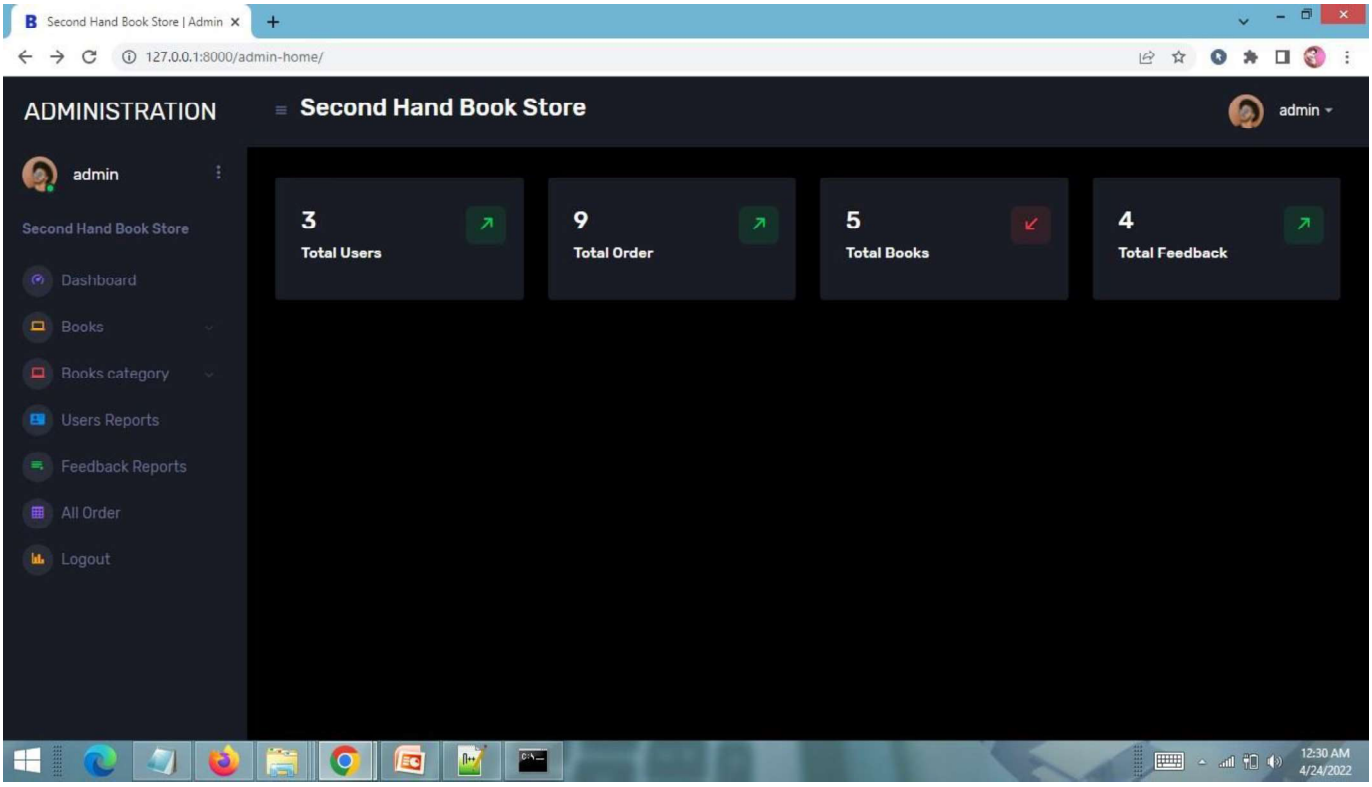


ADD PRODUCT PAGE

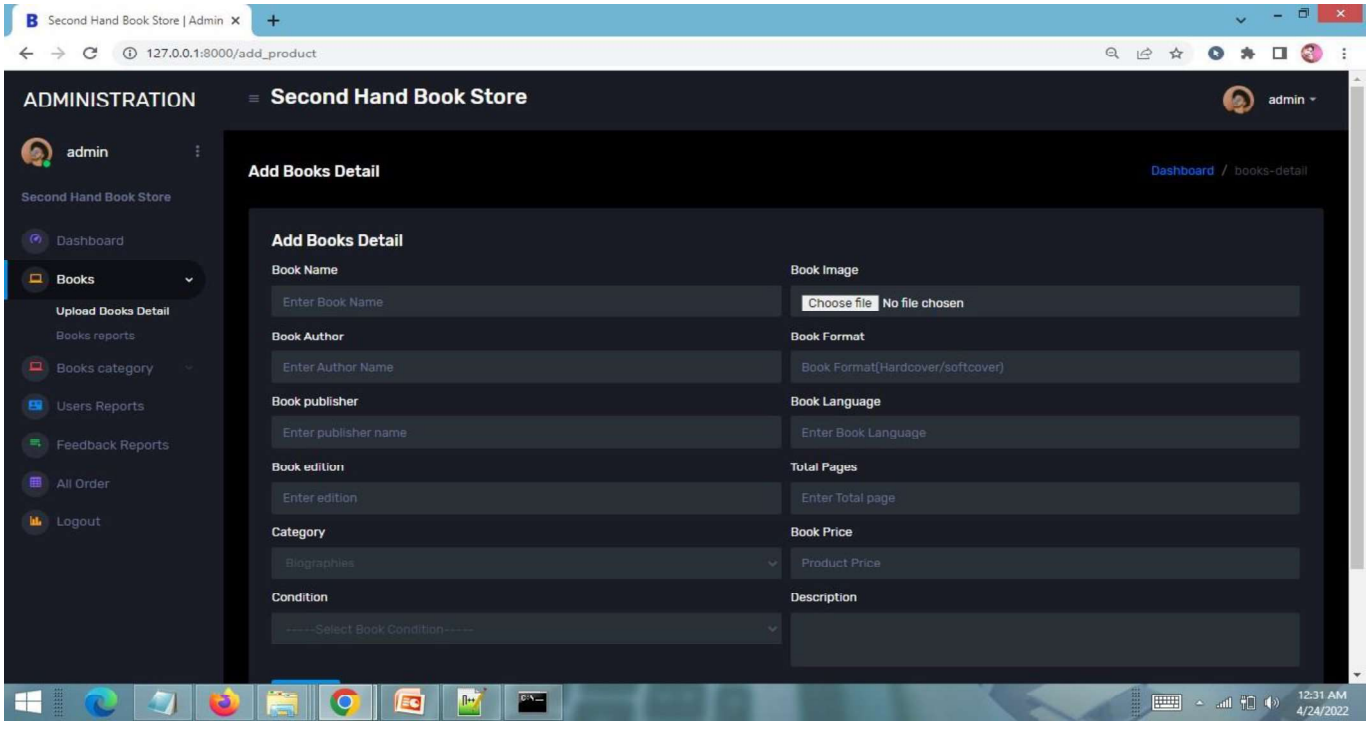


MANAGE PRODUCT PAGE

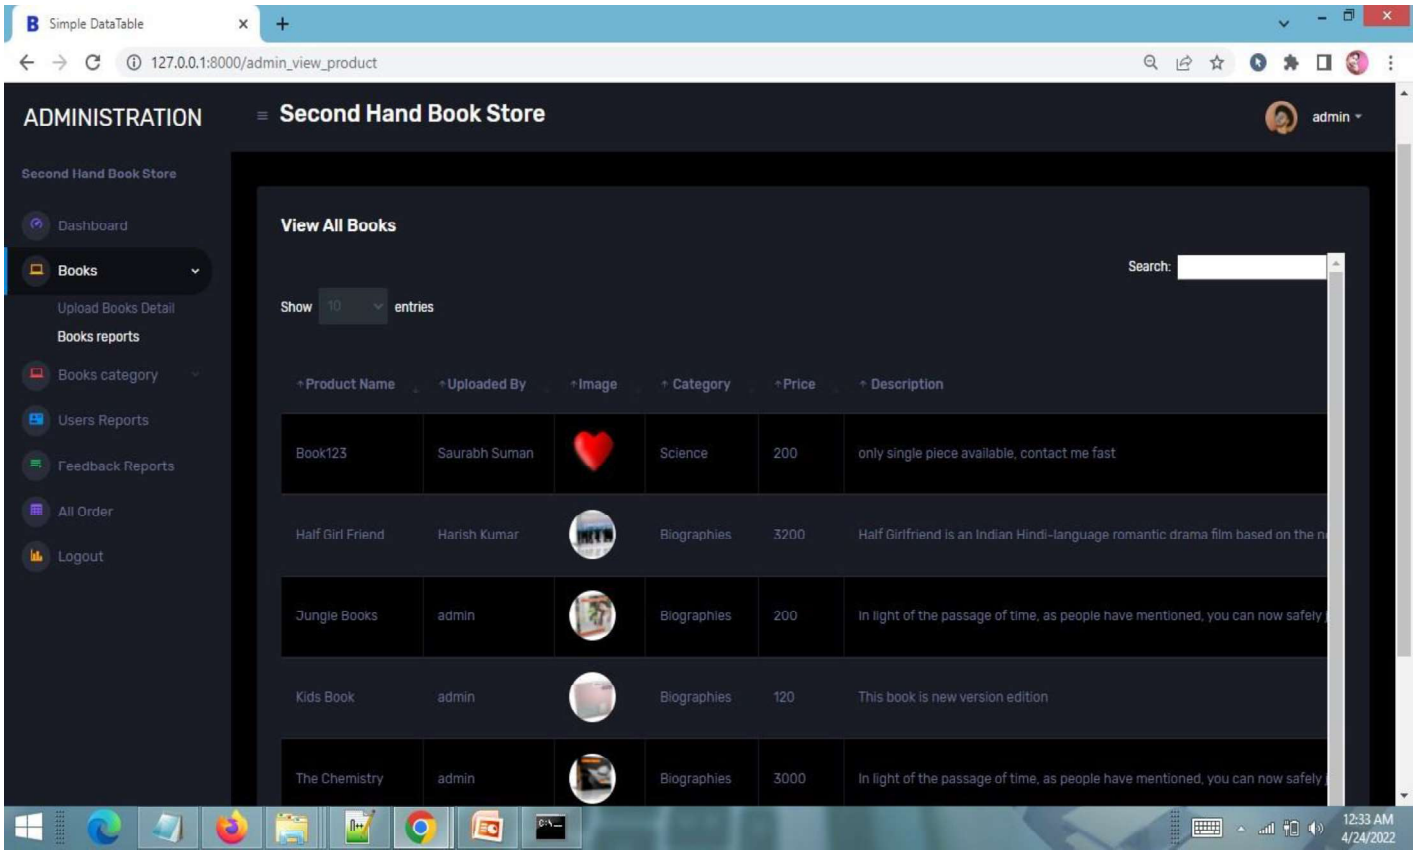


ADD PRODUCT CATEGORY PAGE

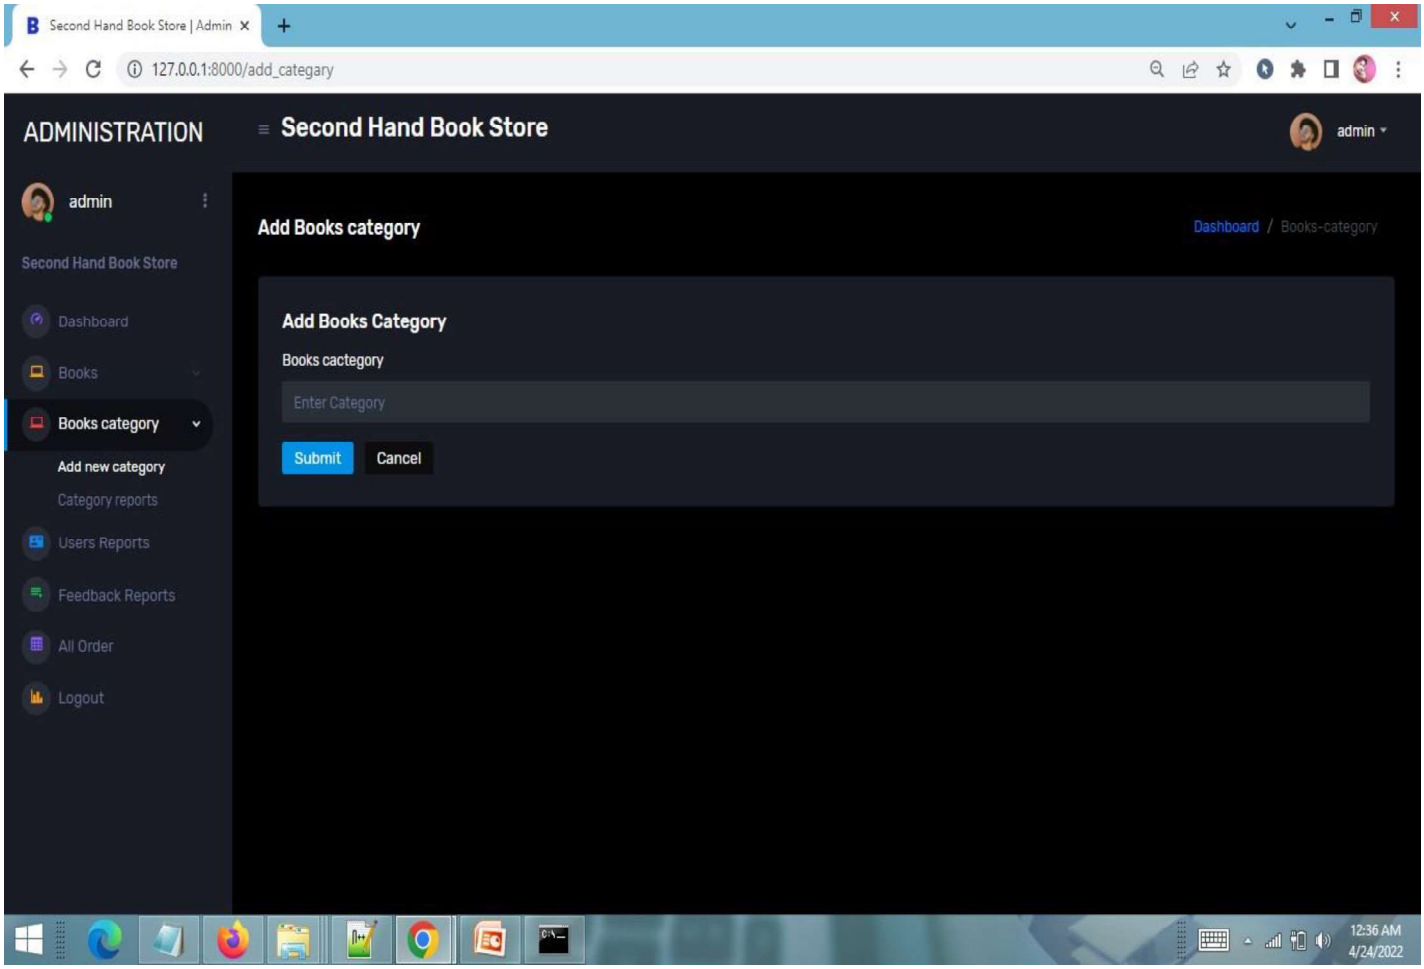


VIEW ALL PRODUCT CATEGORY PAGE

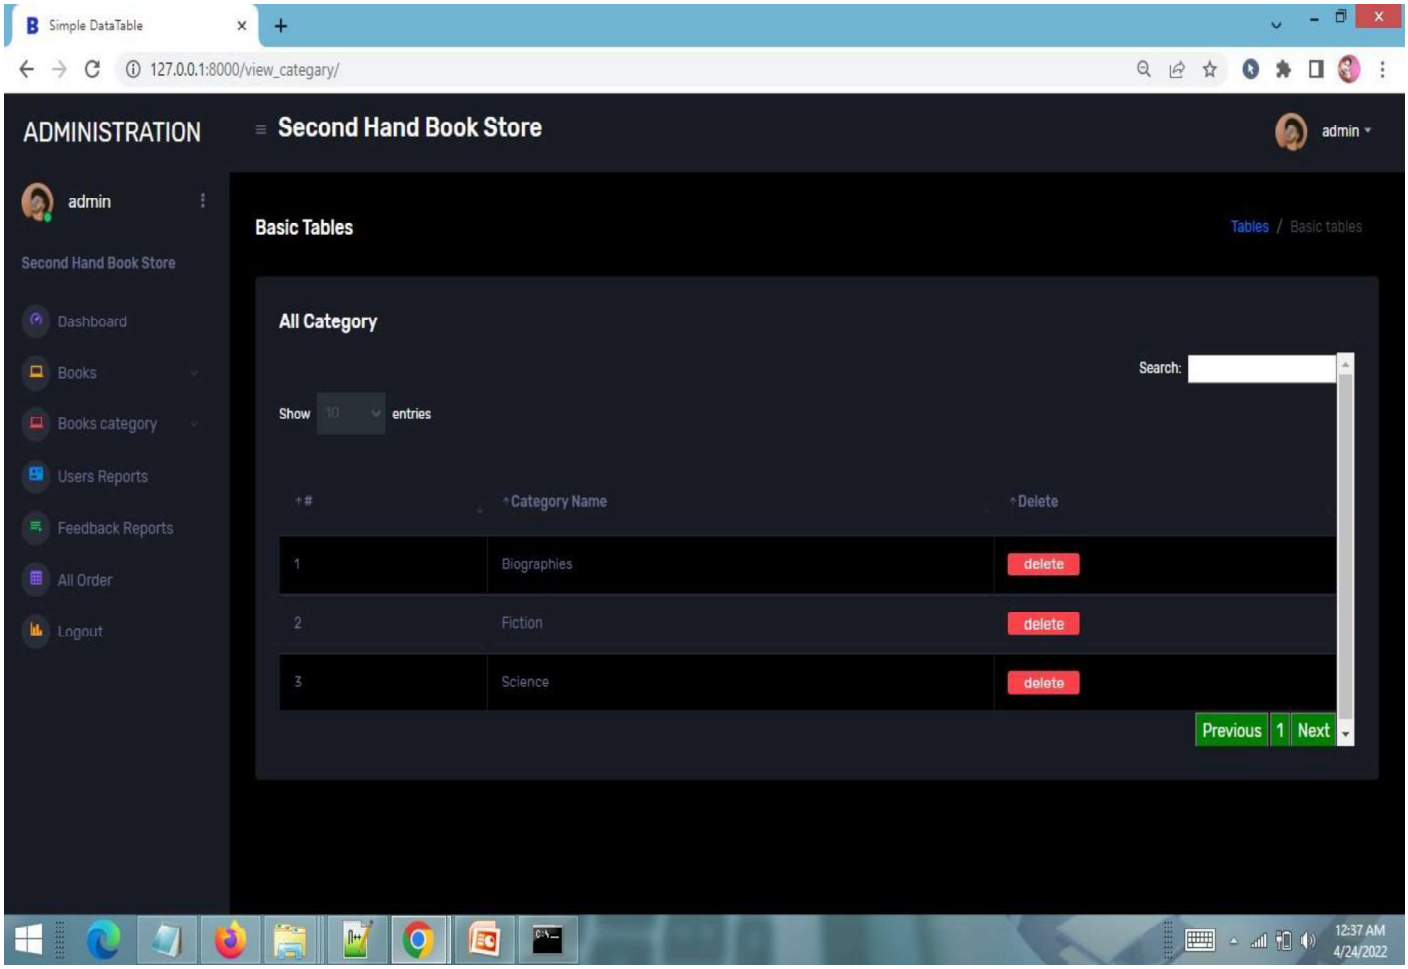


VIEW ALL REG. USERS

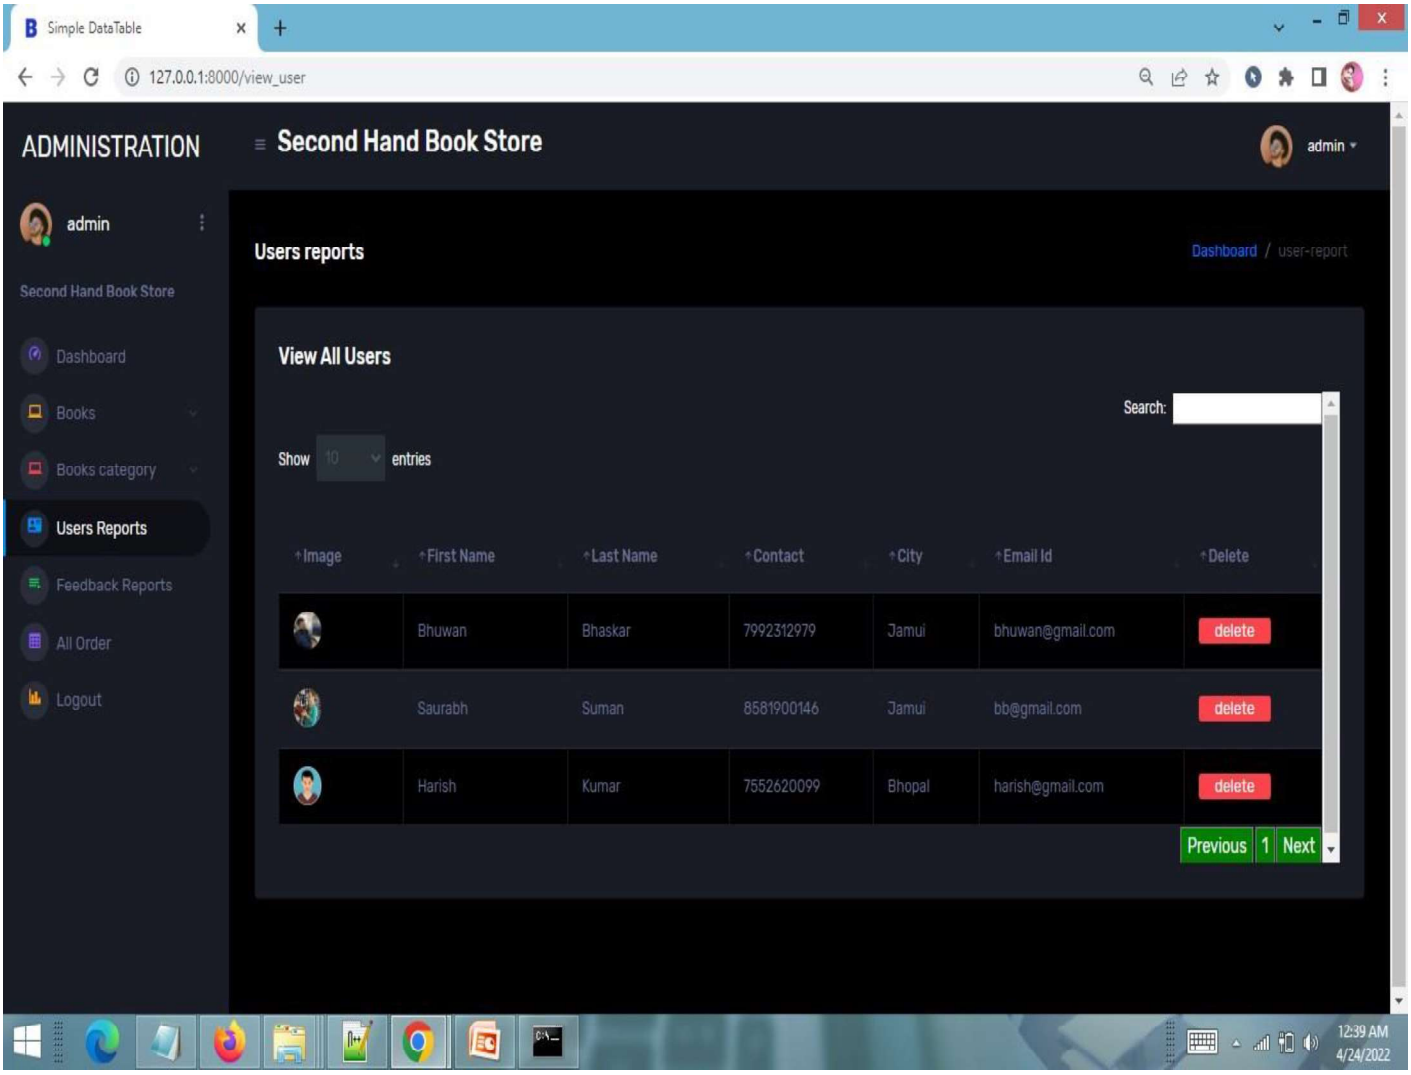

VIEW FEEDBACK PAGE

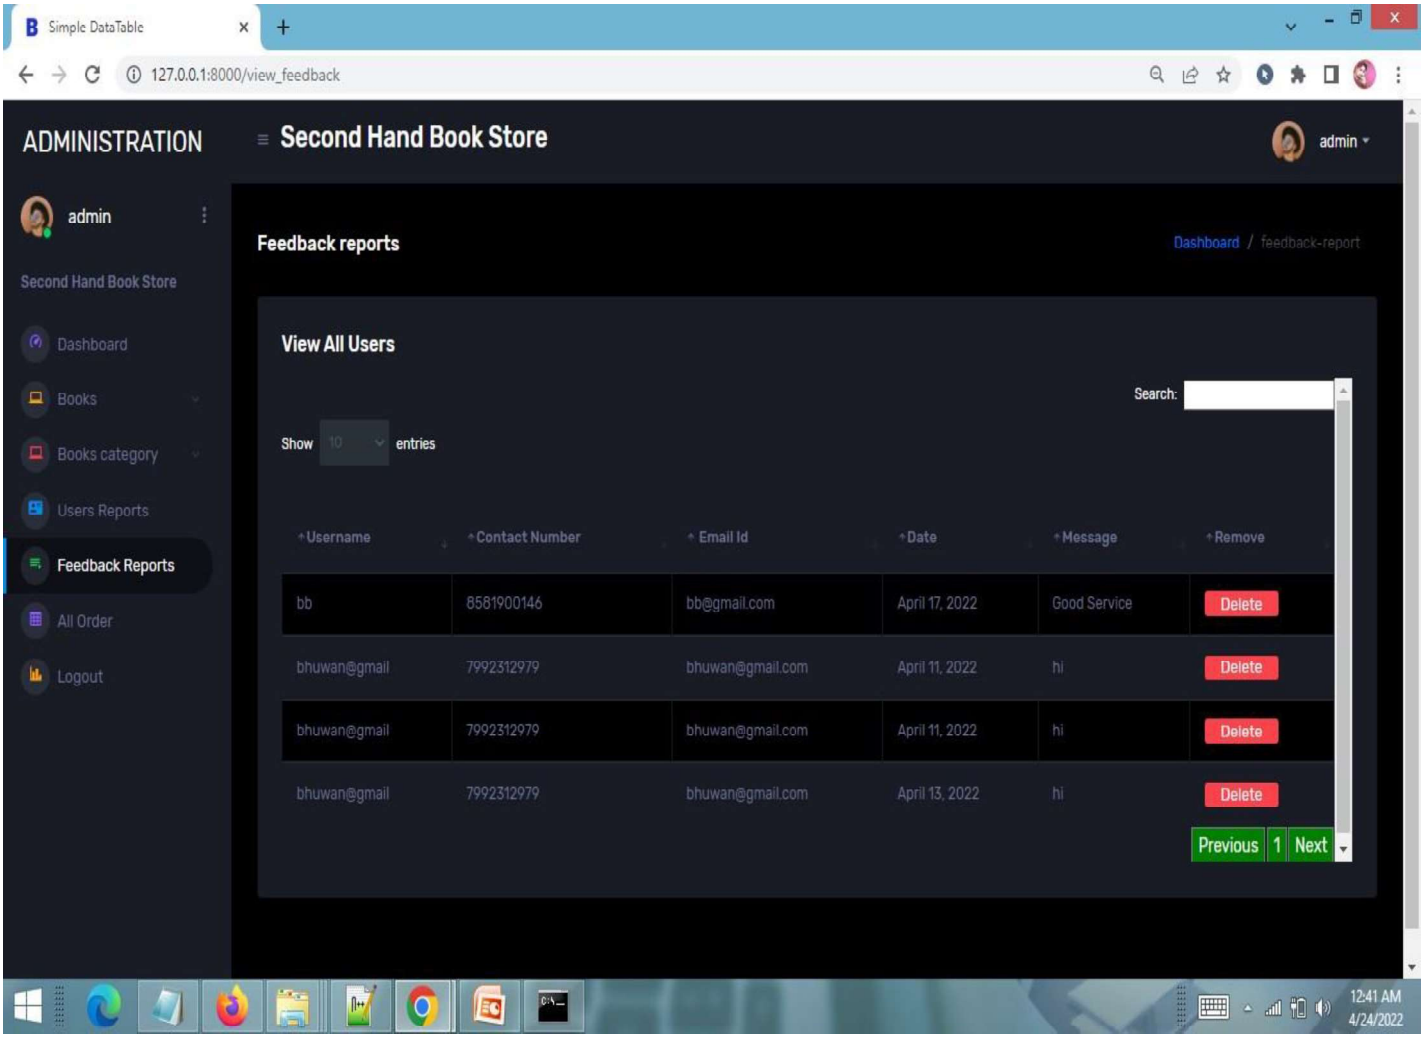

VIEW ALL ORDERS PAGE

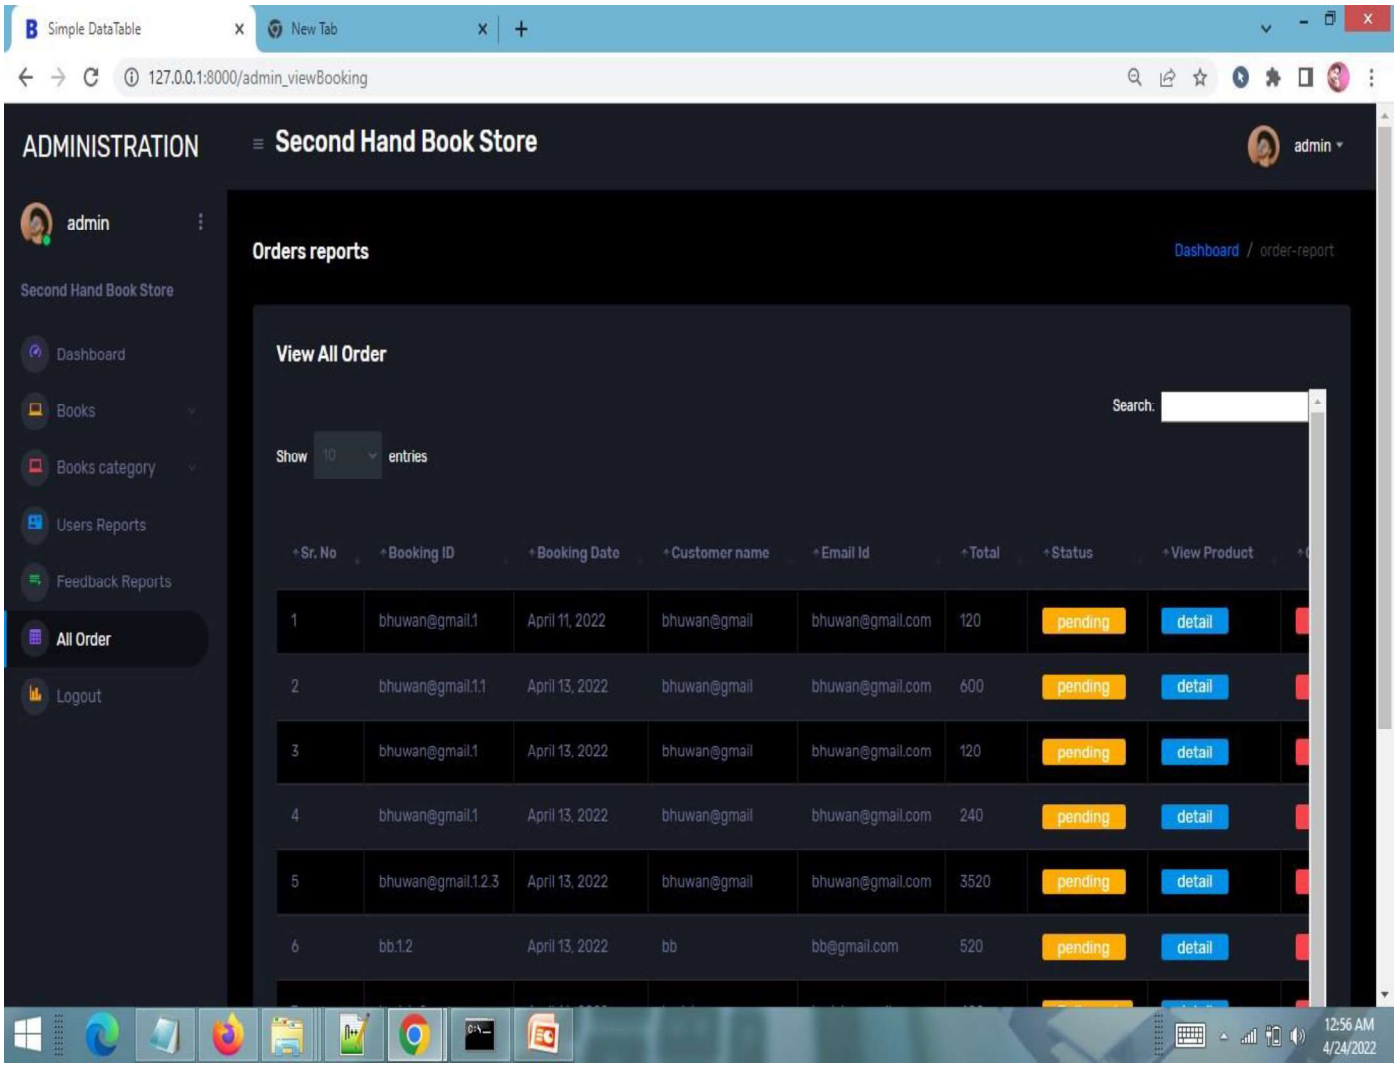

CHAPTER # 7

Coding

HOME PAGE CODING

```
{% extends 'navigation.html' %}
{% load static %}
{% block body %}
<div id="demo" class="carousel slide" data-ride="carousel">

  <!-- Indicators -->
  <ul class="carousel-indicators">
    <li data-target="#demo" data-slide-to="0" class="active"></li>
    <li data-target="#demo" data-slide-to="1"></li>
<li data-target="#demo" data-slide-to="2"></li>     <li
data-target="#demo" data-slide-to="3"></li>     <li
data-target="#demo" data-slide-to="4"></li>

  </ul>

  <!-- The slideshow -->
  <div class="carousel-inner" style="width:100%;height:550px">
    <div class="carousel-item active">
      <img src="{% static 'images/1b.jpg' %}" alt="Los Angeles" style="height:550px">
</div>
    <div class="carousel-item">
      <img src="{% static 'images/7a.jpg' %}" alt="Chicago" style="height:550px">
</div>
    <div class="carousel-item">
```

```
    <img src="{% static 'images/3a.jpg' %}" alt="New York" style="height:550px">
   </div>

   <div class="carousel-item">
    <img src="{% static 'images/4a.jpg' %}" alt="New York" style="height:550px">
   </div>

   <div class="carousel-item">
    <img src="{% static 'images/5a.jpg' %}" alt="New York" style="height:550px">
</div>
 <div class="carousel-item">
    <img src="{% static 'images/6a.jpg' %}" alt="New York" style="height:550px">
</div>

   </div>
  </div>

  <!-- Left and right controls -->
  <a class="carousel-control-prev" href="#demo" data-slide="prev">
   <span class="carousel-control-prev-icon"></span>
  </a>
  <a class="carousel-control-next" href="#demo" data-slide="next">
   <span class="carousel-control-next-icon"></span>
  </a>
</div>
{% block b %}
{% endblock %}
{% endblock %}
```

USER LOGIN CODING

```
{% extends 'navigation.html' %}
{% block body %}
{% load static %}

{% ifequal error "yes" %}
<script>
   alert('logged in successfully');
   window.location=('{% url 'home' %}');
</script>
{% endifequal %}
{% ifequal error "not" %}
<script>    alert('Username & Password are not
Matching');
</script>
{% endifequal %}

<style>
.mybtnone:hover{background-color : #E40203}
</style>
<div class="container">
   <h2 style="margin-top:20px" align="center">User Login Form</h2><hr>

<div class="container-fluid" style="width:70%;margin-top:10%">
<form method="post" action="">
   {% csrf_token %}
  <div class="form-group">
   <label for="exampleInputEmail1">Username</label>
   <input       type="text"    class="form-control"          id="exampleInputEmail1"
ariadescribedby="emailHelp" name="uname" placeholder="Enter Username">
  </div>
```

```
 <div class="form-group">
   <label for="exampleInputPassword1">Password</label>
   <input        type="password"      class="form-control"
id="exampleInputPassword1" placeholder="Password" name="pwd">
 </div>
 <button type="submit" class="btn btn-primary mybtnone">Login</button>
 <button class="btn btn-primary mybtnone"><a href="{% url 'signup' %}"
style="color:white">Signup</a></button>
</form>
</div>
</div>

{% endblock %}
```

USER SIGNUP PAGE CODING

```
{% extends 'navigation.html' %}
{% block body %}
{% load static %}
<div class="container">
   <h2 style="margin-top:20px" align="center">Registration Form</h2><hr>

<div class="container-fluid" style="width:70%;margin-top:10%">
<form method="post" action="" enctype="multipart/form-data">
   {% csrf_token %}
   <div class="form-row">
   <div class="form-group col-md-6">
     <label for="inputEmail4">First Name</label>
     <input      type="text"    class="form-control"          placeholder="Enter  First
Name" name="fname" id="inputEmail4">
   </div>
   <div class="form-group col-md-6">
     <label for="inputPassword4">Last Name</label>
     <input type="text" class="form-control" name="lname" placeholder="Enter Last
Name" id="inputPassword4">
   </div>
  </div>
   <div class="form-row">
   <div class="form-group col-md-6">
     <label for="inputEmail4">User Name</label>
     <input type="text" class="form-control" name="uname" placeholder="Enter User
Name" id="inputEmail4">
   </div>
   <div class="form-group col-md-6">
     <label for="inputPassword4">Password</label>
```

```
    <input type="password" class="form-control" name="pwd"
id="inputPassword4">
   </div>
  </div>
      <div class="form-row">
<div class="form-group col-md-6">
   <label for="exampleInputEmail1">Email</label>
   <input       type="email"          class="form-control"
id="exampleInputEmail1"  ariadescribedby="emailHelp" name="email"
placeholder="Enter Email">
  </div>

  <div class="form-group col-md-6">
   <label for="exampleInputPassword1">Contact</label>
   <input       type="text"   class="form-control"         id="exampleInputPassword1"
placeholder="Enter Contact Detail" name="contact">
  </div>
      </div>
      <div class="form-row">
   <div class="form-group col-md-6">
   <label for="exampleInputPassword1">City</label>
   <input       type="text"   class="form-control"         id="exampleInputPassword1"
placeholder="Enter City" name="city">
  </div>

   <div class="form-group col-md-6">
      <label for="exampleInputPassword1">Date of Birth</label>
   <input type="date" class="form-control" id="exampleInputPassword1"
name="date">
  </div>
      </div>
   <div class="form-row">
```

```
   <div class="form-group col-md-6">
   <label for="exampleInputPassword1">Full Address</label>
   <input type="text" class="form-control" id="exampleInputPassword1"
placeholder="Enter Address Detail" name="add">
  </div>

<div class="form-group col-md-6">
   <label for="exampleInputPassword1">Image</label>
   <input type="file" class="form-control" id="exampleInputPassword1" name="img"
value="choose file">
</div></div>

  <button type="submit" class="btn btn-primary">Submit</button>
</form>
</div>
</div>

{% if error %} <script>
alert('Regitered Successfully');
window.location = "{% url 'login' %}";
</script>
{% endif %}

{% endblock %}
```

USER PROFILE PAGE CODING

```
{% extends 'navigation.html' %}
{% load static %}
{% block body %}
<div class="container">
   <h2 style="margin-top:20px" align="center">View Profile</h2><hr>

<div  class="container-fluid" style="width:80%;margin-bottom:5%">
   <hr><div class="row">
      <div class="col-md-6">
         <strong>Full Name:</strong>
      </div>
      <div class="col-md-6">
         {{pro.user.first_name}} {{pro.user.last_name}}
      </div>
   </div><hr>
    <div class="row">
      <div class="col-md-6">
         <strong>Customer Pic:</strong>
      </div><div class="col-md-6">
        <img src="{{pro.image.url}}" style="width:150px;height:150px">
      </div></div><hr><div class="row">
      <div class="col-md-6">
         <strong>Email Id :</strong>
      </div>
      <div class="col-md-6">
         {{pro.user.email}}
      </div>
   </div><hr>
    <div class="row">
```

```
    <div class="col-md-6">
      <strong>Contact :</strong>
    </div>
    <div class="col-md-6">
      {{pro.contact}}
    </div>
  </div><hr>
 <div class="row">
    <div class="col-md-6">
      <strong>Date of Birth :</strong>
    </div>
    <div class="col-md-6">
      {{pro.dob}}
    </div>
 </div><hr>
  <div class="row">
    <div class="col-md-6">
      <strong>City :</strong>
    </div>
    <div class="col-md-6">
      {{pro.city}}
    </div>
  </div><hr><div class="row">
    <div class="col-md-6">
      <strong>Address :</strong>
    </div>
    <div class="col-md-6">
      {{pro.address}}
    </div>
 </div><hr>
 <a  href="{%  url  'edit_profile'  %}"><button  class="btn  btn-
```

primary" style="width:100%;margin-bottom:5%">Edit Profile</button>

** **

{% endblock %}

VIEW ALL PRODUCT PAGE CODING

```
{% extends 'carousel.html' %}
{% block b %}
{% load static %}
<link rel="stylesheet" href="https://maxcdn.bootstrapcdn.com/bootstrap/4.0.0/css/bootstrap.min.css" integrity="sha384-Gn5384xqQ1aoWXA+058RXPxPg6fy4IWvTNh0E263XmFcJlSAwiGgFAW/dAiS6JXm" crossorigin="anonymous">
   <link rel="stylesheet" href="{% static 'css/style.css' %}">

<style>
.mybtnone:hover{background-color : #E40203}
</style>

<hr>
{% for i in cat %}
 <div class="container-fluid">
        <h1 class="text-center mt-5 mb-5">
        </h1>
         <h2 class= "pl-5" style = "color : #E40203 ; text-transform : uppercase">{{i.name}}</h2><hr>
        <div id="{{i.id}}" class="carousel slide" data-ride="carousel">
                <div class="carousel-inner row w-100 mx-auto">
                        {% for j in pro %}
                        {% if i.name == j.category.name %}
                        {% if forloop.counter in num %}
                                <div class="carousel-item col-md-3 active"><div class="card">
                                        <center><img class="card-img-top img-fluid" align="center" src="{{j.image.url}}" style="width:160px;height:170px;float:center"
```

```
alt="card-img"></center>
                                        <div class="card-body">
                                        <h4             class="card-title">{{j.name}}
Rs.{{j.price}}</h4>
                                        <p class="card-text">{{j.desc}}</p>
                                    <form align="center" action="{% url 'add_cart' j.id
%}" method="post">
                                                {% csrf_token %}
                                            <button  type="submit"  class="btn
btn-primary mybtnone">Add to Cart</button>
</form>
                                    </div>
                                </div>
                            </div>


                            {% else %}
                            <div class="carousel-item col-md-3">
                            <div class="card">
                                <center><img  class="card-img-top  img-fluid"
align="center" src="{{j.image.url}}" style="width:160px;height:170px;float:center"
alt="card-img"></center>
                                        <div class="card-body">
                                        <h4             class="card-title">{{j.name}}
Rs.{{j.price}}</h4>
                                        <p class="card-text">{{j.desc}}</p>
<form align="center" action="{% url 'add_cart' j.id %}" method="post">
        {% csrf_token %}
                                            <button  type="submit"  class="btn
btn-primary mybtnone">Add to Cart</button>
</form>                                 </div>
                                </div>
```

```
                    </div>


                    {% endif %}
                    {% endif %}
                    {% endfor %}
                     <a class="carousel-control-prev" href="#{{i.id}}" role="button"
data-slide="prev">
                <span  class="carousel-control-prev-icon"
ariahidden="true"></span>
                        <span class="sr-only">Previous</span>
                    </a>
                      <a class="carousel-control-next" href="#{{i.id}}" role="button"
data-slide="next">
                            <span     class="carousel-control-next-icon"     aria-
hidden="true"></span>
                            <span class="sr-only">Next</span></a>
                </div>
        </div>
 </div>



{% endfor %}

<style> html{ scroll-
behavior:smooth;
}


/*scroll button start*/
#scrollbtn
{

position:fixed;
                                                                                b
```

```
ottom:20px;
right:40px; z-index:99;
border:none;
color:red;
background:#00abff;
padding:10px; border-
radius:10px;
}
/*scroll button end*/
</style>

 <div class="scrolltop float-right">
  <i class="fa fa-arrow-up" onclick="topFunction()" id="scrollbtn"></i>
  </div>

<script>                                scrollbutton          =
document.getElementById("scrollbtn");
window.onscroll = function(){scrollFunction()};

  function scrollFunction()
  {
  if(document.body.scrollTop>20 || document.documentElement.scrollTop>20)
  {
  scrollbutton.style.display="block";
  }
  else
  {
  scrollbutton.style.display="none";
  }
  }
```

```
 function topFunction()
 {
 document.body.scrollTop = 0;//safari
 document.documentElement.scrollTop = 0;//for chrome
 }
</script>

        <script                    src="https://code.jquery.com/jquery-3.2.1.slim.min.js"
integrity="sha384-
KJ3o2DKtIkvYIK3UENzmM7KCkRr/rE9/Qpg6aAZGJwFDMVNA/GpGFF93hXpG5
KkN" crossorigin="anonymous"></script>
   <script
src="https://cdnjs.cloudflare.com/ajax/libs/popper.js/1.12.9/umd/popper.min.js"
integrity="sha384-
ApNbgh9B+Y1QKtv3Rn7W3mgPxhU9K/ScQsAP7hUibX39j7fakFPskvXusvfa0b4Q"
crossorigin="anonymous"></script>
   <script src="https://maxcdn.bootstrapcdn.com/bootstrap/4.0.0/js/bootstrap.min.js"
integrity="sha384-
JZR6Spejh4U02d8jOt6vLEHfe/JQGiRRSQQxSfFWpi1MquVdAyjUar5+76PVCmYl"
crossorigin="anonymous"></script>
   <script src="{% static 'js/jquery.js' %}"></script>
<script      src="https://code.jquery.com/jquery-3.2.1.slim.min.js"      integrity="sha384-
KJ3o2DKtIkvYIK3UENzmM7KCkRr/rE9/Qpg6aAZGJwFDMVNA/GpGFF93hXpG5
KkN" crossorigin="anonymous"></script>
   <script
src="https://cdnjs.cloudflare.com/ajax/libs/popper.js/1.12.9/umd/popper.min.js"
integrity="sha384-
ApNbgh9B+Y1QKtv3Rn7W3mgPxhU9K/ScQsAP7hUibX39j7fakFPskvXusvfa0b4Q"
crossorigin="anonymous"></script>
   <script src="https://maxcdn.bootstrapcdn.com/bootstrap/4.0.0/js/bootstrap.min.js"
integrity="sha384-
JZR6Spejh4U02d8jOt6vLEHfe/JQGiRRSQQxSfFWpi1MquVdAyjUar5+76PVCmYl"
crossorigin="anonymous"></script>
```

<script src="{% static 'js/jquery.js' %}"></script>

{% endblock %}

CONFIRM BOOKING PAGE CODING

```
{% extends 'navigation.html' %}
{% block body %}
{% load static %}
<div class="container">
   <h2 style="margin-top:20px" align="center">Confirm Booking Detail</h2><hr>

<div class="container-fluid" style="width:70%;margin-top:5%">
<form method="post" action="" enctype="multipart/form-data">
   {% csrf_token %}
   <div class="form-row">
   <div class="form-group col-md-6">
     <label for="inputEmail4">Booking Id</label>
     <input type="text" class="form-control" name="book_id" value="{{book_id}}"
id="inputEmail4" readonly>
   </div>
   <div class="form-group col-md-6">
     <label for="inputPassword4">Customer Name</label>
     <input type="text" class="form-control" name="name"
value="{{request.user.username}}" id="inputPassword4" readonly>
   </div>
  </div>
   <div class="form-row">

      <div class="form-group col-md-6">
     <label for="inputEmail4">Booking Date</label>
     <input type="text" class="form-control" name="date1"
value="{{date1}}" id="inputEmail4" readonly>
   </div>

   <div class="form-group col-md-6">
```

```
    <label for="inputPassword4">Email</label>
    <input type="email" class="form-control" name="email"
value="{{request.user.email}}" id="inputPassword4" readonly>
   </div>
  </div>
      <div class="form-row">
<div class="form-group col-md-6">
   <label for="exampleInputEmail1">City</label>
   <input type="text" class="form-control" id="exampleInputEmail1"
ariadescribedby="emailHelp" name="city" value="{{data.city}}" readonly>
  </div>

  <div class="form-group col-md-6">
   <label for="exampleInputPassword1">Contact</label>
   <input type="text" class="form-control" id="exampleInputPassword1"
value="{{data.contact}}" name="contact" readonly>
  </div>
      </div>
      <div class="form-row">
   <div class="form-group col-md-12">
   <label for="exampleInputPassword1">Address</label>
   <input type="text" class="form-control" id="exampleInputPassword1"
name="add" value="{{data.address}}" readonly>
  </div>
      </div>

   <div class="form-row">
   <div class="form-group col-md-12">
   <label for="exampleInputPassword1">Total</label>
   <input type="number" class="form-control"
id="exampleInputPassword1" value="{{total}}" name="total" readonly>
```

```
 </div>
   </div>

 <button style="margin-bottom:5%" type="submit" class="btn btn-
primary">confirm</button>
</form>
</div> </div>
{% if error
%} <script>
alert('Regite
red
Successfully'
);
window.locat
ion = "{%
url 'login'
%}";
</script>
{% endif %}

{% endblock %}
```

ADMIN HOME PAGE CODING

```
{% extends 'navigation.html' %}
{% load static %}
{% block body %}

<style> .glow {
font-size: 80px;
color: #fff;   text-
align: center;
  -webkit-animation: glow 1s ease-in-out infinite alternate;   -moz-
animation: glow 1s ease-in-out infinite alternate;   animation: glow
1s ease-in-out infinite alternate;
}

@-webkit-keyframes glow {   from {     text-shadow: 0 0 10px #fff, 0 0 20px #fff, 0 0 30px
#e60073, 0 0 40px #e60073, 0 0 50px #e60073, 0 0 60px #e60073, 0 0 70px #e60073;
  }

  to {
    text-shadow: 0 0 20px #fff, 0 0 30px #ff4da6, 0 0 40px #ff4da6, 0 0 50px #ff4da6, 0 0
60px #ff4da6, 0 0 70px #ff4da6, 0 0 80px #ff4da6;
  }
}

/* Rounded border */
hr.rounded {   border-top: 8px
solid lightblue;   border-radius:
5px;
}

.prjdiv:hover{ box-shadow:0 0 20px 0
rgba(0,0,0,0.3);
```

```
transform:translateY(-20px)
}

</style>

<link   rel="stylesheet"
href="https://use.fontawesome.com/releases/v5.7.0/css/all.css" integrity="sha384-
lZN37f5QGtY3VHgisS14W3ExzMWZxybE1SJSEsQp9S+oqd12jhcu+A56Ebc1zFSJ"
crossorigin="anonymous">
<br>
<center>
<div class="container" style="margin-top:10%;height:150px;width:80%">
   <div class="row" style="height:90%">
      <div class="col-md-4 prjdiv">
         <a href="{% url 'view_user' %}"><h1>Total Customer</h1>
         <h2 style="color:blue">{{total_customer}}</h2>
                        <hr class="rounded"></a>
      </div>

      <div class="col-md-4 prjdiv">
        <a href="{% url 'admin_viewBooking' %}"><h1>Total Booking</h1>
         <h2 style="color:blue">{{total_book}}</h2>
                        <hr class="rounded"></a>
      </div>

      <div class="col-md-4 prjdiv">
                <a href="{% url 'admin_view_product' %}">
         <h1>Total Product</h1>
         <h2 style="color:blue">{{total_pro}}</h2>
                        <hr class="rounded"></a>
      </div>
   </div>
```

```
</div>
  </center>
      <footer class="site-footer">
    <div class="container">

     <div class="row pt-5 mt-5 text-center">
      <div class="col-md-12">
       <p style = "font-size : 30pt ; color : #FF0000 ; font-weight : bold">

       Copyright &copy;<script>document.write(new Date().getFullYear());</script>
All Rights Reserved <span style = "color : brown">|</span> <span style = "color : #006400">This website is made with <i class="fas fa-heart icon-heart text-warning" ariahidden="true"></i> by </span><a class= "glow" href="#" target="_blank" >Pankaj Panjwani</a>

       </p>
      </div>

     </div>
    </div>
  </footer>



{% endblock %}
```

ADD PRODUCT PAGE CODING

```
{% extends 'navigation.html' %}
{% block body %}
{% load static %}
<div class="container">
   <h2 style="margin-top:20px" align="center">Add Product</h2><hr>

<div class="container-fluid" style="width:70%;margin-top:10%">
<form method="post" action="" enctype="multipart/form-data">
   {% csrf_token %}
   <div class="form-row">
   <div class="form-group col-md-6">
     <label for="inputEmail4">Product Name</label>
     <input type="text" class="form-control" placeholder="Enter Product Name"
name="pname" id="inputEmail4">
   </div>
   <div class="form-group col-md-6">
   <label for="exampleInputPassword1">Product Image</label>
   <input type="file" class="form-control" id="exampleInputPassword1" name="img"
value="choose file">
</div></div>
   <div class="form-row">
      <div class="form-group col-md-6">
     <label for="inputState">Category</label>
     <select id="inputState" class="form-control" name="cat">
        {% for i in cat %}
       <option value="{{i.name}}">{{i.name}}</option>
        {% endfor %}
     </select>
   </div>

   <div class="form-group col-md-6">
```

```
    <label for="inputEmail4">Product Price</label>
    <input type="number" class="form-control" name="price" placeholder="Enter
Price" id="inputEmail4">
   </div></div>
   <div class="form-group">
   <label for="exampleFormControlTextarea1">Description</label>
   <textarea class="form-control" id="exampleFormControlTextarea1" name="desc"
rows="3"></textarea>
  </div>
  <button type="submit" class="btn btn-primary">Submit</button>
</form>
</div>
</div>

{% if error %} <script>     alert('1
Product Added Successfully');
</script>
{% endif %}
{% endblock %}
```

ADD CATEGORY PAGE CODING

```
{% extends 'navigation.html' %}
{% block body %}
{% load static %}

{% if error %} <script>     alert('One New
Category Added Successfully');
</script>
{% endif %}


<div class="container">
   <h2 style="margin-top:20px" align="center">Add Category</h2><hr>

<div class="container-fluid" style="width:70%;margin-top:10%">
<form method="post" action="">
   {% csrf_token %}
  <div class="form-group">
   <label for="exampleInputEmail1">Category Name</label>
   <input        type="text"    class="form-control"          id="exampleInputEmail1"
ariadescribedby="emailHelp" name="cat" placeholder="Enter Category">
  </div>

   <button type="submit" class="btn btn-primary">Submit</button>
</form>
</div>
</div>

{% endblock %}
```

VIEW PRODUCT CATEGORIES PAGE CODING

```
{% extends 'navigation.html' %}
{% block body %}
<center><h2 style="color:red;margin-top:2%">View Category</h2></center><hr>
<div class="container" style="margin-top:5%">
<table class="table table-bordered" id="myTable">
 <thead>
 <tr>
  <th>Product Name</th>
  <th>Delete</th>
 </tr>
 </thead>
  <tbody>

  {% for i in pro %}

 <tr>

  <td>{{i.name}}</td>
  <td><a href="{% url 'delete_category' i.id %}" onclick="return confirm('Are you
sure?')"><button class="button button1">delete</button></a></td>
 </tr>

  {% endfor %}
  </tbody>
{{count}}
</table>

 </div> <script>          var el_up =
document.getElementById("GFG_UP");
```

```
        el_up.innerHTML =
            "Click on the LINK for further confirmation.";
      </script>
{% if error %}
<script>     alert('1 Product Deleted Successfully');
window.location("{% url 'view_feedback' %}");
</script>
{% endif %}

{% endblock %}
```

CHANGE PASSWORD PAGE CODING

```
{% extends 'navigation.html' %}
{% block body %}
{% load static %}
<div class="container">
   <h2 style="margin-top:20px" align="center">Change Password</h2><hr>

<div class="container-fluid" style="width:70%;margin-top:10%">
<form method="post" action="">
   {% csrf_token %}
  <div class="form-group">
   <label for="exampleInputEmail1">Old Password</label>
   <input type="password" class="form-control" id="exampleInputEmail1"
ariadescribedby="emailHelp" name="pwd3">
  </div>

  <div class="form-group">
   <label for="exampleInputEmail1">New Password</label>
   <input type="password" class="form-control" id="exampleInputEmail1"
ariadescribedby="emailHelp" name="pwd1">
  </div>

  <div class="form-group">
   <label for="exampleInputPassword1">Confirm Password</label>
   <input type="password" class="form-control" id="exampleInputPassword1"
name="pwd2">
  </div>
  <button type="submit" class="btn btn-primary">Submit</button>
</form>
</div>
</div>
```

```
{% ifequal error "yes" %}
<script>
   alert('Password Changed.....');
window.location=('{% url 'logout' %}')
</script>
{% endifequal %}
{% ifequal error "not" %}
<script>     alert('New Password and Confirm Password are not
match');
</script>
{% endifequal %}

{% endblock %}
```

CHAPTER # 8

Advantages & Limitations

Advantages of "Online Second Hand Book Store":

"Online Second Hand Book store" provides various features, which complement the information system and increase the productivity of the system. These features make the system easily usable and convenient. Some of the important features included are listed as follows:

- Intelligent User Forms Design
- Data access and manipulation through same forms
- Access to most required information
- Data Security
- Restrictive data access, as per login assigned only.
- Organized and structured storage of facts.
- Strategic Planning made easy.
- No decay of old Records.
- Exact financial position of the Business.

Limitations of "Online Second Hand Book Store":

Besides the above achievements and the successful completion of the project, we still feel the project has some limitations, listed as below:

- It is not a large scale system.
- Only limited information provided by this system.

CHAPTER # 8
Future Scope And Conclusion

Future Scope

- Getting accurate information about what kind of books user likes and this information in cookies, by which we can show recommended books to user.

- We offer e-books and prototype (sample) of books also in future.

Conclusion

It has been a great pleasure for me to work on this exciting and challenging project. This project proved good for me as it provided practical knowledge of not only programming in Python and Sqlite web based application. It also provides knowledge about the latest technology used in developing web enabled application and client server technology that will be great demand in future. This will provide better opportunities and guidance in future in developing projects independently.

Bibliography

- Wikipedia
- https://www.geeksforgeeks.org/python-django/
- https://www.javatpoint.com
- https://www.python.org/
- https://www.tutorialspoint/

➢ REFERENCE BOOKS

Two scoops of Django for 1.11 by ***Daniel Greenfeld's and Audrey Greenfield***

Lightweight Django *by* ***Elman and Mark Lavin***