C · Bounded reasoning, predictable execution

Each node records inputs, outputs, checks and effect identity. Persistence does not replace validation.

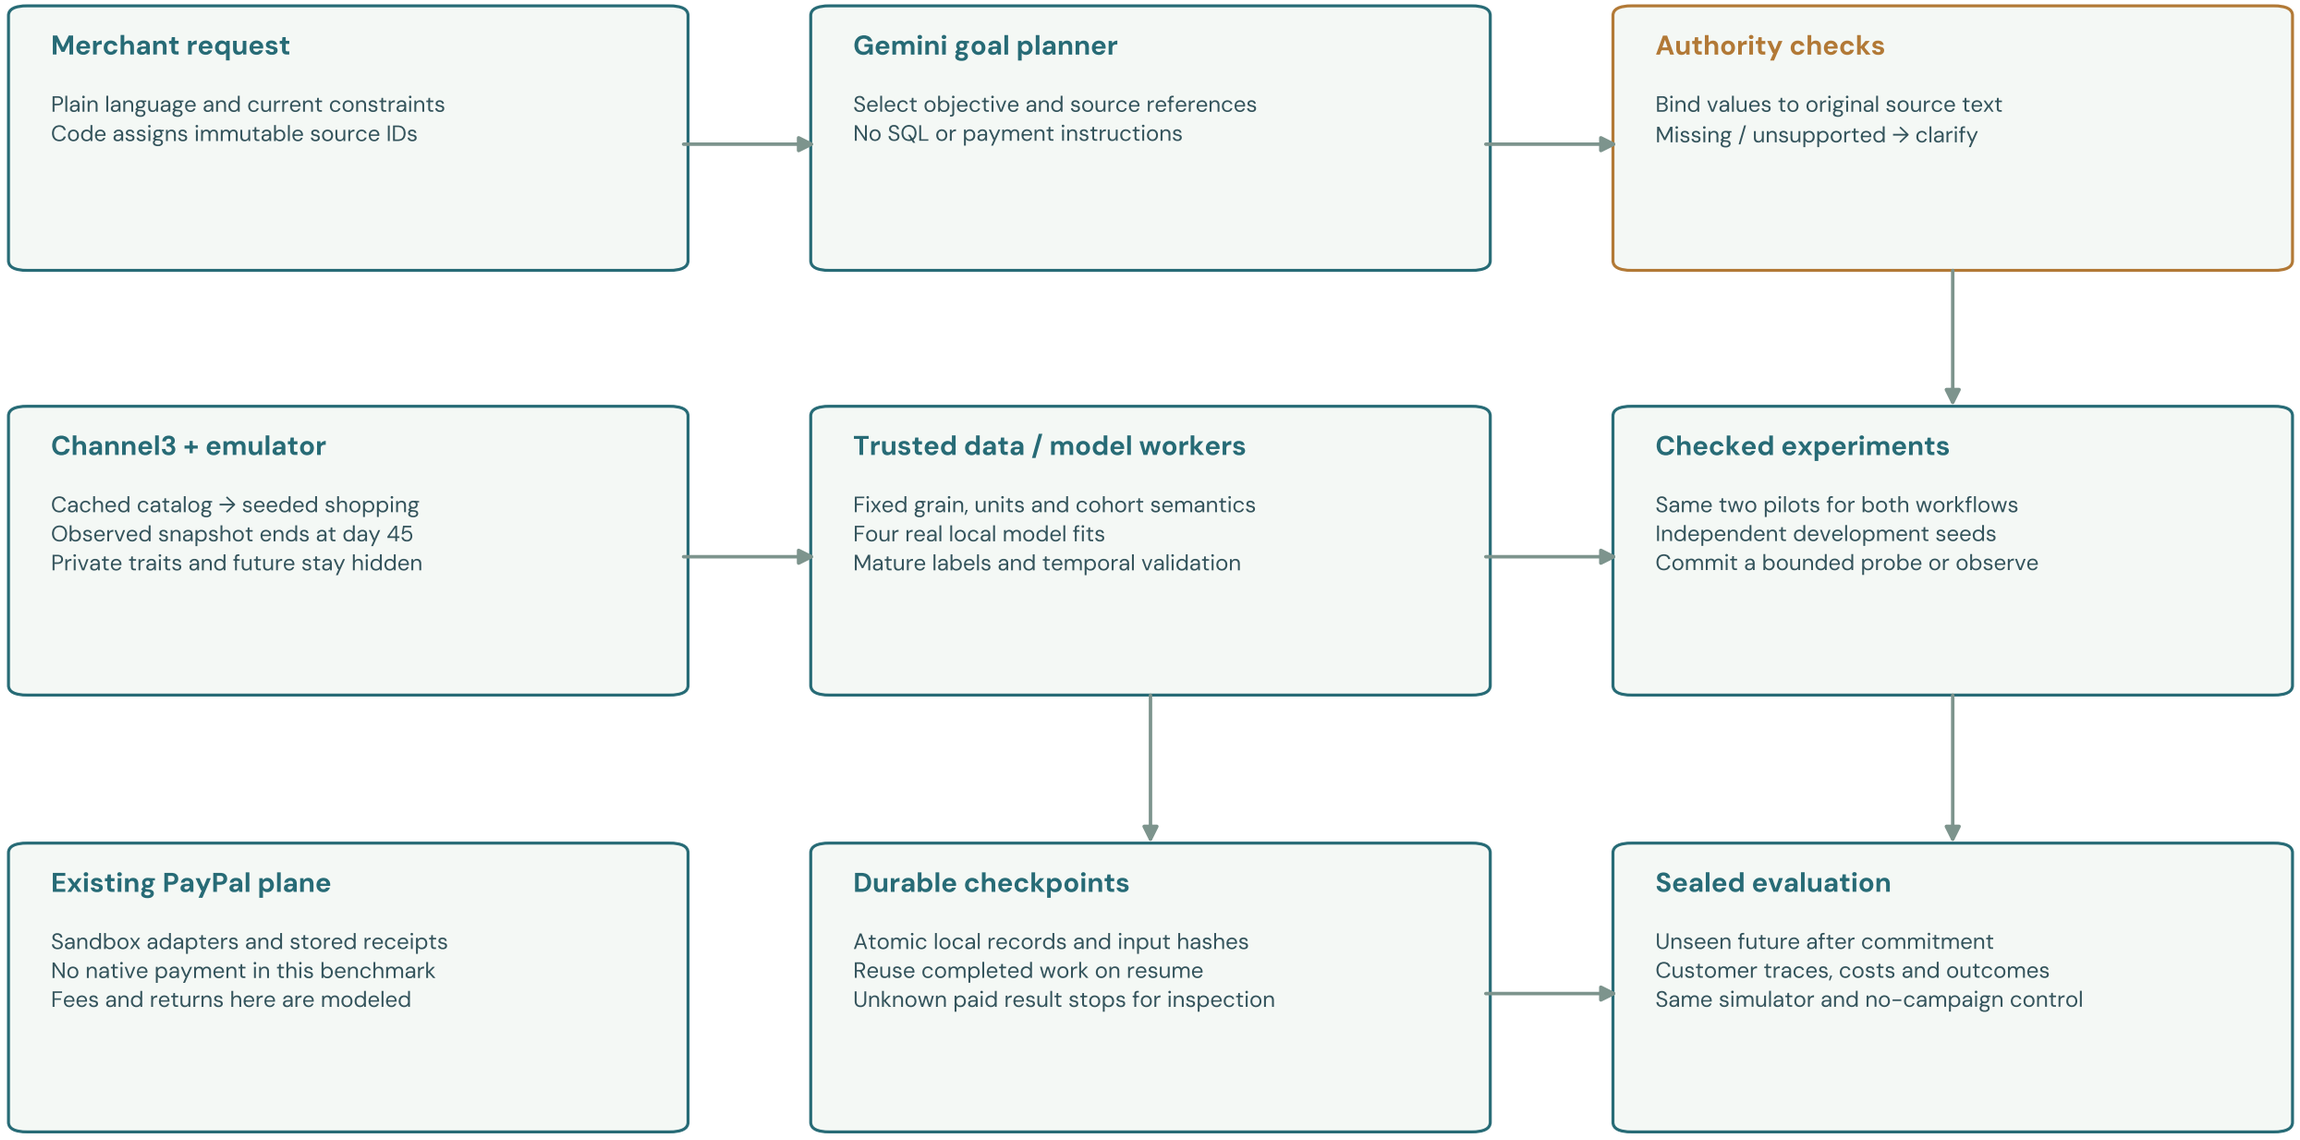

One semantic model call is the default. Additional planning remains experimental after an adverse matched comparison.