


# How to Create a New Mastodon Application

1 Navigate to [https://mastodon.social/auth/sign\\_up](https://mastodon.social/auth/sign_up)


2 Create the account

3 Navigate to <https://mastodon.social/home>


4 Click "Home"

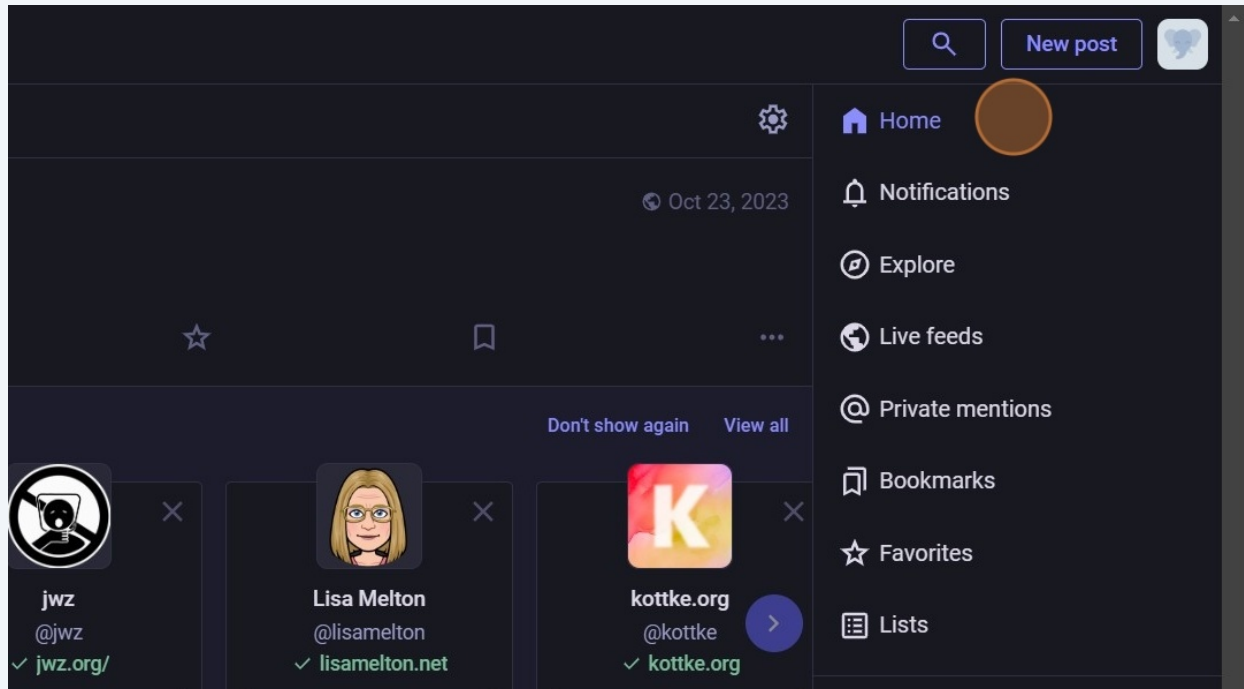


## 5 Click "Preferences"

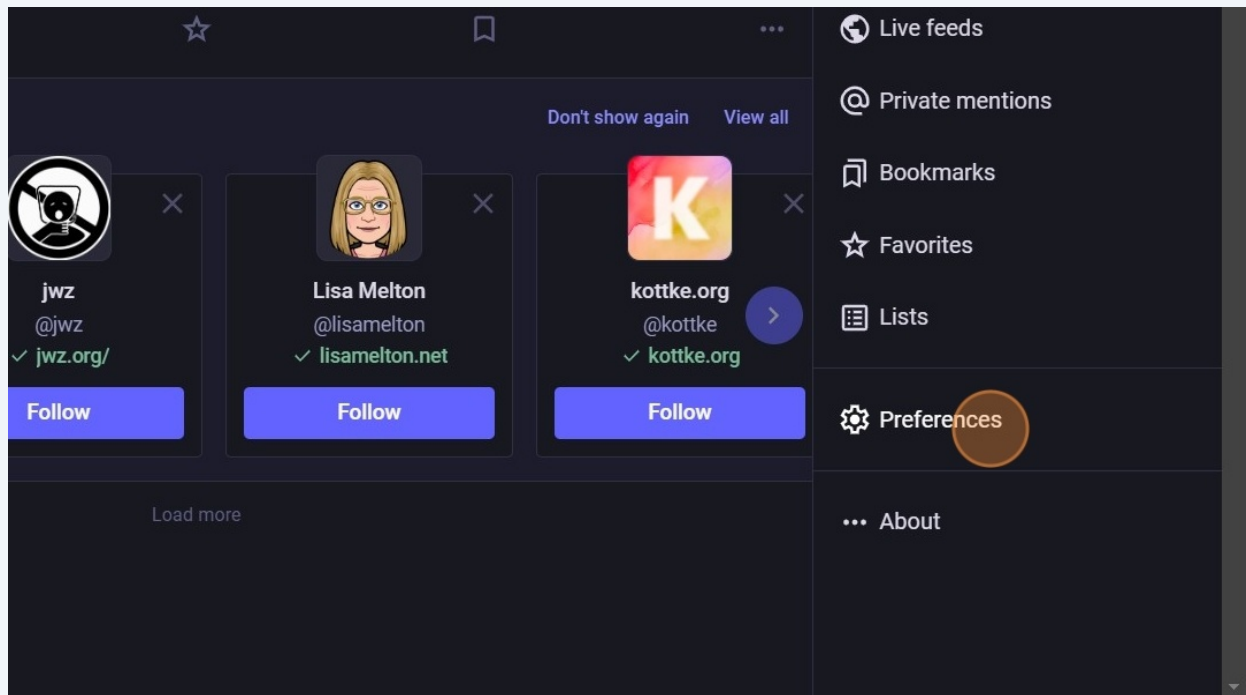

## 6 Click "Development"

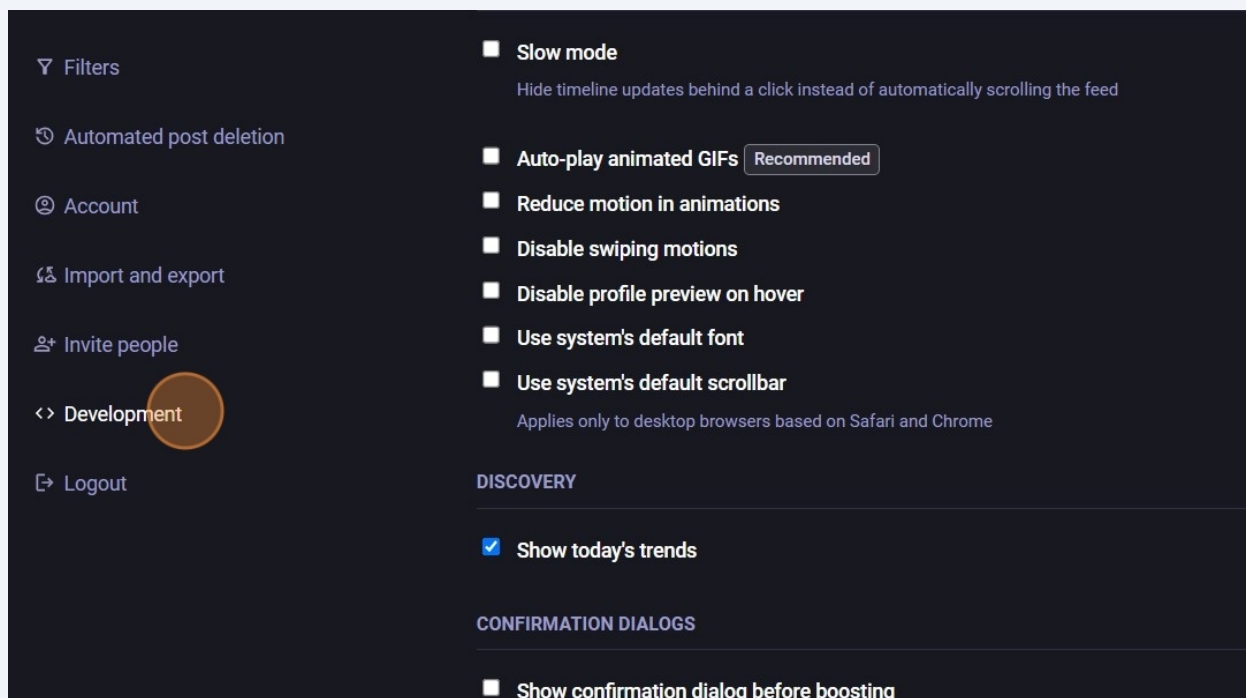

7 Click "New application"

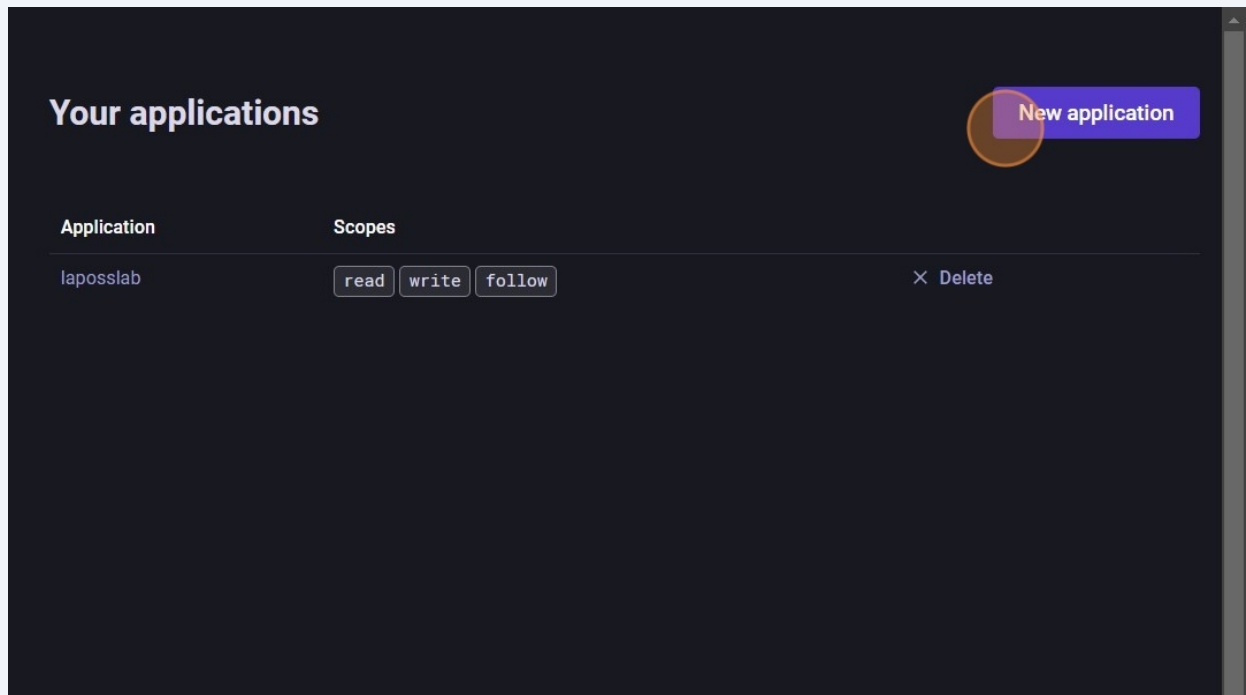

8 Click the "Application name \*" field.

The screenshot shows a dark-themed web interface titled "New application". On the left side, there is a partial view of a blue and white logo. The form contains three main sections: "Application name \*" with a text input field that has a cursor and is circled in orange; "Application website" with a text input field; and "Redirect URI \*" with a text input field containing the text "urn:ietf:wg:oauth:2.0:oob". Below the "Redirect URI" field, there is a small text note: "Use one line per URI" and "Use urn:ietf:wg:oauth:2.0:oob for local tests".

9 Click the "Redirect URI \*" field.

Mastodon

profile

ces

and followers

ted post deletion

and export

people

Application website

Redirect URI \*

Use one line per URI

urn:ietf:wg:oauth:2.0:oob

Use `urn:ietf:wg:oauth:2.0:oob` for local tests

Scopes \*

Which APIs the application will be allowed to access. If you select a top-level scope, you don't need to select individual scopes.

☒ read  
read all your account's data

☐ read:accounts  
see accounts information

☐ read:blocks  
see your blocks

☐ read:bookmarks  
see your bookmarks

☐ read:favorites  
see your favorites

☐ read:follows  
see your follows

☐ read:lists  
see your lists

☐ read:mutes  
see your mutes

☐ read:notifications  
see your notifications

☐ read:search  
see your search results

10 Enable the "read" field.

Follows and followers

Filters

Automated post deletion

Account

Import and export

Invite people

Development

Logout

Redirect URI \*

Use one line per URI

urn:ietf:wg:oauth:2.0:oob

Use `urn:ietf:wg:oauth:2.0:oob` for local tests

Scopes \*

Which APIs the application will be allowed to access. If you select a top-level scope, you don't need to select individual scopes.

☒ read  
read all your account's data

☐ read:accounts  
see accounts information

☐ read:blocks  
see your blocks

☐ read:bookmarks  
see your bookmarks

☐ read:favorites  
see your favorites

☐ read:follows  
see your follows


☐ read:lists  
see your lists

☐ read:mutes  
see your mutes


☐ read:notifications  
see your notifications

☐ read:search  
see your search results

## 11 Enable the "write" field.

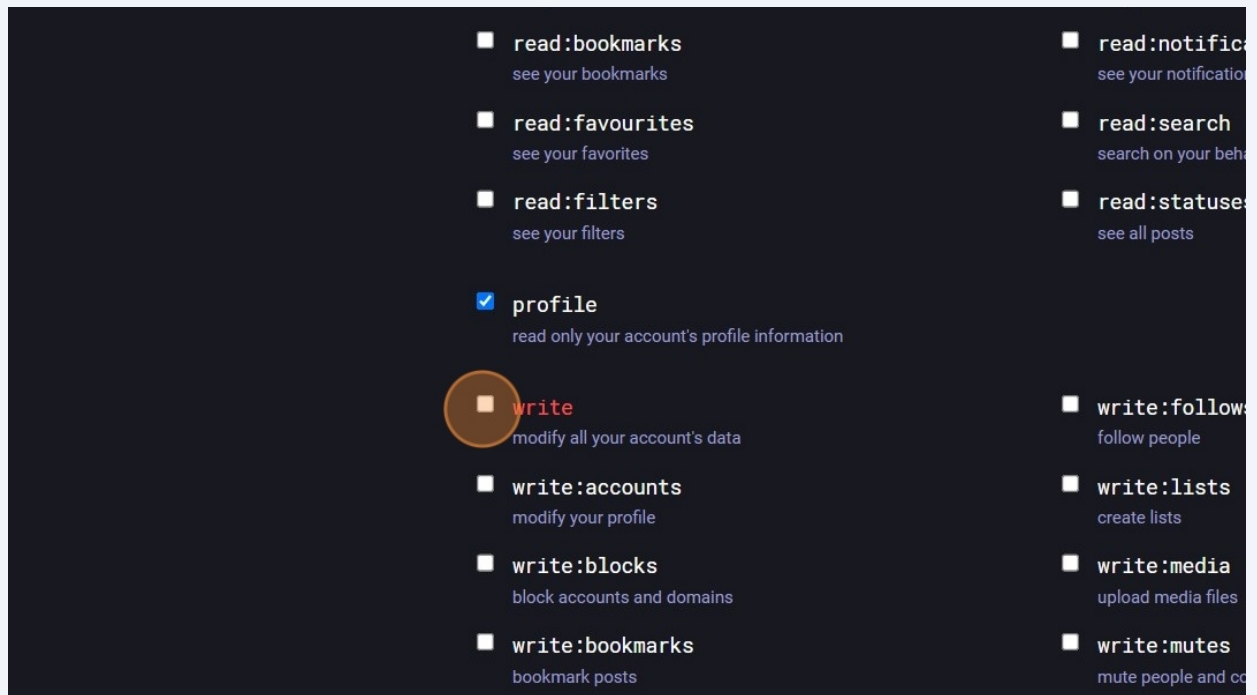

## 12 Enable the "follow" field.

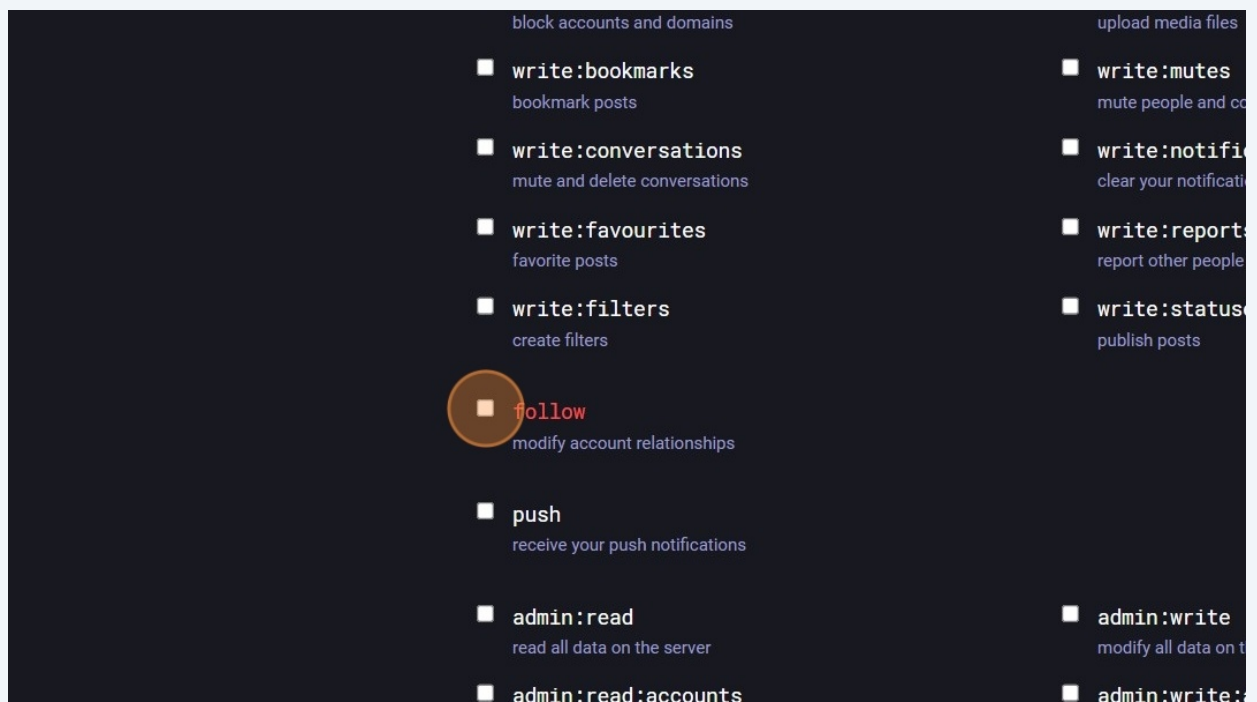

### 13 Click "Submit"

<input type="checkbox"/> <b>admin:read:accounts</b> read sensitive information of all accounts	<input type="checkbox"/> <b>admin:write:accounts</b> perform moderation actions on all accounts
<input type="checkbox"/> <b>admin:read:canonical_email_blocks</b> read sensitive information of all canonical email blocks	<input type="checkbox"/> <b>admin:write:canonical_email_blocks</b> perform moderation actions on all canonical email blocks
<input type="checkbox"/> <b>admin:read:domain_allows</b> read sensitive information of all domain allows	<input type="checkbox"/> <b>admin:write:domain_allows</b> perform moderation actions on all domain allows
<input type="checkbox"/> <b>admin:read:domain_blocks</b> read sensitive information of all domain blocks	<input type="checkbox"/> <b>admin:write:domain_blocks</b> perform moderation actions on all domain blocks
<input type="checkbox"/> <b>admin:read:email_domain_blocks</b> read sensitive information of all email domain blocks	<input type="checkbox"/> <b>admin:write:email_domain_blocks</b> perform moderation actions on all email domain blocks
<input type="checkbox"/> <b>admin:read:ip_blocks</b> read sensitive information of all IP blocks	<input type="checkbox"/> <b>admin:write:ip_blocks</b> perform moderation actions on all IP blocks
<input type="checkbox"/> <b>admin:read:reports</b> read sensitive information of all reports and reported accounts	<input type="checkbox"/> <b>admin:write:reports</b> perform moderation actions on all reports and reported accounts

Submit

### 14 Click "Development"

Public profile

Preferences

Follows and followers

Filters

Automated post deletion

Account

Import and export

Invite people

<> **Development**

Logout

can't be blank

Application website

Redirect URI \*

Use one line per URI

urn:ietf:wg:oauth:2.0:oob

Use urn:ietf:wg:oauth:2.0:oob for local tests

Scopes \*

Which APIs the application will be allowed to access. If you select a top-level scope, you don't need to select any of the sub-scopes.


☒ **read**  
read all your account's data

☐ **read:accounts**  
see accounts information


☐ **read:follows**  
see your follows

☐ **read:lists**  
see your lists

15 Click on application\_name

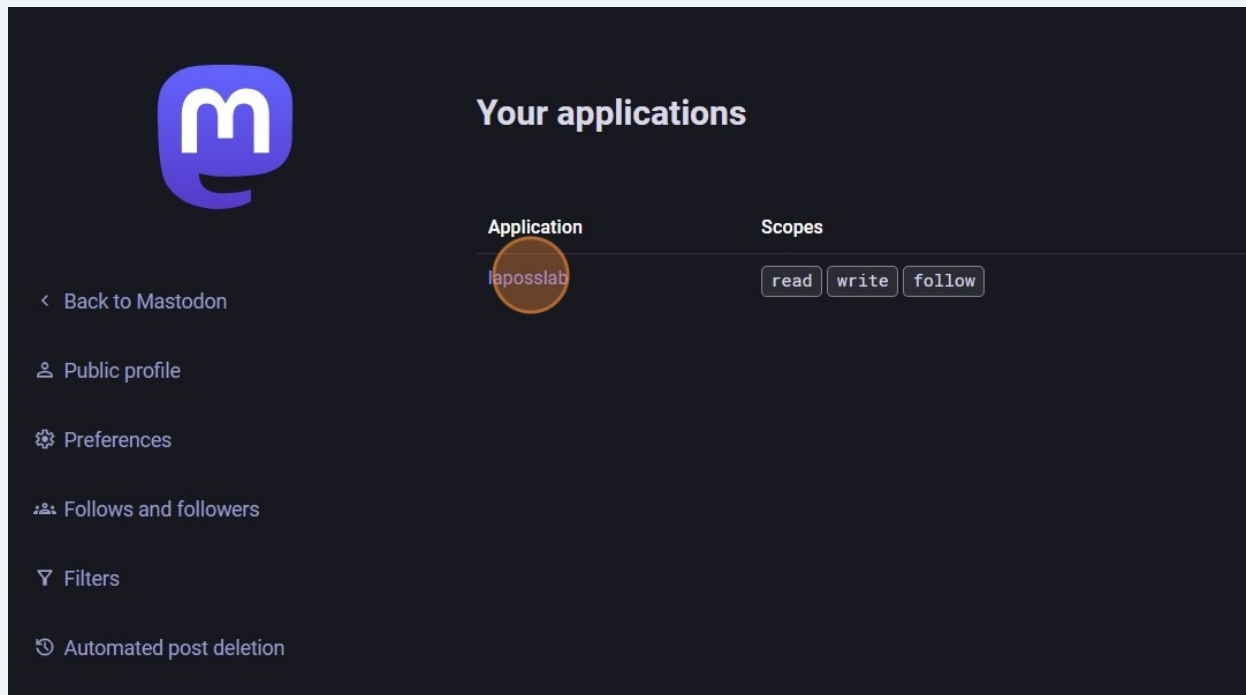

16 We now have the credentials to interact with api

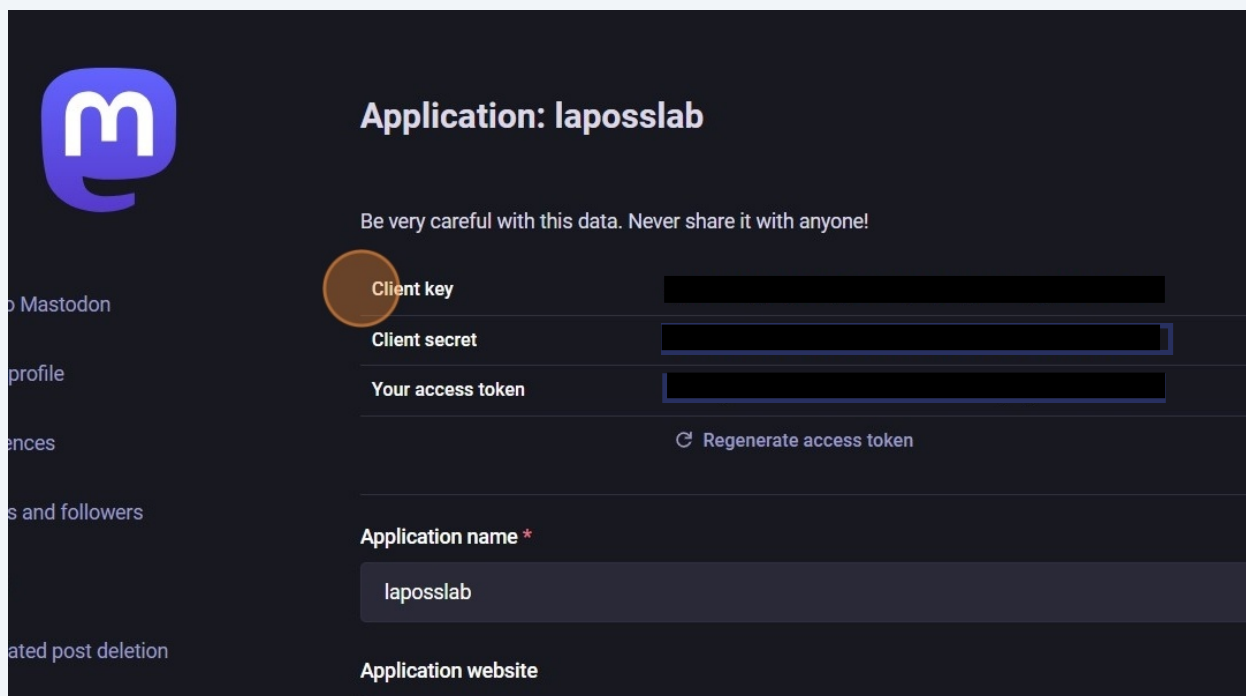

**17** Now open a block notes to create a "config.ini" file

**18** Type [mastodon]

client\_key =

client\_secret =

token =

**19** Save the .txt file as a "config.ini"