

```
1 // src/data/personsData.js
2 export const personsData = [
3   { name: "John Doe", dateOfBirth: "1990-01-15" },
4   { name: "Jane Smith", dateOfBirth: "1985-05-20" },
5   { name: "Alice Johnson", dateOfBirth: "1995-09-10" }
6 ];
7
```

```
35 export default function PersonDetails() {
40   {personsData.map((person, index) => {
41     <div>
42       {person.name}
43       <div>
44         ? "Invalid date"
45         : `${age} ${age === 1 ? "year" : "years"}
46       </div>
47     </div>
48   )}
49   </ul>
50   </div>
51 }
52
```

The screenshot shows the VS Code editor with the file explorer on the left displaying the project structure. The main editor window shows the `PersonDetails.jsx` file. The code implements a `calculateAge` function that takes a `dobString` and returns the age. It includes logic to check if the birthday has occurred this year and a `formatDate` function to format the date as "MM/DD/YYYY". The `PersonDetails` component uses these functions to render a list of people with their names, dates of birth, and ages.

```
function calculateAge(dobString) {
  // Check if the birthday this year has already happened.
  const thisYearBirthday = new Date(today.getFullYear(), dob.getMonth(), dob.getDate());
  if (today < thisYearBirthday) {
    age -= 1; // birthday not yet reached this year
  }

  return age;
}

function formatDate(dobString) {
  const dob = new Date(dobString);
  if (Number.isNaN(dob.getTime())) return dobString;
  // Format nicely, e.g., "Jan 15, 1998" (depends on user locale)
  return dob.toLocaleDateString();
}

export default function PersonDetails() {
  return (
    <div style={{ padding: 20 }}>
      <h2>Person Details</h2>
      <ul style={{ listStyle: "none", padding: 0 }}>
        {personsData.map((person, index) => {
          const age = calculateAge(person.dateOfBirth);
          return (
            <li key={index} style={{ marginBottom: 12 }}>
              <div style={{ fontWeight: 600 }}>{person.name}</div>
              <div>Date of Birth: {formatDate(person.dateOfBirth)}</div>
              <div>
                Age: {age}
                {age === null ? "Invalid date" : `${age} ${age === 1 ? "year" : "years"}`}
              </div>
            </li>
          );
        })}
      </ul>
    </div>
  );
}
```

The screenshot shows the VS Code editor with the file explorer on the left displaying the project structure. The main editor window shows the `PersonDetails.jsx` file. The code implements a `calculateAge` function that takes a `dobString` and returns the age. It includes logic to check if the birthday has occurred this year and a `formatDate` function to format the date as "MM/DD/YYYY". The `PersonDetails` component uses these functions to render a list of people with their names, dates of birth, and ages.

```
import React from "react";
import { personsData } from "../data/personsData";

/**
 * calculateAge
 * - dobString: string in format "YYYY-MM-DD"
 * - returns age in completed years (integer)
 */
function calculateAge(dobString) {
  if (!dobString) return null;


  const dob = new Date(dobString); // parse the input string
  if (Number.isNaN(dob.getTime())) return null; // invalid date guard

  const today = new Date();

  let age = today.getFullYear() - dob.getFullYear();

  // Check if the birthday this year has already happened.
}
```

The terminal at the bottom shows the command `npm run dev` being executed, and the output indicates that the application is running on `http://localhost:5173/`.

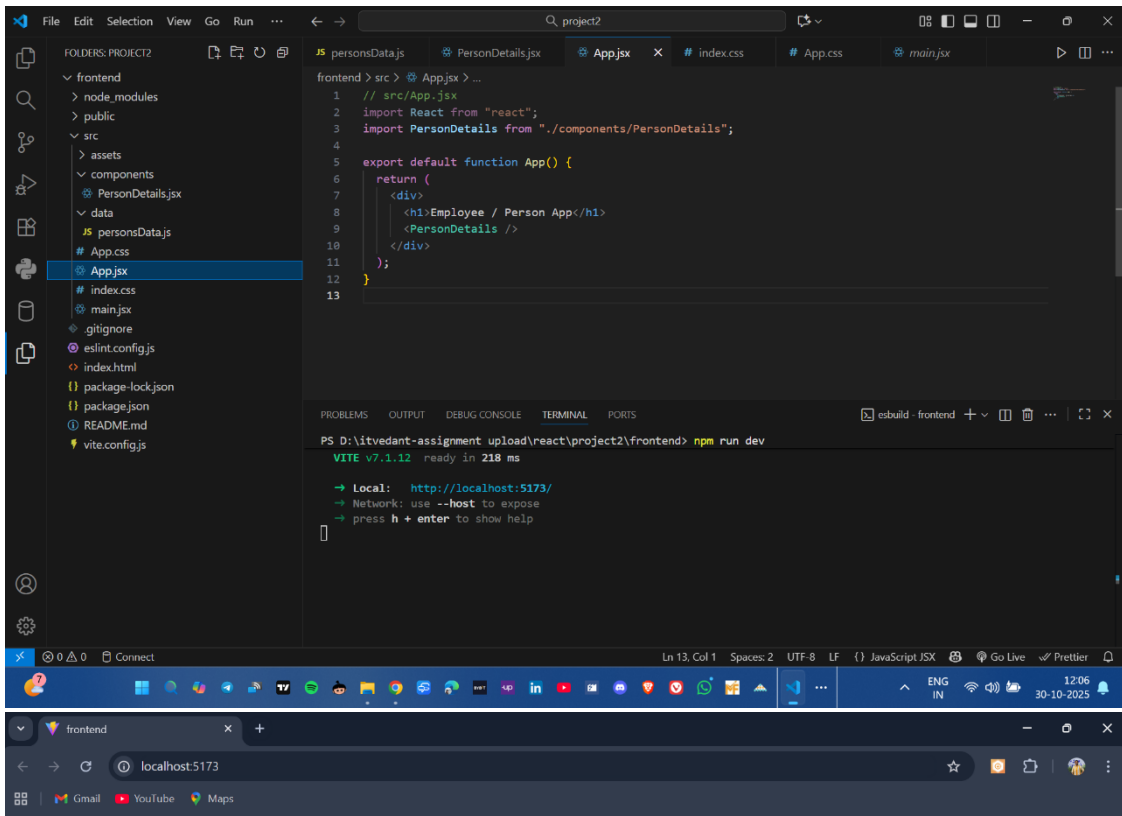

Employee / Person App

Person Details

John Doe
Date of Birth: 1/15/1990
Age: 35 years

Jane Smith
Date of Birth: 5/20/1985
Age: 40 years

Alice Johnson
Date of Birth: 9/10/1995
Age: 30 years

