Figure 1

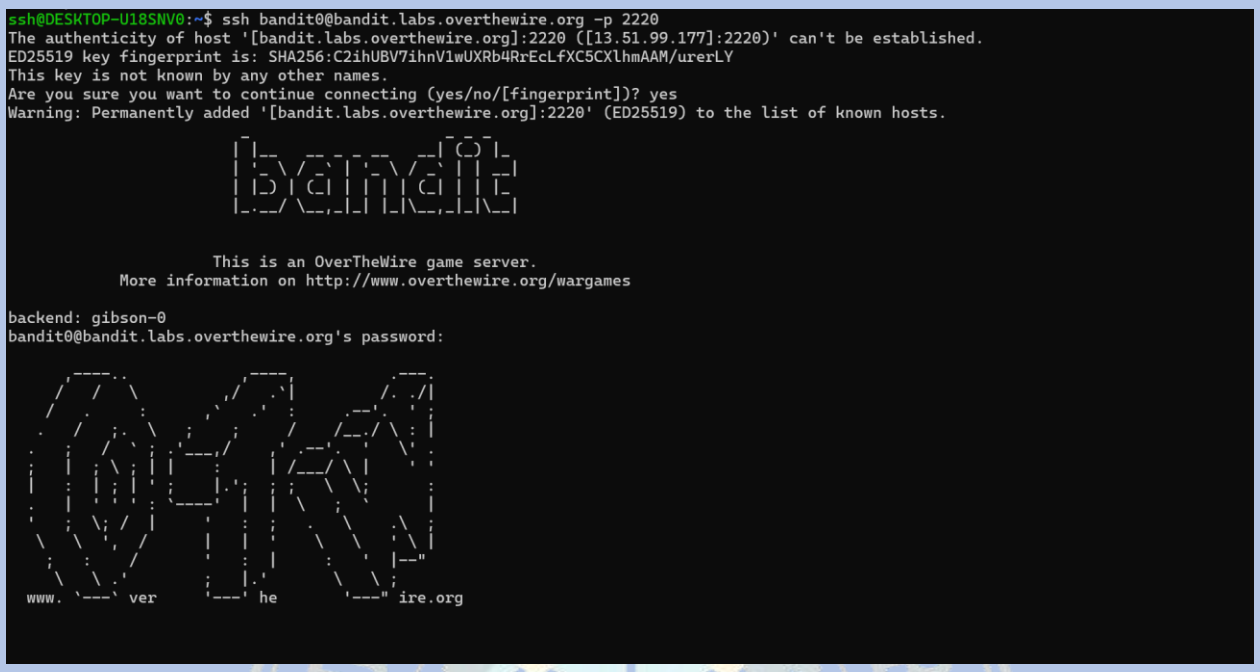


Figure 2

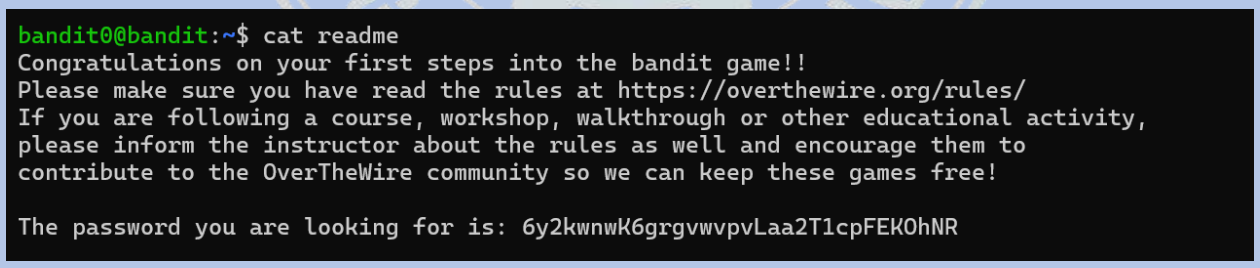


Figure 3

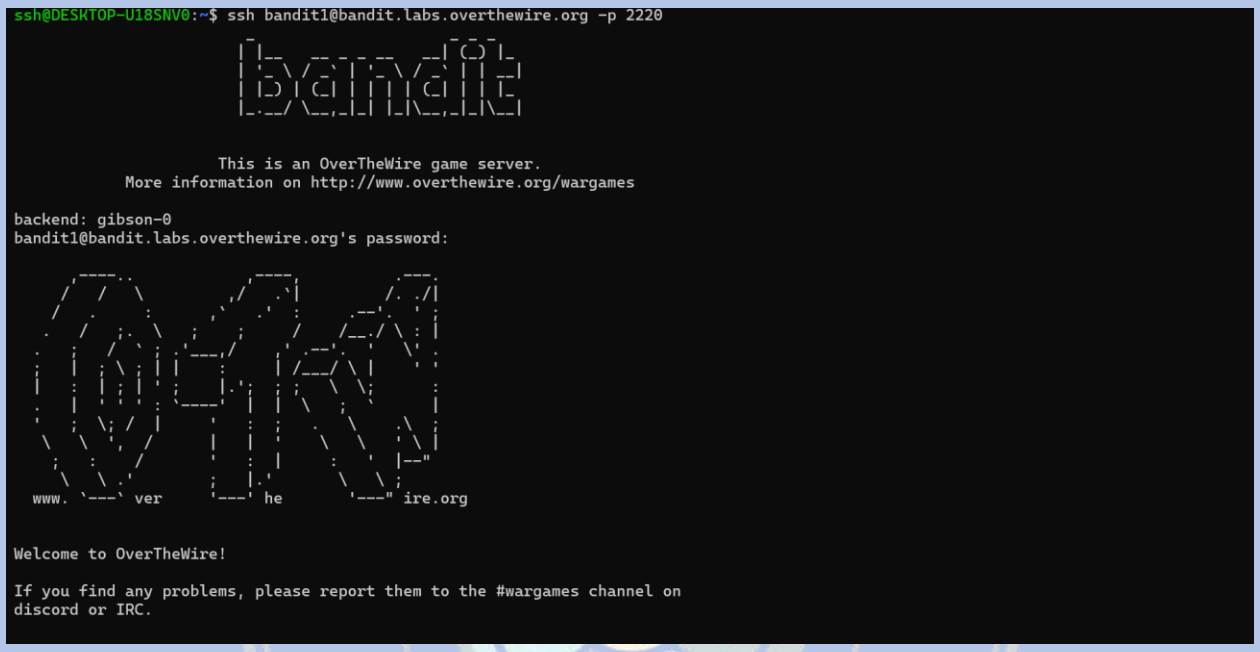


Figure 4

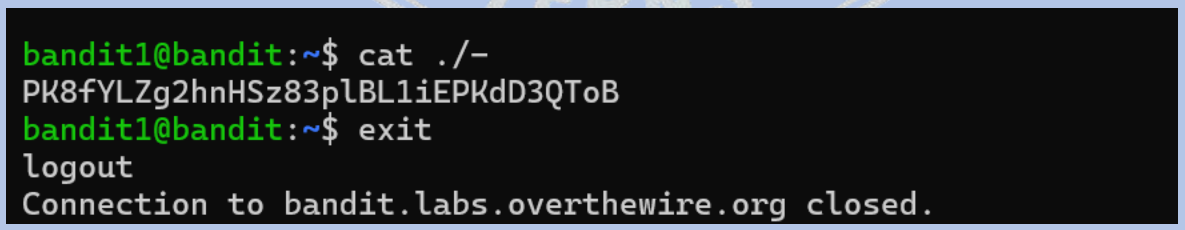


Figure 5

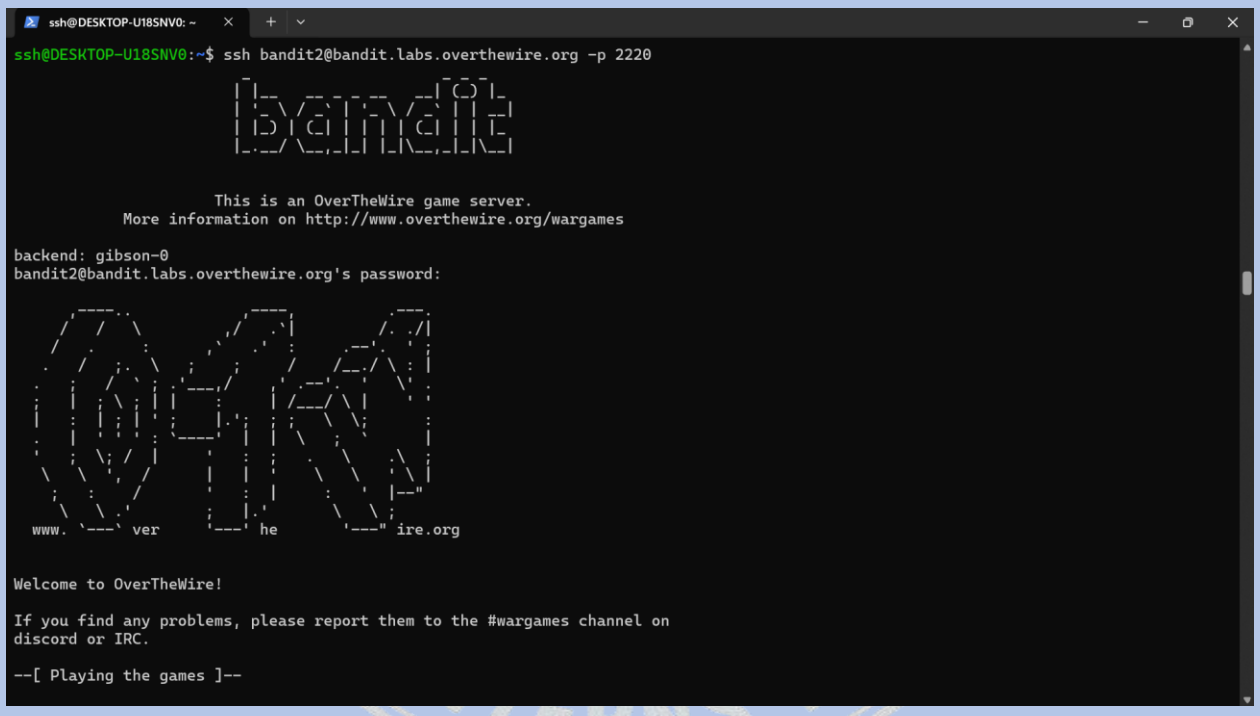


Figure 6

```
bandit2@bandit:~$ cat ./"--spaces in this filename--"
7Z2LFrykP2zEyvBl4m3clcL7tGYJPME
bandit2@bandit:~$ exit
logout
Connection to bandit.labs.overthewire.org closed.
```

Figure 7

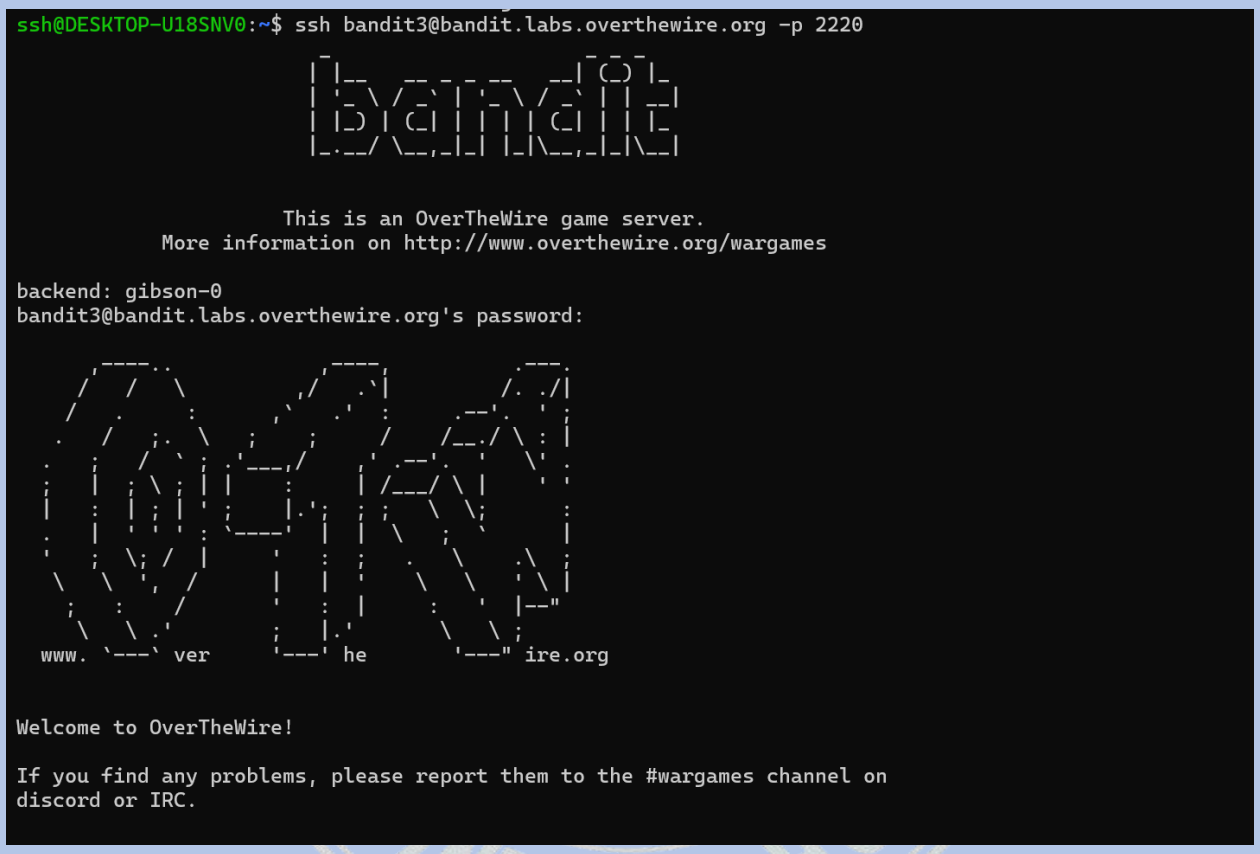


Figure 8

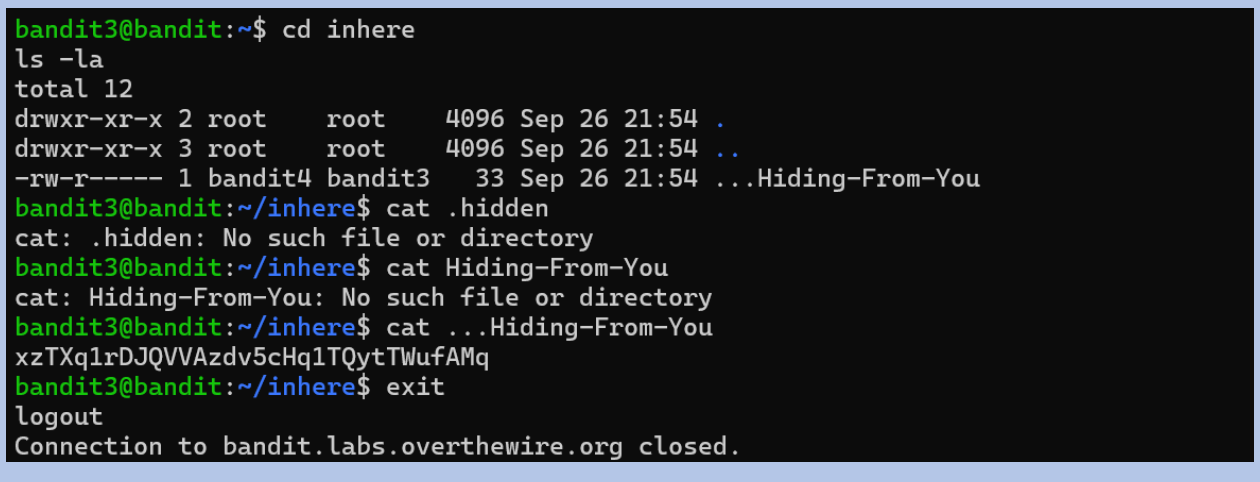


Figure 9

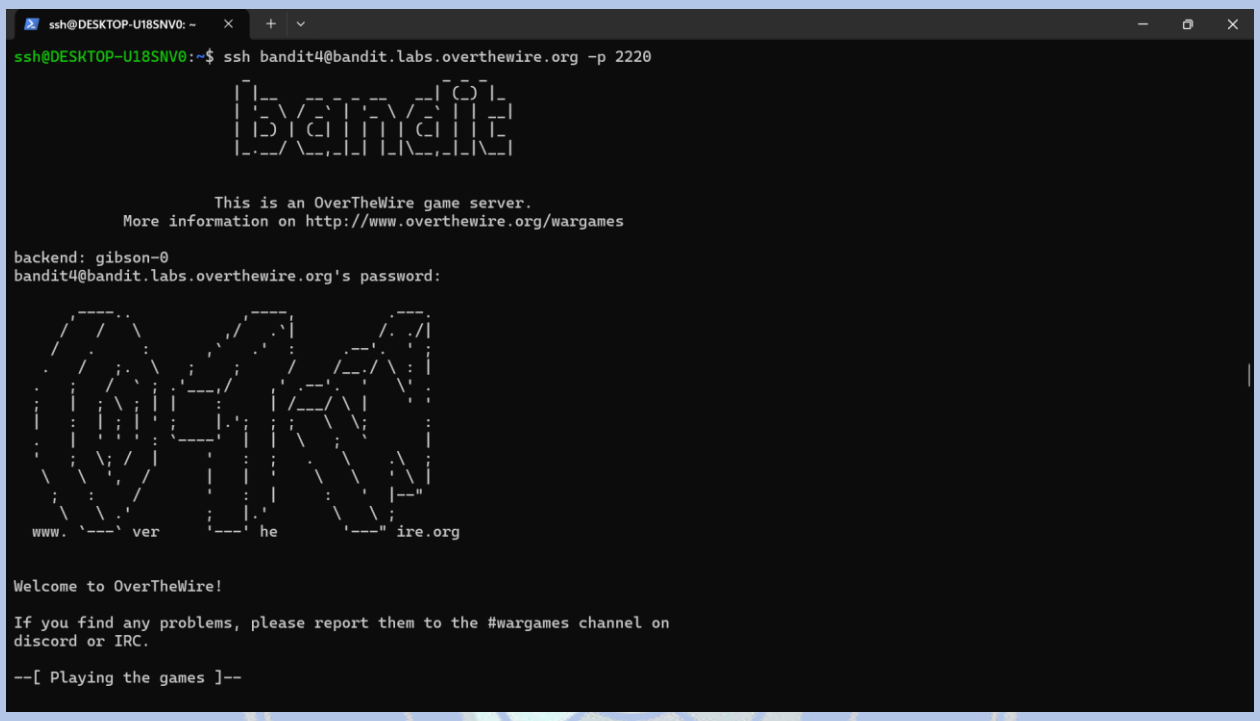


Figure 10

```
bandit4@bandit:~$ cd inhere
bandit4@bandit:~/inhere$ dir
-file00  -file01  -file02  -file03  -file04  -file05  -file06  -file07  -file08  -file09
bandit4@bandit:~/inhere$ file ./*
./-file00: data
./-file01: data
./-file02: data
./-file03: data
./-file04: data
./-file05: data
./-file06: data
./-file07: ASCII text
./-file08: data
./-file09: data
bandit4@bandit:~/inhere$ cat ./-file07
6C7h9GD8M6ai5nr7wo1RonrzFjj9yIrG
bandit4@bandit:~/inhere$ exit
logout
Connection to bandit.labs.overthewire.org closed.
```

Figure 11

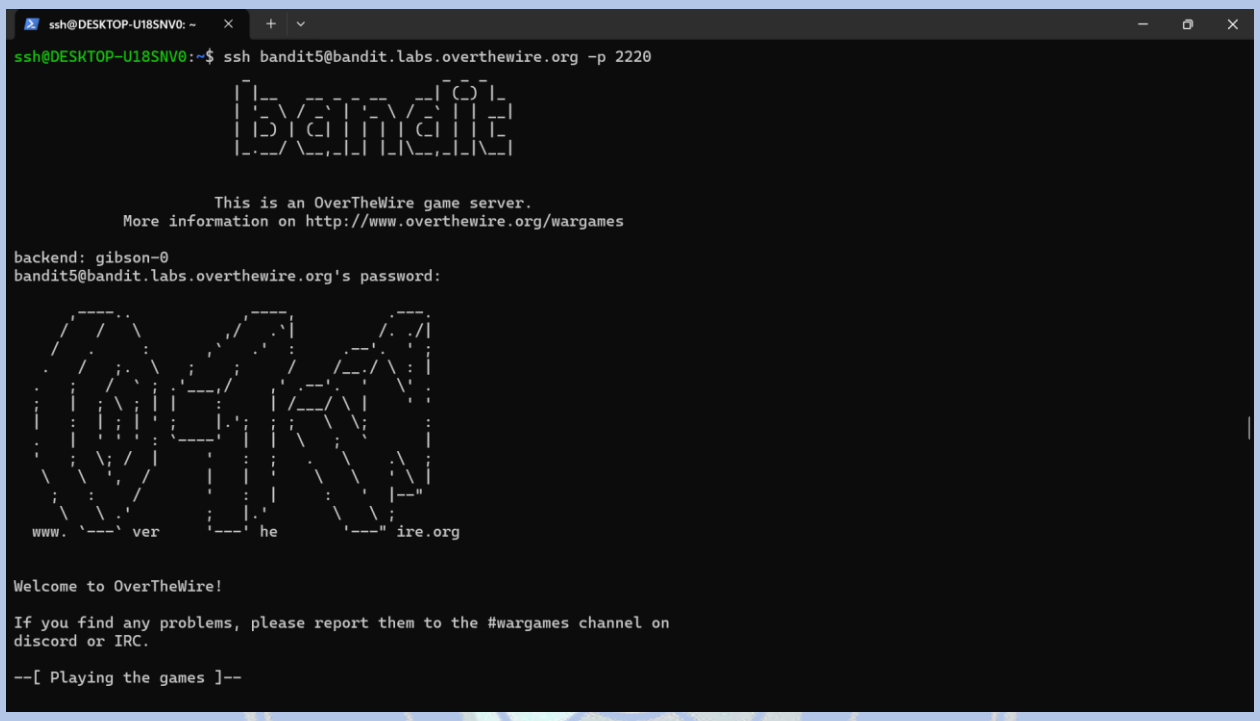


Figure 12

```
bandit5@bandit:~$ find inhere -type f -size 1033c ! -executable
inhere/maybehere07/.file2
bandit5@bandit:~$ cat inhere/maybehere07/.file2
pXa26xhMWaC2SvDotA4r9EgZkulOeSBW
```

Figure 13

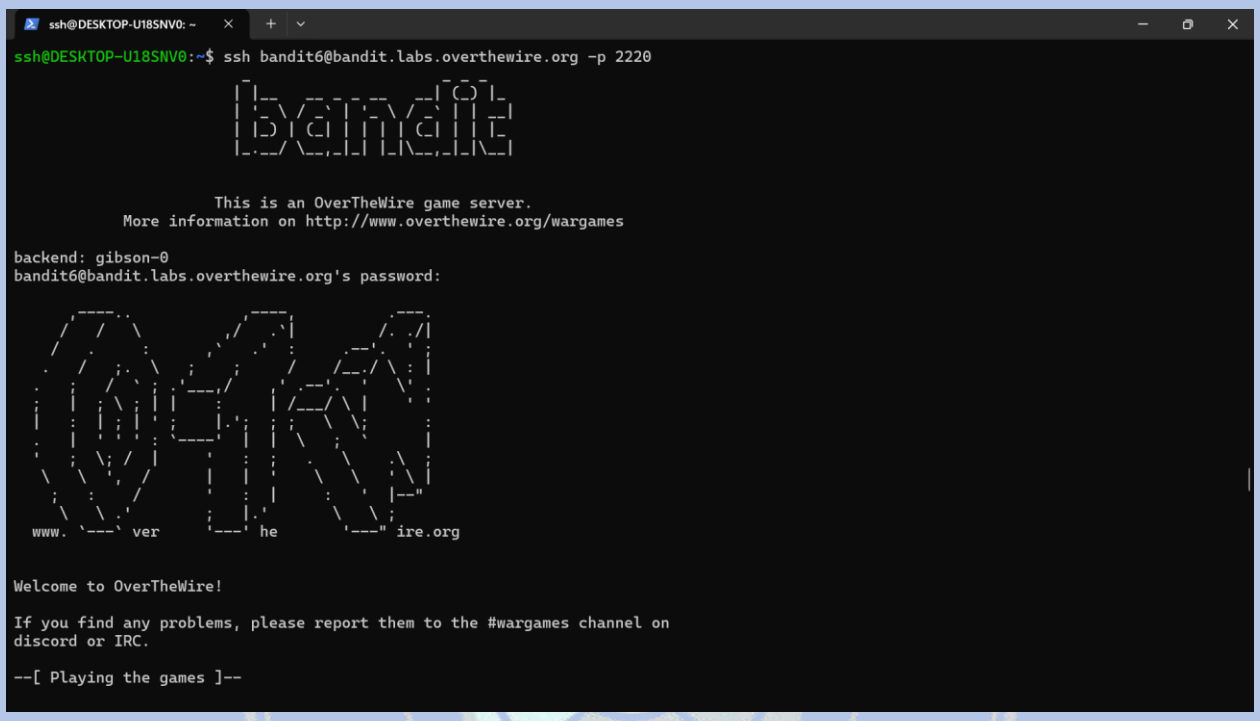


Figure 14

```
bandit6@bandit:~$ find / -user bandit7 -group bandit6 -size 33c 2>/dev/null
/var/lib/dpkg/info/bandit7.password
bandit6@bandit:~$ cat /var/lib/dpkg/info/bandit7.password
Bmnnvf82KzQlfxgAI2d1zYbr1u9pr3E3
bandit6@bandit:~$ exit
logout
Connection to bandit.labs.overthewire.org closed.
```

Figure 15

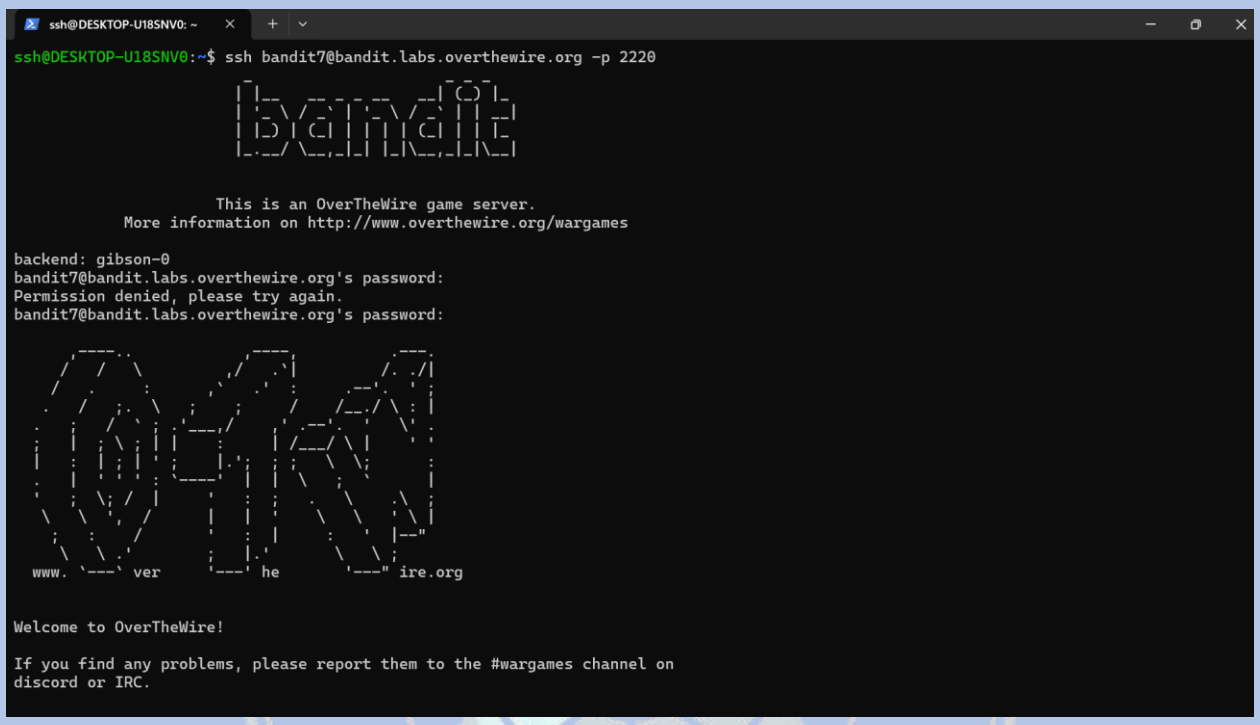


Figure 16

```
bandit7@bandit:~$ grep "millionth" data.txt
millionth       VR1ljMayciFxbnUokuQmJFw6QC9VKtub
bandit7@bandit:~$ exit
logout
Connection to bandit.labs.overthewire.org closed.
```

Figure 17

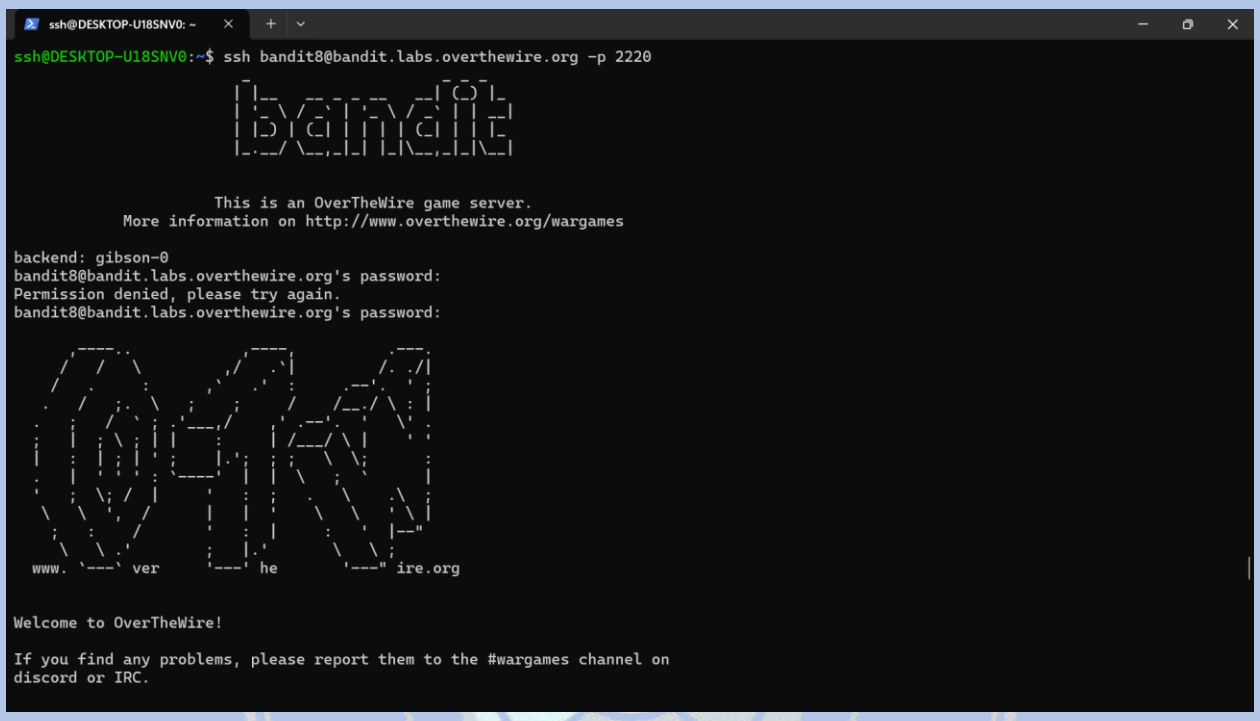


Figure 18

```
bandit8@bandit:~$ sort data.txt | uniq -u
EjmOSvuAu7sGAHqHVcBDPirRe9T03kxl
bandit8@bandit:~$ exit
logout
Connection to bandit.labs.overthewire.org closed.
```

Figure 19

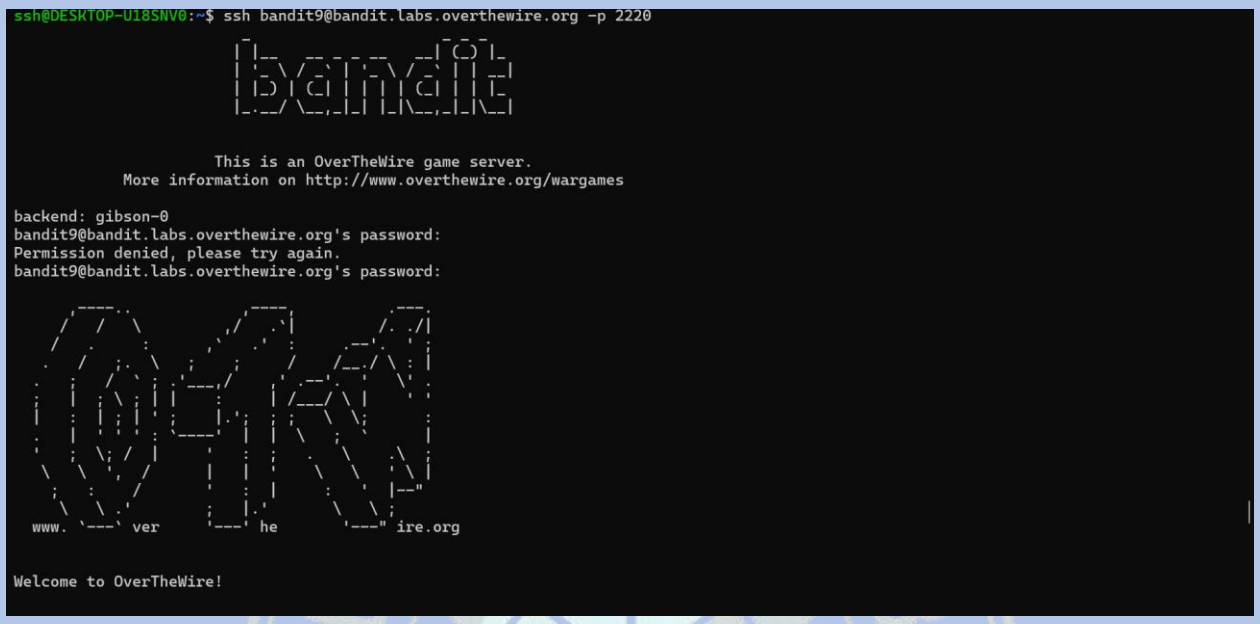


Figure 20

```
bandit9@bandit:~$ strings data.txt | grep "="
\========== the
q:=V
K        *=
=zZw
w=-1
vc.=
========== password
<u*========== is
=9$s
{=S[
;a =
lp>IoY-b==ld
========== B0s2khmbT9u0geKuOoVGW3JZKhndE3BG
ec=}
         =ulD
```

Figure 21

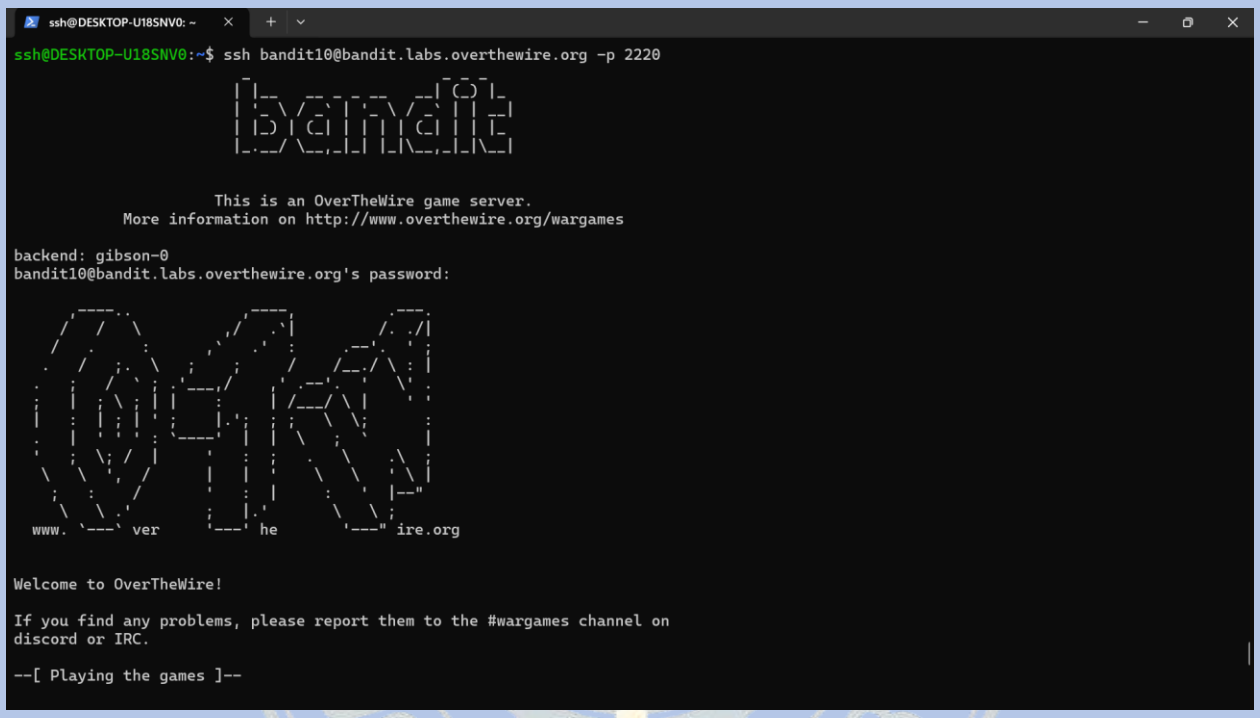


Figure 22

