


24/9/26


Day 1

Software development methodology which improves the collaboration between developers & operations team using various automation tools.

CI/CD process

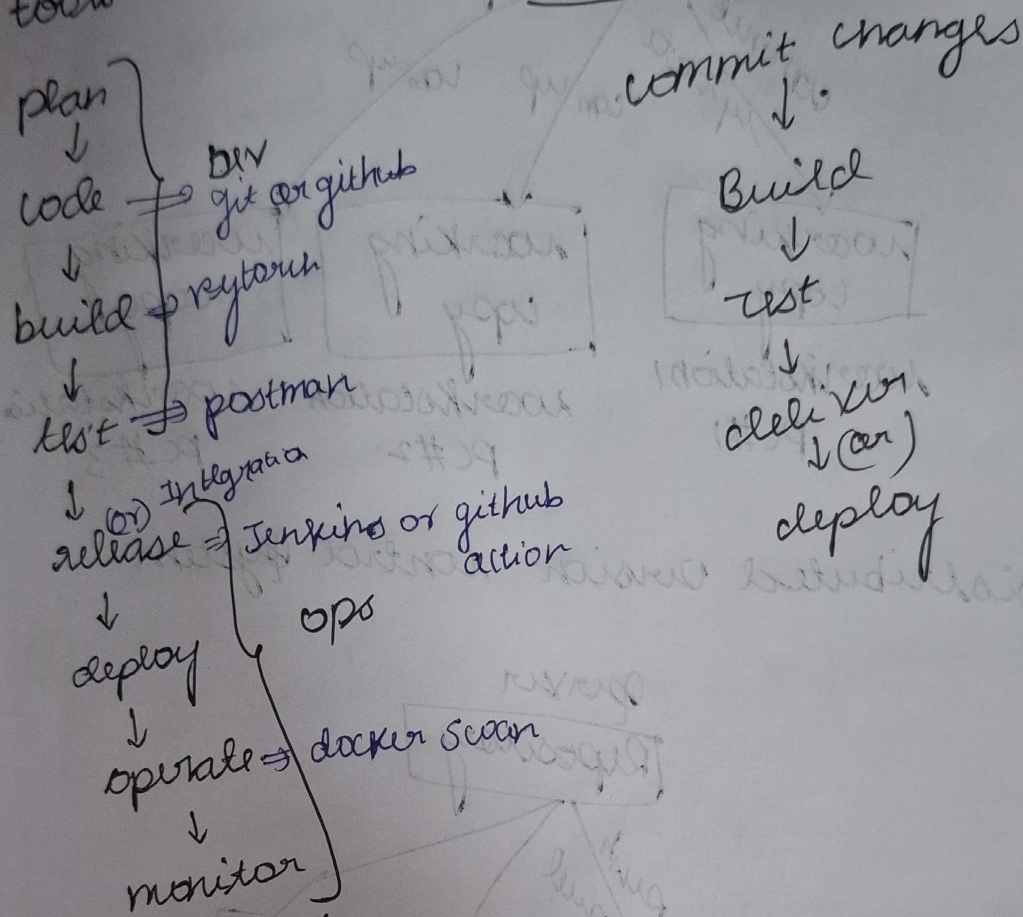


Automated CI/CD

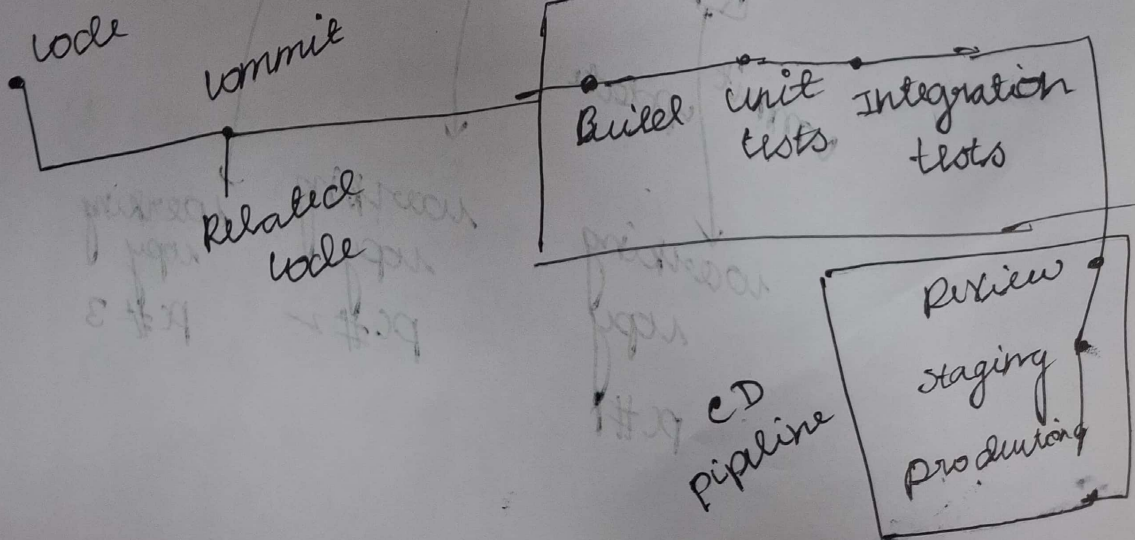


Source code management

centralized version control system

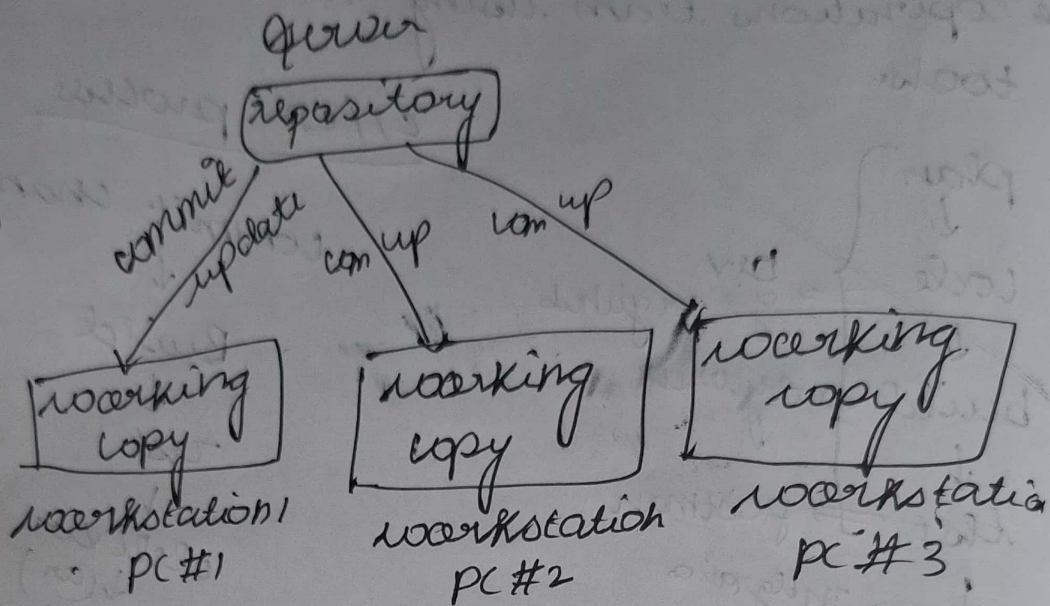

Distributed version control system

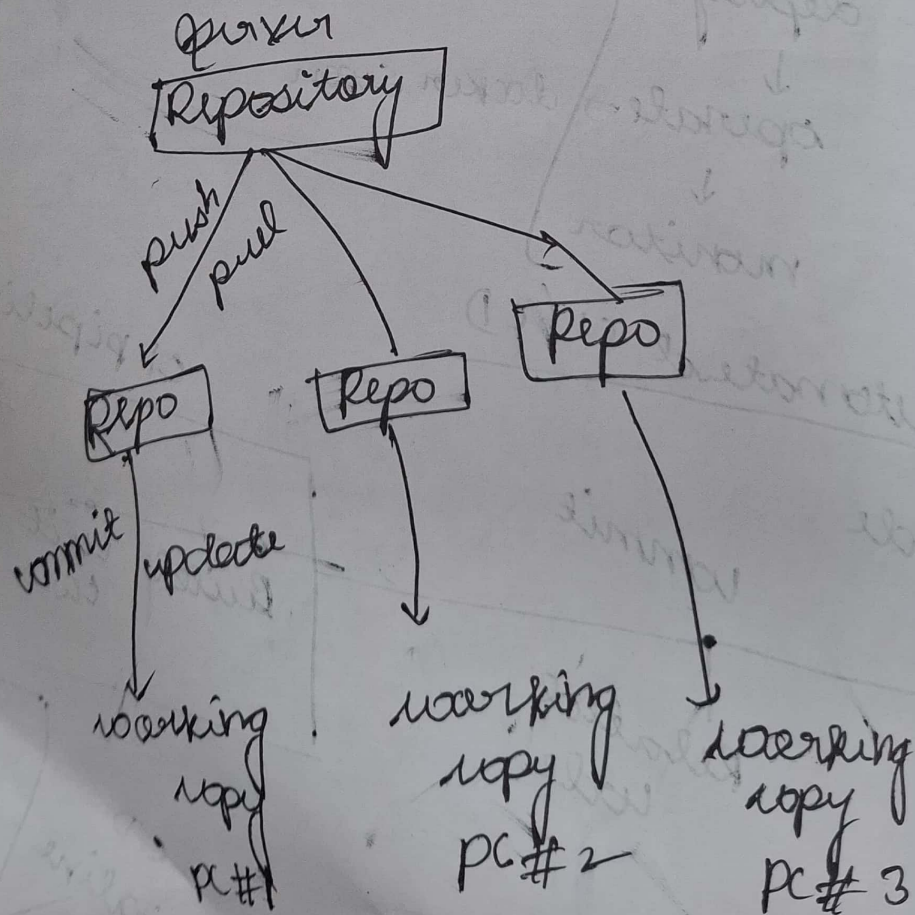

Linux commands

① Create a new folder - mkdir
mkdir sic-dumps

mkdir means make directory
② ls $\Rightarrow$ shows the file and folders in the current location.

③ git init $\Rightarrow$ Initialize (It converts your normal project folder into a git repository.)

After git init, git starts tracking change in that folder.

④ cd $\Rightarrow$ change directory
cd folder-name

↳ It is used to move one folder to another.

cd.. .. $\Rightarrow$ parent directory

⑤ notepad text.txt $\Rightarrow$ can make/open a text file

⑥ vim text.txt $\Rightarrow$ vim is a text editor available inside linux/unix environments
text.txt inside vim.

⑦ i $\Rightarrow$ insert mode $\Rightarrow$ vim insert mode
open $\Rightarrow$ vim text.txt
↳ press i
↳ write content

⑧ Exit Insert mode $\Rightarrow$ Esc.

This takes you out of Insert mode

Now Vim is in command / normal mode.

⑨ Save and exit vim $\rightarrow$:wq

:wq $\rightarrow$ save and exit

Esc $\rightarrow$:wq

w $\Rightarrow$ write / save

q $\Rightarrow$ quit

Exit without saving

:q!

Esc $\Rightarrow$:q!

q $\Rightarrow$ quit

! $\Rightarrow$ force

Exit vim and discard the changes

⑩ cat (see file contents)

cat file

cat text.txt

$\rightarrow$ contains content.

cat is used within a file, not a folder.

⑪ ls -l $\Rightarrow$ shows them in long / list format, including perms as a permissions, owner, size and modification time.

Monolithic Architecture :
UI
↓
Business Logic
↓
Data Access Layer
↓
Database.

