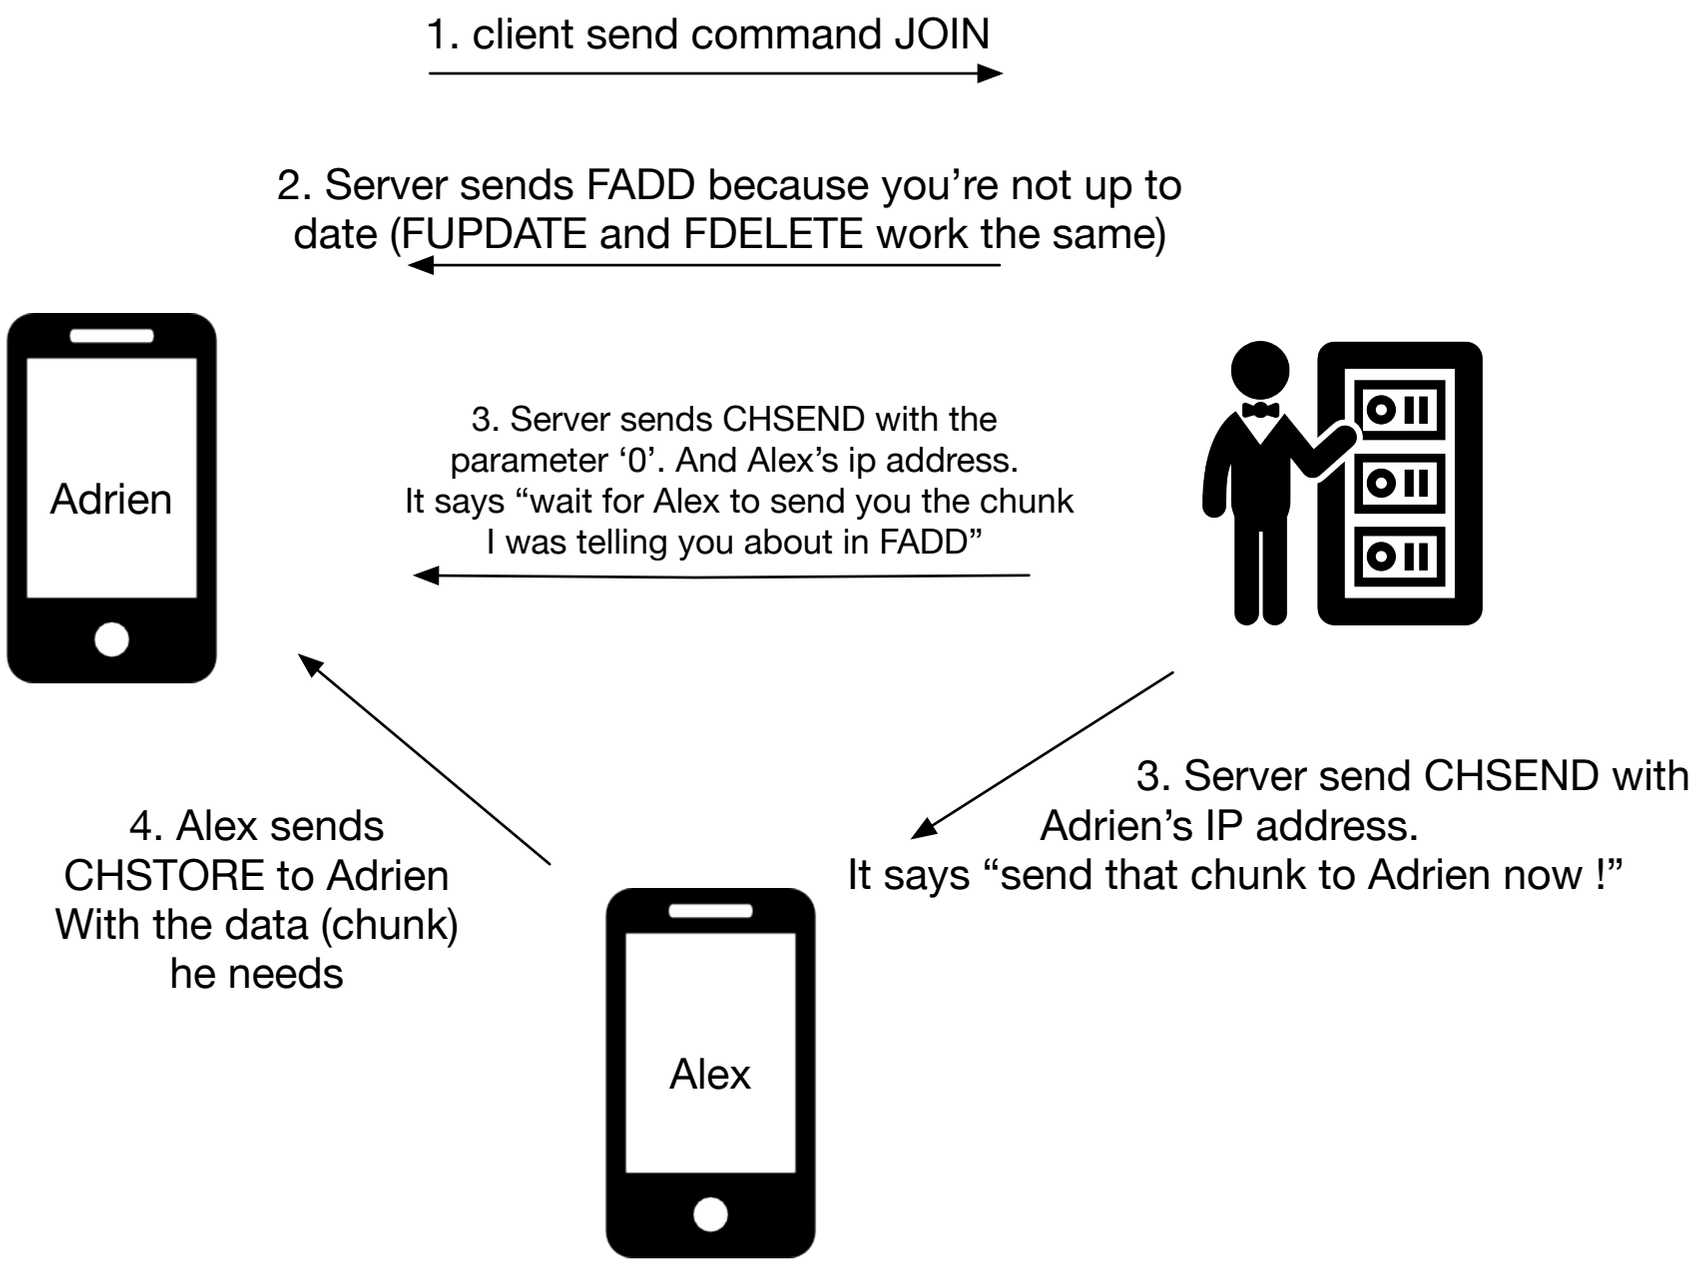
1. client send command JOIN
2. Server sends FADD because you're not up to date (FUPDATE and FDELETE work the same)
Adrien
3. Server sends CHSEND with the parameter '0'. And Alex's ip address.
It says "wait for Alex to send you the chunk I was telling you about in FADD"
3. Server send CHSEND with Adrien's IP address.
It says "send that chunk to Adrien now !"
4. Alex sends CHSTORE to Adrien With the data (chunk) he needs
Alex