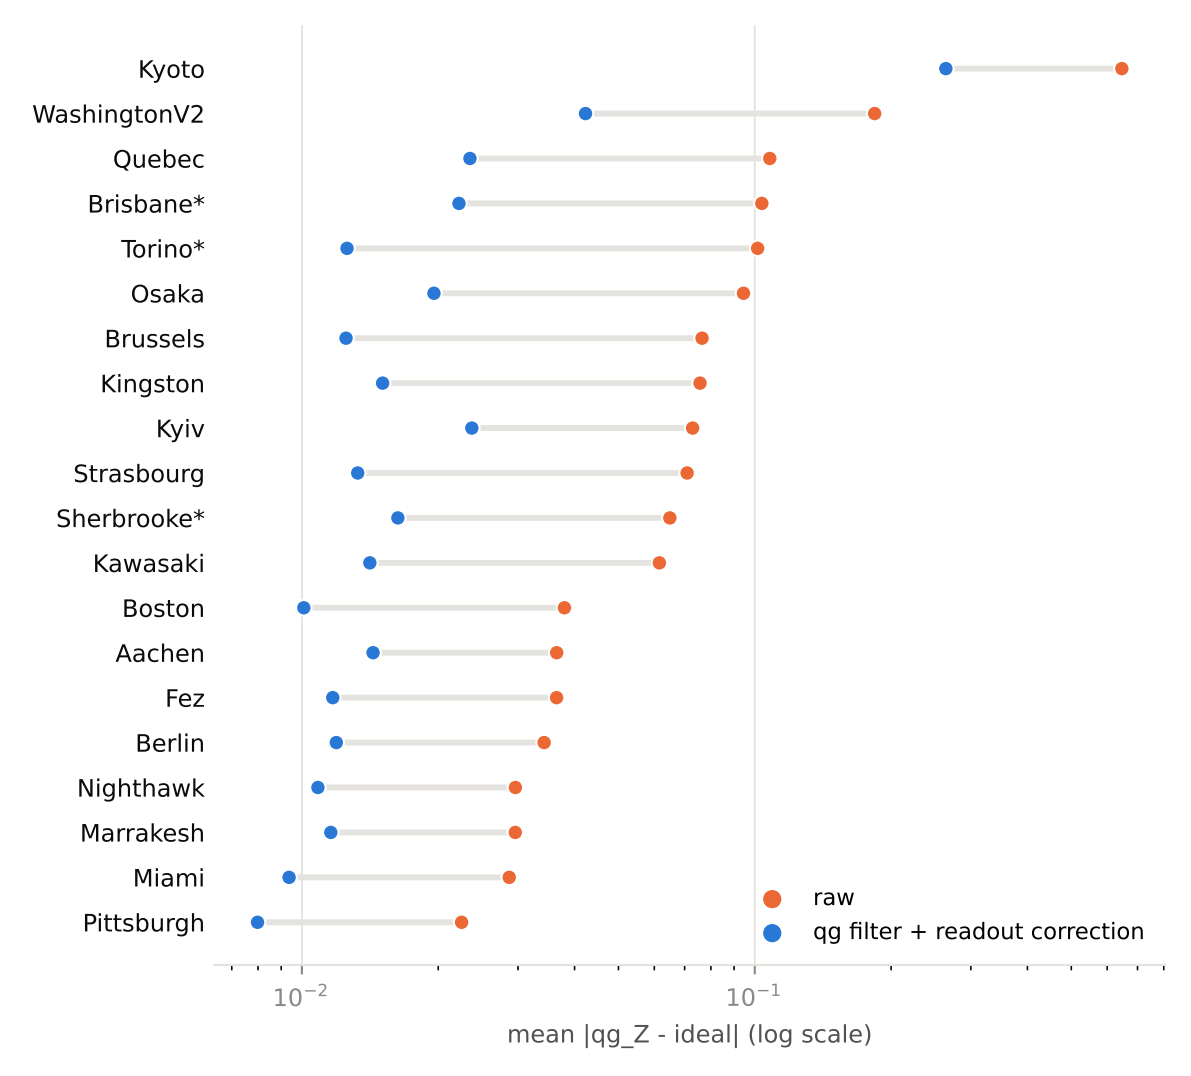
Kyoto
WashingtonV2
Quebec
Brisbane*
Torino*
Osaka
Brussels
Kingston
Kyiv
Strasbourg
Sherbrooke*
Kawasaki
Boston
Aachen
Fez
Berlin
Nighthawk
Marrakesh
Miami
Pittsburgh
raw
qg filter + readout correction
10^{-2}
10^{-1}
mean |qg_Z - ideal| (log scale)