Cucumber Report

Start : Sep 17, 1:01:47.358 pm

End: Sep 17, 1:01:47.472 pm


**Duration** : 0.114 s


**Features** 


Scenarios


Steps


PASSED - 0 FAILED - 1 SKIPPED - 0 PASSED - 0 FAILED - 5 SKIPPED - 0 PASSED - 6 FAILED - 5 SKIPPED - 10












Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
GitHub API Demo	0.114 s	5	0	5	0	21	6	5	10

FAIL & SKIP SCENARIOS -- 3 --

#	Feature Name	Scenario Name
1	GitHub API Demo	Fetch my GitHub public profile
2		Fetch my GitHub user details using JWT Token
3		Create a public repo
4		Verify GitHub repo exists
5		Delete the repo


TAG	Scenario			Feature				
Name	T	P	F	S	T	P	F	S
@GitHubAPI	5	0	5	0	1	0	1	0

FEATURES SUMMARY -- 5 --

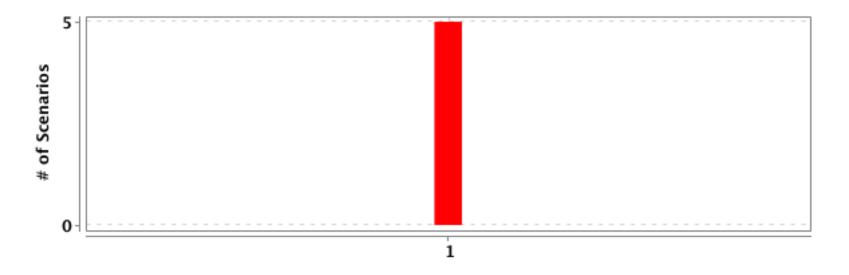

#	Feature Name	T	P	F	S	Duration
1	GitHub API Demo	5	0	5	0	0.114 s

SCENARIOS SUMMARY

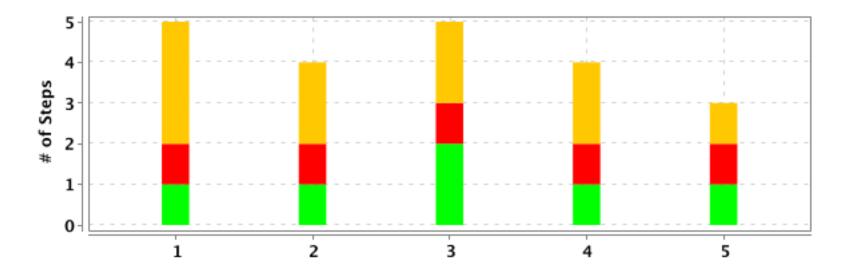


#	Feature Name	Scenario Name	T	P	F	S	Duration
1	GitHub API Demo	Fetch my GitHub public profile	5	1	1	3	0.019 s
2		Fetch my GitHub user details using JWT Token	4	1	1	2	0.007 s
3		Create a public repo	5	2	1	2	0.045 s
4	_	Verify GitHub repo exists	4	1	1	2	0.007 s
5		Delete the repo	3	1	1	1	0.006 s

DETAILED SECTION -- 7 -

#### **GitHub API Demo**

FAILED	DURATION - 0.114 s	Scenarios		Steps	
		Total - 5		Total - 21	
/ 1:01:47.358 pm // 3	1:01:47.472 pm /	Pass - 0	5	Pass - 6	21
		Fail - 5		Fail - 5	21
		Skip - 0		Skip - 10	

## Fetch my GitHub public profile

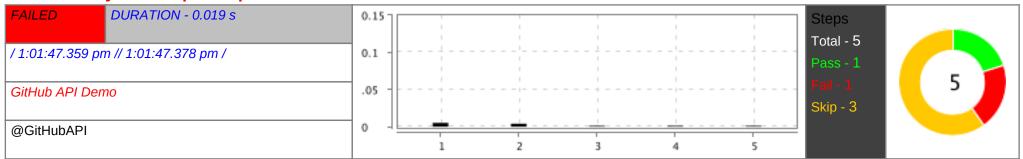

#	Step / Hook Details	Status	Duration
1	When compose a get request to "https://api.github.com/users/octocat" with headers	PASSED	0.005 s
	Accept application/vnd.github+json		
2	And execute and save the response as "profileResponse"	FAILED	0.004 s
	java.lang.NoClassDefFoundError: groovy/lang/GroovyObject		
	at java.base/java.lang.ClassLoader.defineClass1(Native Method)		
	at java.base/java.lang.ClassLoader.defineClass(ClassLoader.java:1022)		
	at java.base/java.security.SecureClassLoader.defineClass(SecureClassLoader.java:174)		
	at java.base/jdk.internal.loader.BuiltinClassLoader.defineClass(BuiltinClassLoader.java:800)		
	at java.base/jdk.internal.loader.BuiltinClassLoader.findClassOnClassPathOrNull(BuiltinClassLoader.java:698)		
	at java.base/jdk.internal.loader.BuiltinClassLoader.loadClassOrNull(BuiltinClassLoader.java:621)		
	at java.base/jdk.internal.loader.BuiltinClassLoader.loadClass(BuiltinClassLoader.java:579)		
	at java.base/jdk.internal.loader.ClassLoaders\$AppClassLoader.loadClass(ClassLoaders.java:178)		
	at java.base/java.lang.ClassLoader.loadClass(ClassLoader.java:527)		
	at io.restassured.RestAssured. <clinit>(RestAssured.java:354)</clinit>		
	at com.nimble.utils.ApiClient.callRestfulAPI(ApiClient.java:47)		
	at com.nimble.stepDefinitions.ApiSteps.saveTheResponse(ApiSteps.java:92)		
	at ?.execute and save the response as "profileResponse"(file:///Users/amitgupta/Viom/Products/viom-studio/test_suite_repositories/sample-		


#	Step / Hook Details	Status	Duration
	test-suites-repo-1757588379161/test-suite-1758097862241/execution 20250917 130142/src/test/java/com/nimble/feature/APITests.feature:7)		
	Caused by: java.lang.ClassNotFoundException: groovy.lang.GroovyObject		
	at java.base/jdk.internal.loader.BuiltinClassLoader.loadClass(BuiltinClassLoader.java:581)		
	at java.base/jdk.internal.loader.ClassLoaders\$AppClassLoader.loadClass(ClassLoaders.java:178)		
	at java.base/java.lang.ClassLoader.loadClass(ClassLoader.java:527)		
	at java.base/java.lang.ClassLoader.defineClass1(Native Method)		
	at java.base/java.lang.ClassLoader.defineClass(ClassLoader.java:1022)		
	at java.base/java.security.SecureClassLoader.defineClass(SecureClassLoader.java:174)		
	at java.base/jdk.internal.loader.BuiltinClassLoader.defineClass(BuiltinClassLoader.java:800)		
	at java.base/jdk.internal.loader.BuiltinClassLoader.findClassOnClassPathOrNull(BuiltinClassLoader.java:698)		
	at java.base/jdk.internal.loader.BuiltinClassLoader.loadClassOrNull(BuiltinClassLoader.java:621)		
	at java.base/jdk.internal.loader.BuiltinClassLoader.loadClass(BuiltinClassLoader.java:579)		
	at java.base/jdk.internal.loader.ClassLoaders\$AppClassLoader.loadClass(ClassLoaders.java:178)		
	at java.base/java.lang.ClassLoader.loadClass(ClassLoader.java:527)		
	at io.restassured.RestAssured. <clinit>(RestAssured.java:354)</clinit>		
	at com.nimble.utils.ApiClient.callRestfulAPI(ApiClient.java:47)		
	at com.nimble.stepDefinitions.ApiSteps.saveTheResponse(ApiSteps.java:92)		
	at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method)		
	at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:62)		
	at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)		
	at java.base/java.lang.reflect.Method.invoke(Method.java:566)		
	at io.cucumber.java.Invoker.doInvoke(Invoker.java:66)		
	at io.cucumber.java.Invoker.invoke(Invoker.java:24)		
	at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)		
	at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29)		
	at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66)		
	at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63)		
	at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)		
	at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:86)		
	at io.cucumber.core.runner.TestStep.run(TestStep.java:57)		
	at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51)		
	at io.cucumber.core.runner.TestCase.run(TestCase.java:95)		
	at io.cucumber.core.runner.Runner.runPickle(Runner.java:75)		
	at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132)		
	at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$3(CucumberExecutionContext.java:110)		
	at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23)		
	at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:110)		
	at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129)		
	at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35)		
	at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method)		
	at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:62)		

DETAILED SECTION -- 9 --

#	Step / Hook Details	Status	Duration
	at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)		
	at java.base/java.lang.reflect.Method.invoke(Method.java:566)		
	at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139)		
	at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:677)		
	at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:221)		
	at org.testng.internal.invokers.MethodRunner.runInSequence(MethodRunner.java:50)		
	at org.testng.internal.invokers.TestInvoker\$MethodInvocationAgent.invoke(TestInvoker.java:969)		
	at org.testng.internal.invokers.TestInvoker.invokeTestMethods(TestInvoker.java:194)		
	at org.testng.internal.invokers.TestMethodWorker.invokeTestMethods(TestMethodWorker.java:148)		
	at org.testng.internal.invokers.TestMethodWorker.run(TestMethodWorker.java:128)		
	at java.base/java.util.ArrayList.forEach(ArrayList.java:1541)		
	at org.testng.TestRunner.privateRun(TestRunner.java:829)		
	at org.testng.TestRunner.run(TestRunner.java:602)		
	at org.testng.SuiteRunner.runTest(SuiteRunner.java:437)		
	at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:431)		
	at org.testng.SuiteRunner.privateRun(SuiteRunner.java:391)		
	at org.testng.SuiteRunner.run(SuiteRunner.java:330)		
	at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:52)		
	at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:95)		
	at org.testng.TestNG.runSuitesSequentially(TestNG.java:1256)		
	at org.testng.TestNG.runSuitesLocally(TestNG.java:1176)		
	at org.testng.TestNG.runSuites(TestNG.java:1099)		
	at org.testng.TestNG.run(TestNG.java:1067)		
	at org.apache.maven.surefire.testng.TestNGExecutor.run(TestNGExecutor.java:324)		
	at org.apache.maven.surefire.testng.TestNGXmlTestSuite.execute(TestNGXmlTestSuite.java:74)		
	at org.apache.maven.surefire.testng.TestNGProvider.invoke(TestNGProvider.java:123)		
	at org.apache.maven.surefire.booter.ForkedBooter.runSuitesInProcess(ForkedBooter.java:456)		
	at org.apache.maven.surefire.booter.ForkedBooter.execute(ForkedBooter.java:169)		
	at org.apache.maven.surefire.booter.ForkedBooter.run(ForkedBooter.java:595)		
	at org.apache.maven.surefire.booter.ForkedBooter.main(ForkedBooter.java:581)		
	* Not displayable characters are replaced by '?'.		
3	Then check that response "profileResponse" has "200" as status code	SKIPPED	0.001 s
4	And check that API response "profileResponse" contains "octocat" at "\$.login"	SKIPPED	0.001 s
5	And check that API response "profileResponse" contains "The Octocat" at "\$.name"	SKIPPED	0.001 s


# Fetch my GitHub user details using JWT Token

DETAILED SECTION -- 10 --

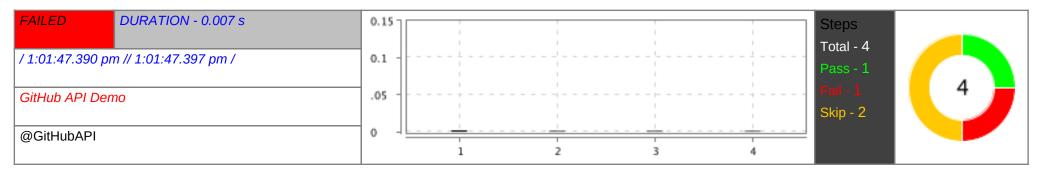

#	Step / Hook Details	Status	Duration
1	When compose a get request to "https://api.github.com/user" with headers	PASSED	0.002 s
	Accept application/vnd.github+json		
2	And execute and save the response as "userProfile"	FAILED	0.001 s
	java.lang.NoClassDefFoundError: Could not initialize class io.restassured.RestAssured at com.nimble.utils.ApiClient.callRestfulAPI(ApiClient.java:47) at com.nimble.stepDefinitions.ApiSteps.saveTheResponse(ApiSteps.java:92) at ?.execute and save the response as "userProfile"(file:///Users/amitgupta/Viom/Products/viom-studio/test_suite_repositories/sample-test-suites-repo-1757588379161/test-suite-1758097862241/execution_20250917_130142/src/test/java/com/nimble/feature/APITests.feature:16) * Not displayable characters are replaced by '?'.		
3	And check that response "userProfile" has "200" as status code	SKIPPED	0.001 s
4	And check that API response "userProfile" contains "80874758" at "\$.id"	SKIPPED	0.001 s

#### Create a public repo

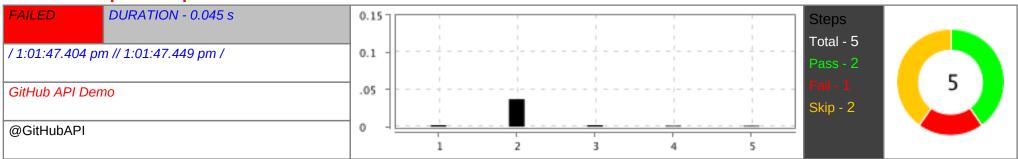


#	Step / Hook Details	Status	Duration
1	When compose a post request to "https://api.github.com/user/repos" with headers	PASSED	0.002 s
	Accept application/vnd.github+json		

DETAILED SECTION -- 11 --

#	Step / Hook Details	Status	Duration
2	And with the below JSON request	PASSED	0.037 s
	{   "name": "demo-repo",   "description": "Created via Nimble API test",   "private": false }		
3	And execute and save the response as "createRepoResponse"  java.lang.NoClassDefFoundError: Could not initialize class io.restassured.RestAssured   at com.nimble.utils.ApiClient.callRestfulAPI(ApiClient.java:47)   at com.nimble.stepDefinitions.ApiSteps.saveTheResponse(ApiSteps.java:92)   at ?.execute and save the response as "createRepoResponse"(file:///Users/amitgupta/Viom/Products/viom-studio/test_suite_repositories/sample-test-suites-repo-1757588379161/test-suite-1758097862241/execution_20250917_130142/src/test/java/com/nimble/feature/APITests. feature:32)   * Not displayable characters are replaced by '?'.	FAILED	0.002 s
4	Then check that response "createRepoResponse" has "201" as status code	SKIPPED	0.001 s
5	And check that API response "createRepoResponse" contains "demo-repo" at "\$.name"	SKIPPED	0.001 s


## **Verify GitHub repo exists**

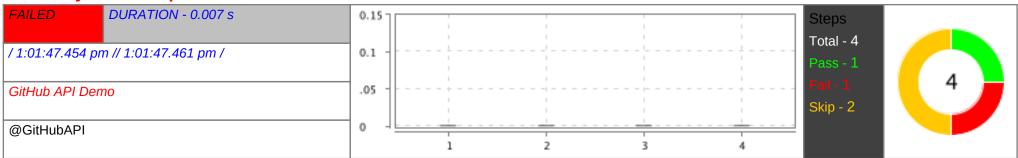

#	Step / Hook Details	Status	Duration
1	When compose a get request to "https://api.github.com/repos/guptaami-commits/demo-repo" with headers	PASSED	0.001 s
	Accept application/vnd.github+json		
2	And execute and save the response as "repoCheckResponse"	FAILED	0.001 s
	java.lang.NoClassDefFoundError: Could not initialize class io.restassured.RestAssured at com.nimble.utils.ApiClient.callRestfulAPI(ApiClient.java:47) at com.nimble.stepDefinitions.ApiSteps.saveTheResponse(ApiSteps.java:92) at ?.execute and save the response as "repoCheckResponse"(file:///Users/amitgupta/Viom/Products/viom-studio/test_suite_repositories/sample-test-suites-repo-1757588379161/test-suite-1758097862241/execution_20250917_130142/src/test/java/com/nimble/feature/APITests.		

#	Step / Hook Details	Status	Duration
	feature:40) * Not displayable characters are replaced by '?'.		
3	Then check that response "repoCheckResponse" has "200" as status code	SKIPPED	0.001 s
4	And check that API response "repoCheckResponse" contains "demo-repo" at "\$.name"	SKIPPED	0.001 s

## **Delete the repo**

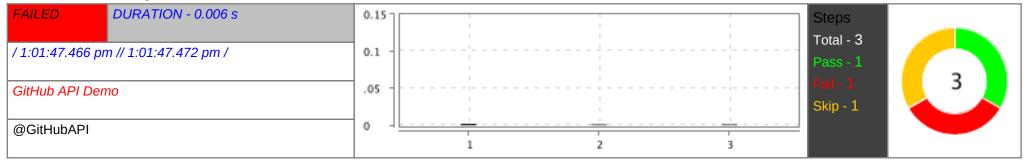

#	Step / Hook Details	Status	Duration
1	When compose a delete request to "https://api.github.com/repos/guptaami-commits/demo-repo" with headers	PASSED	0.002 s
	Accept application/vnd.github+json		
2	And execute and save the response as "deleteResponse"	FAILED	0.001 s
	java.lang.NoClassDefFoundError: Could not initialize class io.restassured.RestAssured at com.nimble.utils.ApiClient.callRestfulAPI(ApiClient.java:47) at com.nimble.stepDefinitions.ApiSteps.saveTheResponse(ApiSteps.java:92) at ?.execute and save the response as "deleteResponse"(file:///Users/amitgupta/Viom/Products/viom-studio/test_suite_repositories/sample-test-suites-repo-1757588379161/test-suite-1758097862241/execution_20250917_130142/src/test/java/com/nimble/feature/APITests. feature:48)  * Not displayable characters are replaced by '?'.		
3	Then check that response "deleteResponse" has "204" as status code	SKIPPED	0.001 s