

Cucumber Report

24 Oct 2025, 14:20:13

Start : Oct 24, 2:20:12.897 pm

End : Oct 24, 2:20:13.041 pm

Duration : 0.144 s

Features

Scenarios

Steps

PASSED - 0
FAILED - 1
SKIPPED - 0

PASSED - 0
FAILED - 1
SKIPPED - 0

PASSED - 2
FAILED - 1
SKIPPED - 1



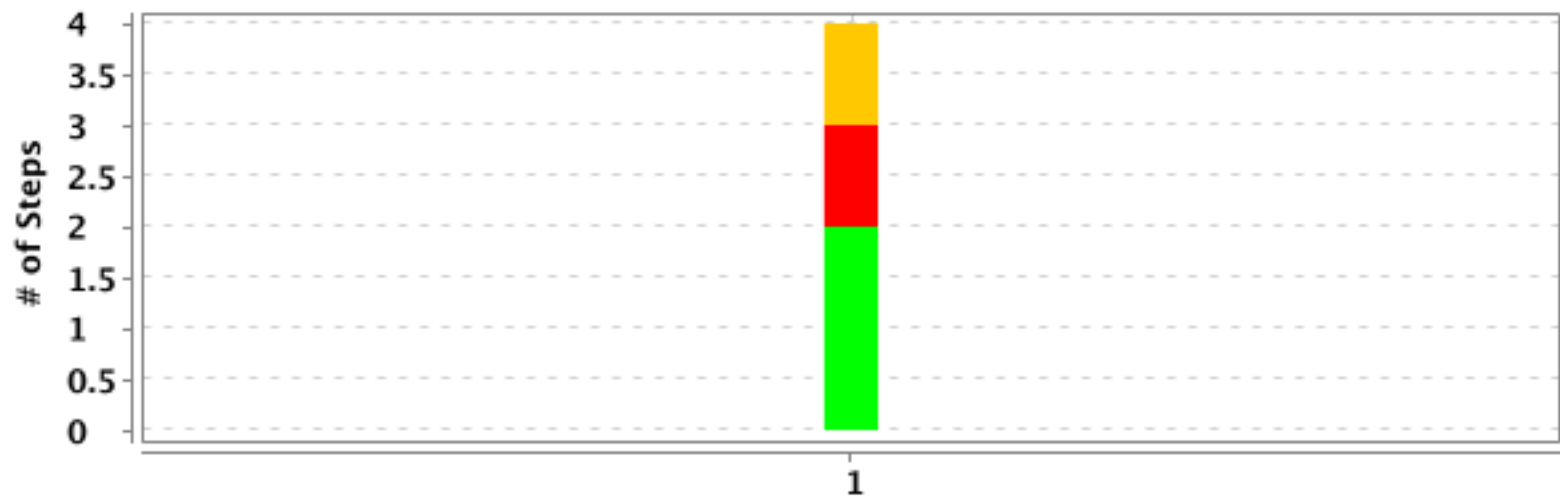
Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
<u>New feature</u>	0.144 s	1	0	1	0	4	2	1	1

#	Feature Name	Scenario Name
1	<u>New feature</u>	<u>API sample</u>

TAG	Scenario				Feature			
Name	T	P	F	S	T	P	F	S
@testapiamit	1	0	1	0	1	0	1	0





#	Feature Name	T	P	F	S	Duration
1	<u>New feature</u>	1	0	1	0	0.144 s

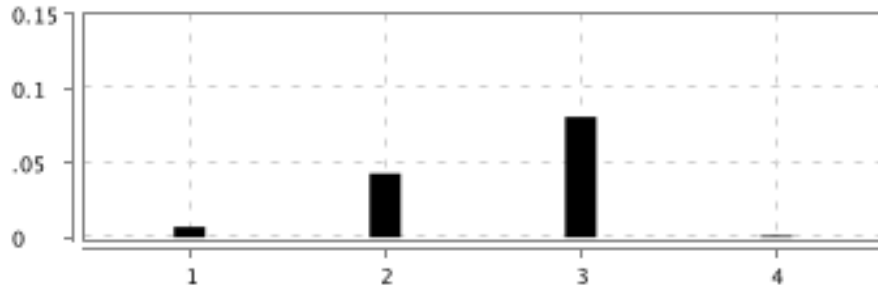



#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>New feature</u>	<u>API sample</u>	4	2	1	1	0.142 s

New feature

FAILED	DURATION - 0.144 s	Scenarios Total - 1 Pass - 0 Fail - 1 Skip - 0		Steps Total - 4 Pass - 2 Fail - 1 Skip - 1	
/ 2:20:12.897 pm // 2:20:13.041 pm /					

API sample

FAILED		DURATION - 0.142 s			Steps Total - 4 Pass - 2 Fail - 1 Skip - 1		
/ 2:20:12.899 pm // 2:20:13.041 pm /							
New feature							
@testapiamit							

#	Step / Hook Details	Status	Duration
1	And compose a post request to "https://jsonplaceholder.typicode.com/posts" with headers	PASSED	0.007 s
	Content-Type application/json		
	stagingtoken 9e107d9d372bb6826bd81d3542a419d6		
2	And with the below JSON request	PASSED	0.043 s
	{ "title": "Test API Call", "body": "This is a test post request body.", "userId": 101 }		
3	And execute and save the response as "API_response"	FAILED	0.081 s
	java.lang.NoClassDefFoundError: io/restassured/common/mapper/factory/ObjectMapperFactory at java.base/java.lang.ClassLoader.defineClass1(Native Method) at java.base/java.lang.ClassLoader.defineClass(ClassLoader.java:1022) at java.base/java.security.SecureClassLoader.defineClass(SecureClassLoader.java:174) at java.base/jdk.internal.loader.BuiltinClassLoader.defineClass(BuiltinClassLoader.java:800) at java.base/jdk.internal.loader.BuiltinClassLoader.findClassOnClassPathOrNull(BuiltinClassLoader.java:698) at java.base/jdk.internal.loader.BuiltinClassLoader.loadClassOrNull(BuiltinClassLoader.java:621)		

#	Step / Hook Details	Status	Duration
	<p>at java.base/jdk.internal.loader.BuiltinClassLoader.loadClass(BuiltinClassLoader.java:579)</p> <p>at java.base/jdk.internal.loader.ClassLoaders\$AppClassLoader.loadClass(ClassLoaders.java:178)</p> <p>at java.base/java.lang.ClassLoader.loadClass(ClassLoader.java:527)</p> <p>at io.restassured.config.RestAssuredConfig.<init>(RestAssuredConfig.java:41)</p> <p>at io.restassured.RestAssured.<clinit>(RestAssured.java:421)</p> <p>at com.nimble.utils.ApiClient.callRestfulAPI(ApiClient.java:47)</p> <p>at com.nimble.stepDefinitions.ApiSteps.saveTheResponse(ApiSteps.java:92)</p> <p>at ?.execute and save the response as "API_response"(file:///Users/ amitgupta/Viom/Products/viom-studio/test_suite_repositories/sample-test-suites-repo-1758699308415/test-suite-1761030126935/execution_20251024_142006/src/test/java/com/nimble/feature/api-new.feature:16)</p> <p>Caused by: java.lang.ClassNotFoundException: io.restassured.common.mapper.factory.ObjectMapperFactory</p> <p>at java.base/jdk.internal.loader.BuiltinClassLoader.loadClass(BuiltinClassLoader.java:581)</p> <p>at java.base/jdk.internal.loader.ClassLoaders\$AppClassLoader.loadClass(ClassLoaders.java:178)</p> <p>at java.base/java.lang.ClassLoader.loadClass(ClassLoader.java:527)</p> <p>at java.base/java.lang.ClassLoader.defineClass1(Native Method)</p> <p>at java.base/java.lang.ClassLoader.defineClass(ClassLoader.java:1022)</p> <p>at java.base/java.security.SecureClassLoader.defineClass(SecureClassLoader.java:174)</p> <p>at java.base/jdk.internal.loader.BuiltinClassLoader.defineClass(BuiltinClassLoader.java:800)</p> <p>at java.base/jdk.internal.loader.BuiltinClassLoader.findClassOnClassPathOrNull(BuiltinClassLoader.java:698)</p> <p>at java.base/jdk.internal.loader.BuiltinClassLoader.loadClassOrNull(BuiltinClassLoader.java:621)</p> <p>at java.base/jdk.internal.loader.BuiltinClassLoader.loadClass(BuiltinClassLoader.java:579)</p> <p>at java.base/jdk.internal.loader.ClassLoaders\$AppClassLoader.loadClass(ClassLoaders.java:178)</p> <p>at java.base/java.lang.ClassLoader.loadClass(ClassLoader.java:527)</p> <p>at io.restassured.config.RestAssuredConfig.<init>(RestAssuredConfig.java:41)</p> <p>at io.restassured.RestAssured.<clinit>(RestAssured.java:421)</p> <p>at com.nimble.utils.ApiClient.callRestfulAPI(ApiClient.java:47)</p> <p>at com.nimble.stepDefinitions.ApiSteps.saveTheResponse(ApiSteps.java:92)</p> <p>at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method)</p> <p>at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:62)</p> <p>at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)</p> <p>at java.base/java.lang.reflect.Method.invoke(Method.java:566)</p> <p>at io.cucumber.java.Invoker.doInvoke(Invoker.java:66)</p> <p>at io.cucumber.java.Invoker.invoke(Invoker.java:24)</p> <p>at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)</p> <p>at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29)</p> <p>at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66)</p> <p>at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63)</p> <p>at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)</p> <p>at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:86)</p> <p>at io.cucumber.core.runner.TestStep.run(TestStep.java:57)</p> <p>at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51)</p> <p>at io.cucumber.core.runner.TestCase.run(TestCase.java:95)</p>		

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$3(CucumberExecutionContext.java:110) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:110) at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129) at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:566) at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139) at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:677) at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:221) at org.testng.internal.invokers.MethodRunner.runInSequence(MethodRunner.java:50) at org.testng.internal.invokers.TestInvoker\$MethodInvocationAgent.invoke(TestInvoker.java:969) at org.testng.internal.invokers.TestInvoker.invokeTestMethods(TestInvoker.java:194) at org.testng.internal.invokers.TestMethodWorker.invokeTestMethods(TestMethodWorker.java:148) at org.testng.internal.invokers.TestMethodWorker.run(TestMethodWorker.java:128) at java.base/java.util.ArrayList.forEach(ArrayList.java:1541) at org.testng.TestRunner.privateRun(TestRunner.java:829) at org.testng.TestRunner.run(TestRunner.java:602) at org.testng.SuiteRunner.runTest(SuiteRunner.java:437) at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:431) at org.testng.SuiteRunner.privateRun(SuiteRunner.java:391) at org.testng.SuiteRunner.run(SuiteRunner.java:330) at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:52) at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:95) at org.testng.TestNG.runSuitesSequentially(TestNG.java:1256) at org.testng.TestNG.runSuitesLocally(TestNG.java:1176) at org.testng.TestNG.runSuites(TestNG.java:1099) at org.testng.TestNG.run(TestNG.java:1067) at org.apache.maven.surefire.testng.TestNGExecutor.run(TestNGExecutor.java:324) at org.apache.maven.surefire.testng.TestNGXmlTestSuite.execute(TestNGXmlTestSuite.java:74) at org.apache.maven.surefire.testng.TestNGProvider.invoke(TestNGProvider.java:123) at org.apache.maven.surefire.booter.ForkedBooter.runSuitesInProcess(ForkedBooter.java:456) at org.apache.maven.surefire.booter.ForkedBooter.execute(ForkedBooter.java:169) at org.apache.maven.surefire.booter.ForkedBooter.run(ForkedBooter.java:595) at org.apache.maven.surefire.booter.ForkedBooter.main(ForkedBooter.java:581) </pre> <p>* Not displayable characters are replaced by '?'. </p>		
4	And check that response {API_response} has "201" as status code	SKIPPED	0.001 s

#	Step / Hook Details	Status	Duration
	AFTER - com.nimble.hooks.Hooks.tearDown(io.cucumber.java.Scenario)	FAILED	0.003 s
	java.lang.RuntimeException: Teardown step failed because scenario failed at com.nimble.hooks.Hooks.tearDown(Hooks.java:202)		