

Cucumber Report

16 Dec 2025, 12:54:28

Start : Dec 16, 12:52:57.670 pm

End : Dec 16, 12:54:27.993 pm

Duration : 1 m 30.323 s

Features




Scenarios

Steps

PASSED - 0
FAILED - 1
SKIPPED - 0

PASSED - 0
FAILED - 1
SKIPPED - 0


PASSED - 20
FAILED - 1
SKIPPED - 24

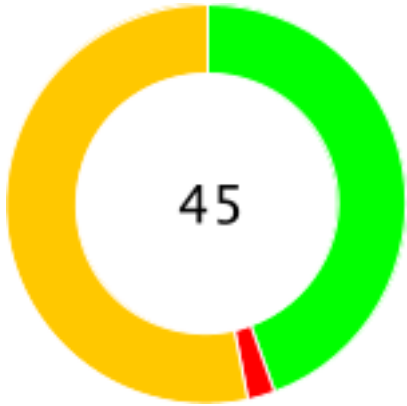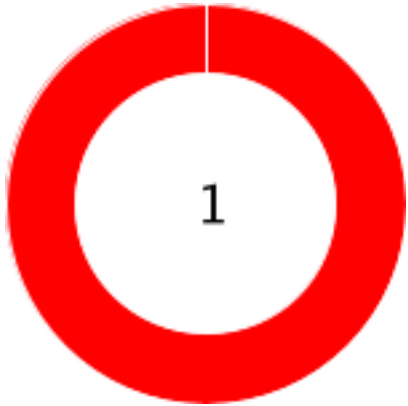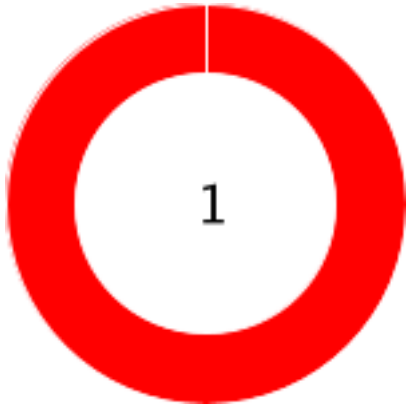


Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
<u>login feature</u>	1 m 30.323 s	1	0	1	0	45	20	1	24

#	Feature Name	Scenario Name
1	<u>login feature</u>	<u>Unhappy login scenario</u>

TAG	Scenario				Feature			
Name	<i>T</i>	<i>P</i>	<i>F</i>	<i>S</i>	<i>T</i>	<i>P</i>	<i>F</i>	<i>S</i>
@smoke	1	0	1	0	1	0	1	0
@regression	1	0	1	0	1	0	1	0


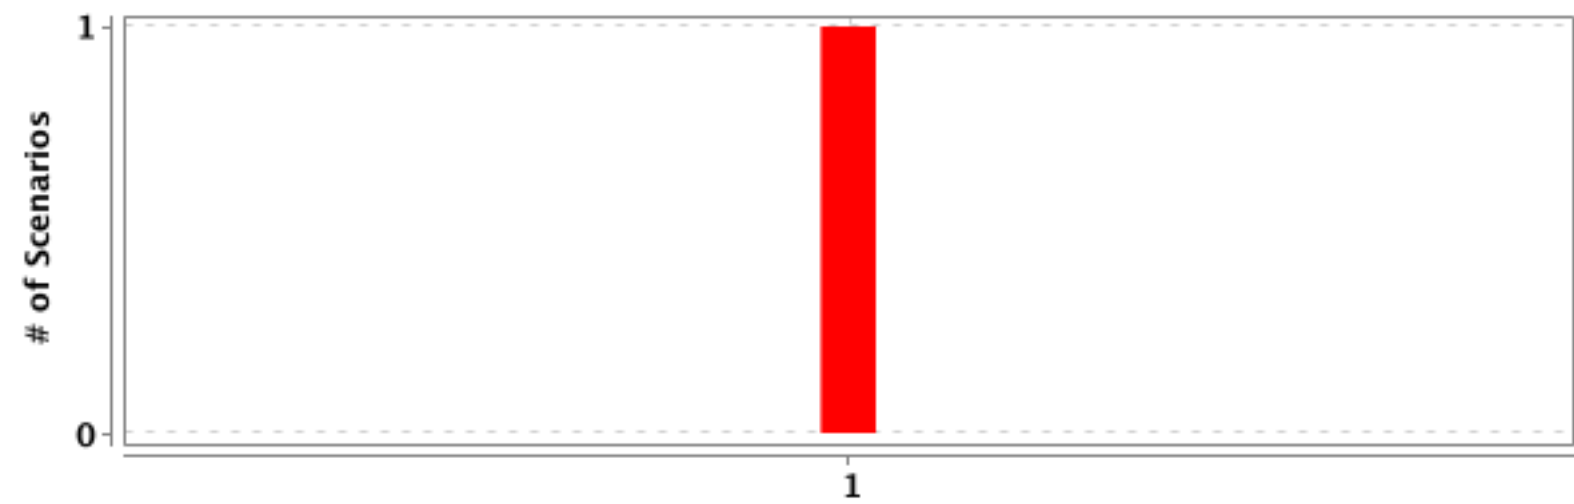


#	Feature Name	T	P	F	S	Duration
1	<u>login feature</u>	1	0	1	0	1 m 30.323 s


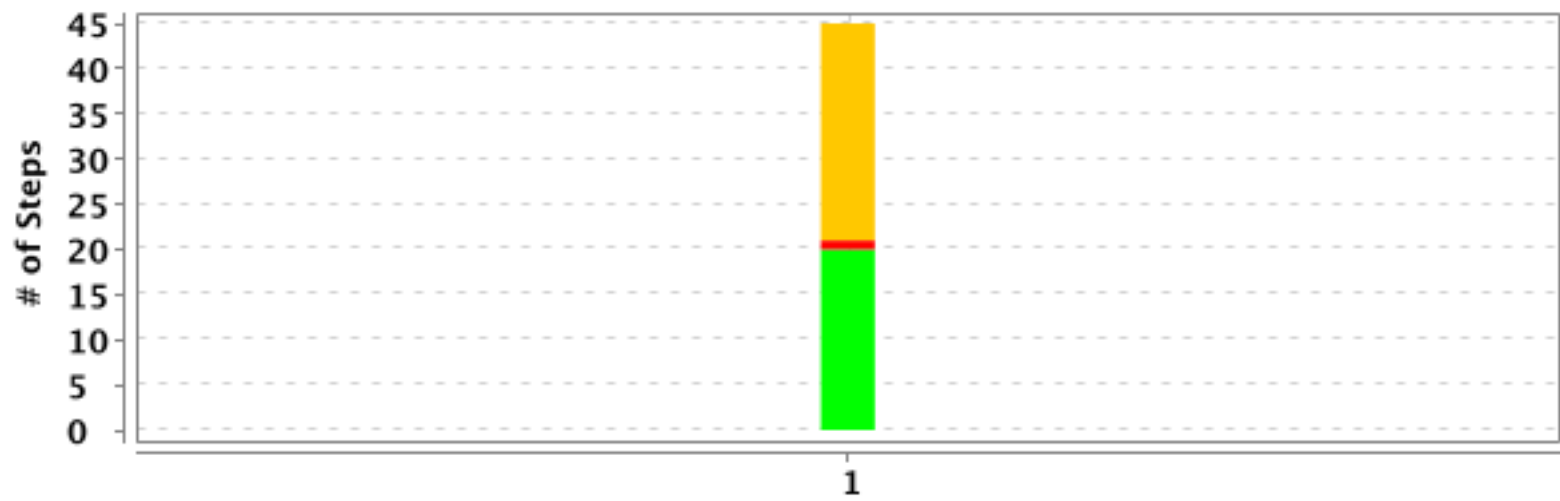


#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>login feature</u>	<u>Unhappy login scenario</u>	45	20	1	24	1 m 30.322 s

login feature

FAILED	DURATION - 1 m 30.323 s	Scenarios Total - 1 Pass - 0 Fail - 1 Skip - 0		Steps Total - 45 Pass - 20 Fail - 1 Skip - 24	
/ 12:52:57.670 pm // 12:54:27.993 pm /					

Unhappy login scenario

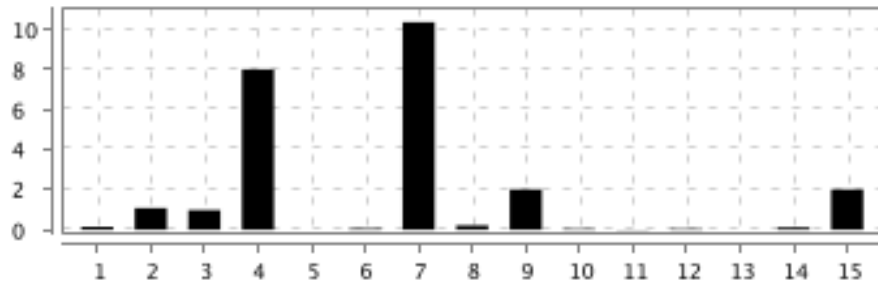FAILED	DURATION - 1 m 30.322 s		Steps Total - 45 Pass - 20 Fail - 1 Skip - 24	
/ 12:52:57.671 pm // 12:54:27.993 pm /				
login feature				
@smoke @regression				

#	Step / Hook Details	Status	Duration
1	And click "{el:x_button}"	PASSED	0.149 s
2	When hover over "Login"	PASSED	1.076 s
3	And click "MYSINGLIFE"	PASSED	0.975 s
4	And wait 8 sec	PASSED	8.003 s
5	And switch to last opened tab	PASSED	0.005 s
6	And wait for "Hello there"	PASSED	0.072 s
7	And wait 10 secs	PASSED	10.346 s
8	And click "{el:Loginwithemail}"	PASSED	0.222 s
9	And wait 2 sec	PASSED	2.004 s
10	And click "{el:email}"	PASSED	0.058 s
11	And enter "{userid}"	PASSED	0.013 s
12	And click on the element with id as "input36"	PASSED	0.052 s
13	And enter "{password}"	PASSED	0.008 s
14	And click "Sign in"	PASSED	0.116 s
15	And wait 2 sec	PASSED	2.002 s

#	Step / Hook Details	Status	Duration
16	And check that screen contains "Incorrect username or password."	PASSED	0.051 s
17	And check that screen contains "Please try again!"	PASSED	0.045 s
18	And click "Help"	PASSED	0.193 s
19	And wait 2 sec	PASSED	2.001 s
20	And switch to last opened tab	PASSED	0.005 s
21	And click "I can't login to MySinglife portal using Singpass. What should I do?"	FAILED	1 m 0.542 s
	<p>com.microsoft.playwright.TimeoutError: Error { message='Timeout 30000ms exceeded. name='TimeoutError' stack='TimeoutError: Timeout 30000ms exceeded. at ProgressController.run (/private/var/folders/hy/1mnb0tn11c189gl2trbspnp00000gn/T/playwright-java-9432766274507835502/package/lib/server/progress.js:68:28) at FrameDispatcher._runCommand (/private/var/folders/hy/1mnb0tn11c189gl2trbspnp00000gn/T/playwright-java-9432766274507835502/package/lib/server/dispatchers/dispatcher.js:95:31) at DispatcherConnection.dispatch (/private/var/folders/hy/1mnb0tn11c189gl2trbspnp00000gn/T/playwright-java-9432766274507835502/package/lib/server/dispatchers/dispatcher.js:329:39) } Call log: - - waiting for locator('//*[contains(normalize-space(text()), 'I can't login to MySinglife portal using Singpass. What should I do?') or contains(@aria-label, 'I can't login to MySinglife portal using Singpass. What should I do?') or contains(@title, 'I can't login to MySinglife portal using Singpass. What should I do?') or contains(@value, 'I can't login to MySinglife portal using Singpass. What should I do?') or contains(@placeholder, 'I can't login to MySinglife portal using Singpass. What should I do?') or contains(@alt, 'I can't login to MySinglife portal using Singpass. What should I do?') or contains(@name, 'I can't login to MySinglife portal using Singpass. What should I do?') or contains(@class, 'I can't login to MySinglife portal using Singpass. What should I do?') or (@aria-labelledby and contains(., 'I can't login to MySinglife portal using Singpass. What should I do?')) //label[contains(normalize-space(text()), 'I can't login to MySinglife portal using Singpass. What should I do?')] //*[id=//label[contains(normalize-space(text()), 'I can't login to MySinglife portal using Singpass. What should I do?')]/@for]').nth(1) - - locator resolved to <h2 class="faq-anchor-question-text">I can't login to MySinglife portal using Singpass...</h2> - - attempting click action - 2 × waiting for element to be visible, enabled and stable - - element is visible, enabled and stable - - scrolling into view if needed - - done scrolling - - <div class="sl-menu-content theme-teal sl-no-border sl-no-label">...</div> from <header class="sl-header" x-on:resize.window.debounce="width = window.innerWidth;" @scroll.window="? scrollNumber = window.pageYOffset,? stopPoint = \$refs.stop.offsetTop? menuShadow = (scrollNumber > (stopPoint/2)) ? true : false;? " x-data="{? width: window.innerWidth,? scrollNumber: 0,? mobileScrollNumber: 0,? stopPoint: \$refs.stop.offsetTop,? startPoint: \$refs.start.offsetTop,? menuShadow: false,? menuMobileOpen: false,? menuShow: false,? ...>...</header> subtree intercepts pointer events - - retrying click action - - waiting 20ms - - waiting for element to be visible, enabled and stable - - element is visible, enabled and stable - - scrolling into view if needed - - done scrolling - - <div class="sl-menu-content theme-teal sl-no-border sl-no-label">...</div> from <header class="sl-header" x-on:resize.window.debounce="width = window.innerWidth;" @scroll.window="? scrollNumber = window.pageYOffset,? stopPoint = \$refs.stop.offsetTop? menuShadow = (scrollNumber > (stopPoint/2)) ? true : false;? " x-data="{? width: window.innerWidth,? scrollNumber: 0,? mobileScrollNumber: 0,? stopPoint: \$refs.stop.offsetTop,? startPoint: \$refs.start.offsetTop,? menuShadow: false,? menuMobileOpen: false,? menuShow: false,? ...>...</header> subtree intercepts pointer events - 2 × retrying click action - - waiting 100ms - - waiting for element to be visible, enabled and stable - - element is visible, enabled and stable - - scrolling into view if needed - - done scrolling - - <h5 class="sl-section-label text-singlife-teal">help</h5> from <header class="sl-header" x-on:resize.window.debounce="width = window.innerWidth;" @scroll.window="? scrollNumber = window.pageYOffset,? stopPoint = \$refs.stop.offsetTop? menuShadow = (scrollNumber > (stopPoint/2)) ? true : false;? " x-data="{? width: window.innerWidth,? scrollNumber: 0,? mobileScrollNumber: 0,? stopPoint: \$refs.stop.offsetTop,? startPoint: \$refs.start.offsetTop,? menuShadow: false,? menuMobileOpen: false,? menuShow: false,? ...>...</header> subtree intercepts pointer events - 14 × retrying click action - - waiting 500ms - - waiting for element to be visible, enabled and stable - - element is visible, enabled and stable - - scrolling into view if needed - - done scrolling - - <div class="bg-grey-600 flex flex-row items-center justify-center space-x-10">...</div> from <header class="sl-header" x-on:resize.window.debounce="width = window.innerWidth;" @scroll.window="? scrollNumber = window.pageYOffset,? stopPoint = \$refs.stop.offsetTop? menuShadow = (scrollNumber > (stopPoint/2)) ? true : false;? " x-data="{? width: window.innerWidth,? scrollNumber: 0,? mobileScrollNumber: 0,? stopPoint: \$refs.stop</p>		

#	Step / Hook Details	Status	Duration
	<p>offsetTop,? startPoint: \$refs.start.offsetTop,? menuShadow: false,? menuMobileOpen: false,? menuShow: false,? ...>...</header> subtree intercepts pointer events - - retrying click action - - waiting 500ms - - waiting for element to be visible, enabled and stable - - element is visible, enabled and stable - - scrolling into view if needed - - done scrolling - - <div class="sl-menu-content theme-teal sl-no-border sl-no-label">...</div> from <header class="sl-header" x-on:resize.window.debounce="width = window.innerWidth;" @scroll.window="? scrollNumber = window.pageYOffset,? stopPoint = \$refs.stop.offsetTop? menuShadow = (scrollNumber > (stopPoint/2)) ? true : false;? " x-data="{? width: window.innerWidth,? scrollNumber: 0,? mobileScrollNumber: 0,? stopPoint: \$refs.stop.offsetTop,? startPoint: \$refs.start.offsetTop,? menuShadow: false,? menuMobileOpen: false,? menuShow: false,? ...>...</header> subtree intercepts pointer events - - retrying click action - - waiting 500ms - - waiting for element to be visible, enabled and stable - - element is visible, enabled and stable - - scrolling into view if needed - - done scrolling - - <h5 class="sl-section-label text-singlife-teal">help</h5> from <header class="sl-header" x-on:resize.window.debounce="width = window. innerWidth;" @scroll.window="? scrollNumber = window.pageYOffset,? stopPoint = \$refs.stop.offsetTop? menuShadow = (scrollNumber > (stopPoint/2)) ? true : false;? " x-data="{? width: window.innerWidth,? scrollNumber: 0,? mobileScrollNumber: 0,? stopPoint: \$refs.stop.offsetTop,? startPoint: \$refs.start.offsetTop,? menuShadow: false,? menuMobileOpen: false,? menuShow: false,? ...>...</header> subtree intercepts pointer events - - retrying click action - - waiting 500ms - - waiting for element to be visible, enabled and stable - - element is visible, enabled and stable - - scrolling into view if needed - - done scrolling - - <h5 class="sl-section-label text-singlife-teal">help</h5> from <header class="sl-header" x-on:resize.window.debounce="width = window. innerWidth;" @scroll.window="? scrollNumber = window.pageYOffset,? stopPoint = \$refs.stop.offsetTop? menuShadow = (scrollNumber > (stopPoint/2)) ? true : false;? " x-data="{? width: window.innerWidth,? scrollNumber: 0,? mobileScrollNumber: 0,? stopPoint: \$refs.stop.offsetTop,? startPoint: \$refs.start.offsetTop,? menuShadow: false,? menuMobileOpen: false,? menuShow: false,? ...>...</header> subtree intercepts pointer events - - retrying click action - - waiting 500ms</p> <p>at com.microsoft.playwright.impl.WaitableResult.get(WaitableResult.java:52) at com.microsoft.playwright.impl.ChannelOwner.runUntil(ChannelOwner.java:138) at com.microsoft.playwright.impl.Connection.sendMessage(Connection.java:131) at com.microsoft.playwright.impl.ChannelOwner.sendMessage(ChannelOwner.java:124) at com.microsoft.playwright.impl.FrameImpl.clickImpl(FrameImpl.java:241) at com.microsoft.playwright.impl.FrameImpl.click(FrameImpl.java:232) at com.microsoft.playwright.impl.LocatorImpl.click(LocatorImpl.java:164) at com.microsoft.playwright.Locator.click(Locator.java:2500) at com.nimble.stepDefinitions.UserActionSteps.performNormalClick(UserActionSteps.java:93) at com.nimble.stepDefinitions.UserActionSteps.performClickAction(UserActionSteps.java:83) at com.nimble.stepDefinitions.UserActionSteps.clickActionMerged(UserActionSteps.java:186) at ?.click "I can't login to MySinglife portal using Singpass. What should I do?"(file:///Users/amtgupta/Viom/Products/viom-studio/ test_suite_repositories/sample-test-suites-repo-1765797350540/test-suite-1752403830282/execution_20251216_125243/src/test/java/com/ nimble/feature/login.feature:25)</p> <p>Caused by: com.microsoft.playwright.TimeoutError: Error { message='Timeout 30000ms exceeded. name='TimeoutError stack='TimeoutError: Timeout 30000ms exceeded. at ProgressController.run (/private/var/folders/hy/1mrvb0tn11c189gl2trbspnp00000gn/T/ playwright-java-9432766274507835502/package/lib/server/progress.js:68:28) at FrameDispatcher._runCommand (/private/var/folders/hy/ 1mrvb0tn11c189gl2trbspnp00000gn/T/playwright-java-9432766274507835502/package/lib/server/dispatchers/dispatcher.js:95:31) at DispatcherConnection.dispatch (/private/var/folders/hy/1mrvb0tn11c189gl2trbspnp00000gn/T/playwright-java-9432766274507835502/package/ lib/server/dispatchers/dispatcher.js:329:39) } Call log: - - waiting for locator("//*[@contains(normalize-space(text()), 'I can't login to MySinglife portal using Singpass. What should I do?') or contains(@aria-label, 'I can't login to MySinglife portal using Singpass. What should I do?') or contains(@title, 'I can't login to MySinglife portal using Singpass. What should I do?') or contains(@value, 'I can't login to MySinglife portal using Singpass. What should I do?') or contains(@placeholder, 'I can't login to MySinglife portal using Singpass. What should I do?') or contains(@alt, 'I can't login to MySinglife portal using Singpass. What should I do?') or contains(@name, 'I can't login to MySinglife portal using</p>		

#	Step / Hook Details	Status	Duration
	Singpass. What should I do?) or contains(@class, 'I can't login to MySinglife portal using Singpass. What should I do?') or (@aria-labelledby and contains(., 'I can't login to MySinglife portal using Singpass. What should I do?')) //label[contains(normalize-space(text()), 'I can't login to MySinglife portal using Singpass. What should I do?')] /*[@id=//label[contains(normalize-space(text()), 'I can't login to MySinglife portal using Singpass. What should I do?')/@for]').nth(1) - locator resolved to <h2 class="faq-anchor-question-text">I can't login to MySinglife portal using Singpass...</h2> - attempting click action - 2 x waiting for element to be visible, enabled and stable - element is visible, enabled and stable - scrolling into view if needed - done scrolling - <div class="sl-menu-content theme-teal sl-no-border sl-no-label">...</div> from <header class="sl-header" x-on:resize.window.debounce="width = window.innerWidth;" @scroll.window="" ? true : false;? scrollNumber = window.pageYOffset,? stopPoint = \$refs.stop.offsetTop? menuShadow = (scrollNumber > (stopPoint/2)) ? true : false;? " x-data="{ width: window.innerWidth,? scrollNumber: 0,? mobileScrollNumber: 0,? stopPoint: \$refs.stop.offsetTop,? startPoint: \$refs.start.offsetTop,? menuShadow: false,? menuMobileOpen: false,? menuShow: false,? ...}>...</header> subtree intercepts pointer events - retrying click action - waiting 20ms - waiting for element to be visible, enabled and stable - element is visible, enabled and stable - scrolling into view if needed - done scrolling - <div class="sl-menu-content theme-teal sl-no-border sl-no-label">...</div> from <header class="sl-header" x-on:resize.window.debounce="width = window.innerWidth;" @scroll.window="" ? true : false;? scrollNumber = window.pageYOffset,? stopPoint = \$refs.stop.offsetTop? menuShadow = (scrollNumber > (stopPoint/2)) ? true : false;? " x-data="{ width: window.innerWidth,? scrollNumber: 0,? mobileScrollNumber: 0,? stopPoint: \$refs.stop.offsetTop,? startPoint: \$refs.start.offsetTop,? menuShadow: false,? menuMobileOpen: false,? menuShow: false,? ...}>...</header> subtree intercepts pointer events - 2 x retrying click action - waiting 100ms - waiting for element to be visible, enabled and stable - element is visible, enabled and stable - scrolling into view if needed - done scrolling - <h5 class="sl-section-label text-singlife-teal">help</h5> from <header class="sl-header" x-on:resize.window.debounce="width = window.innerWidth;" @scroll.window="" ? true : false;? scrollNumber = window.pageYOffset,? stopPoint = \$refs.stop.offsetTop? menuShadow = (scrollNumber > (stopPoint/2)) ? true : false;? " x-data="{ width: window.innerWidth,? scrollNumber: 0,? mobileScrollNumber: 0,? stopPoint: \$refs.stop.offsetTop,? startPoint: \$refs.start.offsetTop,? menuShadow: false,? menuMobileOpen: false,? menuShow: false,? ...}>...</header> subtree intercepts pointer events - 14 x retrying click action - waiting 500ms - waiting for element to be visible, enabled and stable - element is visible, enabled and stable - scrolling into view if needed - done scrolling - <div class="bg-grey-600 flex flex-row items-center justify-center space-x-10">...</div> from <header class="sl-header" x-on:resize.window.debounce="width = window.innerWidth;" @scroll.window="" ? true : false;? scrollNumber = window.pageYOffset,? stopPoint = \$refs.stop.offsetTop? menuShadow = (scrollNumber > (stopPoint/2)) ? true : false;? " x-data="{ width: window.innerWidth,? scrollNumber: 0,? mobileScrollNumber: 0,? stopPoint: \$refs.stop.offsetTop,? startPoint: \$refs.start.offsetTop,? menuShadow: false,? menuMobileOpen: false,? menuShow: false,? ...}>...</header> subtree intercepts pointer events - retrying click action - waiting 500ms - waiting for element to be visible, enabled and stable - element is visible, enabled and stable - scrolling into view if needed - done scrolling - <div class="sl-menu-content theme-teal sl-no-border sl-no-label">...</div> from <header class="sl-header" x-on:resize.window.debounce="width = window.innerWidth;" @scroll.window="" ? true : false;? scrollNumber = window.pageYOffset,? stopPoint = \$refs.stop.offsetTop? menuShadow = (scrollNumber > (stopPoint/2)) ? true : false;? " x-data="{ width: window.innerWidth,? scrollNumber: 0,? mobileScrollNumber: 0,? stopPoint: \$refs.stop.offsetTop,? startPoint: \$refs.start.offsetTop,? menuShadow: false,? menuMobileOpen: false,? menuShow: false,? ...}>...</header> subtree intercepts pointer events - retrying click action - waiting 500ms - waiting for element to be visible, enabled and stable - element is visible, enabled and stable - scrolling into view if needed - done scrolling - <h5 class="sl-section-label text-singlife-teal">help</h5> from <header class="sl-header" x-on:resize.window.debounce="width = window.innerWidth;" @scroll.window="" ? true : false;? scrollNumber = window.pageYOffset,? stopPoint = \$refs.stop.offsetTop? menuShadow = (scrollNumber > (stopPoint/2)) ? true : false;? " x-data="{ width: window.innerWidth,? scrollNumber: 0,? mobileScrollNumber: 0,? stopPoint: \$refs.stop.offsetTop,? startPoint: \$refs.start.offsetTop,? menuShadow: false,? menuMobileOpen: false,? menuShow: false,? ...}>...</header> subtree intercepts pointer events - retrying click action - waiting 500ms - waiting for element to be visible, enabled and stable - element is visible, enabled and stable - scrolling into view if needed - done scrolling - <h5 class="sl-section-label text-singlife-teal">help</h5> from <header class="sl-header" x-on:resize.window.debounce="width = window.innerWidth;" @scroll.window="" ? true : false;? scrollNumber = window.pageYOffset,? stopPoint = \$refs.stop.offsetTop? menuShadow = (scrollNumber > (stopPoint/2)) ? true : false;? " x-data="{ width: window.innerWidth,? scrollNumber: 0,? mobileScrollNumber: 0,		

#	Step / Hook Details	Status	Duration
	<pre> stopPoint: \$refs.stop.offsetTop,? startPoint: \$refs.start.offsetTop,? menuShadow: false,? menuMobileOpen: false,? menuShow: false,? ...>...</header> subtree intercepts pointer events - - retrying click action - - waiting 500ms at com.microsoft.playwright.impl.Connection.dispatch(Connection.java:257) at com.microsoft.playwright.impl.Connection.processOneMessage(Connection.java:214) at com.microsoft.playwright.impl.ChannelOwner.runUntil(ChannelOwner.java:136) at com.microsoft.playwright.impl.Connection.sendMessage(Connection.java:131) at com.microsoft.playwright.impl.ChannelOwner.sendMessage(ChannelOwner.java:124) at com.microsoft.playwright.impl.FrameImpl.clickImpl(FrameImpl.java:241) at com.microsoft.playwright.impl.FrameImpl.click(FrameImpl.java:232) at com.microsoft.playwright.impl.LocatorImpl.click(LocatorImpl.java:164) at com.microsoft.playwright.Locator.click(Locator.java:2500) at com.nimble.stepDefinitions.UserActionSteps.performNormalClick(UserActionSteps.java:93) at com.nimble.stepDefinitions.UserActionSteps.performClickAction(UserActionSteps.java:83) at com.nimble.stepDefinitions.UserActionSteps.clickActionMerged(UserActionSteps.java:186) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:566) at io.cucumber.java.Invoker.doInvoke(Invoker.java:66) at io.cucumber.java.Invoker.invoke(Invoker.java:24) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:86) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:95) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$3(CucumberExecutionContext.java:110) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:110) at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129) at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:566) at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139) </pre>		

#	Step / Hook Details	Status	Duration
	<pre> at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:677) at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:221) at org.testng.internal.invokers.MethodRunner.runInSequence(MethodRunner.java:50) at org.testng.internal.invokers.TestInvoker\$MethodInvocationAgent.invoke(TestInvoker.java:969) at org.testng.internal.invokers.TestInvoker.invokeTestMethods(TestInvoker.java:194) at org.testng.internal.invokers.TestMethodWorker.invokeTestMethods(TestMethodWorker.java:148) at org.testng.internal.invokers.TestMethodWorker.run(TestMethodWorker.java:128) at java.base/java.util.ArrayList.forEach(ArrayList.java:1541) at org.testng.TestRunner.privateRun(TestRunner.java:829) at org.testng.TestRunner.run(TestRunner.java:602) at org.testng.SuiteRunner.runTest(SuiteRunner.java:437) at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:431) at org.testng.SuiteRunner.privateRun(SuiteRunner.java:391) at org.testng.SuiteRunner.run(SuiteRunner.java:330) at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:52) at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:95) at org.testng.TestNG.runSuitesSequentially(TestNG.java:1256) at org.testng.TestNG.runSuitesLocally(TestNG.java:1176) at org.testng.TestNG.runSuites(TestNG.java:1099) at org.testng.TestNG.run(TestNG.java:1067) at org.apache.maven.surefire.testng.TestNGExecutor.run(TestNGExecutor.java:324) at org.apache.maven.surefire.testng.TestNGXmlTestSuite.execute(TestNGXmlTestSuite.java:74) at org.apache.maven.surefire.testng.TestNGProvider.invoke(TestNGProvider.java:123) at org.apache.maven.surefire.booter.ForkedBooter.runSuitesInProcess(ForkedBooter.java:456) at org.apache.maven.surefire.booter.ForkedBooter.execute(ForkedBooter.java:169) at org.apache.maven.surefire.booter.ForkedBooter.run(ForkedBooter.java:595) at org.apache.maven.surefire.booter.ForkedBooter.main(ForkedBooter.java:581) </pre> <p>* Not displayable characters are replaced by '?'. </p>		
22	And wait 2 sec	SKIPPED	0.000 s
23	And click on the 1st "here" inside a with exact phrase	SKIPPED	0.002 s
24	And wait 5 sec	SKIPPED	0.001 s
25	And scroll down until screen contains "Your feedback matters" with exact phrase	SKIPPED	0.003 s
26	And click "Lodge a complaint"	SKIPPED	0.002 s
27	And wait 5 sec	SKIPPED	0.000 s
28	And wait for "Salutation" with exact phrase	SKIPPED	0.000 s
29	And scroll down until screen contains "Salutation" with exact phrase	SKIPPED	0.003 s
30	And click "Please select..." with exact phrase	SKIPPED	0.003 s
31	And click "Mr"	SKIPPED	0.002 s

#	Step / Hook Details	Status	Duration
32	And click on the element with id as "firstName"	SKIPPED	0.002 s
33	And enter "firstName"	SKIPPED	0.003 s
34	And click on the element with id as "surname"	SKIPPED	0.002 s
35	And enter "surname"	SKIPPED	0.003 s
36	And click on the element with id as "email"	SKIPPED	0.002 s
37	And enter "email@test.com"	SKIPPED	0.002 s
38	And click on the element with id as "phoneNumber"	SKIPPED	0.004 s
39	And enter "98765432"	SKIPPED	0.003 s
40	And click on the element with id as "nationalIdentifier"	SKIPPED	0.002 s
41	And enter "121"	SKIPPED	0.002 s
42	And click "I have read and agree to the terms and conditions above. "	SKIPPED	0.003 s
43	And click "Submit"	SKIPPED	0.002 s
44	And check that screen contains "We're sorry our service standard has fallen short of your expectations, or members of our team have not handled your concerns to your satisfaction."	SKIPPED	0.003 s
45	And wait 5 secs	SKIPPED	0.000 s
	AFTER - com.nimble.hooks.Hooks.tearDown(io.cucumber.java.Scenario)	FAILED	0.376 s
	Unhappy_login_scenario		
	java.lang.RuntimeException: Teardown step failed because scenario failed at com.nimble.hooks.Hooks.tearDown(Hooks.java:212)		
	