Start: Oct 21, 11:05:13.311 AM End: Oct 21, 11:05:13.346 AM **Duration** : 0.035 s Scenarios **Features** Steps PASSED - 0 PASSED - 0 PASSED - 0 SKIPPED - 0 SKIPPED - 0 SKIPPED - 15 16 40 50 60 40 50 60 40 50 60 30 Pass % 70 30 Pass % 70 30 Pass % 70 20 80 20 80 20 80 90 90 10 10 10 100 100 100

| Feature   |          |   | Scer | nario |   |    | St | ер |    |
|-----------|----------|---|------|-------|---|----|----|----|----|
| Name      | Duration | T | P    | F     | S | T  | P  | F  | S  |
| API Vastu | 0.035 s  | 1 | 0    | 1     | 0 | 16 | 0  | 1  | 15 |

FAIL & SKIP SCENARIOS -- 3 --

| # Feature Name     | Scenario Name         |
|--------------------|-----------------------|
| 1 <u>API Vastu</u> | <u>First scenario</u> |


| TAG  |   | Scei | nario |   | <b>T P</b> 1 0 |   | ature |   |
|------|---|------|-------|---|----------------|---|-------|---|
| Name | T | P    | F     | S | T              | P | F     | S |
| @api | 1 | 0    | 1     | 0 | 1              | 0 | 1     | 0 |

FEATURES SUMMARY -- 5 --



| # | Feature Name     | T | P | F | S | Duration |  |
|---|------------------|---|---|---|---|----------|--|
| 1 | <u>API Vastu</u> | 1 | 0 | 1 | 0 | 0.035 s  |  |


SCENARIOS SUMMARY

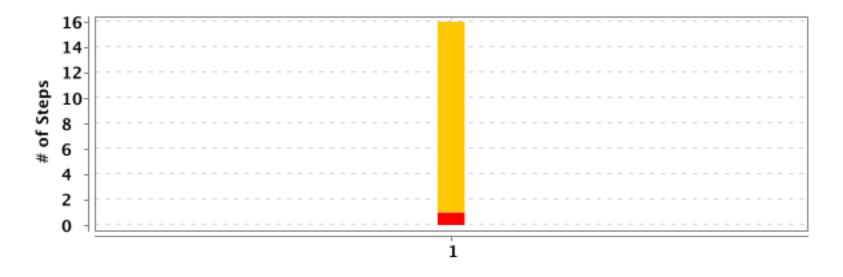


| # | Feature Name | Scenario Name         | T  | P | F | S  | Duration |
|---|--------------|-----------------------|----|---|---|----|----------|
| 1 | API Vastu    | <u>First scenario</u> | 16 | 0 | 1 | 15 | 0.034 s  |

DETAILED SECTION -- 7

## **API Vastu**

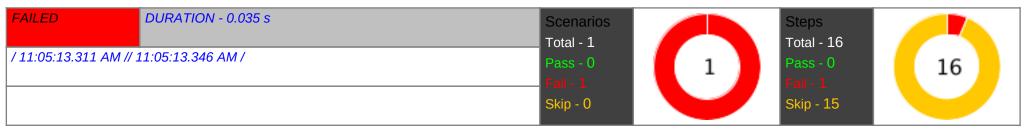

## **First scenario**

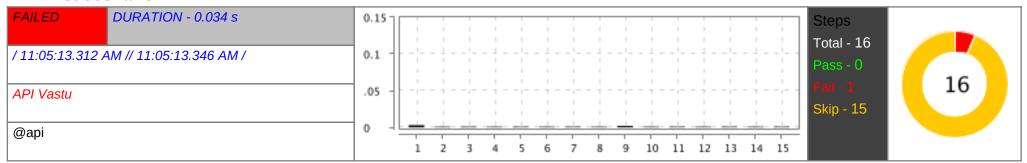

| # | Step / Hook Details  | Status | Duration |
|---|--|--------|----------|
| 1 | And compose a post request to "https://test-aws-web.vastucorp.com/api/sales_timesheet_view" with headers   | FAILED | 0.003 s  |
|   | io.cucumber.core.exception.CucumberException: Step [^compose a (get post put patch delete) request to "([^"]*)" with headers\$] is defined with 3 parameters at 'com.nimble.stepDefinitions.ApiSteps.sendAPIRequest(java.lang.String,java.lang.String,java.util.Map <java.lang.string, java.="" lang.string="">)'. However, the gherkin step has 2 arguments: * post * https://test-aws-web.vastucorp.com/api/sales_timesheet_view Step text: compose a post request to "https://test-aws-web.vastucorp.com/api/sales_timesheet_view" with headers at io.cucumber.core.runner.PickleStepDefinitionMatch.arityMismatch(PickleStepDefinitionMatch.java:83) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:42) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:86) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$3(CucumberExecutionContext.java:110) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23)</java.lang.string,> | PAILED | 0.003 5  |
|   | at io.cucumber.core.runner.TestCase.run(TestCase.java:95) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$3(CucumberExecutionContext.java:110)  |        |          |

| # | Step / Hook Details  | Status  | Duration |
|---|--|---------|----------|
|   | at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35)                   |         |          |
|   | at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method)                                    |         |          |
|   | at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:62)                  |         |          |
|   | at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)          |         |          |
|   | at java.base/java.lang.reflect.Method.invoke(Method.java:566)  |         |          |
|   | $at\ org. testng. internal. invokers. Method Invocation Helper. invoke Method (Method Invocation Helper. java: 139)$ |         |          |
|   | at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:677)                                       |         |          |
|   | at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:221)                                   |         |          |
|   | at org.testng.internal.invokers.MethodRunner.runlnSequence(MethodRunner.java:50)                                     |         |          |
|   | at org.testng.internal.invokers.TestInvoker\$MethodInvocationAgent.invoke(TestInvoker.java:969)                      |         |          |
|   | at org.testng.internal.invokers.TestInvoker.invokeTestMethods(TestInvoker.java:194)                                  |         |          |
|   | at org.testng.internal.invokers.TestMethodWorker.invokeTestMethods(TestMethodWorker.java:148)                        |         |          |
|   | at org.testng.internal.invokers.TestMethodWorker.run(TestMethodWorker.java:128)                                      |         |          |
|   | at java.base/java.util.ArrayList.forEach(ArrayList.java:1541)  |         |          |
|   | at org.testng.TestRunner.privateRun(TestRunner.java:829)   |         |          |
|   | at org.testng.TestRunner.run(TestRunner.java:602)  |         |          |
|   | at org.testng.SuiteRunner.runTest(SuiteRunner.java:437)  |         |          |
|   | at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:431)  |         |          |
|   | at org.testng.SuiteRunner.privateRun(SuiteRunner.java:391)   |         |          |
|   | at org.testng.SuiteRunner.run(SuiteRunner.java:330)  |         |          |
|   | at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:52)  |         |          |
|   | at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:95)   |         |          |
|   | at org.testng.TestNG.runSuitesSequentially(TestNG.java:1256)   |         |          |
|   | at org.testng.TestNG.runSuitesLocally(TestNG.java:1176)  |         |          |
|   | at org.testng.TestNG.runSuites(TestNG.java:1099)   |         |          |
|   | at org.testng.TestNG.run(TestNG.java:1067)   |         |          |
|   | at org.apache.maven.surefire.testng.TestNGExecutor.run(TestNGExecutor.java:324)                                      |         |          |
|   | at org.apache.maven.surefire.testng.TestNGXmlTestSuite.execute(TestNGXmlTestSuite.java:74)                           |         |          |
|   | at org.apache.maven.surefire.testng.TestNGProvider.invoke(TestNGProvider.java:123)                                   |         |          |
|   | at org.apache.maven.surefire.booter.ForkedBooter.runSuitesInProcess(ForkedBooter.java:456)                           |         |          |
|   | at org.apache.maven.surefire.booter.ForkedBooter.execute(ForkedBooter.java:169)                                      |         |          |
|   | at org.apache.maven.surefire.booter.ForkedBooter.run(ForkedBooter.java:595)  |         |          |
|   | at org.apache.maven.surefire.booter.ForkedBooter.main(ForkedBooter.java:581)   |         |          |
| 2 | And   stagingtoken   9e107d9d372bb6826bd81d3542a419d6  | SKIPPED | 0.001 s  |
| 3 | And   Content-Type   application/json  | SKIPPED | 0.001 s  |
| 4 | And with the below JSON request  | SKIPPED | 0.001 s  |
| 5 | And """  | SKIPPED | 0.001 s  |
| 6 | And {  | SKIPPED | 0.001 s  |
| 7 | And "username": "user_15@vastuhfc.com",  | SKIPPED | 0.001 s  |

DETAILED SECTION -- 9 --

| #  | Step / Hook Details   | Status  | Duration |
|----|---|---------|----------|
| 8  | And "password": "123456",   | SKIPPED | 0.001 s  |
| 9  | And "deviceid": "b401d05b86dd2f95",   | SKIPPED | 0.002 s  |
| 10 | And "version": "3.2.9",   | SKIPPED | 0.001 s  |
| 11 | And "app_name": "pulse_app",  | SKIPPED | 0.001 s  |
| 12 | And "userid": "15"  | SKIPPED | 0.001 s  |
| 13 | And }   | SKIPPED | 0.001 s  |
| 14 | And """   | SKIPPED | 0.001 s  |
| 15 | And execute and save the response as "API_response"   | SKIPPED | 0.001 s  |
| 16 | And check that variable {API_response} is equals to "completed" with exact phrase   | SKIPPED | 0.001 s  |
|    | AFTER - com.nimble.hooks.Hooks.tearDown(io.cucumber.java.Scenario)  | FAILED  | 0.004 s  |
|    | java.lang.RuntimeException: Teardown step failed because scenario failed at com.nimble.hooks.Hooks.tearDown(Hooks.java:202) |         |          |