

# Cucumber Report

20 Sep 2025, 12:25:26

**Start : Sep 20, 12:25:25.891 pm**

**End : Sep 20, 12:25:26.011 pm**

**Duration : 0.120 s**

*Features*

*Scenarios*

*Steps*

**PASSED - 0**

**FAILED - 1**

**SKIPPED - 0**

**PASSED - 0**

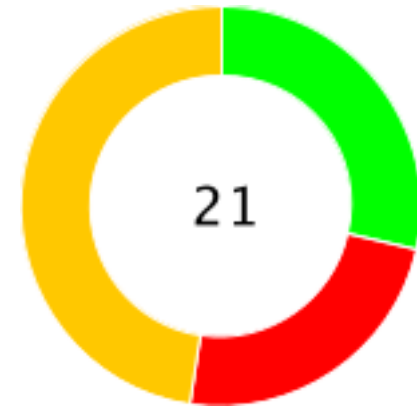
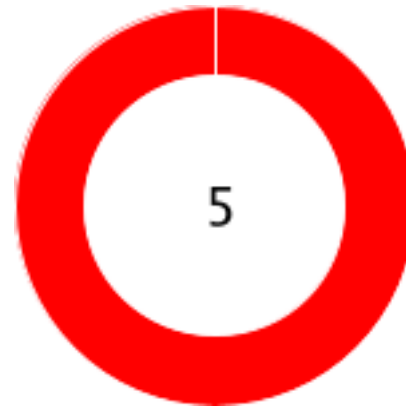
**FAILED - 5**

**SKIPPED - 0**

**PASSED - 6**

**FAILED - 5**

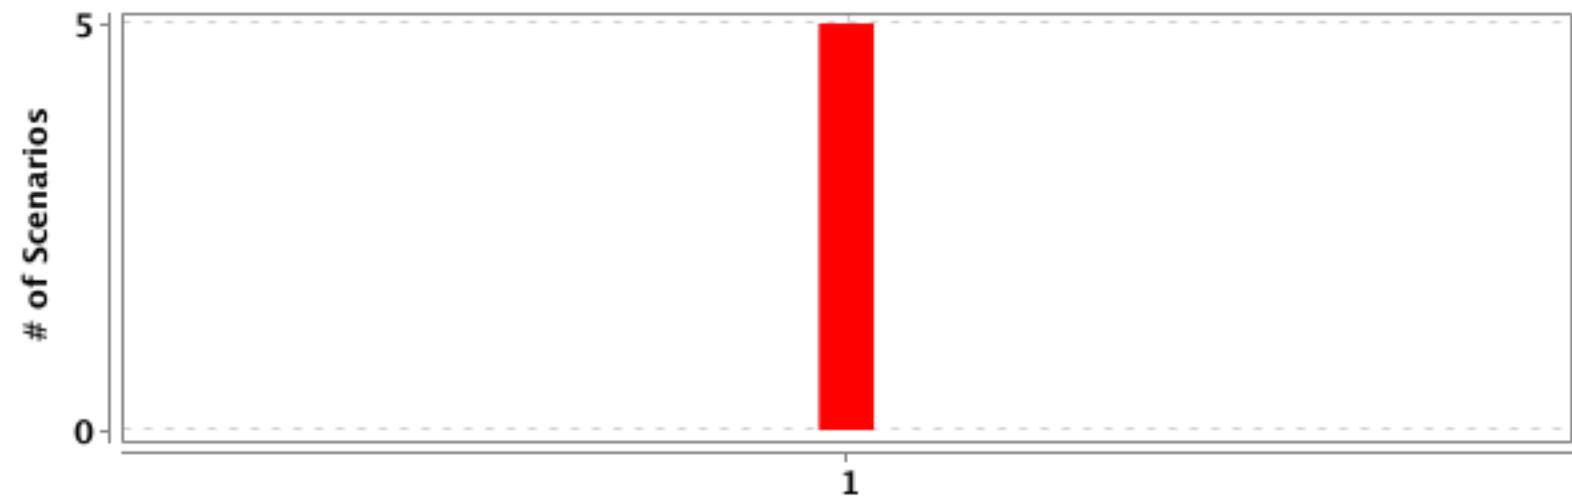
**SKIPPED - 10**



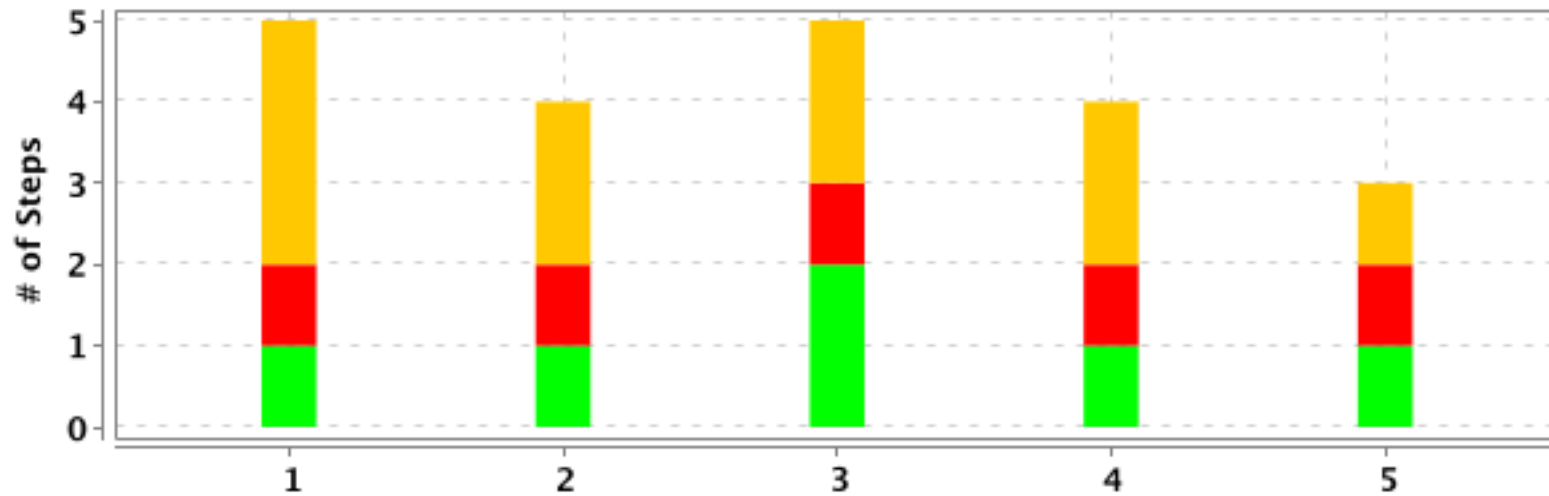
Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
<u>GitHub API Demo</u>	0.120 s	5	0	5	0	21	6	5	10

#	Feature Name	Scenario Name
1	<u>GitHub API Demo</u>	<u>Fetch my GitHub public profile</u>
2		<u>Fetch my GitHub user details using JWT Token</u>
3		<u>Create a public repo</u>
4		<u>Verify GitHub repo exists</u>
5		<u>Delete the repo</u>

TAG	Scenario				Feature			
Name	T	P	F	S	T	P	F	S
@GitHubAPI	5	0	5	0	1	0	1	0





#	Feature Name	T	P	F	S	Duration
1	<u>GitHub API Demo</u>	5	0	5	0	0.120 s

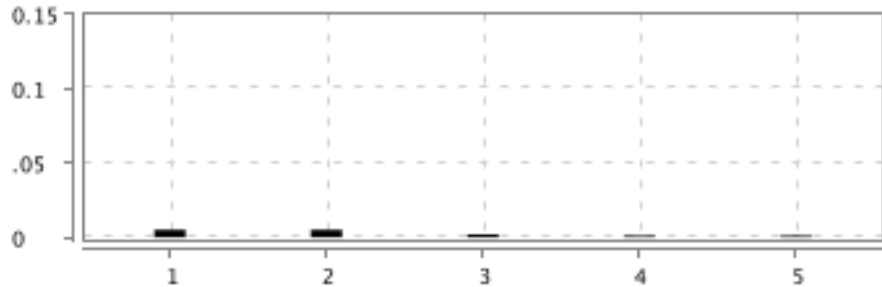



#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>GitHub API Demo</u>	<u>Fetch my GitHub public profile</u>	5	1	1	3	0.021 s
2		<u>Fetch my GitHub user details using JWT Token</u>	4	1	1	2	0.008 s
3		<u>Create a public repo</u>	5	2	1	2	0.051 s
4		<u>Verify GitHub repo exists</u>	4	1	1	2	0.008 s
5		<u>Delete the repo</u>	3	1	1	1	0.007 s

## GitHub API Demo

<b>FAILED</b>	DURATION - 0.120 s	Scenarios		Steps	
/ 12:25:25.891 pm // 12:25:26.011 pm /		Total - 5		Total - 21	
		Pass - 0		Pass - 6	
		Fail - 5		Fail - 5	
		Skip - 0		Skip - 10	

## Fetch my GitHub public profile

<div>FAILED</div> <div>DURATION - 0.021 s</div>			<div>Steps</div> <div>Total - 5</div> <div>Pass - 1</div> <div>Fail - 1</div> <div>Skip - 3</div>	
/ 12:25:25.892 pm // 12:25:25.913 pm /				
GitHub API Demo				
@GitHubAPI				

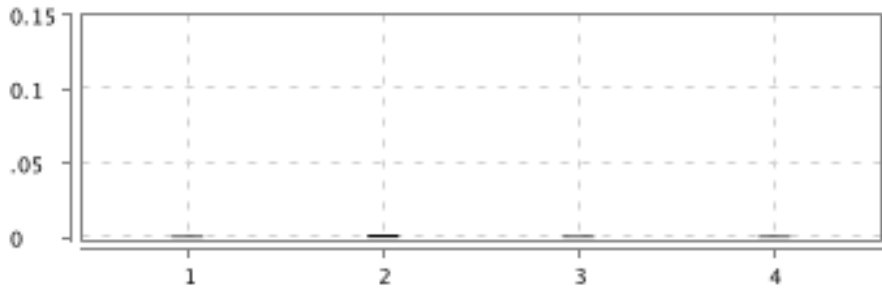

#	Step / Hook Details	Status	Duration
1	When compose a get request to "https://api.github.com/users/octocat" with headers Accept application/vnd.github+json	PASSED	0.005 s
2	And execute and save the response as "profileResponse" <pre> java.lang.NoClassDefFoundError: groovy/lang/GroovyObject     at java.base/java.lang.ClassLoader.defineClass1(Native Method)     at java.base/java.lang.ClassLoader.defineClass(ClassLoader.java:1022)     at java.base/java.security.SecureClassLoader.defineClass(SecureClassLoader.java:174)     at java.base/jdk.internal.loader.BuiltinClassLoader.defineClass(BuiltinClassLoader.java:800)     at java.base/jdk.internal.loader.BuiltinClassLoader.findClassOnClassPathOrNull(BuiltinClassLoader.java:698)     at java.base/jdk.internal.loader.BuiltinClassLoader.loadClassOrNull(BuiltinClassLoader.java:621)     at java.base/jdk.internal.loader.BuiltinClassLoader.loadClass(BuiltinClassLoader.java:579)     at java.base/jdk.internal.loader.ClassLoaders\$AppClassLoader.loadClass(ClassLoaders.java:178)     at java.base/java.lang.ClassLoader.loadClass(ClassLoader.java:527)     at io.restassured.RestAssured.&lt;clinit&gt;(RestAssured.java:354)     at com.nimble.utils.ApiClient.callRestfulAPI(ApiClient.java:47)     at com.nimble.stepDefinitions.ApiSteps.saveTheResponse(ApiSteps.java:92)     at ?.execute and save the response as "profileResponse"(file:///Users/amitgupta/Viom/Products/viom-studio/test_suite_repositories/sample- </pre>	FAILED	0.005 s

#	Step / Hook Details	Status	Duration
	<p>test-suites-repo-1757588379161/test-suite-1758097862241/execution_20250920_122521/src/test/java/com/nimble/feature/APITests.feature:7)</p> <p>Caused by: java.lang.ClassNotFoundException: groovy.lang.GroovyObject</p> <p>at java.base/jdk.internal.loader.BuiltinClassLoader.loadClass(BuiltinClassLoader.java:581)</p> <p>at java.base/jdk.internal.loader.ClassLoaders\$AppClassLoader.loadClass(ClassLoaders.java:178)</p> <p>at java.base/java.lang.ClassLoader.loadClass(ClassLoader.java:527)</p> <p>at java.base/java.lang.ClassLoader.defineClass1(Native Method)</p> <p>at java.base/java.lang.ClassLoader.defineClass(ClassLoader.java:1022)</p> <p>at java.base/java.security.SecureClassLoader.defineClass(SecureClassLoader.java:174)</p> <p>at java.base/jdk.internal.loader.BuiltinClassLoader.defineClass(BuiltinClassLoader.java:800)</p> <p>at java.base/jdk.internal.loader.BuiltinClassLoader.findClassOnClassPathOrNull(BuiltinClassLoader.java:698)</p> <p>at java.base/jdk.internal.loader.BuiltinClassLoader.loadClassOrNull(BuiltinClassLoader.java:621)</p> <p>at java.base/jdk.internal.loader.BuiltinClassLoader.loadClass(BuiltinClassLoader.java:579)</p> <p>at java.base/jdk.internal.loader.ClassLoaders\$AppClassLoader.loadClass(ClassLoaders.java:178)</p> <p>at java.base/java.lang.ClassLoader.loadClass(ClassLoader.java:527)</p> <p>at io.restassured.RestAssured.&lt;clinit&gt;(RestAssured.java:354)</p> <p>at com.nimble.utils.ApiClient.callRestfulAPI(ApiClient.java:47)</p> <p>at com.nimble.stepDefinitions.ApiSteps.saveTheResponse(ApiSteps.java:92)</p> <p>at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method)</p> <p>at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:62)</p> <p>at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)</p> <p>at java.base/java.lang.reflect.Method.invoke(Method.java:566)</p> <p>at io.cucumber.java.Invoker.doInvoke(Invoker.java:66)</p> <p>at io.cucumber.java.Invoker.invoke(Invoker.java:24)</p> <p>at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)</p> <p>at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29)</p> <p>at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66)</p> <p>at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63)</p> <p>at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)</p> <p>at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:86)</p> <p>at io.cucumber.core.runner.TestStep.run(TestStep.java:57)</p> <p>at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51)</p> <p>at io.cucumber.core.runner.TestCase.run(TestCase.java:95)</p> <p>at io.cucumber.core.runner.Runner.runPickle(Runner.java:75)</p> <p>at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132)</p> <p>at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$3(CucumberExecutionContext.java:110)</p> <p>at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23)</p> <p>at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:110)</p> <p>at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129)</p> <p>at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35)</p> <p>at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method)</p> <p>at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:62)</p>		



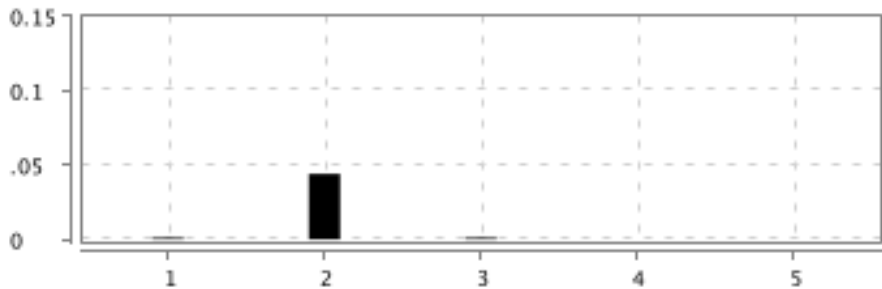

#	Step / Hook Details	Status	Duration
	<pre> at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:566) at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139) at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:677) at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:221) at org.testng.internal.invokers.MethodRunner.runInSequence(MethodRunner.java:50) at org.testng.internal.invokers.TestInvoker\$MethodInvocationAgent.invoke(TestInvoker.java:969) at org.testng.internal.invokers.TestInvoker.invokeTestMethods(TestInvoker.java:194) at org.testng.internal.invokers.TestMethodWorker.invokeTestMethods(TestMethodWorker.java:148) at org.testng.internal.invokers.TestMethodWorker.run(TestMethodWorker.java:128) at java.base/java.util.ArrayList.forEach(ArrayList.java:1541) at org.testng.TestRunner.privateRun(TestRunner.java:829) at org.testng.TestRunner.run(TestRunner.java:602) at org.testng.SuiteRunner.runTest(SuiteRunner.java:437) at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:431) at org.testng.SuiteRunner.privateRun(SuiteRunner.java:391) at org.testng.SuiteRunner.run(SuiteRunner.java:330) at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:52) at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:95) at org.testng.TestNG.runSuitesSequentially(TestNG.java:1256) at org.testng.TestNG.runSuitesLocally(TestNG.java:1176) at org.testng.TestNG.runSuites(TestNG.java:1099) at org.testng.TestNG.run(TestNG.java:1067) at org.apache.maven.surefire.testng.TestNGExecutor.run(TestNGExecutor.java:324) at org.apache.maven.surefire.testng.TestNGXmlTestSuite.execute(TestNGXmlTestSuite.java:74) at org.apache.maven.surefire.testng.TestNGProvider.invoke(TestNGProvider.java:123) at org.apache.maven.surefire.booter.ForkedBooter.runSuitesInProcess(ForkedBooter.java:456) at org.apache.maven.surefire.booter.ForkedBooter.execute(ForkedBooter.java:169) at org.apache.maven.surefire.booter.ForkedBooter.run(ForkedBooter.java:595) at org.apache.maven.surefire.booter.ForkedBooter.main(ForkedBooter.java:581) </pre> <p>* Not displayable characters are replaced by '?'. </p>		
3	Then check that response "profileResponse" has "200" as status code	SKIPPED	0.002 s
4	And check that API response "profileResponse" contains "octocat" at "\$.login"	SKIPPED	0.001 s
5	And check that API response "profileResponse" contains "The Octocat" at "\$.name"	SKIPPED	0.001 s

## Fetch my GitHub user details using JWT Token

<b>FAILED</b>	DURATION - 0.008 s		<b>Steps</b> Total - 4 Pass - 1 Fail - 1 Skip - 2	
/ 12:25:25.921 pm // 12:25:25.929 pm /				
GitHub API Demo				
@GitHubAPI				

#	Step / Hook Details	Status	Duration
1	When compose a get request to "https://api.github.com/user" with headers Accept application/vnd.github+json	PASSED	0.001 s
2	And execute and save the response as "userProfile" java.lang.NoClassDefFoundError: Could not initialize class io.restassured.RestAssured at com.nimble.utils.ApiClient.callRestfulAPI(ApiClient.java:47) at com.nimble.stepDefinitions.ApiSteps.saveTheResponse(ApiSteps.java:92) at ?.execute and save the response as "userProfile"(file:///Users/amitgupta/Viom/Products/viom-studio/test_suite_repositories/sample-test-suites-repo-1757588379161/test-suite-1758097862241/execution_20250920_122521/src/test/java/com/nimble/feature/APITests.feature:16) * Not displayable characters are replaced by '?'. 	FAILED	0.002 s
3	And check that response "userProfile" has "200" as status code	SKIPPED	0.001 s
4	And check that API response "userProfile" contains "80874758" at "\$.id"	SKIPPED	0.001 s

### Create a public repo

<b>FAILED</b>	DURATION - 0.051 s		<b>Steps</b> Total - 5 Pass - 2 Fail - 1 Skip - 2	
/ 12:25:25.935 pm // 12:25:25.986 pm /				
GitHub API Demo				
@GitHubAPI				

#	Step / Hook Details	Status	Duration
1	When compose a post request to "https://api.github.com/user/repos" with headers Accept application/vnd.github+json	PASSED	0.001 s

#	Step / Hook Details	Status	Duration
2	And with the below JSON request <pre>{   "name": "demo-repo",   "description": "Created via Nimble API test",   "private": false }</pre>	PASSED	0.044 s
3	And execute and save the response as "createRepoResponse" <pre>java.lang.NoClassDefFoundError: Could not initialize class io.restassured.RestAssured     at com.nimble.utils.ApiClient.callRestfulAPI(ApiClient.java:47)     at com.nimble.stepDefinitions.ApiSteps.saveTheResponse(ApiSteps.java:92)     at ?.execute and save the response as "createRepoResponse"(file:///Users/amitgupta/Viom/Products/viom-studio/test_suite_repositories/sample-test-suites-repo-1757588379161/test-suite-1758097862241/execution_20250920_122521/src/test/java/com/nimble/feature/APITests.feature:32) * Not displayable characters are replaced by '?'. </pre>	FAILED	0.001 s
4	Then check that response "createRepoResponse" has "201" as status code	SKIPPED	0.000 s
5	And check that API response "createRepoResponse" contains "demo-repo" at "\$.name"	SKIPPED	0.000 s

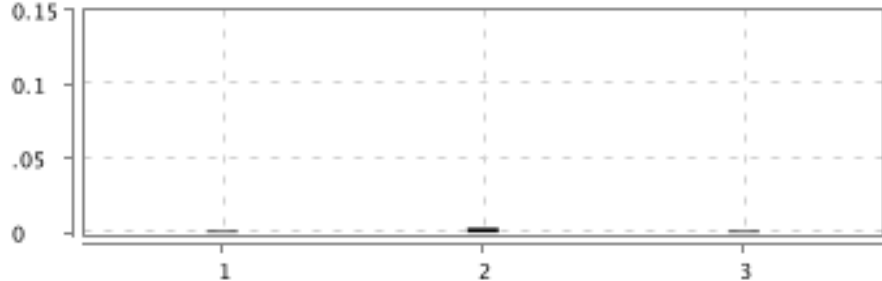

### Verify GitHub repo exists

<b>FAILED</b> DURATION - 0.008 s / 12:25:25.991 pm // 12:25:25.999 pm / GitHub API Demo @GitHubAPI		Steps Total - 4 Pass - 1 Fail - 1 Skip - 2	
---	--	--	--

#	Step / Hook Details	Status	Duration
1	When compose a get request to "https://api.github.com/repos/guptaami-commits/demo-repo" with headers Accept application/vnd.github+json	PASSED	0.001 s
2	And execute and save the response as "repoCheckResponse" <pre>java.lang.NoClassDefFoundError: Could not initialize class io.restassured.RestAssured     at com.nimble.utils.ApiClient.callRestfulAPI(ApiClient.java:47)     at com.nimble.stepDefinitions.ApiSteps.saveTheResponse(ApiSteps.java:92)     at ?.execute and save the response as "repoCheckResponse"(file:///Users/amitgupta/Viom/Products/viom-studio/test_suite_repositories/sample-test-suites-repo-1757588379161/test-suite-1758097862241/execution_20250920_122521/src/test/java/com/nimble/feature/APITests. </pre>	FAILED	0.002 s

#	Step / Hook Details	Status	Duration
	feature:40) * Not displayable characters are replaced by '?'. Then check that response "repoCheckResponse" has "200" as status code		
3	Then check that response "repoCheckResponse" has "200" as status code	SKIPPED	0.001 s
4	And check that API response "repoCheckResponse" contains "demo-repo" at "\$.name"	SKIPPED	0.001 s

## Delete the repo

<div>FAILED</div> <div>DURATION - 0.007 s</div>			<div>Steps</div> <div>Total - 3</div> <div>Pass - 1</div> <div>Fail - 1</div> <div>Skip - 1</div>	
/ 12:25:26.004 pm // 12:25:26.011 pm /				
GitHub API Demo				
@GitHubAPI				

#	Step / Hook Details	Status	Duration
1	When compose a delete request to "https://api.github.com/repos/guptaami-commits/demo-repo" with headers Accept application/vnd.github+json	PASSED	0.001 s
2	And execute and save the response as "deleteResponse" java.lang.NoClassDefFoundError: Could not initialize class io.restassured.RestAssured at com.nimble.utils.ApiClient.callRestfulAPI(ApiClient.java:47) at com.nimble.stepDefinitions.ApiSteps.saveTheResponse(ApiSteps.java:92) at ?.execute and save the response as "deleteResponse"(file:///Users/amitgupta/Viom/Products/viom-studio/test_suite_repositories/sample-test-suites-repo-1757588379161/test-suite-1758097862241/execution_20250920_122521/src/test/java/com/nimble/feature/APITests.feature:48) * Not displayable characters are replaced by '?'. Then check that response "deleteResponse" has "204" as status code	FAILED	0.003 s
3	Then check that response "deleteResponse" has "204" as status code	SKIPPED	0.001 s