

Cucumber Report

3 Nov 2025, 10:02:38

Start : Nov 03, 10:02:37.573 am

End : Nov 03, 10:02:37.598 am

Duration : 0.025 s

Features




PASSED - 0
FAILED - 1
SKIPPED - 0

Scenarios

PASSED - 0
FAILED - 1
SKIPPED - 0

Steps

PASSED - 0
FAILED - 1
SKIPPED - 15

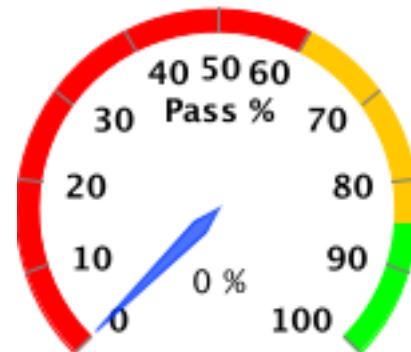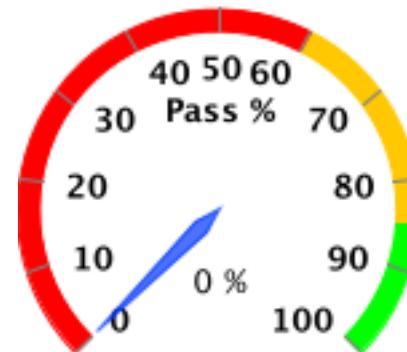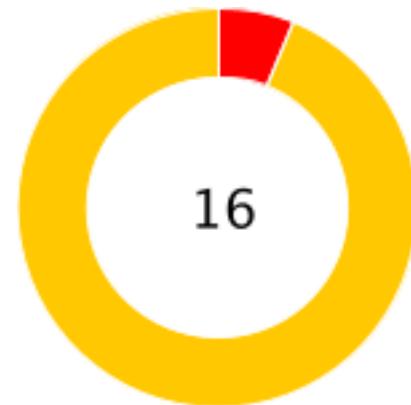


Feature				Scenario				Step			
Name		Duration		T	P	F	S	T	P	F	S
<u>API Vastu</u>		0.025 s		1	0	1	0	16	0	1	15

#	Feature Name	Scenario Name
1	<u>API Vastu</u>	<u>First scenario</u>

TAG	Scenario				Feature				
	Name	T	P	F	S	T	P	F	S
@api		1	0	1	0	1	0	1	0



#	Feature Name	T	P	F	S	Duration
1	<u>API Vastu</u>	1	0	1	0	0.025 s

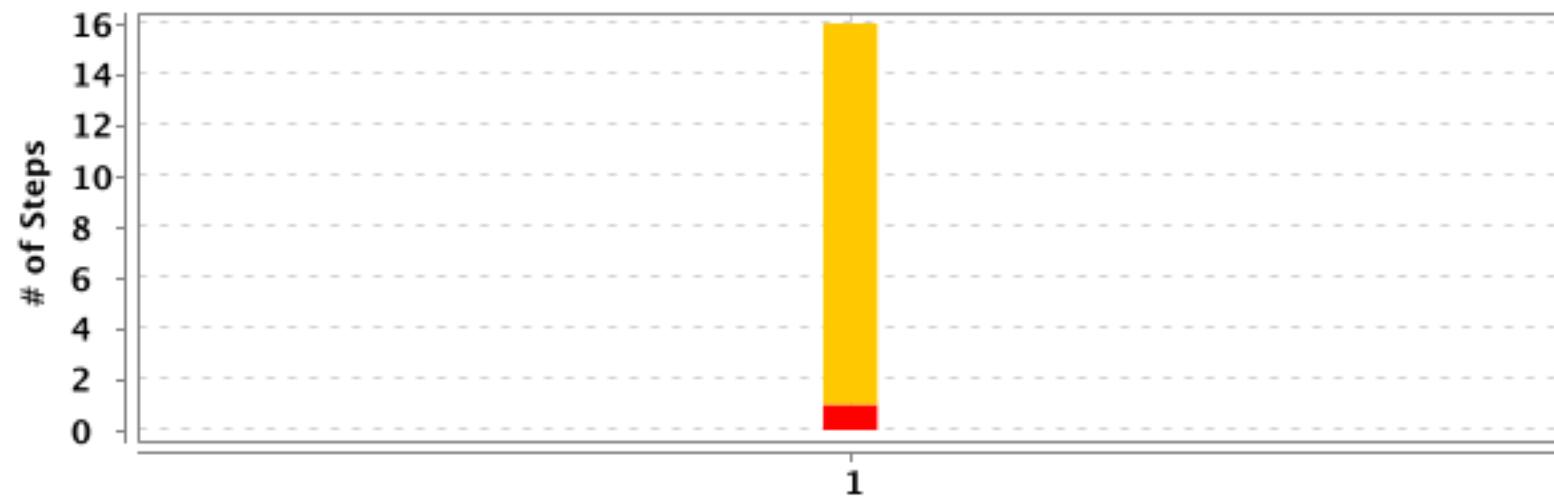


#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>API Vastu</u>	<u>First scenario</u>	16	0	1	15	0.024 s

API Vastu



First scenario

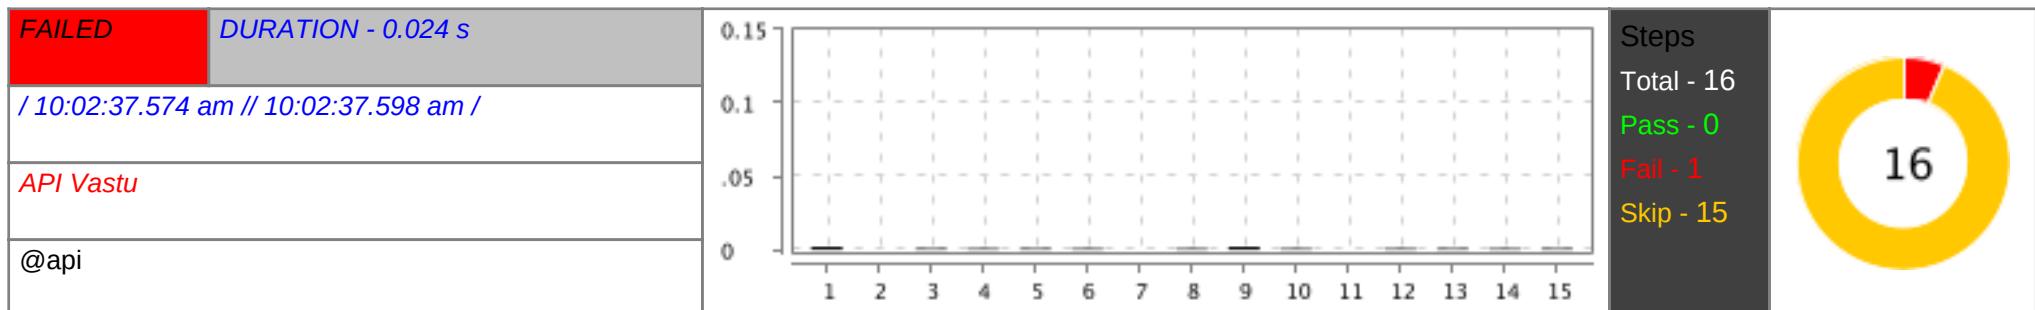

#	Step / Hook Details	Status	Duration
1	<p>When compose a post request to "https://test-aws-web.vastucorp.com/api/sales_timesheet_view" with headers</p> <pre>io.cucumber.core.exception.CucumberException: Step [*compose a (get post put patch delete) request to "([^\"]*" with headers\$] is defined with 3 parameters at 'com.nimble.stepDefinitions.ApiSteps.sendAPIRequest(java.lang.String,java.lang.String,java.util.Map<java.lang.String, java.lang.String>)'. However, the gherkin step has 2 arguments: * post * https://test-aws-web.vastucorp.com/api/sales_timesheet_view Step text: compose a post request to "https://test-aws-web.vastucorp.com/api/sales_timesheet_view" with headers at io.cucumber.core.runner.PickleStepDefinitionMatch.arityMismatch(PickleStepDefinitionMatch.java:83) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:42) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:86) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:95) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$3(CucumberExecutionContext.java:110) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:110) at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129)</pre>	FAILED	0.002 s

#	Step / Hook Details	Status	Duration
	at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:566) at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139) at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:677) at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:221) at org.testng.internal.invokers.MethodRunner.runInSequence(MethodRunner.java:50) at org.testng.internal.invokers.TestInvoker\$MethodInvocationAgent.invoke(TestInvoker.java:969) at org.testng.internal.invokers.TestInvoker.invokeTestMethods(TestInvoker.java:194) at org.testng.internal.invokers.TestMethodWorker.invokeTestMethods(TestMethodWorker.java:148) at org.testng.internal.invokers.TestMethodWorker.run(TestMethodWorker.java:128) at java.base/java.util.ArrayList.forEach(ArrayList.java:1541) at org.testng.TestRunner.privateRun(TestRunner.java:829) at org.testng.TestRunner.run(TestRunner.java:602) at org.testng.SuiteRunner.runTest(SuiteRunner.java:437) at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:431) at org.testng.SuiteRunner.privateRun(SuiteRunner.java:391) at org.testng.SuiteRunner.run(SuiteRunner.java:330) at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:52) at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:95) at org.testng.TestNG.runSuitesSequentially(TestNG.java:1256) at org.testng.TestNG.runSuitesLocally(TestNG.java:1176) at org.testng.TestNG.runSuites(TestNG.java:1099) at org.testng.TestNG.run(TestNG.java:1067) at org.apache.maven.surefire.testng.TestNGExecutor.run(TestNGExecutor.java:324) at org.apache.maven.surefire.testng.TestNGXmlTestSuite.execute(TestNGXmlTestSuite.java:74) at org.apache.maven.surefire.testng.TestNGProvider.invoke(TestNGProvider.java:123) at org.apache.maven.surefire.booter.ForkedBooter.runSuitesInProcess(ForkedBooter.java:456) at org.apache.maven.surefire.booter.ForkedBooter.execute(ForkedBooter.java:169) at org.apache.maven.surefire.booter.ForkedBooter.run(ForkedBooter.java:595) at org.apache.maven.surefire.booter.ForkedBooter.main(ForkedBooter.java:581)		
2	And Content-Type application/json	SKIPPED	0.000 s
3	And stagintoken 9e107d9d372bb6826bd81d3542a419d6	SKIPPED	0.001 s
4	And with the below JSON request	SKIPPED	0.001 s
5	And """"	SKIPPED	0.001 s
6	And {	SKIPPED	0.001 s
7	And "username": "user_15@vastuhfc.com",	SKIPPED	0.000 s

#	Step / Hook Details	Status	Duration
8	And "password": "123456",	SKIPPED	0.001 s
9	And "deviceid": "b401d05b86dd2f95",	SKIPPED	0.002 s
10	And "version": "3.2.9",	SKIPPED	0.001 s
11	And "app_name": "pulse_app",	SKIPPED	0.000 s
12	And "userid": "15"	SKIPPED	0.001 s
13	And }	SKIPPED	0.001 s
14	And """"	SKIPPED	0.001 s
15	And execute and save the response as "API_response"	SKIPPED	0.001 s
16	And check that variable {API_response} is equals to "completed" with exact phrase	SKIPPED	0.001 s
	AFTER - com.nimble.hooks.Hooks.tearDown(io.cucumber.java.Scenario) java.lang.RuntimeException: Teardown step failed because scenario failed at com.nimble.hooks.Hooks.tearDown(Hooks.java:202)	FAILED	0.002 s