
Cucumber Report

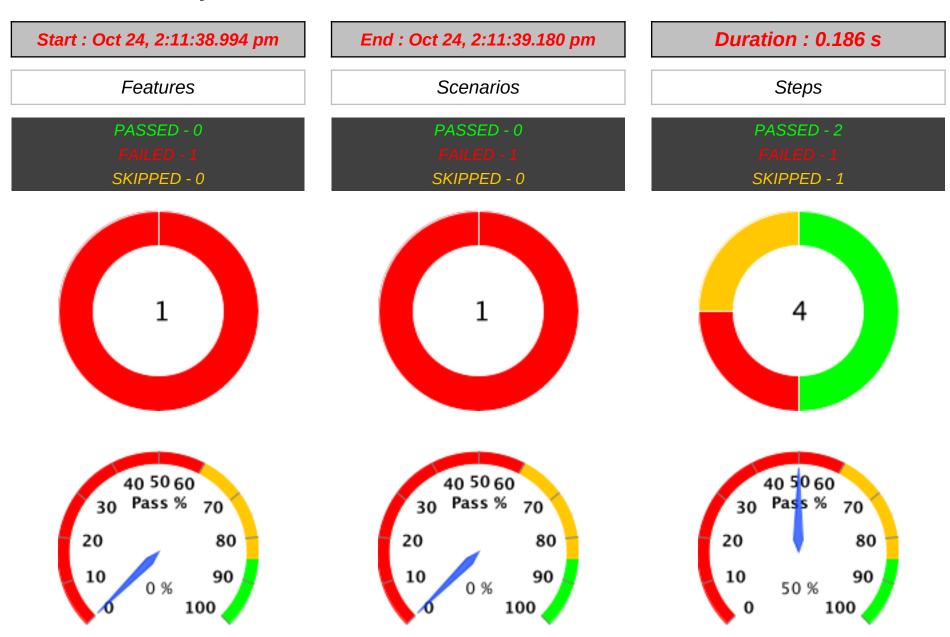

Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
New feature	0.186 s	1	0	1	0	4	2	1	1

FAIL & SKIP SCENARIOS -- 3 --


#	Feature Name	Scenario Name
1	New feature	<u>API sample</u>

TAG	Scenario			Feature				
Name	T	P	F	S	T	P	F	S
@testapiamit	1	0	1	0	1	0	1	0

FEATURES SUMMARY -- 5 --



#	Feature Name	T	P	F	S	Duration
1	New feature	1	0	1	0	0.186 s

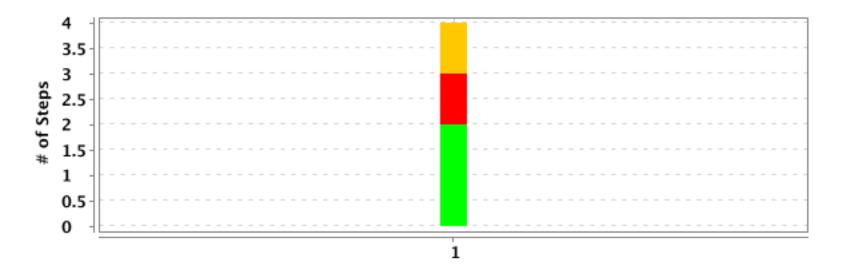


#	Feature Name	Scenario Name	T	P	F	S	Duration
1	New feature	<u>API sample</u>	4	2	1	1	0.185 s

DETAILED SECTION -- 7 --

New feature

S	Scenarios		Steps	
	Total - 1		Total - 4	
	Pass - 0	1	Pass - 2	Δ 📕
	Fail - 1		Fail - 1	
	Skip - 0		Skip - 1	
36 	36 s	Total - 1 Pass - 0 Fail - 1	Total - 1 Pass - 0 Fail - 1	Total - 1 Pass - 0 Fail - 1 Total - 4 Pass - 2 Fail - 1

API sample

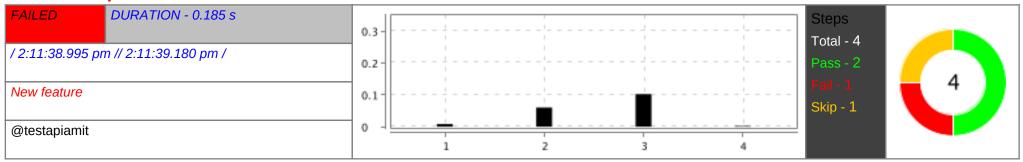

#	Step / Hook Details	Status	Duration
1	And compose a post request to "https://jsonplaceholder.typicode.com/posts" with headers	PASSED	0.008 s
	Content-Type application/json stagingtoken 9e107d9d372bb6826bd81d3542a419d6		
2	And with the below JSON request	PASSED	0.060 s
	{ "title": "Test API Call", "body": "This is a test post request body.", "userId": 101 }		
3	And execute and save the response as "API_response"	FAILED	0.102 s
	java.lang.NoClassDefFoundError: org/apache/http/client/HttpClient at io.restassured.config.HttpClientConfig.defaultHttpClientFactory(HttpClientConfig.java:264) at io.restassured.config.HttpClientConfig. <init>(HttpClientConfig.java:76) at io.restassured.config.RestAssuredConfig.<init>(RestAssuredConfig.java:41) at io.restassured.RestAssured.<clinit>(RestAssured.java:421) at com.nimble.utils.ApiClient.callRestfulAPI(ApiClient.java:47) at com.nimble.stepDefinitions.ApiSteps.saveTheResponse(ApiSteps.java:92)</clinit></init></init>		

#	Step / Hook Details	Status	Duration
	at ?.execute and save the response as "API_response"(file:///Users/amitgupta/Viom/Products/viom-studio/test_suite_repositories/sample-		
	test-suites-repo-1758699308415/test-suite-1761030126935/execution_20251024_141132/src/test/java/com/nimble/feature/api-new.feature:16)		
	Caused by: java.lang.ClassNotFoundException: org.apache.http.client.HttpClient		
	at java.base/jdk.internal.loader.BuiltinClassLoader.loadClass(BuiltinClassLoader.java:581)		
	at java.base/jdk.internal.loader.ClassLoaders\$AppClassLoader.loadClass(ClassLoaders.java:178)		
	at java.base/java.lang.ClassLoader.loadClass(ClassLoader.java:527)		
	at io.restassured.config.HttpClientConfig.defaultHttpClientFactory(HttpClientConfig.java:264)		
	at io.restassured.config.HttpClientConfig. <init>(HttpClientConfig.java:76)</init>		
	at io.restassured.config.RestAssuredConfig. <init>(RestAssuredConfig.java:41)</init>		
	at io.restassured.RestAssured. <clinit>(RestAssured.java:421)</clinit>		
	at com.nimble.utils.ApiClient.callRestfulAPI(ApiClient.java:47)		
	at com.nimble.stepDefinitions.ApiSteps.saveTheResponse(ApiSteps.java:92)		
	at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method)		
	at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:62)		
	at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)		
	at java.base/java.lang.reflect.Method.invoke(Method.java:566)		
	at io.cucumber.java.Invoker.doInvoke(Invoker.java:66)		
	at io.cucumber.java.Invoker.invoke(Invoker.java:24)		
	at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)		
	at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29)		
	at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66)		
	at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63)		
	at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)		
	at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:86)		
	at io.cucumber.core.runner.TestStep.run(TestStep.java:57)		
	at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51)		
	at io.cucumber.core.runner.TestCase.run(TestCase.java:95)		
	at io.cucumber.core.runner.Runner.runPickle(Runner.java:75)		
	at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132)		
	at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$3(CucumberExecutionContext.java:110)		
	at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23)		
	at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:110)		
	at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129)		
	at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35)		
	at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method)		
	at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:62)		
	at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)		
	at java.base/java.lang.reflect.Method.invoke(Method.java:566)		
	at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139)		
	at org.testng.internal.invokers.Metriounivocationnelper.invokemetriou(metriounivocationnelper.java.139) at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:677)		
	at org.testing.internal.invokers.Testinvoker.invokeriod(Testinvoker.java.077) at org.testng.internal.invokers.TestInvoker.invokerestMethod(TestInvoker.java.221)		
	at organismitatinalinvokers. I estilivoke i estivietilou (i estilivoker.java.221)		

#	Step / Hook Details	Status	Duration
	at org.testng.internal.invokers.MethodRunner.runInSequence(MethodRunner.java:50)		
	at org.testng.internal.invokers.TestInvoker\$MethodInvocationAgent.invoke(TestInvoker.java:969)		
	at org.testng.internal.invokers.TestInvoker.invokeTestMethods(TestInvoker.java:194)		
	at org.testng.internal.invokers.TestMethodWorker.invokeTestMethods(TestMethodWorker.java:148)		
	at org.testng.internal.invokers.TestMethodWorker.run(TestMethodWorker.java:128)		
	at java.base/java.util.ArrayList.forEach(ArrayList.java:1541)		
	at org.testng.TestRunner.privateRun(TestRunner.java:829)		
	at org.testng.TestRunner.run(TestRunner.java:602)		
	at org.testng.SuiteRunner.runTest(SuiteRunner.java:437)		
	at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:431)		
	at org.testng.SuiteRunner.privateRun(SuiteRunner.java:391)		
	at org.testng.SuiteRunner.run(SuiteRunner.java:330)		
	at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:52)		
	at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:95)		
	at org.testng.TestNG.runSuitesSequentially(TestNG.java:1256)		
	at org.testng.TestNG.runSuitesLocally(TestNG.java:1176)		
	at org.testng.TestNG.runSuites(TestNG.java:1099)		
	at org.testng.TestNG.run(TestNG.java:1067)		
	at org.apache.maven.surefire.testng.TestNGExecutor.run(TestNGExecutor.java:324)		
	at org.apache.maven.surefire.testng.TestNGXmlTestSuite.execute(TestNGXmlTestSuite.java:74)		
	at org.apache.maven.surefire.testng.TestNGProvider.invoke(TestNGProvider.java:123)		
	at org.apache.maven.surefire.booter.ForkedBooter.runSuitesInProcess(ForkedBooter.java:456)		
	at org.apache.maven.surefire.booter.ForkedBooter.execute(ForkedBooter.java:169)		
	at org.apache.maven.surefire.booter.ForkedBooter.run(ForkedBooter.java:595)		
	at org.apache.maven.surefire.booter.ForkedBooter.main(ForkedBooter.java:581)		
	* Not displayable characters are replaced by '?'.		
4	And check that response {API_response} has "201" as status code	SKIPPED	0.002 s
	AFTER - com.nimble.hooks.Hooks.tearDown(io.cucumber.java.Scenario)	FAILED	0.004 s
	java.lang.RuntimeException: Teardown step failed because scenario failed		
	at com.nimble.hooks.Hooks.tearDown(Hooks.java:202)		