Terraform Tasks - 03

- Execute the script shown in the video.
- Environment Variables:

```
PS C:\Users\Viqaas\Desktop\Testing\Terraform> $env:TF_VAR_filename="Lions.txt"
PS C:\Users\Viqaas\Desktop\Testing\Terraform> $env:TF_VAR_length="1"
PS C:\Users\Viqaas\Desktop\Testing\Terraform>
```

```
Plan: 2 to add, 0 to change, 2 to destroy.
random_pet.my_pet: Destroying... [id=Mr.proper.mongoose]
local_file.my_pet: Destroying... [id=7e4db4fbfdbb108bdd04692602bae3e9bd1e1b68]
random_pet.my_pet: Destruction complete after 0s
local_file.my_pet: Destruction complete after 0s
random_pet.my_pet: Creating...
random_pet.my_pet: Creation complete after 0s [id=Mr.robin]
local_file.my_pet: Creating...
local_file.my_pet: Creation complete after 0s [id=7e4db4fbfdbb108bdd04692602bae3e9bd1e1b68]

Apply complete! Resources: 2 added, 0 changed, 2 destroyed.
```

main.tf > resource "random_pet" "my_pet"

```
resource "local_file" "my_pet" {
  filename = var.filename
  content  = "I love pets!"
}

resource "random_pet" "my_pet" {
  prefix    = "Mr"
  separator = "."
  length    = var.length
}
```

variables.tf > variable "length"

```
variable "filename" {
  default = "Succubus.txt"
}
variable "length" {
  default = "2"
}
```

-

```
PS C:\Users\Viqaas\Desktop\Testing\Terraform> $env:TF_VAR_filename="Lions.txt"
PS C:\Users\Viqaas\Desktop\Testing\Terraform> $env:TF_VAR_length="1"
PS C:\Users\Viqaas\Desktop\Testing\Terraform> terraform apply -var="filename=pets.txt" -var="length=3"
```

```
  "length": 3,
  "prefix": "Mr",
  "separator": "."
},
```

- main.tf
- pets.txt
- terraform.tfstate
- terraform.tfstate.backup
- variables.tf

Terraform Tasks - 03

main.tf > resource "local_file" "my_pet"

```
resource "random_pet" "my_pet" {
  prefix    = "Mr"
  separator = "."
  length    = var.length
}

resource "local_file" "my_pet" {
  filename = var.filename
  content  = "My pet name is ${random_pet.my_pet.id}"
}
```

-

Lions.txt

```
My pet name is Mr.osprey
```


```
"schema_version": 0,
"attributes": {
  "id": "Mr.osprey",
  "keepers": null,
  "length": 1,
  "prefix": "Mr",
  "separator": "."
},
```

Terraform Tasks - 03

- main.tf > output "my_pet"

```terraform
resource "random_pet" "my_pet" {
  prefix    = "Mr"
  separator = "."
  length    = var.length
}

resource "local_file" "my_pet" {
  filename = var.filename
  content  = "My pet name is ${random_pet.my_pet.id}"
}
output "my_pet" {
  value       = random_pet.my_pet.id
  description = "Optional name"
}
```

```
PS C:\Users\Viqaas\Desktop\Testing\Terraform> terraform output
my_pet = "Mr.osprey"
```

- Create one Jenkins job using Maven Project for the code below with two stages:
  - **Stage 1:** Git clone
  - **Stage 2:** Maven Compilation

#2 (Mar 1, 2026, 4:08:49 PM)

Started by user Viqaas Taimoor

This run spent:

- 4 ms waiting;
- 4.8 sec build duration;
- 4.8 sec total from scheduled to completio

git

Revision: 9405b107fdffdf68e69fe953ea1f96697
Repository: https://github.com/betawins/java-

- refs/remotes/origin/main

No changes.

```
jenkins@634d24255021:~/workspace/Task-03$ ls
 Dockerfile   Jenkinsfile   README.md  'Untitled Diagram.drawio'   jenkinsfile-cicd   pom.xml   src   target
jenkins@634d24255021:~/workspace/Task-03$ cd target/
jenkins@634d24255021:~/workspace/Task-03/target$ ls
hiring  hiring.war  maven-archiver
jenkins@634d24255021:~/workspace/Task-03/target$
```

- Use the same code and create a parameterized job in Jenkins with:

Terraform Tasks - 03

- **Stage 1:** Git clone
- **Stage 2:** Maven Compilation

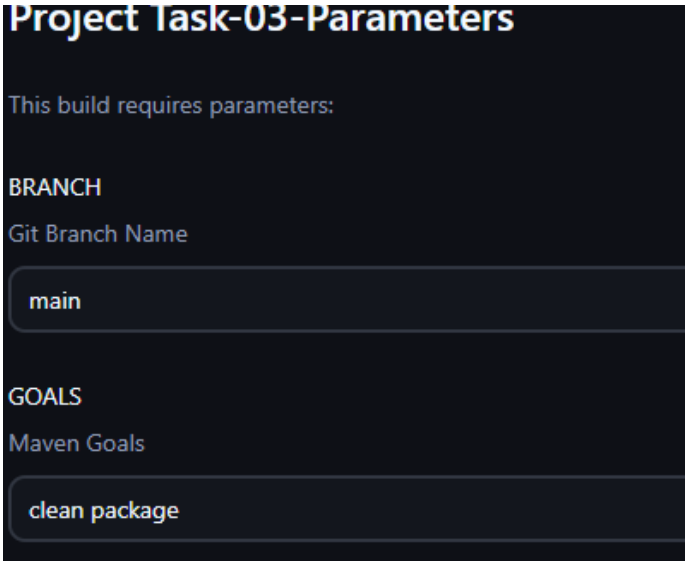

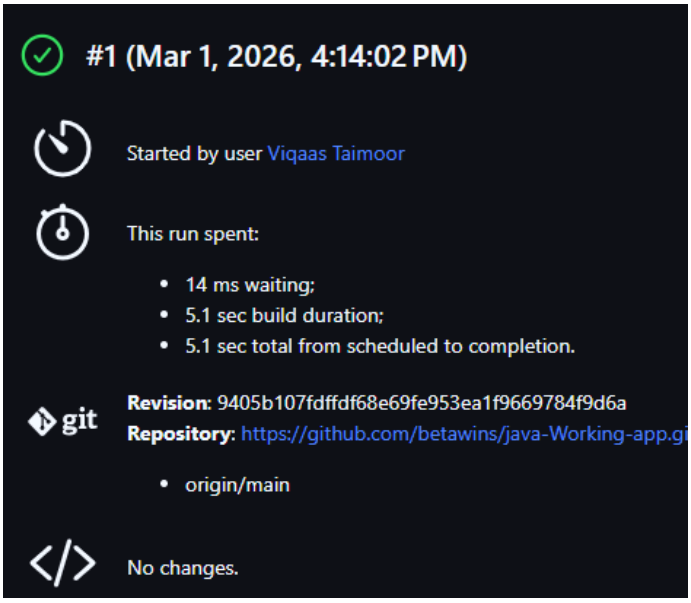


```
jenkins@634d24255021:~/workspace/Task-03-Parameters$ ls
 Dockerfile   Jenkinsfile   README.md  'Untitled Diagram.drawio'   jenkinsfile-cicd   pom.xml   src   target
jenkins@634d24255021:~/workspace/Task-03-Parameters$ cd target
jenkins@634d24255021:~/workspace/Task-03-Parameters/target$ ls
hiring  hiring.war  maven-archiver
jenkins@634d24255021:~/workspace/Task-03-Parameters/target$
```

- What are the global variables in Jenkins?
- Jenkins global variables are predefined environment variables like BUILD_NUMBER and WORKSPACE available in every job.
  We can use them like ${VARIABLE_NAME} or in pipeline as env.VARIABLE_NAME.
- Common Variables used are:
  - BUILD_NUMBER - Current build number

Terraform Tasks - 03

- BUILD_ID - Unique build ID
- JOB_NAME - Name of the job
- BUILD_URL - URL of the build
- WORKSPACE - Job workspace path
- JENKINS_HOME - Jenkins home directory
- NODE_NAME - Agent name
- GIT_BRANCH - Git branch
- GIT_COMMIT - Git commit ID