

Copyright Notice

These slides are distributed under the Creative Commons License.

[DeepLearning.AI](#) makes these slides available for educational purposes. You may not use or distribute these slides for commercial purposes. You may make copies of these slides and use or distribute them for educational purposes as long as you cite [DeepLearning.AI](#) as the source of the slides.

For the rest of the details of the license, see <https://creativecommons.org/licenses/by-sa/2.0/legalcode>




deeplearning.ai

RNNs and Vanishing Gradients

Outline

- Backprop through time
- RNNs and vanishing/exploding gradients
- Solutions

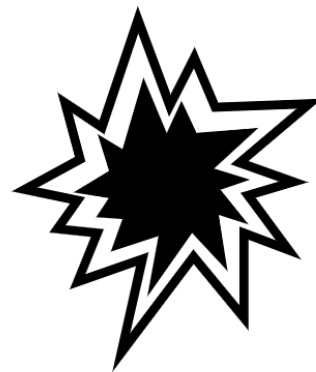

RNNs: Advantages


- + Captures dependencies within a short range
- + Takes up less RAM than other n-gram models

RNNs: Disadvantages

- Struggles to capture long term dependencies
- Prone to vanishing or exploding gradients


RNN Basic Structure

She kicked the ball right into the _____

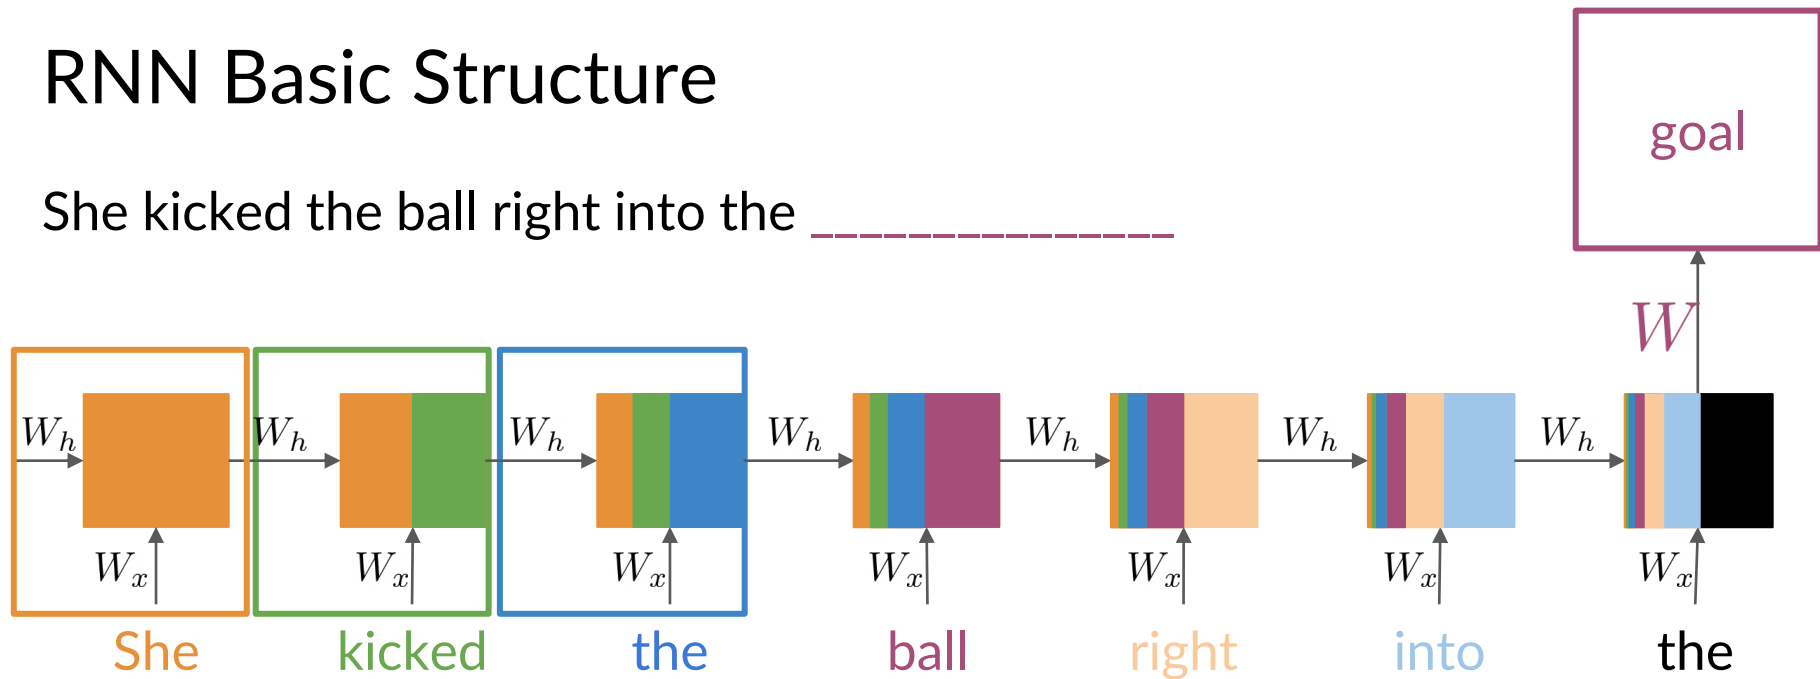

Learnable parameters

Backpropagation through time

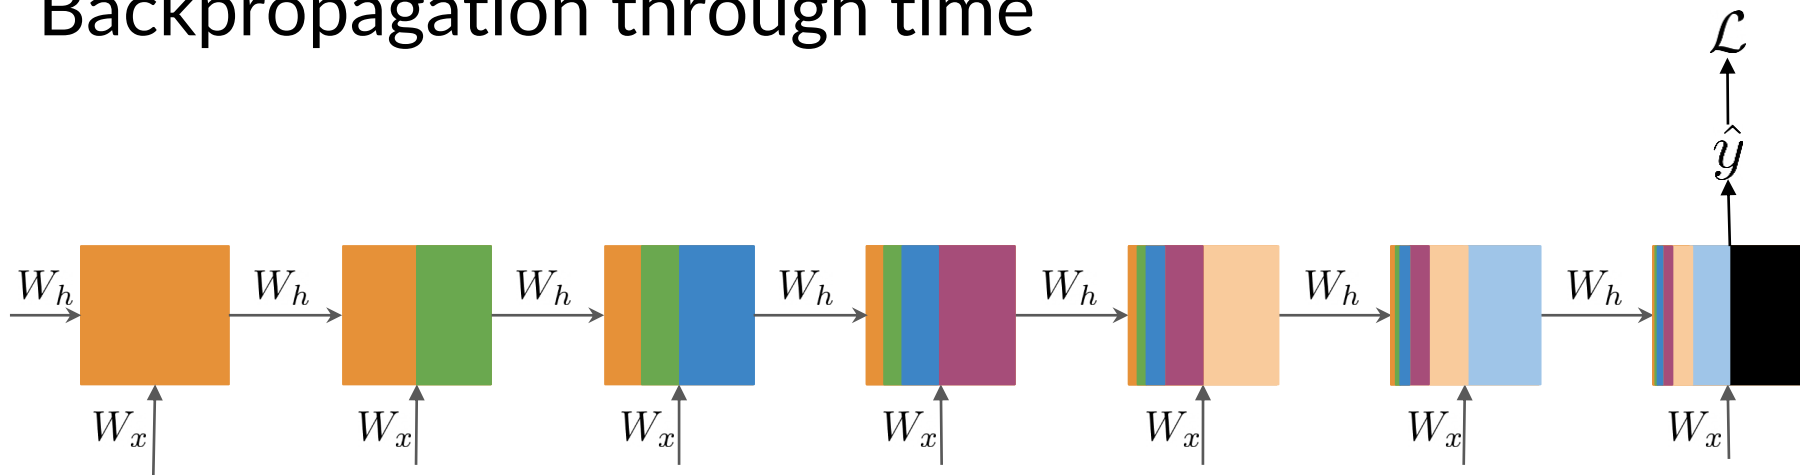

W_x
 W_h → Same at every step

$$\frac{\partial L}{\partial W_h} \propto \sum_{1 \leq k \leq t} \left(\prod_{t \geq i > k} \frac{\partial h_i}{\partial h_{i-1}} \right) \frac{\partial h_k}{\partial W_h}$$

Gradient is proportional to a sum of partial derivative products

Backpropagation through time

$$\frac{\partial L}{\partial W_h} \propto \sum_{1 \leq k \leq t} \left(\prod_{t \geq i > k} \frac{\partial h_i}{\partial h_{i-1}} \right) \frac{\partial h_k}{\partial W_h}$$

Contribution of hidden state k

Length of the product proportional to
how far k is from t

$$\frac{\partial h_t}{\partial h_{t-1}} \frac{\partial h_{t-1}}{\partial h_{t-2}} \frac{\partial h_{t-2}}{\partial h_{t-3}} \frac{\partial h_{t-3}}{\partial h_{t-4}} \frac{\partial h_{t-4}}{\partial h_{t-5}} \frac{\partial h_{t-5}}{\partial h_{t-6}} \frac{\partial h_{t-6}}{\partial h_{t-7}} \frac{\partial h_{t-7}}{\partial h_{t-8}} \frac{\partial h_{t-8}}{\partial h_{t-9}} \frac{\partial h_{t-9}}{\partial h_{t-10}} \frac{\partial h_{t-10}}{\partial W_h}$$

Contribution of hidden state $t-10$

Backpropagation through time

$$\frac{\partial L}{\partial W_h} \propto \sum_{1 \leq k \leq t} \left(\prod_{t \geq i > k} \frac{\partial h_i}{\partial h_{i-1}} \right) \frac{\partial h_k}{\partial W_h}$$

Contribution of hidden state k

Length of the product proportional to
how far k is from t

Partial derivatives < 1

Contribution goes to 0

Vanishing Gradient

Partial derivatives > 1

Contribution goes to
infinity

Exploding Gradient

Solving for vanishing or exploding gradients

$$\begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix}$$



-1


- Identity RNN with ReLU activation



- Gradient clipping

0

- Skip connections

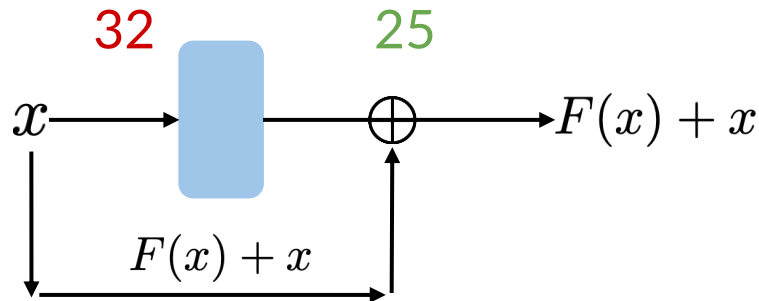




deeplearning.ai

Introduction to LSTMs

Outline

- Meet the Long short-term memory unit!
- LSTM architecture
- Applications



LSTMs: a memorable solution


- Learns when to remember and when to forget
- Basic anatomy:
 - A cell state
 - A hidden state
 - Multiple gates
- Gates allow gradients to avoid vanishing and exploding

LSTMs: Based on previous understanding


Starting point with some irrelevant information



Cell and Hidden States

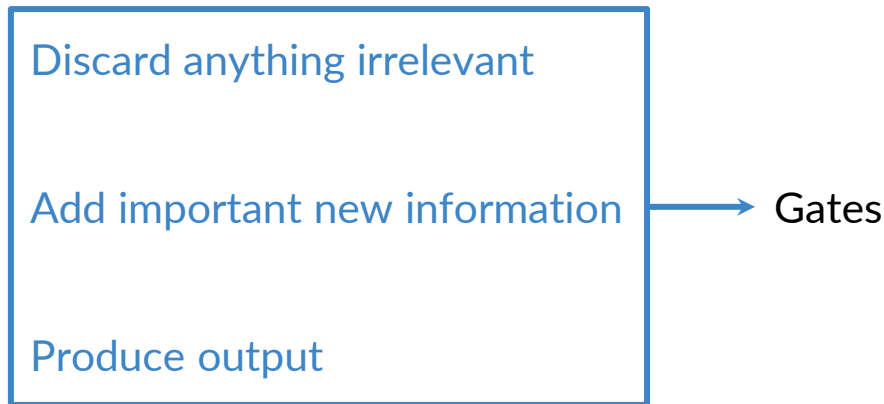

Gates in LSTM

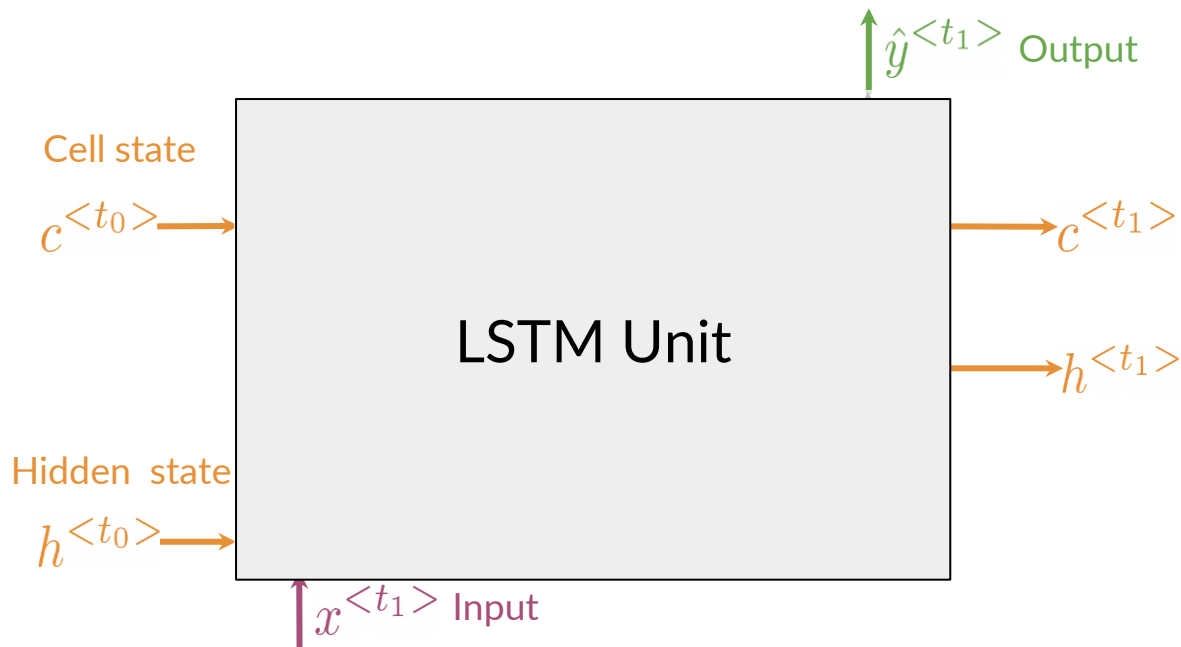

- 1. Forget Gate:** information that is no longer important
- 2. Input Gate:** information to be stored
- 3. Output Gate:** information to use at current step

Applications of LSTMs

Next-character
prediction



Chatbots



Music
composition



Image
captioning




Speech
recognition



Summary

- LSTMs offer a solution to vanishing gradients
- Typical LSTMs have a cell and three gates:
 - Forget gate
 - Input gate
 - Output gate

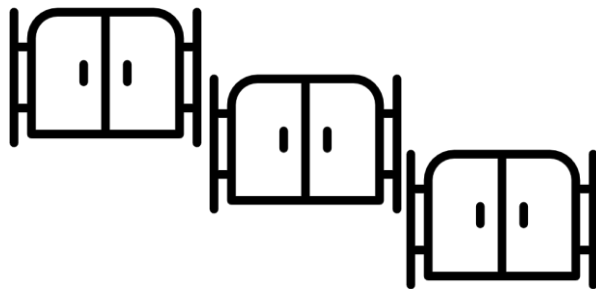




deeplearning.ai

LSTM Architecture

Gates in LSTM

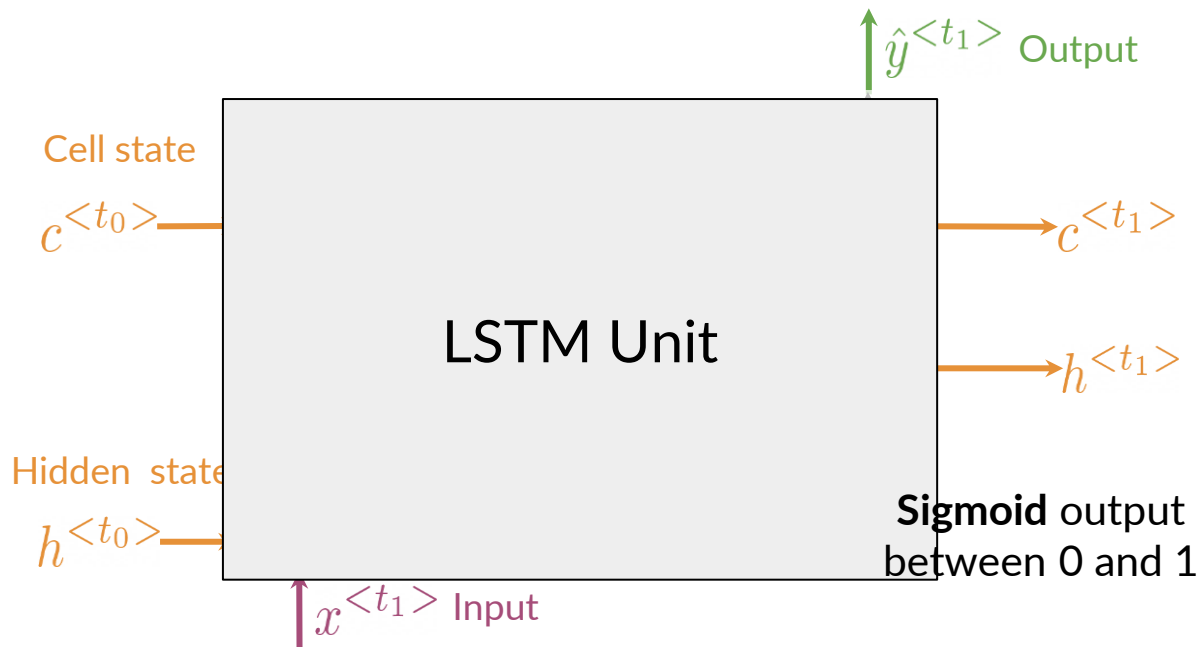


1. Forget Gate:

information that is no longer important

2. Input Gate: information to be stored

3. Output Gate:


information to use at current step



0-Closed

1-Open

Candidate Cell State

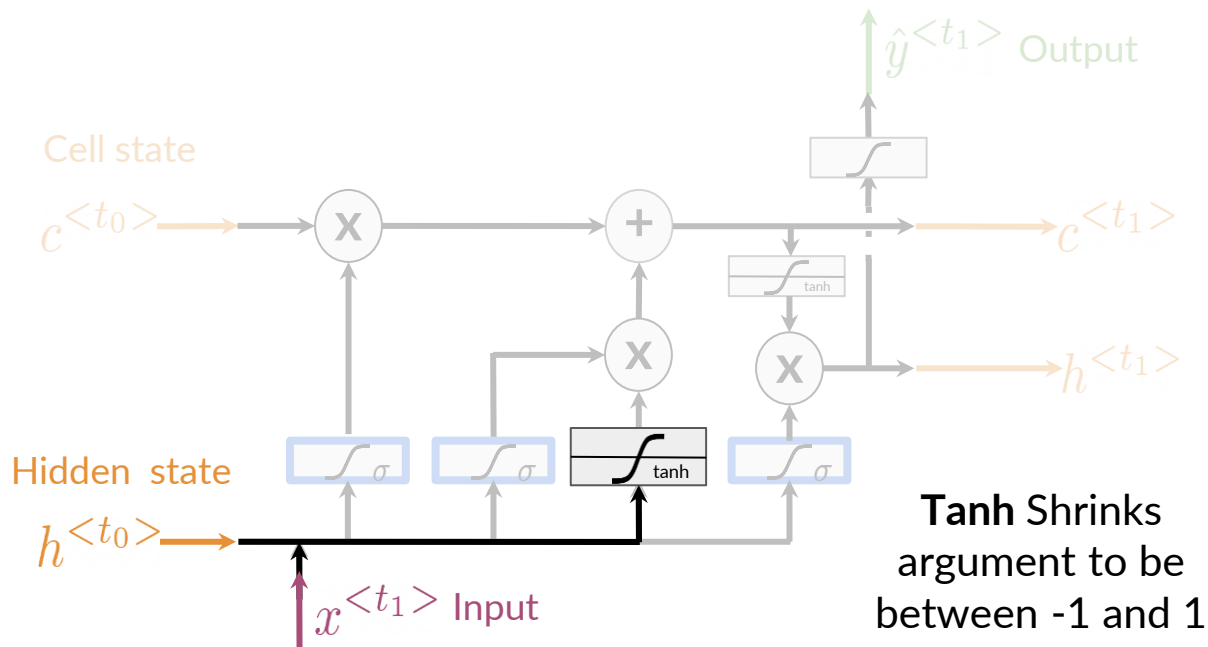


Candidate cell state

Information from the previous **hidden state** and current **input**

Other activations could be used


New Cell State

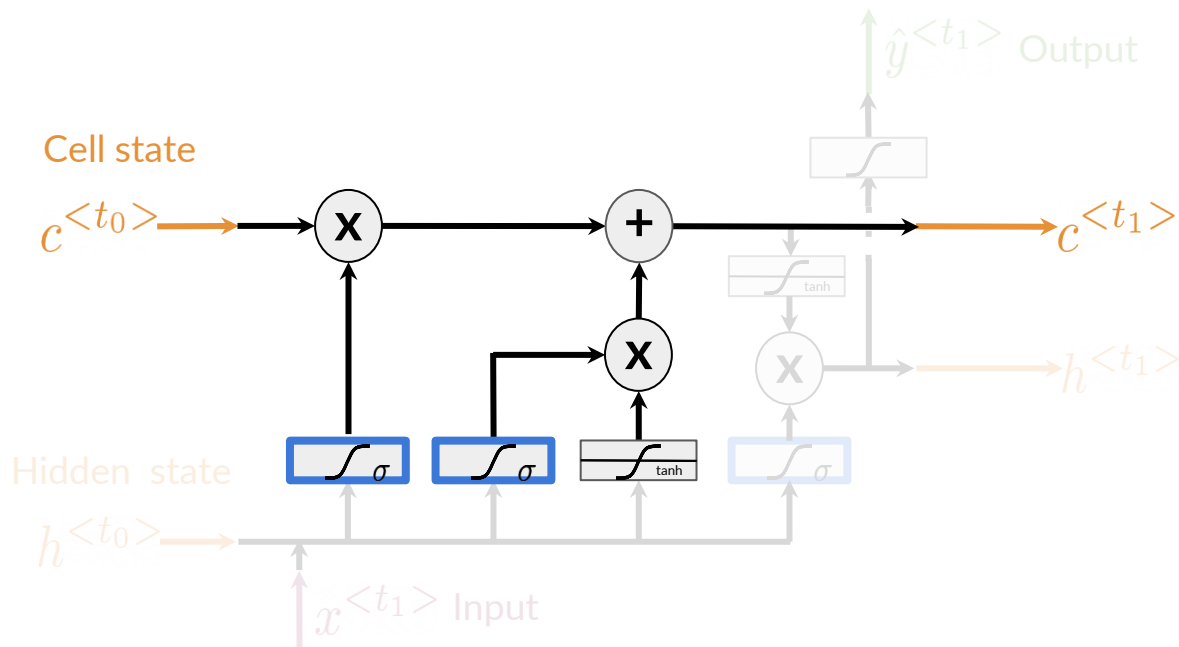

New Cell state

Add information from the candidate cell state using the **forget** and **input gates**

New Hidden State

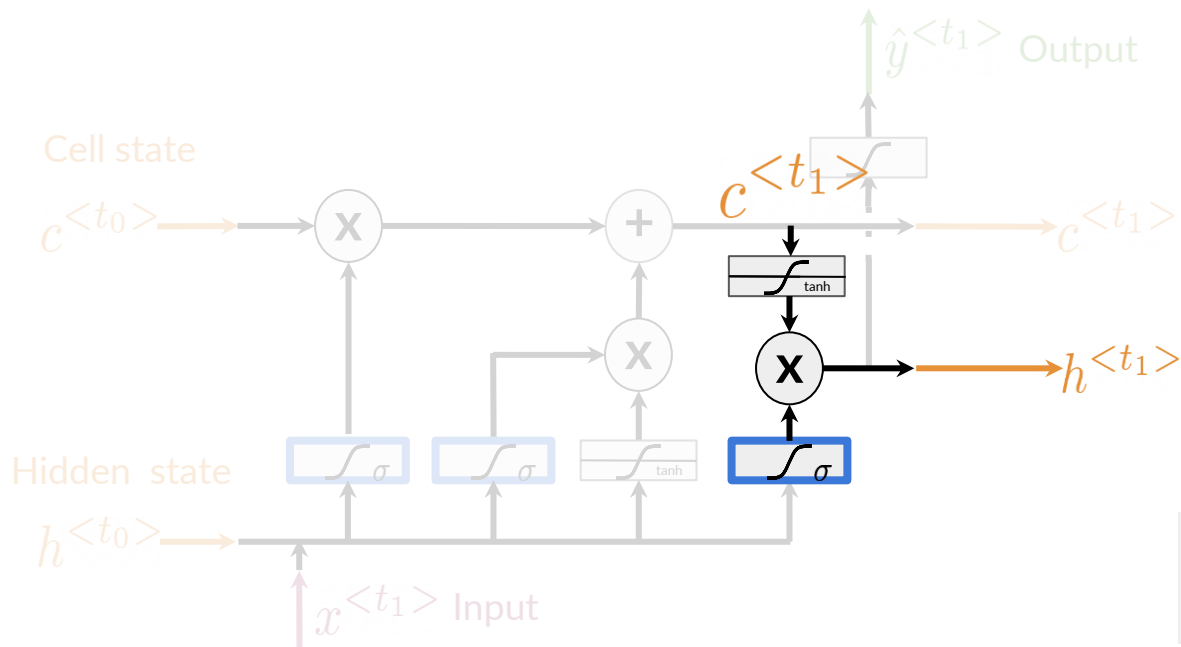

New Hidden State

Select information from the **new cell state** using the **output gate**

The **Tanh** activation could be omitted

Summary

- LSTMs use a series of gates to decide which information to keep:
 - Forget gate decides what to keep
 - Input gate decides what to add
 - Output gate decides what the next hidden state will be



deeplearning.ai

Introduction to Named Entity Recognition

What is Named Entity Recognition?

- Locates and extracts predefined entities from text
- Places, organizations, names, time and dates



Types of Entities



Thailand:
Geographical



Google:
Organization



Indian:
Geopolitical

More Types of Entities



December:
Time Indicator




Egyptian statue:
Artifact



Barack Obama:
Person

Example of a labeled sentence

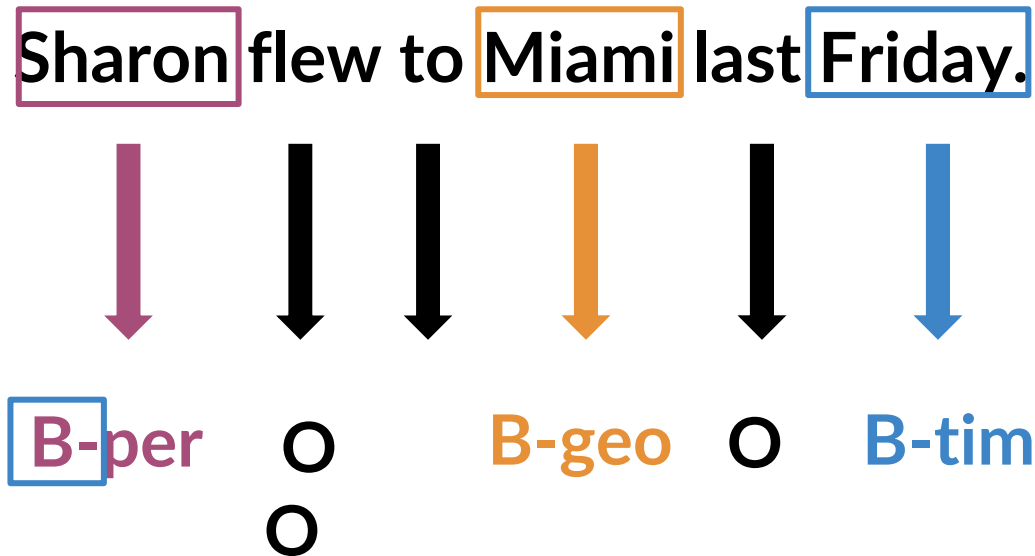

Applications of NER systems

- Search engine efficiency
- Recommendation engines
- Customer service
- Automatic trading






deeplearning.ai

Training NERs: Data Processing

Outline

- Convert words and entity classes into arrays
- Token padding
- Create a data generator

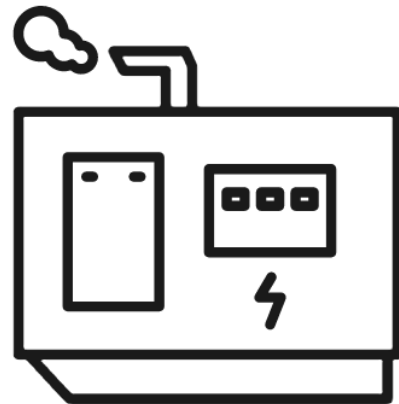

Processing data for NERs

- Assign each class a number
- Assign each word a number

Sharon flew to Miami last Friday.

[4282, 853, 187, 5388, 2894, 7]

B- O O B-geo O B-tim


per

Token padding


For LSTMs, all sequences need to be the same size.

- Set sequence length to a certain number
- Use the **<PAD>** token to fill empty spaces

Training the NER

1. Create a tensor for each input and its corresponding number
2. Put them in a batch  64, 128, 256, 512 ...
3. Feed it into an LSTM unit
4. Run the output through a dense layer
5. Predict using a log softmax over K classes

Training the NER

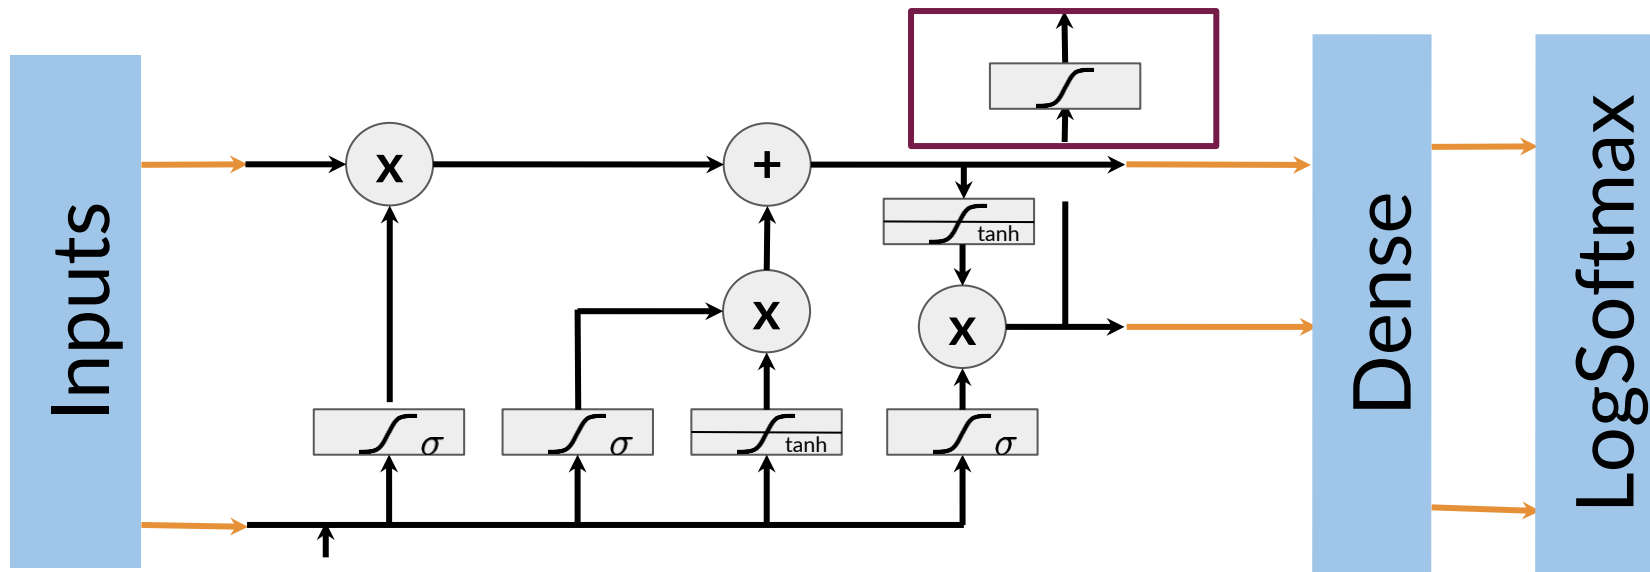

Layers in Trax

```
model = tl.Serial(  
    tl.Embedding(),  
    tl.LSTM(),  
    tl.Dense(),  
    tl.LogSoftmax()  
)
```

Summary

- Convert words and entities into same-length numerical arrays
- Train in batches for faster processing
- Run the output through a final layer and activation





deeplearning.ai

Computing Accuracy

Evaluating the model

1. Pass test set through the model
2. Get arg max across the prediction array
3. Mask padded tokens
4. Compare outputs against test labels

Evaluating the model in Python

```
def evaluate_model(test_sentences, test_labels, model):  
    pred = model(test_sentences)  
    outputs = np.argmax(pred, axis=2)  
    mask = ...  
    accuracy =   
    np.sum(outputs==test_labels)/float(np.sum(mask))  
  
    return accuracy
```


Summary

- If padding tokens, remember to mask them when computing accuracy
- Coding assignment!