

NudgeAI Self-hosted n8n workflow Setup Instructions

Accounts to prepare:

1. Microsoft Office with OneDrive and Excel access
2. Microsoft Outlook
3. Any n8n-supported LLM API Chat Model - details in Item #5 in Credentials Configuration Section

Programs to prepare:

1. Docker Desktop
2. Git (optional)

Setup steps:


1. Have a copy of this Git repository: https://github.com/Virgel24-7/n8n_NudgeAI. You may download this as zip then extract to the desired folder.
2. Download the Excel File in the repository and upload to own OneDrive
3. Set up docker by following instructions in the README.md file.
4. In the Docker Desktop, Go to containers page and run the newly made n8n container.
5. In the n8n page, set up your account.

Credentials Configuration:

1. Open “Config” workflow.
2. Open Set Configs node and update excelid to use the newly uploaded Excel File, and isActualEnvironment to true




- a. To get the Excel ID, open the file through OneDrive in the browser then click the icon highlighted below.

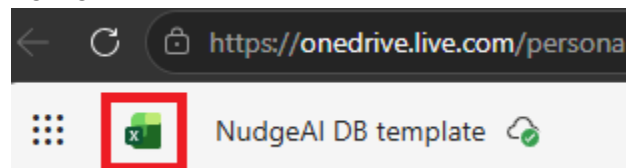

- b. Then click “Open in Excel”
- c. Extract the docId, as shown in the highlighted part in the example link below.

Sample: <https://excel.cloud.microsoft/open/onedrive/?docId=yourdocid&driveId=yourdriveid>

3. Open “Check Email workflow” and click any Excel Node to add credentials. Use the same account used in uploading.
4. On the same workflow, open any Outlook node to add credentials. Use the Outlook account you want to track.
5. Go back to the home page and open the “Test AI API” workflow. You may replace the node boxed below to use other models.

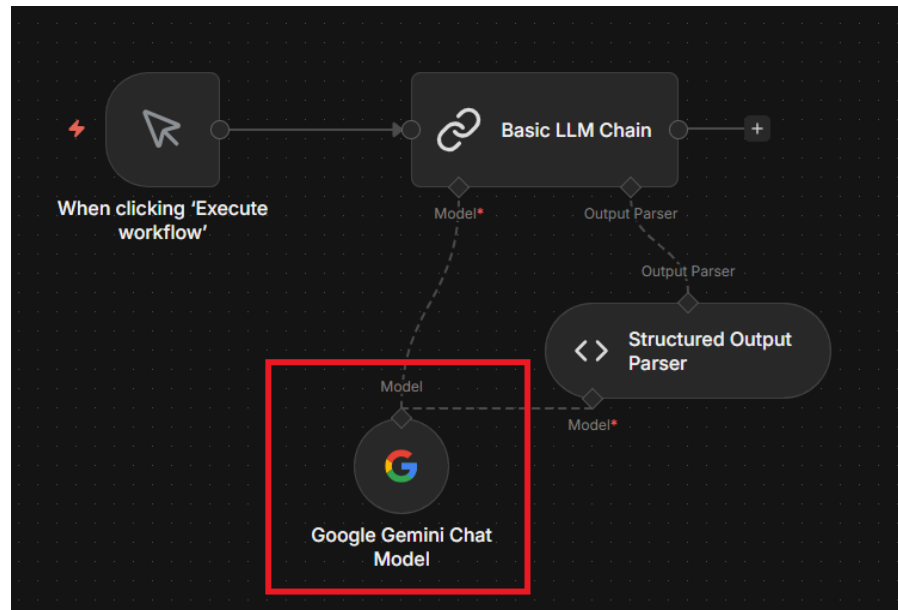

- a. Right click anywhere empty in the workstation, click Add Node then search for “Chat Model” to see all available chat models supported by n8n.
- b. Reconnect the Nodes properly in the same structure as before except Google Gemini Chat Model node is now replaced with the new Chat model.
- c. Open the node to set up credentials and select the model.
- d. Run ‘Execute Workflow’ to test the model. Check the output in the Basic LLM Chain node. The output should structurally look like this. The actual content may differ.

```
{
  "output": {
    "urgency": "high",
    "relationship": "external",
    "nature": "support",
    "timeSensitivity": "short",
    "shouldFollowUp": false,
    "recommendedDelayInDays": 0,
    "followupMessage": "",
    "reason": "The email provides a password reset link, which serves as the resolution to the user's request. According to the rules, a follow-up is not needed to confirm if the resolution was satisfactory. The recipient is expected to reply if they encounter any issues with the link or the reset process."
  }
}
```

- e. If the output looks different or node throws an error, it's possible that the model selected inside the node or the actual Chat Model node selected does not support JSON output, or your account does not have enough credits to successfully run the model. Either way, you may replace the model or Chat Model node with a different one.

6. Update “Followup prompt” workflow to use the same model.

Publishing Instructions:

1. Go back to the home page.
2. Before you publish workflows, update Schedule Trigger nodes for the following workflows, to use the desired time between triggers:
 - a. Check email
 - b. Check unprompted
 - c. Email followup checker
3. Start publishing workflows. To publish a workflow, open it and click “Publish” in the upper-right part of the page. The workflows should be published in this order:
 - a. Config
 - b. Redactor
 - c. Followup prompt
 - d. Record Data
 - e. Check Email
 - f. Email followup checker
 - g. Check Unprompted

By following these setup instructions, the Agent should be able to perform its tasks properly.