

SELENIUM AUTOMATION – 10 TEST CASES

TC-1: Open Online Shopping Website


Testcase

Customer opens the online shopping website.

Program

```
import time
from selenium import webdriver
from selenium.webdriver.common.by import By
driver = webdriver.Chrome()
driver.get("https://www.saucedemo.com/inventory.html")
driver.find_element(By.ID,"user-name").send_keys("standard_user")
driver.find_element(By.ID,"password").send_keys("secret_sauce")
driver.find_element(By.ID,"login-button").click()
time.sleep(10)
driver.quit()
```

Output:

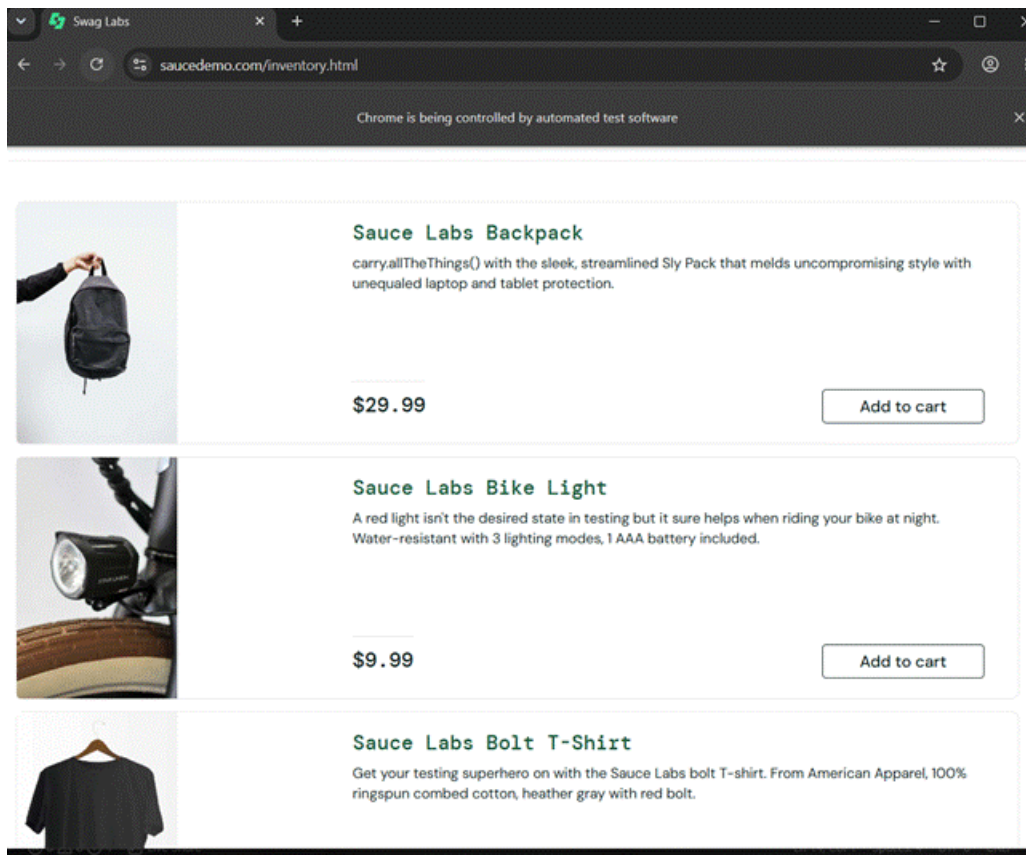

TC-2: Alert Accept

Testcase

Customer clicks Delete/Remove Product and the confirmation popup appears.

Program

```
import time
from selenium import webdriver
from selenium.webdriver.common.by import By

driver = webdriver.Chrome()

driver.get("https://www.tutorialspoint.com/selenium/practice/alerts.php")

driver.find_element(By.XPATH, "//button[@onclick='myDesk()']").click()

alert = driver.switch_to.alert

time.sleep(5)

alert.accept()

time.sleep(10)

driver.quit()
```

Output:



TC-3: Alert Dismiss

Testcase

Customer clicks Delete/Remove Product but chooses Cancel.

Program

```

import time
from selenium import webdriver
from selenium.webdriver.common.by import By
driver = webdriver.Chrome()
driver.get("https://www.tutorialspoint.com/selenium/practice/alerts.php")
driver.find_element(By.XPATH, "//button[@onclick='myDesk()']").click()
alert = driver.switch_to.alert
time.sleep(5)
alert.dismiss()
time.sleep(10)
driver.quit()

```

Output:



TC-4: Prompt Alert

Testcase

Customer enters a name/coupon/customer information in a prompt popup.

Program

```

import time
from selenium import webdriver
from selenium.webdriver.common.by import By

driver = webdriver.Chrome()

driver.get("https://www.tutorialspoint.com/selenium/practice/alerts.php")

driver.find_element(By.XPATH, "//button[@onclick='myPromp()']").click()
time.sleep(1)
alert = driver.switch_to.alert
alert.send_keys("DK")
time.sleep(10)

```

```
alert.accept()
time.sleep(2)
driver.quit()
```

Output:



TC-5: Mouse Hover

Testcase

Customer moves the mouse over the Products/Category menu.

Program

```
import time
from selenium import webdriver
from selenium.webdriver.common.by import By
from selenium.webdriver.common.action_chains import ActionChains

driver = webdriver.Chrome()

driver.get("https://demoqa.com/menu/")
time.sleep(5)

menu = driver.find_element(By.XPATH, "//a[text()='Main Item 2']")
actions = ActionChains(driver)
time.sleep(2)

actions.move_to_element(menu).perform()
time.sleep(3)
driver.quit()
```

Output:



TC-6: Double Click

Testcase

Customer double-clicks a product/button.

Program

```
import time
from selenium import webdriver
from selenium.webdriver.common.by import By
from selenium.webdriver.common.action_chains import ActionChains
driver = webdriver.Chrome()
driver.get("https://demoqa.com/buttons")
time.sleep(10)
button = driver.find_element(By.ID, "doubleClickBtn")
ActionChains(driver).double_click(button).perform()
time.sleep(10)
driver.quit()
```

Output:



TC-7: Drag and Drop

Testcase

Customer drags a product/item into a shopping cart area.

Program

```
import time
from selenium import webdriver
from selenium.webdriver.common.by import By
from selenium.webdriver.common.action_chains import ActionChains

driver = webdriver.Chrome()

driver.get("https://demoqa.com/droppable")
driver.maximize_window()

time.sleep(2)

source = driver.find_element(By.ID, "draggable")
target = driver.find_element(By.ID, "droppable")

time.sleep(3)
actions = ActionChains(driver)
actions.click_and_hold(source)
actions.move_to_element(target)
```

```
actions.release()
actions.perform()
time.sleep(3)
driver.quit()
```

Output:



TC-8: Explicit Wait

Testcase

Customer searches for a product and waits for the product results to load.

Program

```
import time

from selenium import webdriver
from selenium.webdriver.common.by import By
from selenium.webdriver.support.ui import WebDriverWait
from selenium.webdriver.support import expected_conditions as EC

driver = webdriver.Chrome()

driver.get("https://www.saucedemo.com/")

driver.find_element(By.ID, "user-name").send_keys("standard_user")
driver.find_element(By.ID, "password").send_keys("secret_sauce")
driver.find_element(By.ID, "login-button").click()
wait = WebDriverWait(driver, 10)
product = wait.until(EC.visibility_of_element_located((By.XPATH, "//div[text()='Sauce Labs Backpack']"))).click()
time.sleep(10)
driver.quit()
```

Output:



TC-9: Clickable Wait

Testcase

Customer completes checkout and waits until the Place Order/Finish button becomes clickable.

Program

```
import time

from selenium import webdriver
from selenium.webdriver.common.by import By
from selenium.webdriver.support.ui import WebDriverWait
from selenium.webdriver.support import expected_conditions as EC

driver = webdriver.Chrome()

driver.get("https://www.saucedemo.com/")

driver.find_element(By.ID, "user-name").send_keys("standard_user")
driver.find_element(By.ID, "password").send_keys("secret_sauce")
driver.find_element(By.ID, "login-button").click()

driver.find_element(By.ID, "add-to-cart-sauce-labs-backpack").click()
driver.find_element(By.CLASS_NAME, "shopping_cart_link").click()
driver.find_element(By.ID, "checkout").click()

time.sleep(5)

driver.find_element(By.ID, "first-name").send_keys("DK")
driver.find_element(By.ID, "last-name").send_keys("Test")
driver.find_element(By.ID, "postal-code").send_keys("600001")

driver.find_element(By.ID, "continue").click()

wait = WebDriverWait(driver, 10)

finish_button = wait.until(
    EC.element_to_be_clickable(
        (By.ID, "finish")
    )
)

finish_button.click()

time.sleep(2)

driver.quit()
```

Output:



TC-10: Alert Wait

Testcase

Customer completes the purchase and waits for the order confirmation popup.

Program

```
import time

from selenium import webdriver
from selenium.webdriver.common.by import By
from selenium.webdriver.support.ui import WebDriverWait
from selenium.webdriver.support import expected_conditions as EC

driver = webdriver.Chrome()

driver.get("https://www.tutorialspoint.com/selenium/practice/alerts.php")

driver.find_element(By.XPATH,"//button[@onclick='myMessage()']").click()

wait = WebDriverWait(driver, 10)

alert = wait.until(EC.alert_is_present())

time.sleep(5)

alert.accept()

time.sleep(5)

driver.quit()
```

Output:



GitHub Link: <https://github.com/Virumaaharish/Selenium-10-test-cases-test-practice>