

localhost:3000/borrower

Save | No Environment |

POST localhost:3000/borrower Send

Params Authorization Headers (9) Body Scripts Settings

Body (x-www-form-urlencoded) raw binary GraphQL

	Key	Value
<input checked="" type="checkbox"/>	fname	Aku
<input checked="" type="checkbox"/>	lname	Ankka
<input checked="" type="checkbox"/>	streetaddress	Paratiisikatu 13

Body Cookies Headers (7) Test Results Status: 200 OK Time: 13 ms Size: 343 B ...

Pretty Raw Preview JSON

```
1 {"fieldCount":0,"affectedRows":1,"insertId":1,"info":"","serverStatus":2,"warningStatus":0,"changedRows":0}
```

Tässä välissä lisäsin toisen akun jota muokata.

localhost:3000/borrower/2

Save | No Environment |

PUT localhost:3000/borrower/2 Send

Params Authorization Headers (9) Body Scripts Settings

Body (x-www-form-urlencoded) raw binary GraphQL

	Key	Value
<input checked="" type="checkbox"/>	fname	Roope
<input checked="" type="checkbox"/>	lname	Ankka
<input checked="" type="checkbox"/>	streetaddress	Rahasiilo
	Key	Value

Body Cookies Headers (7) Test Results Status: 200 OK Time: 11 ms Size: 383 B ...

Pretty Raw Preview JSON

```
1 {"fieldCount":0,"affectedRows":1,"insertId":0,"info":"Rows matched: 1  Changed: 0  Warnings: 0","serverStatus":2,"warningStatus":0,"changedRows":0}
```

The screenshot shows a browser window and a Postman interface side-by-side.

**Browser View:**

localhost:3000/borrower

Kaunista koodia

```
[  
  {  
    "fname": "Aku",  
    "lname": "Ankka",  
    "streetaddress": "Paratiisikatu 13",  
    "id_borrower": 1  
  },  
  {  
    "fname": "Roope",  
    "lname": "Ankka",  
    "streetaddress": "Rahasiilo",  
    "id_borrower": 2  
  }  
]
```

**Postman Request:**

localhost:3000/borrower/2

DELETE | localhost:3000/borrower/2 | Send

Params Authorization Headers (7) Body Scripts Settings

none  form-data  x-www-form-urlencoded  raw  binary  GraphQL


This request does not have a body

Body Cookies Headers (7) Test Results

Status: 200 OK Time: 11 ms Size: 343 B

Pretty Raw Preview JSON

```
1  [{"fieldCount":0,"affectedRows":1,"insertId":0,"info":null,"serverStatus":2,"warningStatus":0,"changedRows":0}]
```

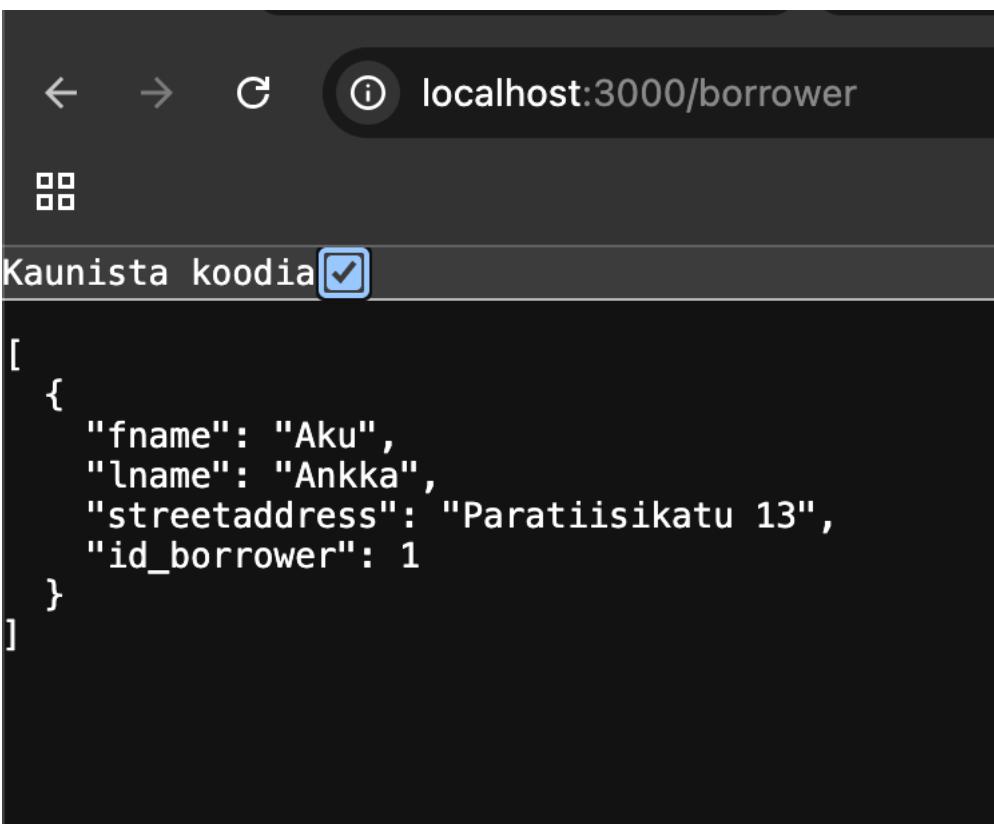

A screenshot of a terminal window with a dark background. At the top, there are navigation icons: a left arrow, a right arrow, a refresh symbol, and a circular icon with an 'i'. To the right of these is the text "localhost:3000/borrower". Below this, the terminal shows the command "Kaunista koodia" followed by a blue square icon containing a white checkmark. The main content is a JSON array [ ] containing one object { } with fields: "fname": "Aku", "lname": "Ankka", "streetaddress": "Paratiisikatu 13", and "id\_borrower": 1.

```
[{"fname": "Aku", "lname": "Ankka", "streetaddress": "Paratiisikatu 13", "id_borrower": 1}]
```