



EP. 4

THE FRONTEND INTERVIEW






Define box model

Every HTML element is considered to be wrapped inside a box that consists of margin, border, padding and the actual content.



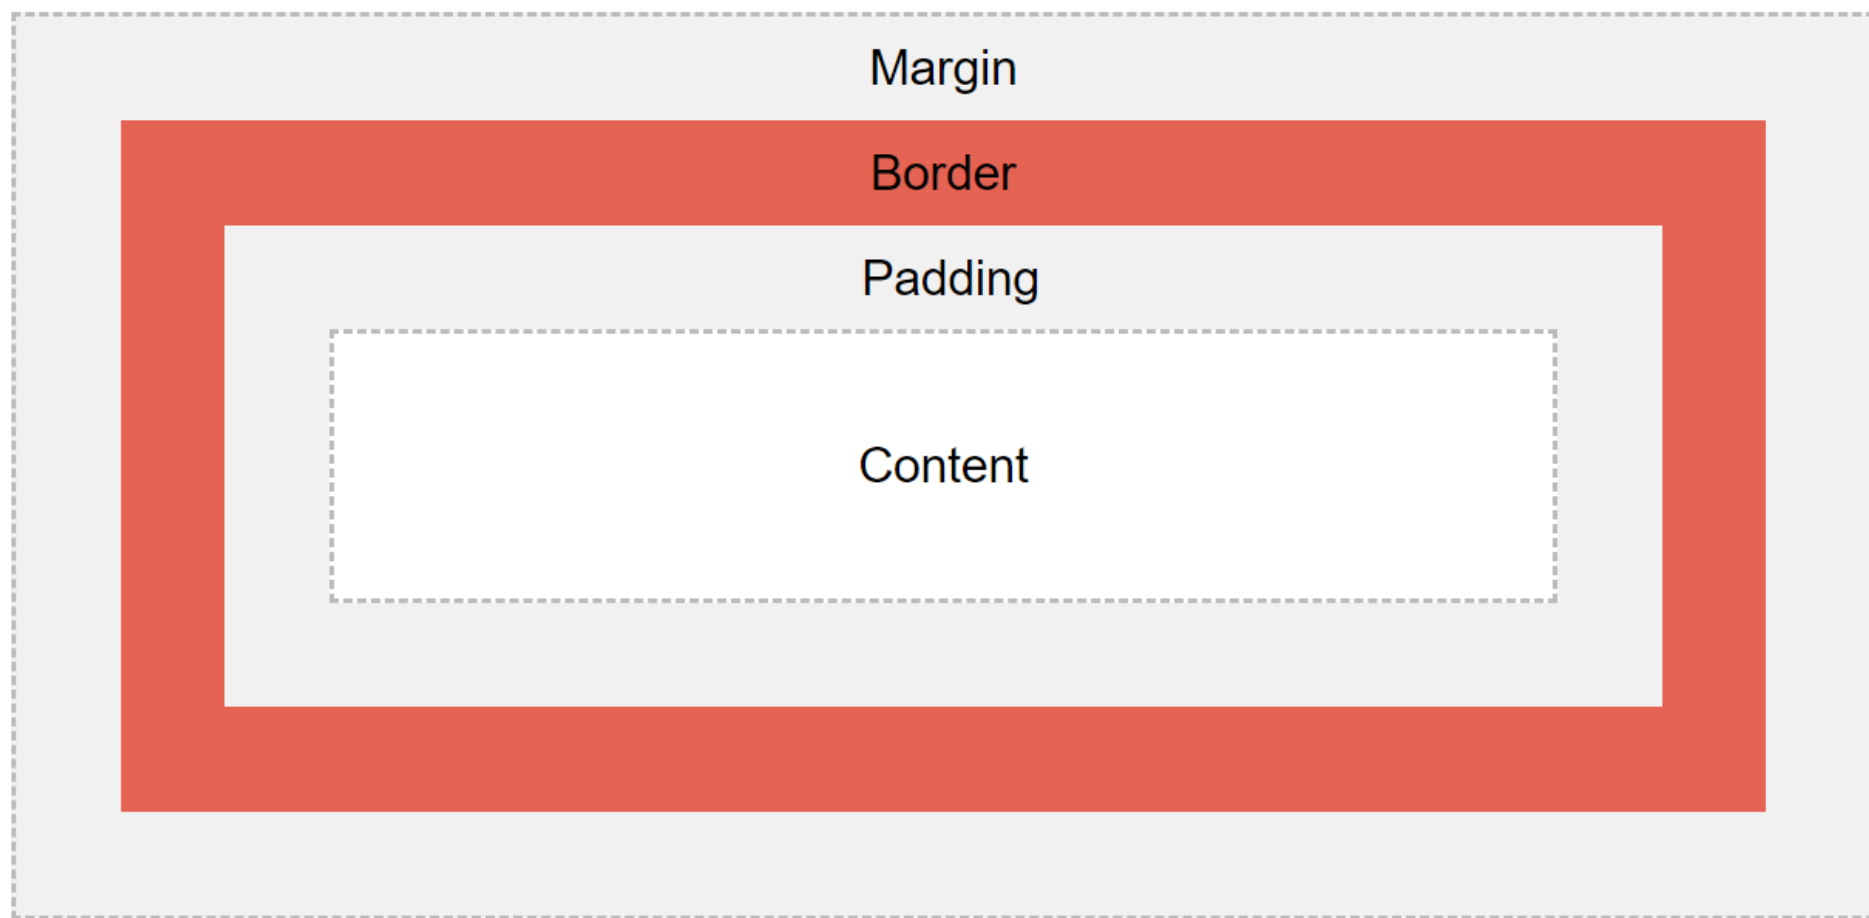



What is CSS selector?

CSS selectors are like element identifiers that you can use to find or select the HTML element that you want to style.





Okay, I want to apply red color to all the anchor tags in a web page which links to 'https://www.shahbazkhan.in' How can I achieve this?

You can directly use the anchor tag selector by specifying the link to apply the color as red alternatively you can use classes.





```
a[href="https://www.shahbazkhan.in"]  
{  
  color: red;  
}
```





What if I want to apply red color to all the anchor tags having .com domain?

In that case, you can use anchor tag selector and specify ".com" as the proceeding value along with * and apply the color as red.





```
a[href*=".com"]  
{  
  color: red;  
}
```





What is the difference between `display: none;` and `visibility: hidden;` ?

`display:none;` hides the html element from the viewport and the proceeding element takes its place whereas `visibilit:hidden;` hides the element but the element occupies its space.






TO BE CONTINUED...



LIKE



COMMENT



SHARE



SAVE FOR FUTURE REFERENCE