

Python For Data Science Cheat Sheet

Matplotlib

Learn Python Interactively at [www.DataCamp.com](https://www.datacamp.com)



Matplotlib

Matplotlib is a Python 2D plotting library which produces publication-quality figures in a variety of hardcopy formats and interactive environments across platforms.



1 Prepare The Data

Also see Lists & NumPy

1D Data

```
>>> import numpy as np
>>> x = np.linspace(0, 10, 100)
>>> y = np.cos(x)
>>> z = np.sin(x)
```

2D Data or Images

```
>>> data = 2 * np.random.random((10, 10))
>>> data2 = 3 * np.random.random((10, 10))
>>> Y, X = np.mgrid[-3:3:100j, -3:3:100j]
>>> U = -1 - X**2 + Y
>>> V = 1 + X - Y**2
>>> from matplotlib.cbook import get_sample_data
>>> img = np.load(get_sample_data('axes_grid/bivariate_normal.npy'))
```

2 Create Plot

```
>>> import matplotlib.pyplot as plt
```

Figure

```
>>> fig = plt.figure()
>>> fig2 = plt.figure(figsize=plt.figaspect(2.0))
```

Axes

All plotting is done with respect to an Axes. In most cases, a subplot will fit your needs. A subplot is an axes on a grid system.

```
>>> fig.add_axes()
>>> ax1 = fig.add_subplot(221) # row-col-num
>>> ax3 = fig.add_subplot(212)
>>> fig3, axes = plt.subplots(nrows=2,ncols=2)
>>> fig4, axes2 = plt.subplots(ncols=3)
```

3 Plotting Routines

1D Data

```
>>> fig, ax = plt.subplots()
>>> lines = ax.plot(x,y)
>>> ax.scatter(x,y)
>>> axes[0,0].bar([1,2,3],[3,4,5])
>>> axes[1,0].barh([0.5,1,2.5],[0,1,2])
>>> axes[1,1].axhline(0.45)
>>> axes[0,1].axvline(0.65)
>>> ax.fill(x,y,color='blue')
>>> ax.fill_between(x,y,color='yellow')
```

Draw points with lines or markers connecting them
Draw unconnected points, scaled or colored
Plot vertical rectangles (constant width)
Plot horizontal rectangles (constant height)
Draw a horizontal line across axes
Draw a vertical line across axes
Draw filled polygons
Fill between y-values and 0


2D Data or Images

```
>>> fig, ax = plt.subplots()
>>> im = ax.imshow(img,
                  cmap='gist_earth',
                  interpolation='nearest',
                  vmin=-2,
                  vmax=2)
```

Colormapped or RGB arrays

Plot Anatomy & Workflow

Plot Anatomy

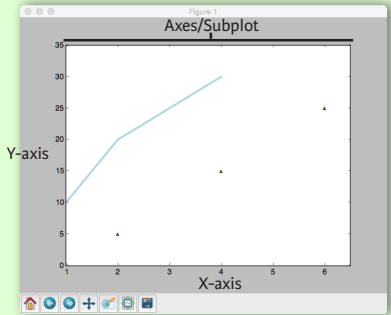

Workflow

The basic steps to creating plots with matplotlib are:

- 1 Prepare data
- 2 Create plot
- 3 Plot
- 4 Customize plot
- 5 Save plot
- 6 Show plot

```
>>> import matplotlib.pyplot as plt
>>> x = [1,2,3,4]
>>> y = [10,20,25,30]
>>> fig = plt.figure()
>>> ax = fig.add_subplot(111)
>>> ax.plot(x, y, color='lightblue', linewidth=3)
>>> ax.scatter([2,4,6],
              [5,15,25],
              color='darkgreen',
              marker='^')
>>> ax.set_xlim(1, 6.5)
>>> plt.savefig('foo.png')
>>> plt.show()
```

4 Customize Plot

Colors, Color Bars & Color Maps

```
>>> plt.plot(x, x, x, x**2, x, x**3)
>>> ax.plot(x, y, alpha = 0.4)
>>> ax.plot(x, y, c='k')
>>> fig.colorbar(im, orientation='horizontal')
>>> im = ax.imshow(img,
                  cmap='seismic')
```

Markers

```
>>> fig, ax = plt.subplots()
>>> ax.scatter(x,y,marker=".")
>>> ax.plot(x,y,marker="o")
```

Linestyles

```
>>> plt.plot(x,y,linewidth=4.0)
>>> plt.plot(x,y,ls='solid')
>>> plt.plot(x,y,ls='--')
>>> plt.plot(x,y,'--',x**2,y**2,'-.')
>>> plt.setp(lines,color='r',linewidth=4.0)
```

Text & Annotations

```
>>> ax.text(1,
          -2.1,
          'Example Graph',
          style='italic')
>>> ax.annotate("Sine",
               xy=(8, 0),
               xycoords='data',
               xytext=(10.5, 0),
               textcoords='data',
               arrowprops=dict(arrowstyle="->",
                              connectionstyle="arc3"),)
```

Mathtext

```
>>> plt.title(r'$\sigma_i=15$', fontsize=20)
```

Limits, Legends & Layouts

Limits & Autoscaling

```
>>> ax.margins(x=0.0,y=0.1)
>>> ax.axis('equal')
>>> ax.set(xlim=[0,10.5],ylim=[-1.5,1.5])
>>> ax.set_xlim(0,10.5)
```

Legends

```
>>> ax.set(title='An Example Axes',
          ylabel='Y-Axis',
          xlabel='X-Axis')
>>> ax.legend(loc='best')
```

Ticks

```
>>> ax.xaxis.set(ticks=range(1,5),
               ticklabels=[3,100,-12,"foo"])
>>> ax.tick_params(axis='y',
                  direction='inout',
                  length=10)
```

Subplot Spacing

```
>>> fig3.subplots_adjust(wspace=0.5,
                        hspace=0.3,
                        left=0.125,
                        right=0.9,
                        top=0.9,
                        bottom=0.1)
```

```
>>> fig.tight_layout()
```

Axis Spines

```
>>> ax1.spines['top'].set_visible(False)
>>> ax1.spines['bottom'].set_position(('outward',10))
```

Add padding to a plot
Set the aspect ratio of the plot to 1
Set limits for x-and y-axis
Set limits for x-axis

Set a title and x-and y-axis labels

No overlapping plot elements

Manually set x-ticks

Make y-ticks longer and go in and out

Adjust the spacing between subplots

Fit subplot(s) in to the figure area

Make the top axis line for a plot invisible
Move the bottom axis line outward

5 Save Plot

Save figures

```
>>> plt.savefig('foo.png')
```

Save transparent figures

```
>>> plt.savefig('foo.png', transparent=True)
```

6 Show Plot

```
>>> plt.show()
```

Close & Clear

```
>>> plt.cla()
>>> plt.clf()
>>> plt.close()
```

Clear an axis
Clear the entire figure
Close a window





Statistical Data Visualization With Seaborn

The Python visualization library **Seaborn** is based on **matplotlib** and provides a high-level interface for drawing attractive statistical graphics.

Make use of the following aliases to import the libraries:

```
>>> import matplotlib.pyplot as plt
>>> import seaborn as sns
```

The basic steps to creating plots with Seaborn are:

- 1. Prepare some data
- 2. Control figure aesthetics
- 3. Plot with Seaborn
- 4. Further customize your plot

```
>>> import matplotlib.pyplot as plt
>>> import seaborn as sns
>>> tips = sns.load_dataset("tips")
>>> sns.set_style("whitegrid")
>>> g = sns.lmplot(x="tip", y="total_bill", data=tips, aspect=2)
>>> g = (g.set_axis_labels("Tip", "Total bill (USD)")).set(xlim=(0,10),ylim=(0,100))
>>> plt.title("title")
>>> plt.show(g)
```

1 Data

Also see Lists, NumPy & Pandas

```
>>> import pandas as pd
>>> import numpy as np
>>> uniform_data = np.random.rand(10, 12)
>>> data = pd.DataFrame({'x':np.arange(1,101), 'y':np.random.normal(0,4,100)})
```

Seaborn also offers built-in data sets:

```
>>> titanic = sns.load_dataset("titanic")
>>> iris = sns.load_dataset("iris")
```

2 Figure Aesthetics

```
>>> f, ax = plt.subplots(figsize=(5,6))
```

Create a figure and one subplot

Seaborn styles

```
>>> sns.set()
>>> sns.set_style("whitegrid")
>>> sns.set_style("ticks", {'xtick.major.size':8, 'ytick.major.size':8})
>>> sns.axes_style("whitegrid")
```

(Re)set the seaborn default Set the matplotlib parameters Set the matplotlib parameters

Return a dict of params or use with to temporarily set the style

3 Plotting With Seaborn

Axis Grids

```
>>> g = sns.FacetGrid(titanic, col="survived", row="sex")
>>> g = g.map(plt.hist, "age")
>>> sns.factorplot(x="pclass", y="survived", hue="sex", data=titanic)
>>> sns.lmplot(x="sepal_width", y="sepal_length", hue="species", data=iris)
```

Subplot grid for plotting conditional relationships

Draw a categorical plot onto a Facetgrid

Plot data and regression model fits across a FacetGrid

Categorical Plots

```
Scatterplot
>>> sns.stripplot(x="species", y="petal_length", data=iris)
>>> sns.swarmplot(x="species", y="petal_length", data=iris)

Bar Chart
>>> sns.barpplot(x="sex", y="survived", hue="class", data=titanic)

Count Plot
>>> sns.countplot(x="deck", data=titanic, palette="Greens_d")

Point Plot
>>> sns.pointplot(x="class", y="survived", hue="sex", data=titanic, palette={"male": "g", "female": "m"}, markers=["^", "o"], linestyle=["-", "--"])

Boxplot
>>> sns.boxplot(x="alive", y="age", hue="adult_male", data=titanic)
>>> sns.boxplot(data=iris, orient="h")

Violinplot
>>> sns.violinplot(x="age", y="sex", hue="survived", data=titanic)
```

Scatterplot with one categorical variable

Categorical scatterplot with non-overlapping points

Show point estimates and confidence intervals with scatterplot glyphs

Show count of observations

Show point estimates and confidence intervals as rectangular bars

Boxplot

Boxplot with wide-form data

Violin plot

Context Functions

```
>>> sns.set_context("talk")
>>> sns.set_context("notebook", font_scale=1.5, rc={"lines.linewidth":2.5})
```

Set context to "talk" Set context to "notebook", scale font elements and override param mapping

Color Palette

```
>>> sns.set_palette("husl", 3)
>>> sns.color_palette("husl")
>>> flatui = ["#9b59b6", "#3498db", "#95a5a6", "#e74c3c", "#34495e", "#2ecc71"]
>>> sns.set_palette(flatui)
```

Define the color palette Use with with to temporarily set palette Set your own color palette

```
>>> h = sns.PairGrid(iris)
>>> h = h.map(plt.scatter)
>>> sns.pairplot(iris)
>>> i = sns.JointGrid(x="x", y="y", data=data)
>>> i = i.plot(sns.regplot, sns.distplot)
>>> sns.jointplot("sepal_length", "sepal_width", data=iris, kind='kde')
```

Subplot grid for plotting pairwise relationships Plot pairwise bivariate distributions Grid for bivariate plot with marginal univariate plots

Plot bivariate distribution

Regression Plots

```
>>> sns.regplot(x="sepal_width", y="sepal_length", data=iris, ax=ax)
```

Plot data and a linear regression model fit

Distribution Plots

```
>>> plot = sns.distplot(data.y, kde=False, color="b")
```

Plot univariate distribution

Matrix Plots

```
>>> sns.heatmap(uniform_data, vmin=0, vmax=1)
```

Heatmap

4 Further Customizations

Also see Matplotlib

Axisgrid Objects

```
>>> g.despine(left=True)
>>> g.set_ylabels("Survived")
>>> g.set_xticklabels(rotation=45)
>>> g.set_axis_labels("Survived", "Sex")
>>> h.set(xlim=(0,5), ylim=(0,5), xticks=[0,2.5,5], yticks=[0,2.5,5])
```

Remove left spine Set the labels of the y-axis Set the tick labels for x Set the axis labels

Set the limit and ticks of the x-and y-axis

Plot

```
>>> plt.title("A Title")
>>> plt.ylabel("Survived")
>>> plt.xlabel("Sex")
>>> plt.ylim(0,100)
>>> plt.xlim(0,10)
>>> plt.setp(ax, yticks=[0,5])
>>> plt.tight_layout()
```

Add plot title Adjust the label of the y-axis Adjust the label of the x-axis Adjust the limits of the y-axis Adjust the limits of the x-axis Adjust a plot property Adjust subplot params

5 Show or Save Plot

Also see Matplotlib

```
>>> plt.show()
>>> plt.savefig("foo.png")
>>> plt.savefig("foo.png", transparent=True)
```

Show the plot Save the plot as a figure Save transparent figure

Close & Clear

Also see Matplotlib

```
>>> plt.cla()
>>> plt.clf()
>>> plt.close()
```

Clear an axis Clear an entire figure Close a window



Bokeh


Learn Bokeh **Interactively** at [www.DataCamp.com](https://www.datacamp.com),
taught by Bryan Van de Ven, core contributor



Plotting With Bokeh

The Python interactive visualization library **Bokeh** enables high-performance visual presentation of large datasets in modern web browsers.

Bokeh's mid-level general purpose `bokeh.plotting` interface is centered around two main components: data and glyphs.



The basic steps to creating plots with the `bokeh.plotting` interface are:

1. Prepare some data:
2. Create a new plot
3. Add renderers for your data, with visual customizations
4. Specify where to generate the output
5. Show or save the results

```
>>> from bokeh.plotting import figure
>>> from bokeh.io import output_file, show
>>> x = [1, 2, 3, 4, 5]
>>> y = [6, 7, 2, 4, 5]
>>> p = figure(title="simple line example",
>>>             x_axis_label='x',
>>>             y_axis_label='y')
>>> p.line(x, y, legend="Temp.", line_width=2)
>>> output_file("lines.html")
>>> show(p)
```

Also see Lists, NumPy & Pandas

1 Data

Under the hood, your data is converted to Column Data Sources. You can also do this manually:

```
>>> import numpy as np
>>> import pandas as pd
>>> df = pd.DataFrame(np.array([[33.9, 4, 65, 'US'],
>>>                             [32.4, 4, 66, 'Asia'],
>>>                             [21.4, 4, 109, 'Europe']]
>>>                  columns=['mpg', 'cyl', 'hp', 'origin'],
>>>                  index=['Toyota', 'Fiat', 'Volvo'])
>>> from bokeh.models import ColumnDataSource
>>> cds_df = ColumnDataSource(df)
```

2 Plotting

```
>>> from bokeh.plotting import figure
>>> p1 = figure(plot_width=300, tools='pan, box_zoom')
>>> p2 = figure(plot_width=300, plot_height=300,
>>>             x_range=(0, 8), y_range=(0, 8))
>>> p3 = figure()
```

Glyphs

Scatter Markers

```
>>> p1.circle(np.array([1, 2, 3]), np.array([3, 2, 1]),
>>>           fill_color='white')
>>> p2.square(np.array([1.5, 3.5, 5.5]), [1, 4, 3],
>>>           color='blue', size=1)
```

Line Glyphs

```
>>> p1.line([1, 2, 3, 4], [3, 4, 5, 6], line_width=2)
>>> p2.multi_line(pd.DataFrame([[1, 2, 3], [5, 6, 7]]),
>>>               pd.DataFrame([[3, 4, 5], [3, 2, 1]]),
>>>               color="blue")
```

Customized Glyphs

Also see Data

Selection and Non-Selection Glyphs

```
>>> p = figure(tools='box_select')
>>> p.circle('mpg', 'cyl', source=cds_df,
>>>          selection_color='red',
>>>          nonselection_alpha=0.1)
```

Hover Glyphs

```
>>> from bokeh.models import HoverTool
>>> hover = HoverTool(tooltips=None, mode='vline')
>>> p3.add_tools(hover)
```

Colormapping

```
>>> from bokeh.models import CategoricalColorMapper
>>> color_mapper = CategoricalColorMapper(
>>>               factors=['US', 'Asia', 'Europe'],
>>>               palette=['blue', 'red', 'green'])
>>> p3.circle('mpg', 'cyl', source=cds_df,
>>>           color=dict(field='origin',
>>>                      transform=color_mapper),
>>>           legend='Origin')
```

Legend Location

Inside Plot Area

```
>>> p.legend.location = 'bottom_left'
```

Outside Plot Area

```
>>> from bokeh.models import Legend
>>> r1 = p2.asterisk(np.array([1, 2, 3]), np.array([3, 2, 1]))
>>> r2 = p2.line([1, 2, 3, 4], [3, 4, 5, 6])
>>> legend = Legend(items=[("One", [p1, r1]), ("Two", [r2])],
>>>                  location=(0, -30))
>>> p.add_layout(legend, 'right')
```

Legend Orientation

```
>>> p.legend.orientation = "horizontal"
>>> p.legend.orientation = "vertical"
```

Legend Background & Border

```
>>> p.legend.border_line_color = "navy"
>>> p.legend.background_fill_color = "white"
```

Rows & Columns Layout

Rows

```
>>> from bokeh.layouts import row
>>> layout = row(p1, p2, p3)
```

Columns

```
>>> from bokeh.layouts import columns
>>> layout = column(p1, p2, p3)
```

Nesting Rows & Columns

```
>>> layout = row(column(p1, p2), p3)
```

Grid Layout

```
>>> from bokeh.layouts import gridplot
>>> row1 = [p1, p2]
>>> row2 = [p3]
>>> layout = gridplot([[p1, p2], [p3]])
```

Tabbed Layout

```
>>> from bokeh.models.widgets import Panel, Tabs
>>> tab1 = Panel(child=p1, title="tab1")
>>> tab2 = Panel(child=p2, title="tab2")
>>> layout = Tabs(tabs=[tab1, tab2])
```

Linked Plots

Linked Axes

```
>>> p2.x_range = p1.x_range
>>> p2.y_range = p1.y_range
```

Linked Brushing

```
>>> p4 = figure(plot_width = 100,
>>>             tools='box_select, lasso_select')
>>> p4.circle('mpg', 'cyl', source=cds_df)
>>> p5 = figure(plot_width = 200,
>>>             tools='box_select, lasso_select')
>>> p5.circle('mpg', 'hp', source=cds_df)
>>> layout = row(p4, p5)
```

4 Output & Export

Notebook

```
>>> from bokeh.io import output_notebook, show
>>> output_notebook()
```

HTML

Standalone HTML

```
>>> from bokeh.embed import file_html
>>> from bokeh.resources import CDN
>>> html = file_html(p, CDN, "my_plot")
>>> from bokeh.io import output_file, show
>>> output_file('my_bar_chart.html', mode='cdn')
```

Components

```
>>> from bokeh.embed import components
>>> script, div = components(p)
```

PNG

```
>>> from bokeh.io import export_png
>>> export_png(p, filename="plot.png")
```

SVG

```
>>> from bokeh.io import export_svgs
>>> p.output_backend = "svg"
>>> export_svgs(p, filename="plot.svg")
```

5 Show or Save Your Plots

```
>>> show(p1)
>>> save(p1)
```

```
>>> show(layout)
>>> save(layout)
```

