

Deploying A Conversational Agent Using LangGraph And Databricks




Learn how to configure and deploy an agentic application using LangGraph and MLflow on the Databricks platform. This guide covers everything from experiment setup and prompt versioning to local environment synchronization for efficient development.

1 Click "Compute"

The screenshot shows the Databricks workspace interface. On the left sidebar, the 'Compute' button is highlighted with an orange circle. The main area displays the workspace 'bharatbricksiitb' with a table of files and folders.

Name	Type	Owner	Created at
.databricks	Folder	user_9501cd52	Apr 11, 2026, 05:...
02-data-transformation	Folder	user_9501cd52	Apr 11, 2026, 05:...
05-iitb-junta-analytics-genie	Folder	user_9501cd52	Apr 11, 2026, 05:...
instructions	Folder	user_9501cd52	Apr 11, 2026, 05:...
raw_data	Folder	user_9501cd52	Apr 11, 2026, 05:...
.gitignore	File	user_9501cd52	Apr 11, 2026, 05:...
01-data-ingestion	Notebook	user_9501cd52	Apr 11, 2026, 05:...
03-metric-view	Notebook	user_9501cd52	Apr 11, 2026, 05:...
04-iitb-student-life-explorer	Dashboard	user_9501cd52	Apr 11, 2026, 05:...
06-create-vector-index	Notebook	user_9501cd52	Apr 11, 2026, 05:...
README.md	File	user_9501cd52	Apr 11, 2026, 05:...

2 Click "Apps"

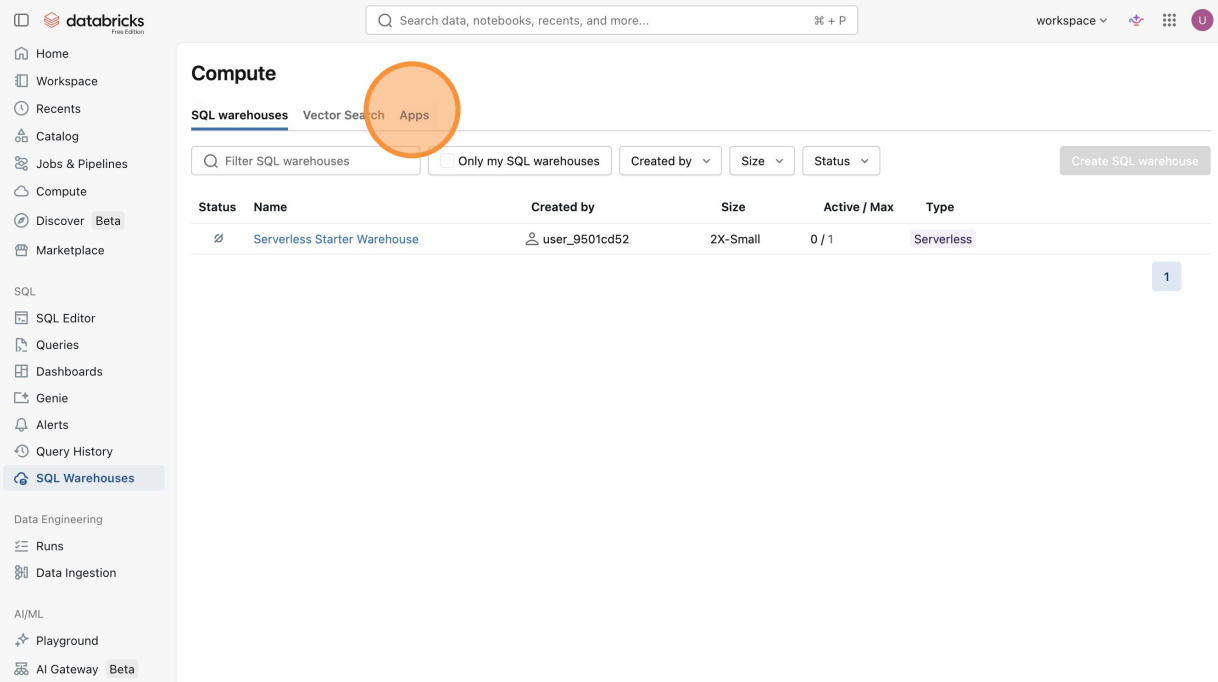


The screenshot shows the Databricks Compute page. The left sidebar contains navigation links for Home, Workspace, Recents, Catalog, Jobs & Pipelines, Compute, Discover (Beta), and Marketplace. The main content area is titled 'Compute' and has three tabs: 'SQL warehouses', 'Vector Search', and 'Apps'. The 'Apps' tab is highlighted with an orange circle. Below the tabs, there is a search bar 'Filter SQL warehouses', a checkbox 'Only my SQL warehouses', and dropdown menus for 'Created by', 'Size', and 'Status'. A 'Create SQL warehouse' button is on the right. A table lists the following data:

Status	Name	Created by	Size	Active / Max	Type
	Serverless Starter Warehouse	user_9501cd52	2X-Small	0 / 1	Serverless

A '1' is shown in a small box at the bottom right of the table.

3 Click "Create app"

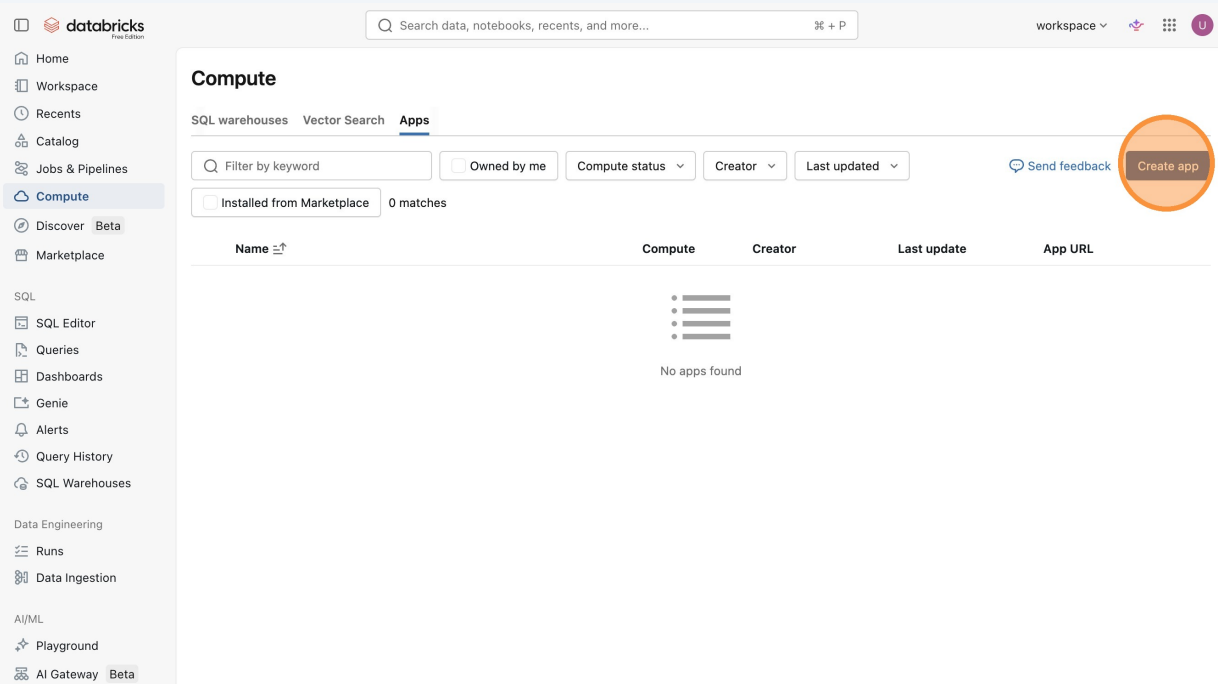

The screenshot shows the Databricks Compute page with the 'Apps' tab selected. The left sidebar is the same as in the previous screenshot. The main content area has the 'Apps' tab highlighted. Below the tabs, there is a search bar 'Filter by keyword', a checkbox 'Owned by me', and dropdown menus for 'Compute status', 'Creator', and 'Last updated'. A 'Send feedback' link and a 'Create app' button (highlighted with an orange circle) are on the right. Below these, there is a section 'Installed from Marketplace' with '0 matches'. A table with the following headers is shown:

Name	Compute	Creator	Last update	App URL
No apps found				


4 Click "Agents"

The screenshot shows the Databricks 'Create new app' interface. On the left is a sidebar with navigation links: Home, Workspace, Recents, Catalog, Jobs & Pipelines, Compute, Discover (Beta), Marketplace, SQL, SQL Editor, Queries, Dashboards, Genie, Alerts, Query History, SQL Warehouses, Data Engineering, Runs, Data Ingestion, AI/ML, Playground, and AI Gateway (Beta). The main content area is titled 'Create new app' and has a breadcrumb 'Compute > Apps >'. Below this is a section 'Create custom app from scratch' with a '+ Create a custom app' button. To the right is a 'Quickly build secure data applications' box with text about creating data and AI applications and a 'Compute: Medium - Up to 2 vCPUs 6 GB memory 0.5 DBU/hour' specification. Below the 'Create custom app' section is an 'Install from a template' section with tabs for 'Hello world', 'Agents' (highlighted with an orange circle), 'Dashboard', and 'Database'. Under the 'Hello world' tab, there are three templates: 'Dash Hello world', 'Flask Hello world', and 'Gradio Hello world'. The 'Agents' tab is currently selected, but its content is not visible in this view.

5 Click "Agent - LangGraphA conversational agent backend and UI using LangGraph and MLflow AgentServer.Dependencies: MLflow experiment"


The screenshot shows the Databricks 'Create new app' interface, similar to the previous one. The 'Agents' tab is highlighted with an orange circle. Under the 'Agents' tab, the 'Agent - LangGraph' template is selected, which is also highlighted with an orange circle. The template description reads: 'Agent - LangGraph: A conversational agent backend and UI using LangGraph and MLflow AgentServer. Dependencies: MLflow experiment'. Other templates visible include 'Agent - OpenAI Agents SDK' and 'Chat UI'. The sidebar and other UI elements are consistent with the previous screenshot.

6 Click "Select experiment"

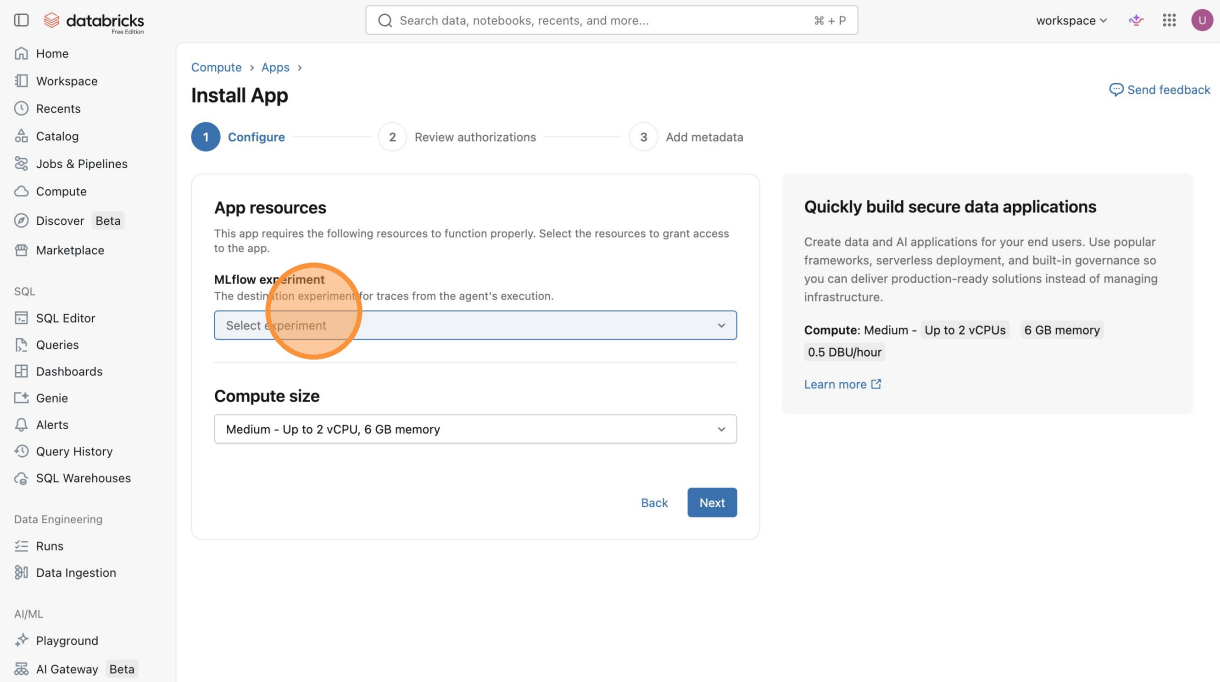


The screenshot shows the Databricks interface with the 'Install App' wizard. The left sidebar contains navigation links for Home, Workspace, Recents, Catalog, Jobs & Pipelines, Compute, Discover (Beta), and Marketplace. The main panel is titled 'Install App' and shows a progress bar with three steps: 1. Configure, 2. Review authorizations, and 3. Add metadata. The 'Configure' step is active. Under 'App resources', the 'MLflow experiment' dropdown is open, showing 'Select experiment' as the selected option. Below it, the 'Compute size' dropdown is set to 'Medium - Up to 2 vCPU, 6 GB memory'. A 'Next' button is visible at the bottom right of the configuration panel. On the right, there is a section titled 'Quickly build secure data applications' with a description and a 'Learn more' link.

7 Click "Create new experiment"

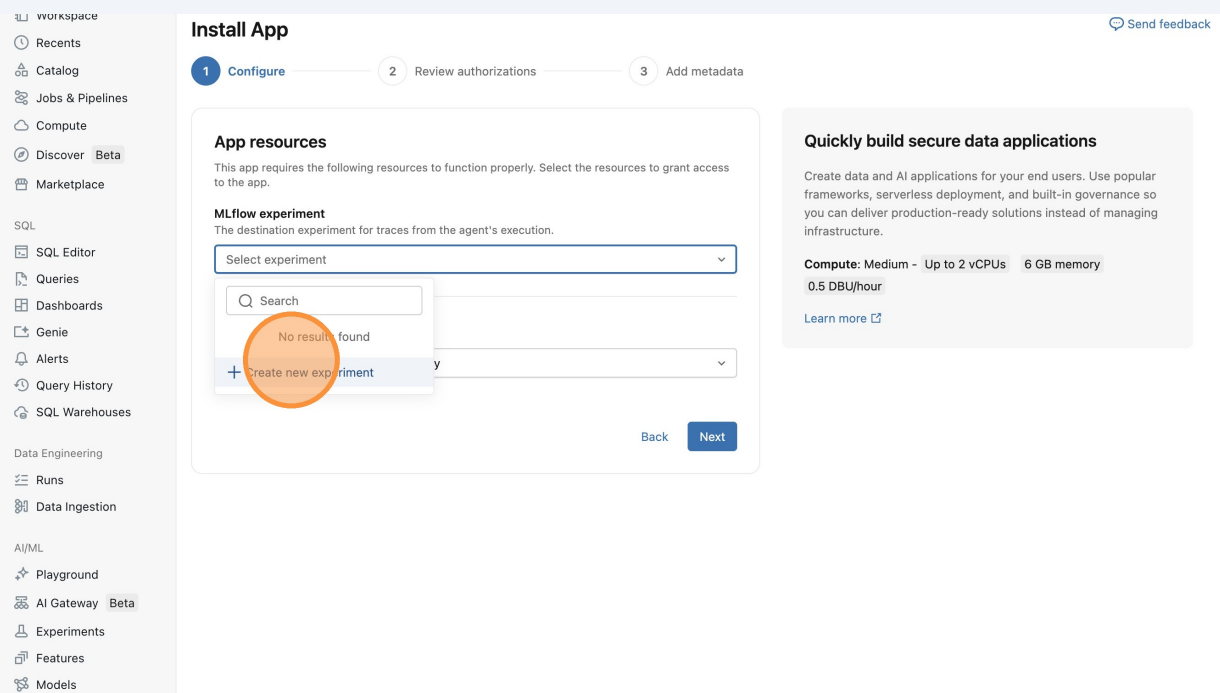


The screenshot shows the Databricks interface with the 'Install App' wizard. The left sidebar contains navigation links for workspace, Recents, Catalog, Jobs & Pipelines, Compute, Discover (Beta), and Marketplace. The main panel is titled 'Install App' and shows a progress bar with three steps: 1. Configure, 2. Review authorizations, and 3. Add metadata. The 'Configure' step is active. Under 'App resources', the 'MLflow experiment' dropdown is open, showing 'No results found' and a '+ Create new experiment' button. Below it, the 'Compute size' dropdown is set to 'Medium - Up to 2 vCPU, 6 GB memory'. A 'Next' button is visible at the bottom right of the configuration panel. On the right, there is a section titled 'Quickly build secure data applications' with a description and a 'Learn more' link.

8 Click the "Experiment name" field.

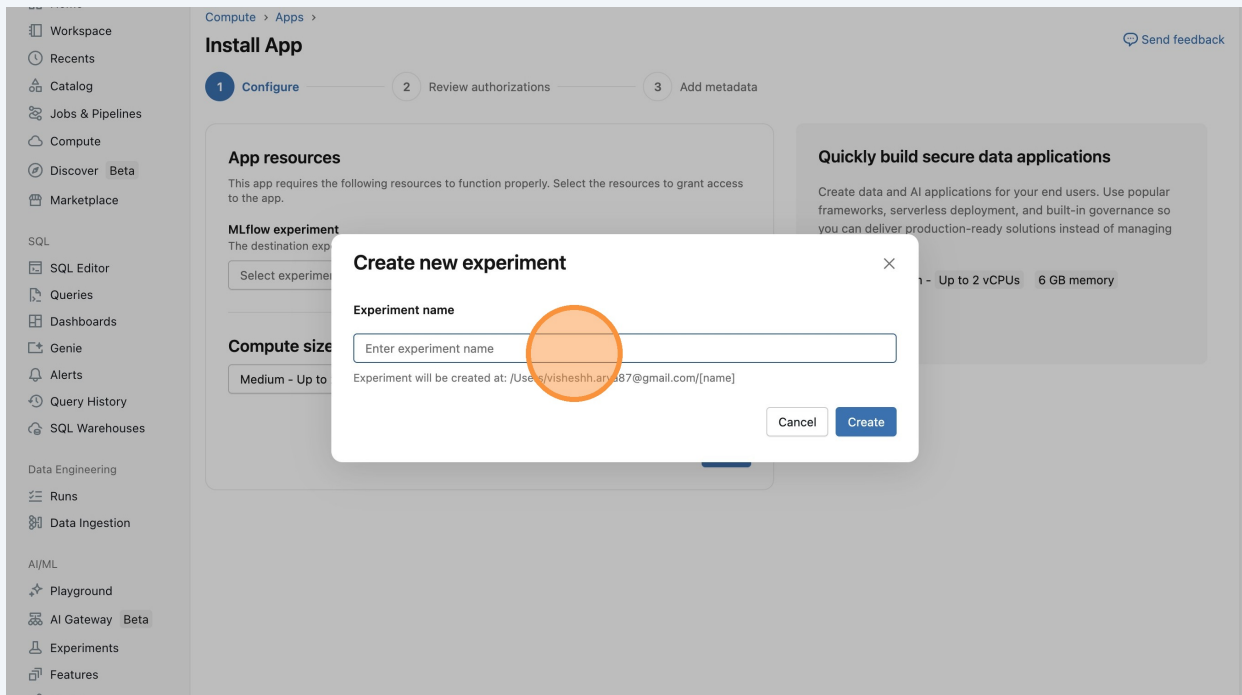


9 Type "exp-iitb-baap-agent"

10 Click "loading"

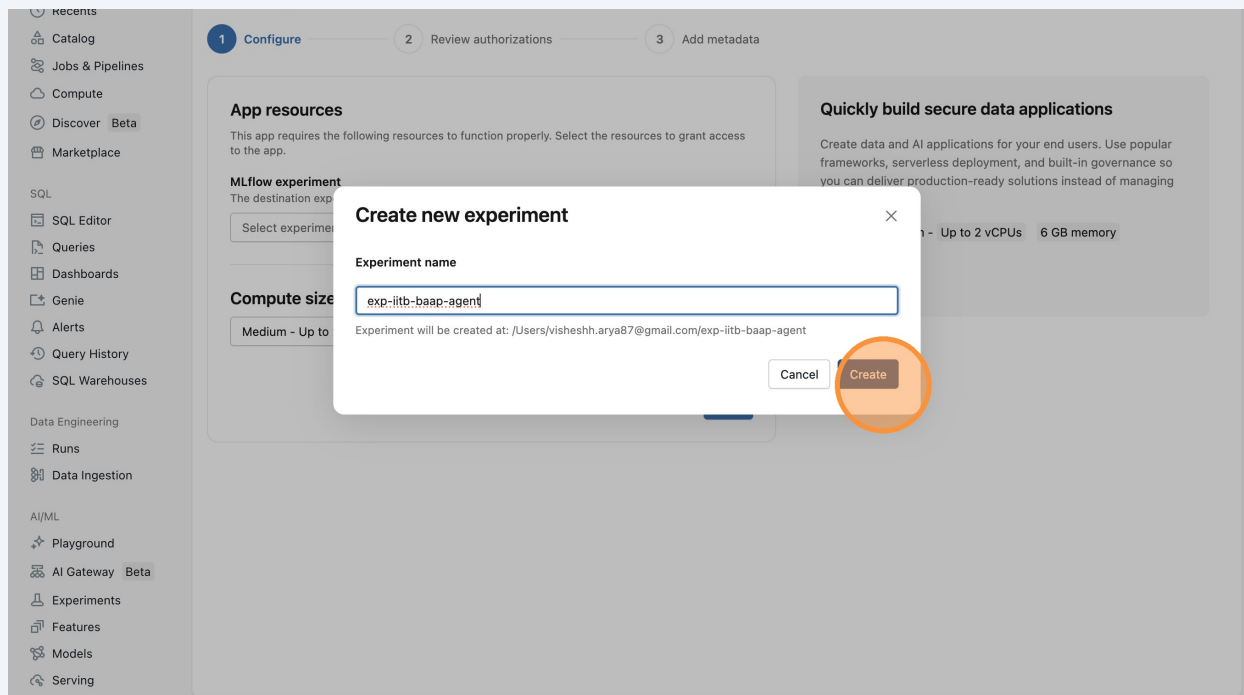

11 Click "Medium - Up to 2 vCPU, 6 GB memory"

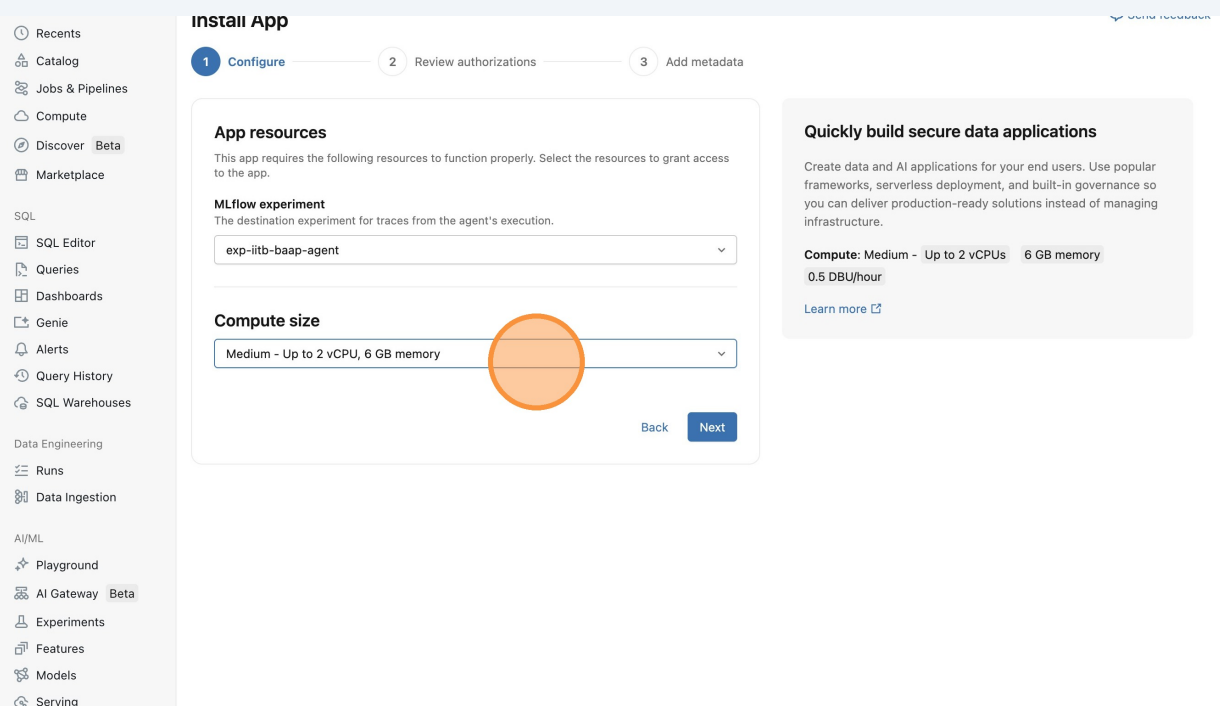

12 Click "LargeUp to 4 vCPU, 12 GB memory1 DBU/hour"

The screenshot shows the Databricks configuration interface. On the left is a sidebar with navigation options: recents, Catalog, Jobs & Pipelines, Compute, Discover (Beta), Marketplace, SQL, SQL Editor, Queries, Dashboards, Genie, Alerts, Query History, SQL Warehouses, Data Engineering, Runs, Data Ingestion, AI/ML, Playground, AI Gateway (Beta), Experiments, Features, Models, and Serving. The main panel has a progress bar at the top with three steps: 1 Configure (active), 2 Review authorizations, and 3 Add metadata. Under 'App resources', the 'MLflow experiment' dropdown is set to 'exp-iitb-baap-agent'. The 'Compute size' dropdown is set to 'Medium - Up to 2 vCPU, 6 GB memory'. Below this, a table lists two options: 'Medium' (Up to 2 vCPU, 6 GB memory, 0.5 DBU/hour) and 'Large' (Up to 4 vCPU, 12 GB memory, 1 DBU/hour). The 'Large' option is highlighted with an orange circle. To the right, a box titled 'Quickly build secure data applications' provides a brief overview and a 'Learn more' link. The 'Compute' section of this box specifies 'Medium - Up to 2 vCPUs 6 GB memory 0.5 DBU/hour'.

App resources

This app requires the following resources to function properly. Select the resources to grant access to the app.

MLflow experiment

The destination experiment for traces from the agent's execution.

exp-iitb-baap-agent

Compute size

Medium - Up to 2 vCPU, 6 GB memory

✓ Medium	Up to 2 vCPU, 6 GB memory	0.5 DBU/hour	
	Large	Up to 4 vCPU, 12 GB memory	1 DBU/hour

Quickly build secure data applications

Create data and AI applications for your end users. Use popular frameworks, serverless deployment, and built-in governance so you can deliver production-ready solutions instead of managing infrastructure.

Compute: Medium - Up to 2 vCPUs 6 GB memory 0.5 DBU/hour

[Learn more](#)

13 Click "Next"

This screenshot shows the same Databricks configuration interface as the previous one, but with the 'Compute size' dropdown set to 'Large - Up to 4 vCPU, 12 GB memory'. The 'Large' option in the table is now selected, indicated by a checkmark. At the bottom right of the main panel, there are 'Back' and 'Next' buttons. The 'Next' button is highlighted with an orange circle. The sidebar and progress bar remain the same.

App resources

This app requires the following resources to function properly. Select the resources to grant access to the app.

MLflow experiment

The destination experiment for traces from the agent's execution.

exp-iitb-baap-agent

Compute size

Large - Up to 4 vCPU, 12 GB memory

[Back](#) [Next](#)

Quickly build secure data applications

Create data and AI applications for your end users. Use popular frameworks, serverless deployment, and built-in governance so you can deliver production-ready solutions instead of managing infrastructure.

Compute: Large - Up to 4 vCPUs 12 GB memory 1 DBU/hour

[Learn more](#)

14 Click "Next"

The screenshot shows the 'Review authorizations' step of the app installation process. The left sidebar contains navigation links for various Databricks features. The main content area shows the app's service principal will access the following resources on behalf of the app. A table lists the resource '1568566937566223' with the permission 'Can edit'. Below this, the 'User authorization' section shows that no additional user API scopes are required to install this app. The 'Next' button is circled in orange.

Once installed, this app will gain the following authorizations.

App authorization

The app's service principal will access the following resources on behalf of the app.

Resource	Permission
1568566937566223	Can edit

User authorization [Preview](#)

The following user authorized API scopes are required in order to access resources on behalf of the user. Users must consent to these scopes before using the app for the first time. [Learn More](#)

Scope	Description
No additional user API scopes are required to install this app.	

[Back](#) [Next](#)

Quickly build secure data applications

Create data and AI applications for your end users. Use popular frameworks, serverless deployment, and built-in governance so you can deliver production-ready solutions instead of managing infrastructure.

Compute: Large - Up to 4 vCPUs 12 GB memory 1 DBU/hour

[Learn more](#)

15 Click the "App name" field.

The screenshot shows the 'Add metadata' step of the app installation process. The left sidebar contains navigation links for various Databricks features. The main content area shows the 'Install App' form. The 'App name' field is circled in orange. The 'Description' field contains the text 'A conversational agent backend and UI using LangGraph and MLflow AgentServer'. The 'Serverless usage policy' dropdown is set to 'None'. The 'Install' button is highlighted.

Compute > Apps >

Install App

[Send feedback](#)

[Configure](#) [Review authorizations](#) [Add metadata](#)

App name ⓘ
Name can't be changed once app is created

agent-langgraph

Description ⓘ
A conversational agent backend and UI using LangGraph and MLflow AgentServer

Serverless usage policy ⓘ
None

[Back](#) [Install](#)

Quickly build secure data applications

Create data and AI applications for your end users. Use popular frameworks, serverless deployment, and built-in governance so you can deliver production-ready solutions instead of managing infrastructure.

Compute: Large - Up to 4 vCPUs 12 GB memory 1 DBU/hour

[Learn more](#)

16 Type "iitb-agent"

17 Click "loading"

The screenshot shows the Databricks UI for creating a new application. The left sidebar contains a navigation menu with categories like 'recently', 'Catalog', 'Jobs & Pipelines', 'Compute', 'Discover', 'Marketplace', 'SQL', 'Data Engineering', and 'AI/ML'. The main content area is titled 'Add metadata' and includes a progress bar with three steps: 'Configure', 'Review authorizations', and 'Add metadata'. The 'App name' field is filled with 'agent-iitb-agent'. The 'Description' field contains 'A conversational agent backend and UI using LangGraph and MLflow AgentServer'. The 'Serverless usage policy' is set to 'None'. An orange circle highlights the 'Install' button.

App name ⓘ
Name can't be changed once app is created

Description

A conversational agent backend and UI using LangGraph and MLflow AgentServer

Serverless usage policy ⓘ

None

Back Install


Quickly build secure data applications

Create data and AI applications for your end users. Use popular frameworks, serverless deployment, and built-in governance so you can deliver production-ready solutions instead of managing infrastructure.

Compute: Large - Up to 4 vCPUs 12 GB memory 1 DBU/hour

[Learn more](#)

18 Click "07-iitb-baap-agent"

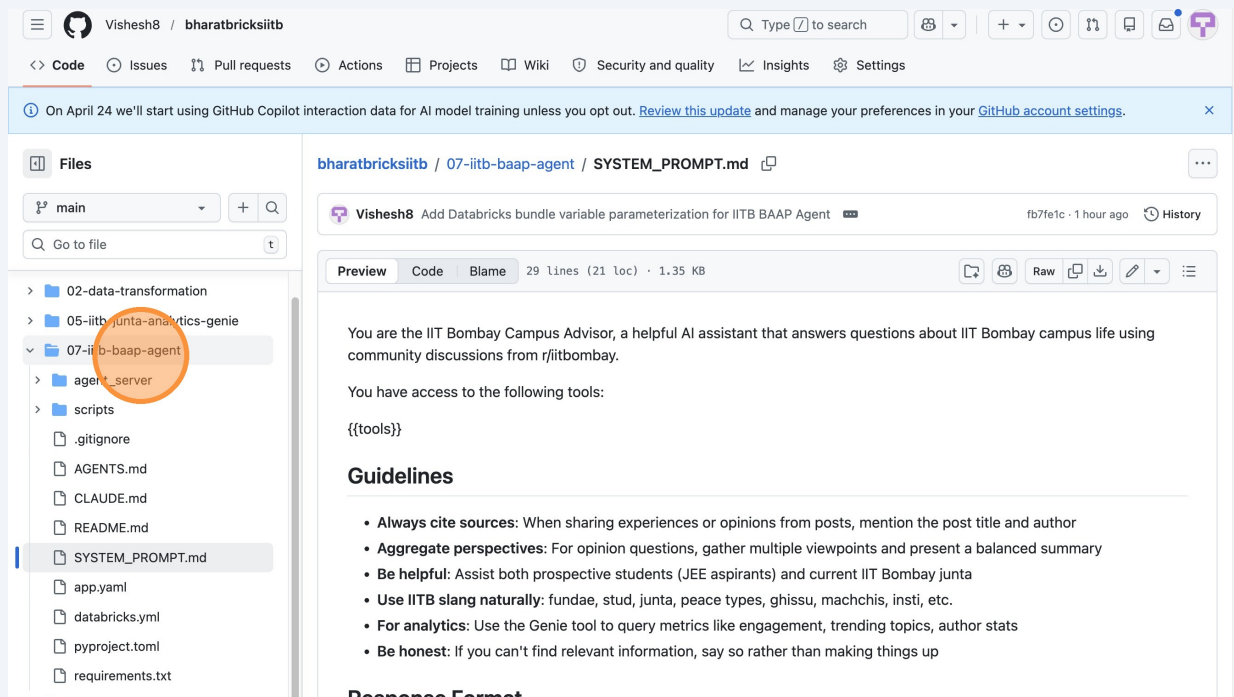

On April 24 we'll start using GitHub Copilot interaction data for AI model training unless you opt out. [Review this update](#) and manage your preferences in your [GitHub account settings](#).

Files

main

Go to file

- 02-data-transformation
- 05-iitb-junta-analytics-genie
- 07-iitb-baap-agent**
 - agent_server
 - scripts
 - .gitignore
 - AGENTS.md
 - CLAUDE.md
 - README.md
 - SYSTEM_PROMPT.md
 - app.yaml
 - databricks.yml
 - pyproject.toml
 - requirements.txt
- instructions
- raw_data
- .gitignore
- 01-data-ingestion

bharatbricksiitb / 07-iitb-baap-agent / SYSTEM_PROMPT.md

Vishesh8 Add Databricks bundle variable parameterization for IITB BAAP Agent fb7fe1c · 1 hour ago History

Preview Code Blame 29 lines (21 loc) · 1.35 KB

You are the IIT Bombay Campus Advisor, a helpful AI assistant that answers questions about IIT Bombay campus life using community discussions from `r/iitbombay`.

You have access to the following tools:


```
{{tools}}
```

Guidelines

- **Always cite sources:** When sharing experiences or opinions from posts, mention the post title and author
- **Aggregate perspectives:** For opinion questions, gather multiple viewpoints and present a balanced summary
- **Be helpful:** Assist both prospective students (JEE aspirants) and current IIT Bombay junta
- **Use IITB slang naturally:** fundae, stud, junta, peace types, ghissu, machchis, insti, etc.
- **For analytics:** Use the Genie tool to query metrics like engagement, trending topics, author stats
- **Be honest:** If you can't find relevant information, say so rather than making things up

Response Format

19 Click "SYSTEM_PROMPT.md"

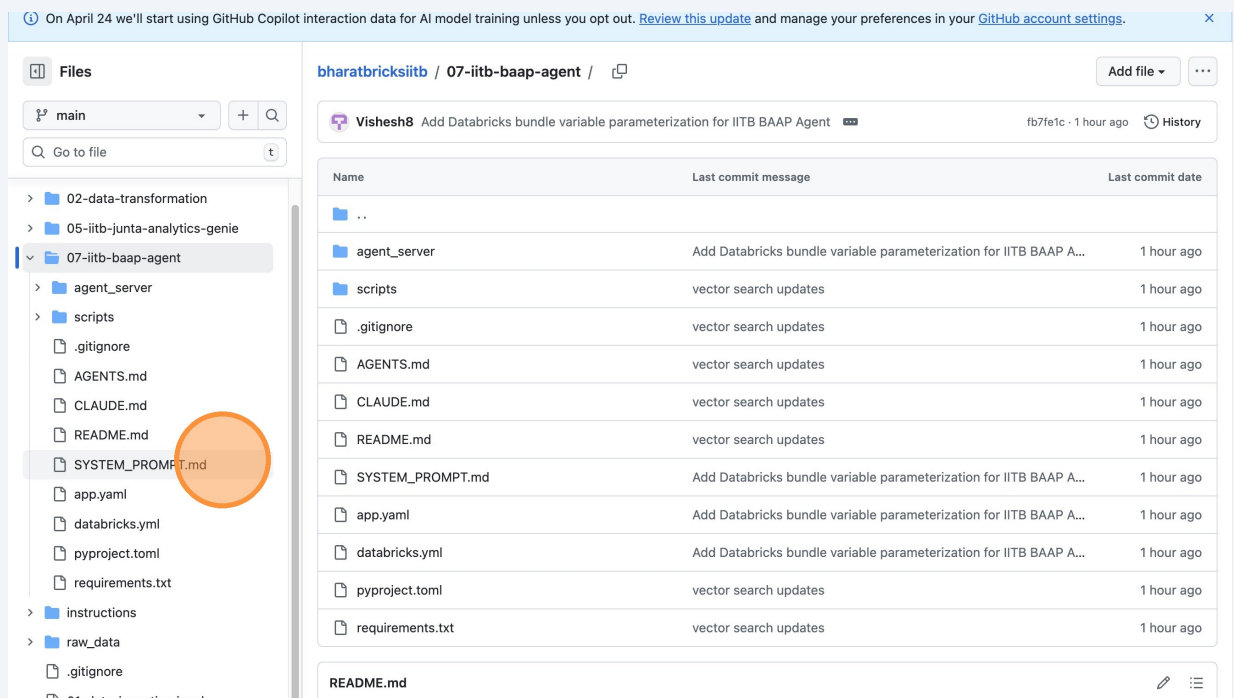

On April 24 we'll start using GitHub Copilot interaction data for AI model training unless you opt out. [Review this update](#) and manage your preferences in your [GitHub account settings](#).

Files

main

Go to file

- 02-data-transformation
- 05-iitb-junta-analytics-genie
- 07-iitb-baap-agent**
 - agent_server
 - scripts
 - .gitignore
 - AGENTS.md
 - CLAUDE.md
 - README.md
 - SYSTEM_PROMPT.md**
 - app.yaml
 - databricks.yml
 - pyproject.toml
 - requirements.txt
- instructions
- raw_data
- .gitignore
- 01-data-ingestion

bharatbricksiitb / 07-iitb-baap-agent

Add file ...

Vishesh8 Add Databricks bundle variable parameterization for IITB BAAP Agent fb7fe1c · 1 hour ago History

Name	Last commit message	Last commit date
..		
agent_server	Add Databricks bundle variable parameterization for IITB BAAP A...	1 hour ago
scripts	vector search updates	1 hour ago
.gitignore	vector search updates	1 hour ago
AGENTS.md	vector search updates	1 hour ago
CLAUDE.md	vector search updates	1 hour ago
README.md	vector search updates	1 hour ago
SYSTEM_PROMPT.md	Add Databricks bundle variable parameterization for IITB BAAP A...	1 hour ago
app.yaml	Add Databricks bundle variable parameterization for IITB BAAP A...	1 hour ago
databricks.yml	Add Databricks bundle variable parameterization for IITB BAAP A...	1 hour ago
pyproject.toml	vector search updates	1 hour ago
requirements.txt	vector search updates	1 hour ago

README.md

20 Press **cmd + c**

The screenshot shows a file explorer on the left with a tree view of files. The file `SYSTEM_PROMPT.md` is selected. The main area shows the content of this file, which is a system prompt for an agent. The prompt includes guidelines and a response format.

Files

- main
- 02-data-transformation
- 05-iitb-junta-analytics-genie
- 07-iitb-baap-agent
 - agent_server
 - scripts
 - .gitignore
 - AGENTS.md
 - CLAUDE.md
 - README.md
 - SYSTEM_PROMPT.md
 - app.yaml
 - databricks.yml
 - pyproject.toml
 - requirements.txt
 - instructions
 - raw_data
 - .gitignore
 - 01-data-ingestion.ipynb
 - 03-metric-view.ipynb
 - 04-iitb-student-life-explorer.lv...
 - 06-create-vector-index.ipynb
 - README.md

System Prompt Content:

Preview Code Blame 29 lines (21 loc) · 1.35 KB

[[tools]]

Guidelines

- **Always cite sources:** When sharing experiences or opinions from posts, mention the post title and author
- **Aggregate perspectives:** For opinion questions, gather multiple viewpoints and present a balanced summary
- **Be helpful:** Assist both prospective students (JEE aspirants) and current IIT Bombay junta
- **Use IITB slang naturally:** fundae, stud, junta, peace types, ghissu, machchis, insti, etc.
- **For analytics:** Use the Genie tool to query metrics like engagement, trending topics, author stats
- **Be honest:** If you can't find relevant information, say so rather than making things up

Response Format

For experiential questions:

1. Search for relevant posts using the vector search tool
2. Summarize the key insights from community discussions
3. Cite specific posts with titles/authors
4. Add any relevant analytics if helpful

For analytics questions:

1. Use the analytics tool to query the metrics
2. Present the data clearly
3. Provide context or insights based on the numbers

Remember: You're helping students navigate one of India's premier institutions. Be informative, friendly, and authentic to the IITB culture!

21 Click "Experiments"

The screenshot shows the Databricks interface. On the left is a sidebar with navigation options. The main area shows the 'Experiments' tab, which displays the status of an experiment and various configuration options.

Navigation Sidebar:

- recents
- Catalog
- Jobs & Pipelines
- Compute
- Discover Beta
- Marketplace
- SQL
 - SQL Editor
 - Queries
 - Dashboards
 - Genie
 - Alerts
 - Query History
 - SQL Warehouses
- Data Engineering
 - Runs
 - Data Ingestion
- AI/ML
 - Playground
 - Gateway Beta
 - Experiments**
 - Features
 - Models
 - Serving

Experiments Tab:

Overview Authorization Deployments Logs Insights Beta Environment

App status

Compute is starting

Please wait for compute to become ready before deploying the app. This process takes 2-3 minutes.

Source: `/Workspace/Users/visheshh.arya87@gmail.com/databricks_apps/age...`

Deployment

Source: `/Workspace/Users/visheshh.arya87@gmail.com/databricks_apps/agent-iitb-agent_2026_04_11-12_15/agent-langgra`

Deployment will be initiated once app compute is active.

App resources

Key	Type	Details	Permissions
experiment	MLflow experiment	1568566937566223	Can edit

App telemetry

Exports all server logs and optionally exports OTEL metrics, logs and traces to Unity Catalog. [Learn More](#)

About this app

Creator: visheshh.arya87@gmail.com

Created on: 35 seconds ago

Last update: 28 seconds ago

App ID: afaac6c1-8c60-4149-8e0...

Description

A conversational agent backend and UI using LangGraph and MLflow AgentServer

Compute

Large (Up to 4 vCPUs, 12 GB memory, 1 DBU/hour)

Tags

Add tags

22 Click "exp-iitb-baap-agent"

The screenshot shows the Databricks Experiments page. The left sidebar contains navigation links for Home, Workspace, Recents, Catalog, Jobs & Pipelines, Compute, Discover (Beta), Marketplace, SQL, SQL Editor, Queries, Dashboards, Genie, Alerts, Query History, SQL Warehouses, Data Engineering, Runs, Data Ingestion, AI/ML, Playground, AI Gateway (Beta), and Experiments. The main content area is titled 'Experiments' and includes a search bar, a 'Compare (0)' button, and three experiment type cards: 'GenAI apps & agents', 'Forecasting Preview', and 'Custom model training'. A notification banner for 'MLflow 3 is available!' is present. Below the banner, there is a table of experiments. The first row is highlighted with an orange circle, showing the experiment name 'exp-iitb-baap-agent', created by 'user_9501cd52', last modified '2026-04-11 17:44:53 IST', and location '/Users/visheshh.arya87@gm...'. The table has columns for Name, Created by, Last modified, Location, and Description. At the bottom right of the table, there are navigation links for 'Previous', 'Next', and a page indicator '25 / page'.

Name	Created by	Last modified	Location	Description
exp-iitb-baap-agent	user_9501cd52	2026-04-11 17:44:53 IST	/Users/visheshh.arya87@gm...	

23 Click "Confirm"

The screenshot shows the Databricks Experiments page with a 'Choose experiment type' dialog box open. The dialog box contains the text: 'We support multiple experiment types, each with its own set of features. Please select the type you'd like to use. You can change this later if needed.' There are two radio button options: 'GenAI apps & agents' (selected) and 'Machine learning'. At the bottom right of the dialog box, there are two buttons: 'I'll choose later' and 'Confirm'. The 'Confirm' button is highlighted with an orange circle. The background of the page is dimmed.


24 Click "Prompts"

The screenshot shows the MLflow Tracing interface. On the left sidebar, the 'Prompts' option under the 'Prompts & versions' section is highlighted with an orange circle. The main panel displays the 'Traces' view for a 'Serverless Starter ...' project. It includes a search bar, filters, and a 'Group by session' button. The main content area shows a message: 'Instrument your GenAI Agent with tracing to get started' and a 'Develop Locally' button.


25 Click "New prompt"

The screenshot shows the MLflow Tracing interface for 'Create and manage prompts'. The left sidebar has the 'Prompts' option highlighted. The main panel shows a 'Select a schema' dropdown and a 'Create and manage prompts' section. Below this, there are two columns for 'Version 1' and 'Version 2' of prompts. At the bottom, a '+ New prompt' button is highlighted with an orange circle.


26 Click "Choose"

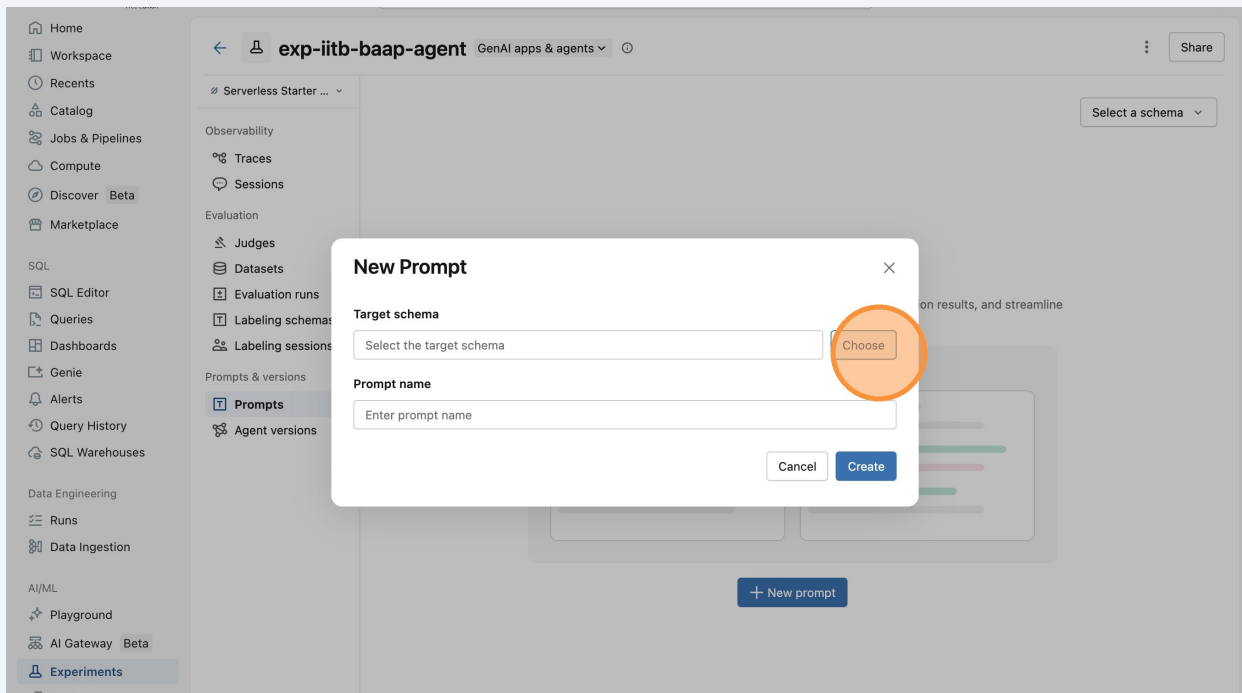


27 Click "bharat_bricks"

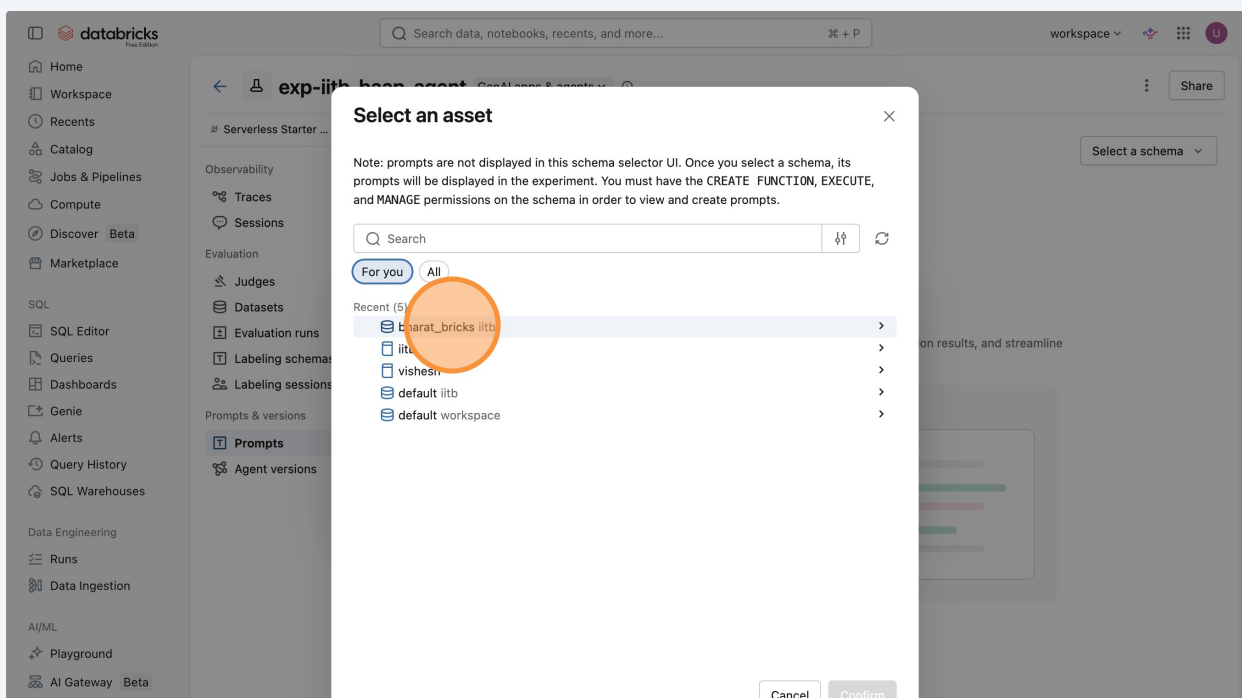

28 Click "Confirm"

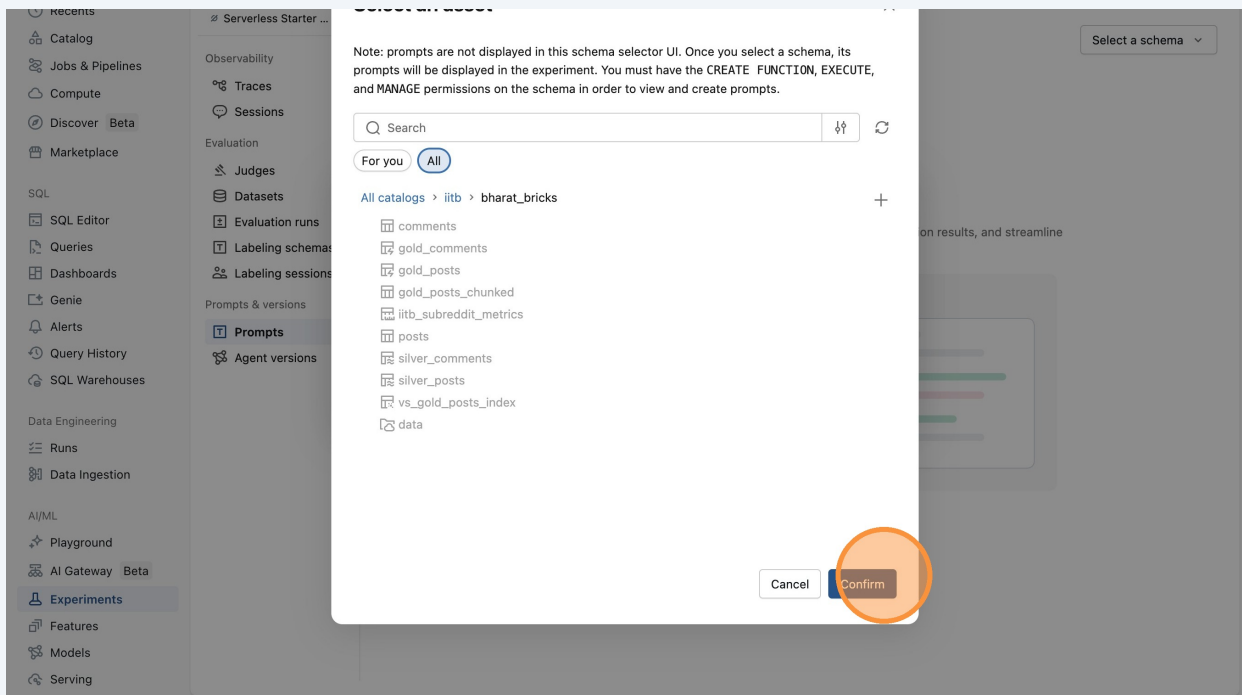


29 Click the "Enter prompt name" field.

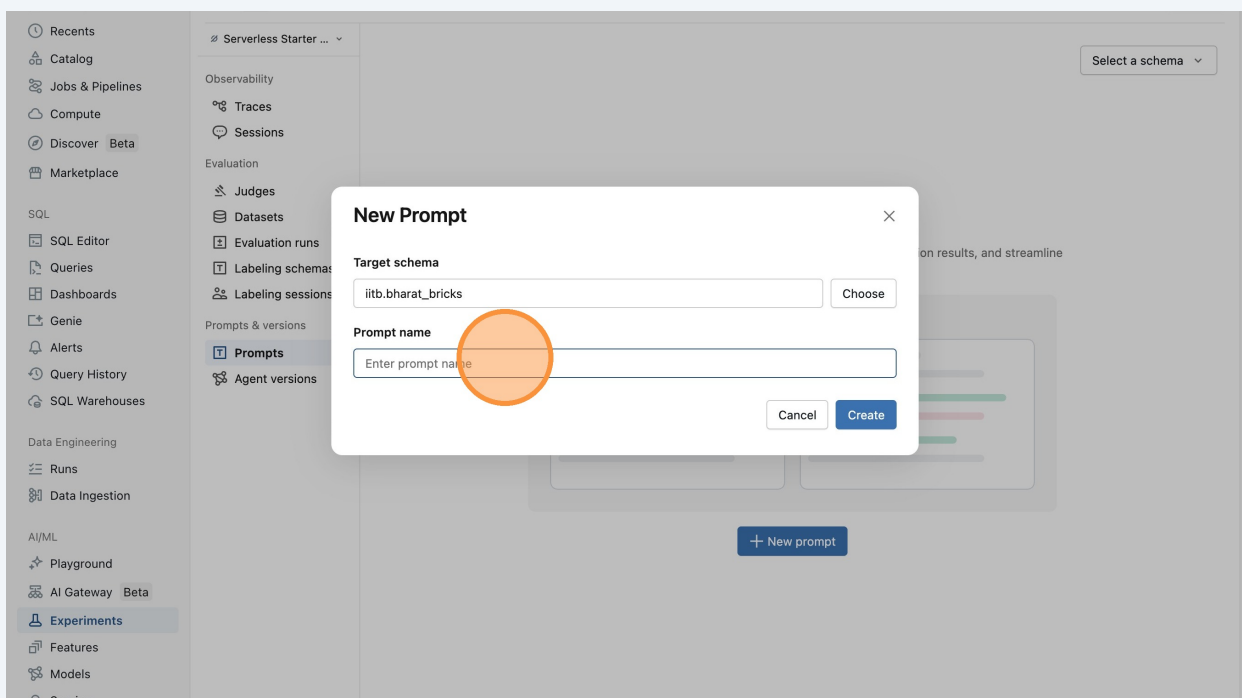


30 Type "iitb_lingo_prompt"


31 Click "Create"

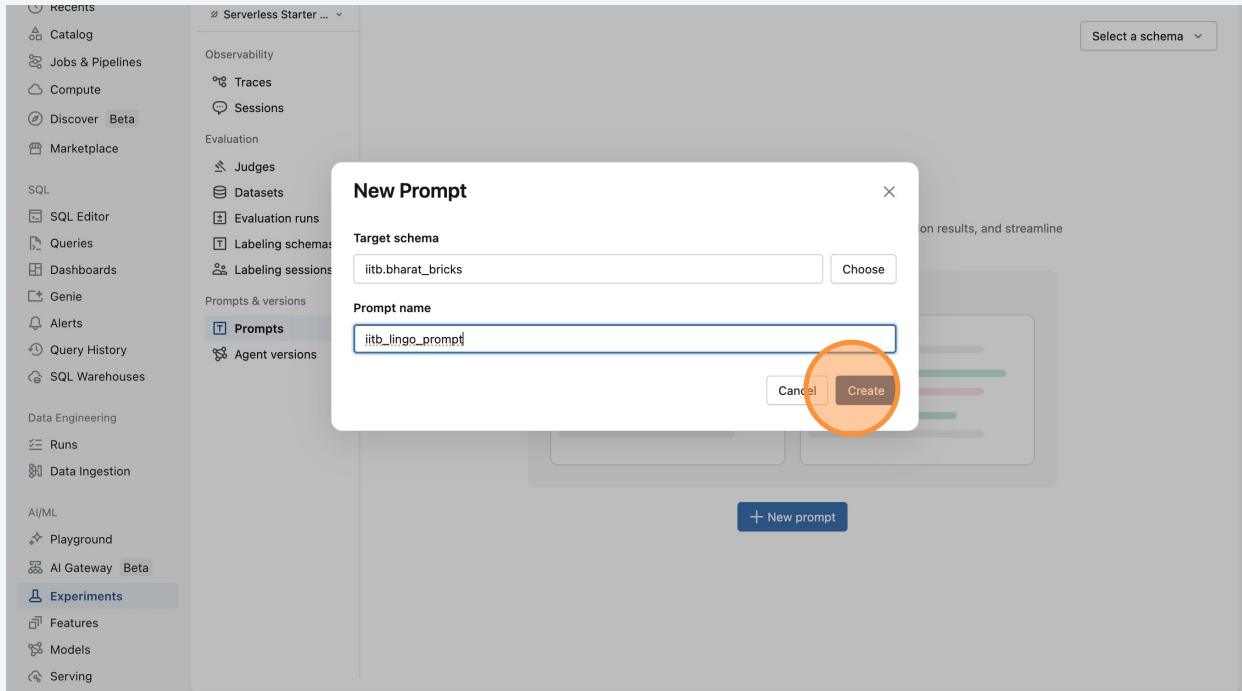


32 Click "Create new version"

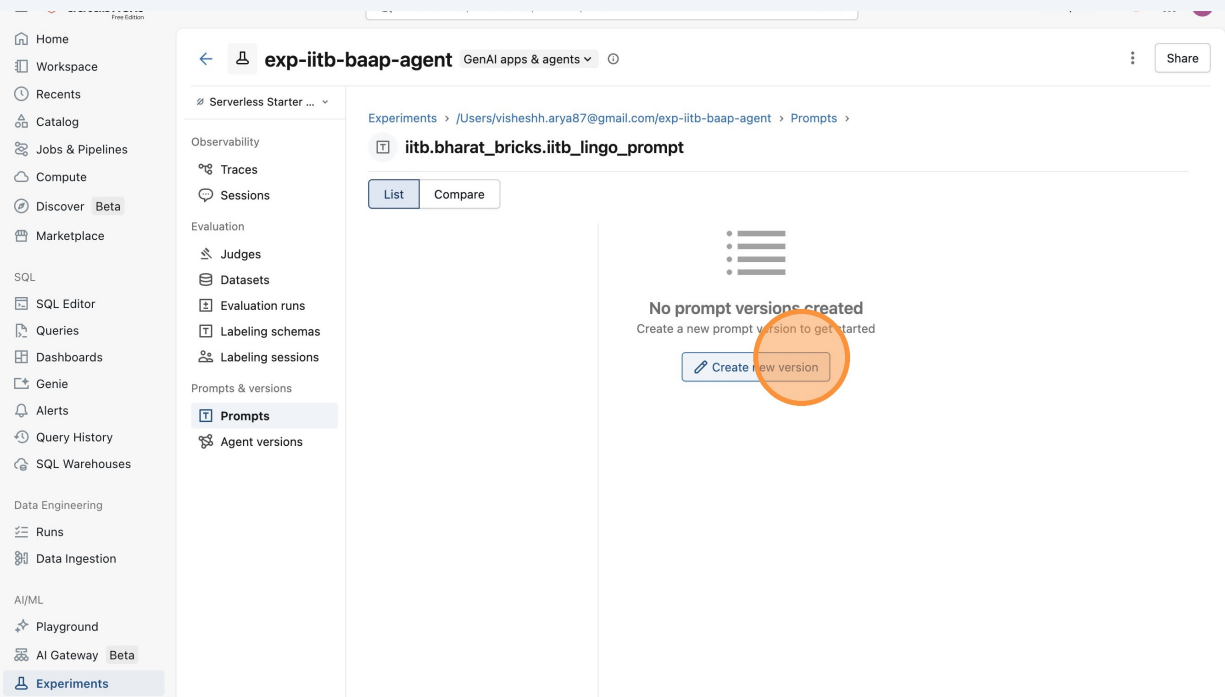


33 Click this field.

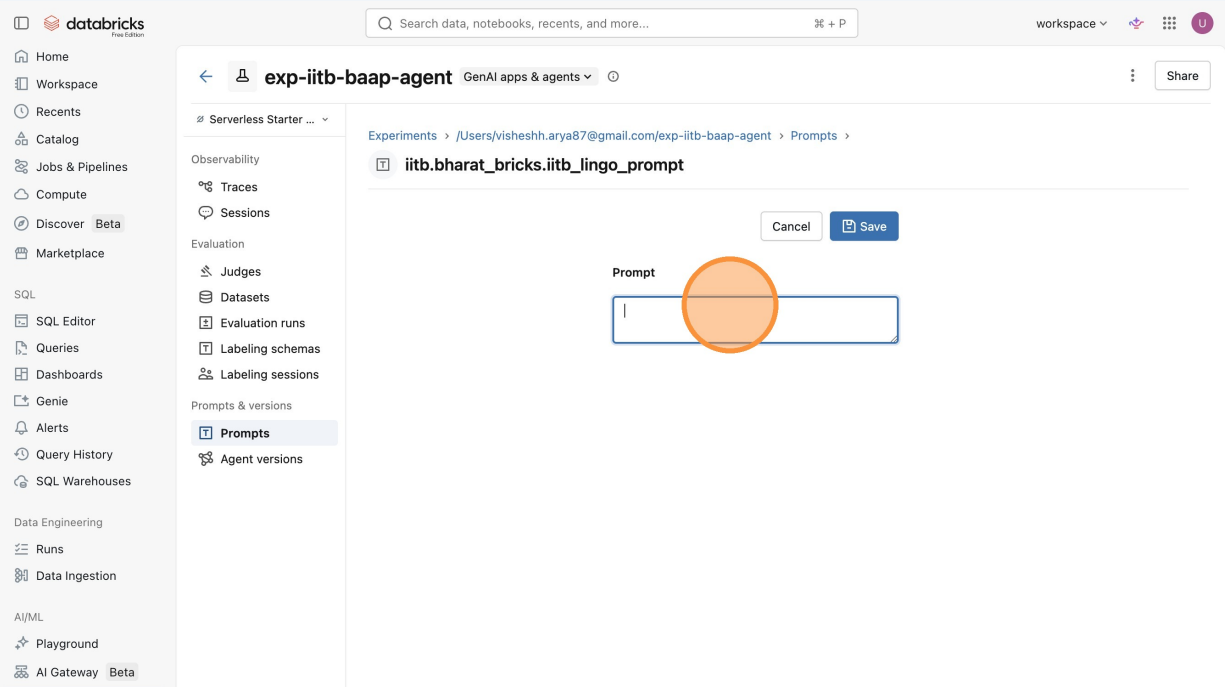

34 Press cmd + v

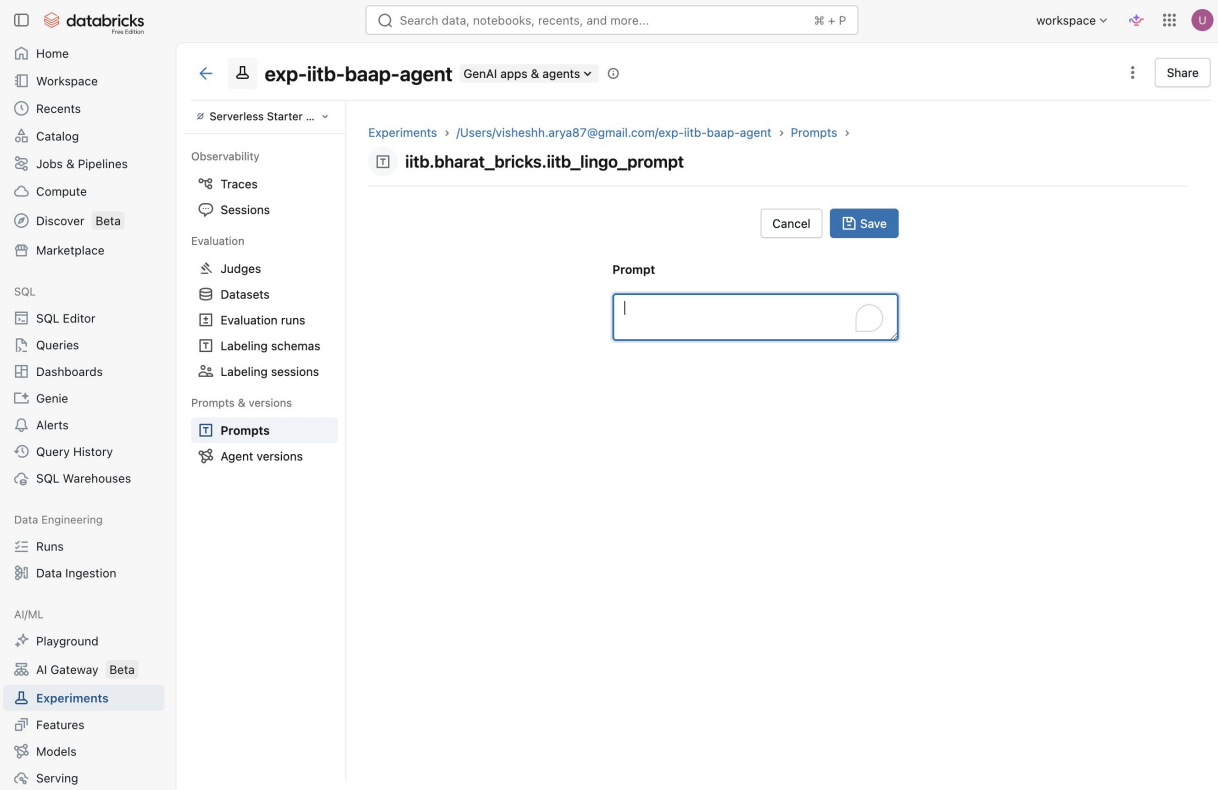

35 Click "loading"

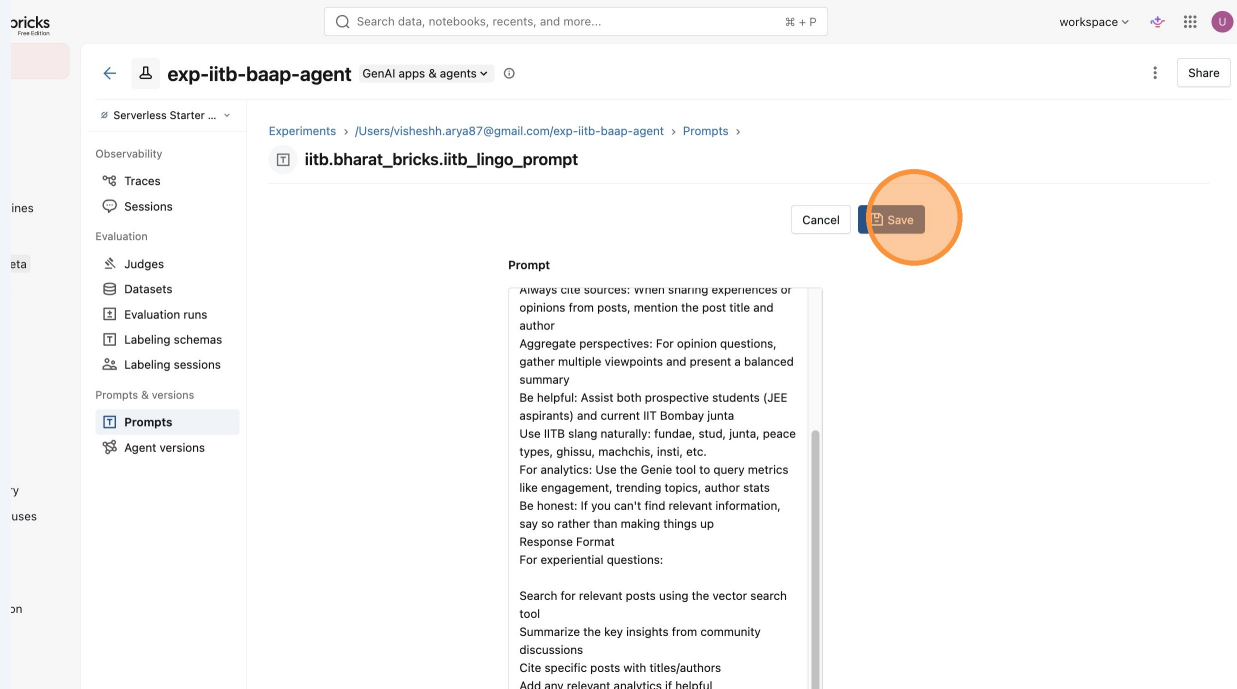

36 Click "Add aliases"


The screenshot shows the AI Studio interface for a prompt named `iitb.bharat_bricks.iitb_lingo_prompt`. The left sidebar contains navigation options: Observability (Traces, Sessions), Evaluation (Judges, Datasets, Evaluation runs, Labeling schemas, Labeling sessions), and Prompts & versions (Prompts, Agent versions). The main panel displays the prompt details for Version 1, created on Apr 11, 2026, at 05:46 PM. The prompt text is: "You are the IIT Bombay Campus Advisor, a helpful AI assistant that answers questions about IIT Bombay campus life using community discussions from r/iitbombay. You have access to the following tools: {{tools}} Guidelines Always cite sources: When sharing experiences or opinions from posts, mention the post title and author. Aggregate perspectives: For opinion questions, gather multiple viewpoints and present a balanced summary. Be helpful: Assist both prospective students (JEE aspirants) and current IIT Bombay junta. Use IITB slang naturally: fundae, stud, junta, peace types, ghissu, machchis, insti, etc. For analytics: Use the Genie tool to query metrics like engagement, trending topics, author stats. Be honest: If you can't find relevant information, say so rather than making things up. Response Format For experiential questions: Search for relevant posts using the vector search tool. Summarize the key insights from community discussions. Cite specific posts with titles/authors. Add any relevant analytics if helpful. For analytics questions:". The right sidebar shows the 'About version 1' section with 'Time created' as Apr 11, 2026, 05:46 PM and 'Location' as iitb.bharat_bricks. The 'Aliases' section has an 'Add aliases' button highlighted with an orange circle.

37 Click here.


The screenshot shows the same AI Studio interface as in step 36, but with a modal dialog box open. The dialog box is titled 'Add/Edit alias for prompt version 1' and contains the text: 'Aliases allow you to assign a mutable, named reference to a particular prompt version'. Below this text is a text input field with the placeholder 'Enter aliases (champion, challenger, etc)'. The input field is highlighted with an orange circle. At the bottom of the dialog box are 'Cancel' and 'Save aliases' buttons. The background interface is dimmed, showing the same prompt details as in step 36.

38 Type "production"


39 Click "production"

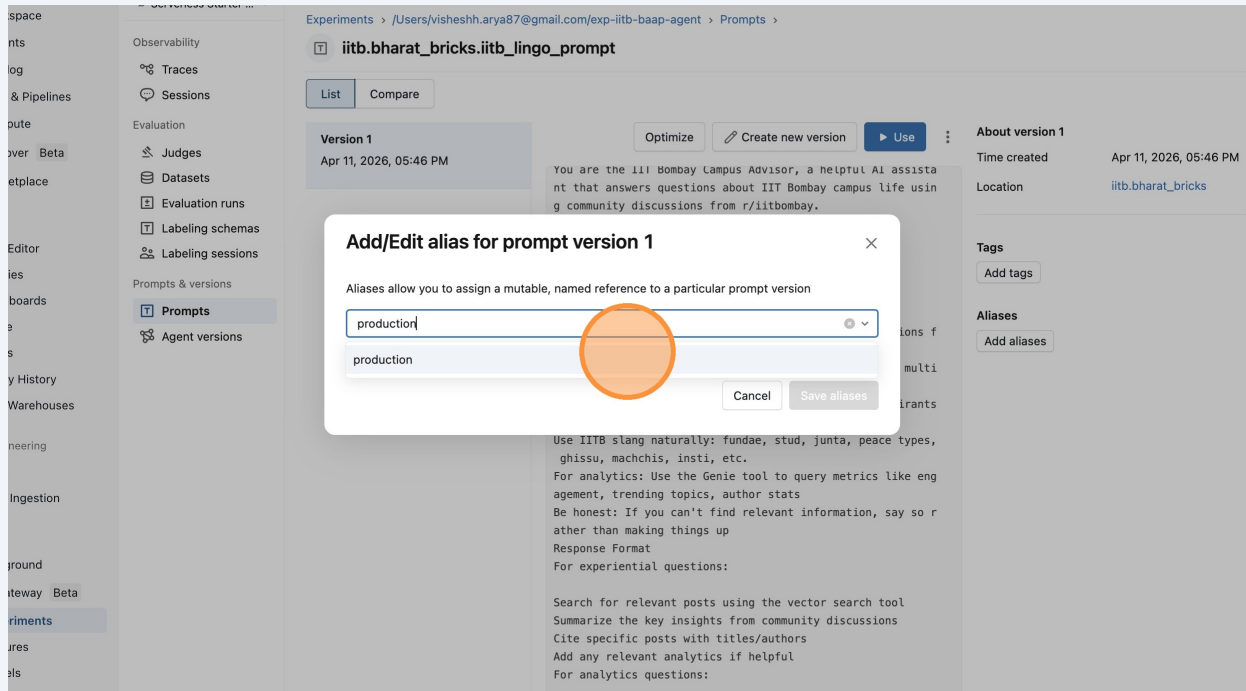

40 Click "Save aliases"

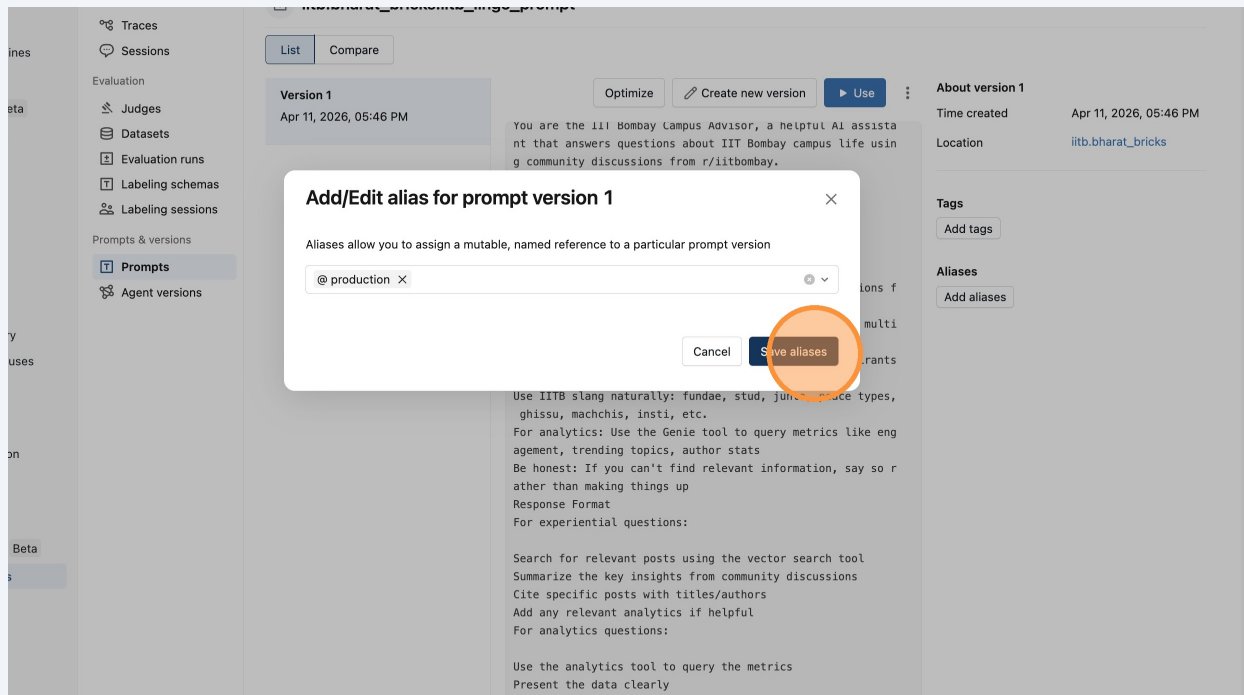

41 Click "Install or update the Databricks CLI"

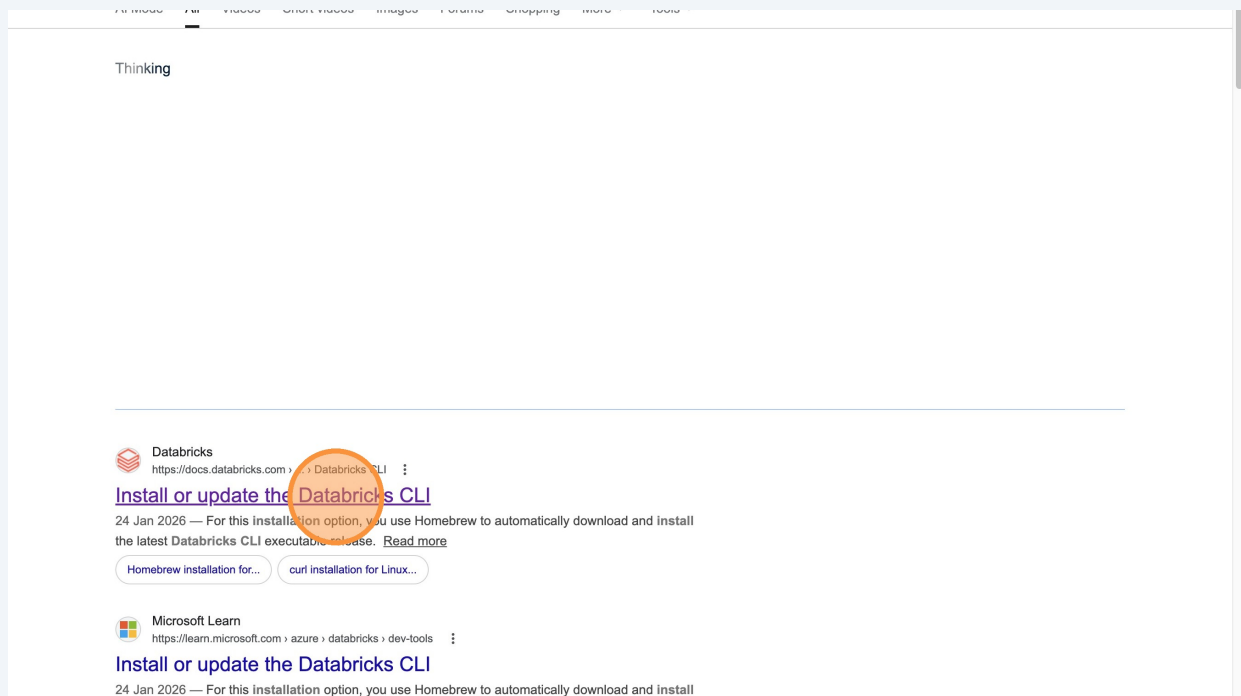

42 Click "brew tap databricks/tapbrew install databricks"

The screenshot shows the Databricks CLI installation page for Linux or macOS using Homebrew. The page is titled "Homebrew installation for Linux or macOS". It provides instructions for installing the Databricks CLI using Homebrew. The instructions are as follows:

- For this installation option, you use [Homebrew](#) to automatically download and install the latest Databricks CLI executable release.
- From your terminal, just run the following two Homebrew commands to install the CLI:

```
Bash
brew tap databricks/tap
brew install databricks
```

Then continue with [Authentication for the Databricks CLI](#).

If you are not sure whether you have Homebrew installed, or if the preceding Homebrew commands fail, follow these longer instructions:

1. Check whether Homebrew is already installed by running the following command from a Linux shell prompt or macOS Terminal. If Homebrew is installed, the Homebrew version number is displayed:

```
Bash
brew -v
```

Was this page helpful?

Yes No

Send feedback

43 Click "winget search databrickswinget install Databricks.DatabricksCLI"

The screenshot shows the Databricks CLI installation page for Windows using Winget. The page is titled "WinGet installation for Windows". It provides instructions for installing the Databricks CLI using Winget. The instructions are as follows:

- If a version number of 0.205.0 or above is listed, the Databricks CLI is installed correctly.
- 6. Continue with [Authentication for the Databricks CLI](#).

WinGet installation for Windows

For this installation option, you use [winget](#) to automatically download and install the latest Databricks CLI executable release.

1. From your Command Prompt, run the following two `winget` commands to install the CLI, and then restart your Command Prompt:

```
Bash
winget search databricks
winget install Databricks.DatabricksCLI
```

2. Confirm whether the Databricks CLI is installed correctly. To do this, view the Databricks CLI executable's version by using the `-v` option or by running the `version` command:

```
Bash
databricks -v

# Or:
databricks version
```

If the output is version 0.205.0 or above, the Databricks CLI is installed correctly.

Was this page helpful?

Yes No

Send feedback

Ask Genie

44 Click "agent-iitb-agent"

The screenshot shows the Databricks interface. On the left is a sidebar with navigation options: Home, Workspace, Recents, Catalog, Jobs & Pipelines, Compute (selected), Discover (Beta), and Marketplace. Below these are sections for SQL (SQL Editor, Queries, Dashboards, Genie, Alerts, Query History, SQL Warehouses), Data Engineering (Runs, Data Ingestion), and AI/ML (Disaggregated). The main area is titled 'Compute' and has tabs for 'SQL warehouses', 'Vector Search', and 'Apps' (selected). A search bar at the top of the 'Apps' section says 'Filter by keyword'. There are filters for 'Owned by me', 'Compute status', 'Creator', and 'Last updated'. A 'Send feedback' link and a 'Create app' button are also present. Below the filters, a table lists apps. The first app is 'agent-iitb-agent', which is highlighted with an orange circle. The table columns are Name, Compute, Creator, Last update, and App URL. The 'agent-iitb-agent' row shows it is 'Starting', created by 'visheshh.arya87@gm...', updated '2 minutes ago', and has an 'Open app' link.

Name	Compute	Creator	Last update	App URL
agent-iitb-agent	Starting	visheshh.arya87@gm...	2 minutes ago	Open app

45 Click "Sync the files"

The screenshot shows the 'Edit in your IDE' section of the Databricks interface. It contains instructions for setting up a Python environment and the Databricks CLI. The 'Sync the files' step is highlighted with an orange circle. Below it are terminal commands for exporting the workspace directory and syncing future edits. The 'Run the app on your computer' section shows commands to start the app and open the URL. The 'Deploy to Databricks Apps' section shows a command to deploy the app.

Sync the files
Copy the template to your computer (skip this step if not using a template).

```
$ databricks workspace export-dir /Workspace/Users/visheshh.arya87@gmail.com/databricks_a
```

Sync future edits back to Databricks

```
$ databricks sync --watch . /Workspace/Users/visheshh.arya87@gmail.com/databricks_apps/ag
```

Run the app on your computer
Start the app:

```
$ python app.py
```

And open the URL on the screen. For Streamlit apps, run:

```
$ streamlit run app.py
```

Deploy to Databricks Apps

```
$ databricks apps deploy agent-iitb-agent --source-code-path /Workspace/Users/visheshh.ar
```

46 Click "Run the app on your computer"

The screenshot shows the Databricks IDE interface. On the left is a sidebar with navigation options: Workspace, Recents, Catalog, Jobs & Pipelines, Compute, Discover (Beta), Marketplace, SQL, SQL Editor, Queries, Dashboards, Genie, Alerts, Query History, SQL Warehouses, Data Engineering, Runs, Data Ingestion, AI/ML, Playground, AI Gateway (Beta), Experiments, Features, and Models. The main panel displays the 'Edit in your IDE' section. It includes prerequisites, a 'Sync the files' section with terminal commands, a 'Run the app on your computer' section (highlighted with an orange circle) with the command `$ python app.py`, and a 'Deploy to Databricks Apps' section with the command `$ databricks apps deploy agent-iitb-agent --source-code-path /Workspace/Users/visheshh.arya87@gmail.com/databricks_apps/ag`. Below these are instructions on how to open the app in a browser and a table for common problems and solutions.

47 Click "Prerequisites: Set up your Python environment and the Databricks CLI.Sync the filesCopy the template to your computer (skip this step if not usi..."

This screenshot is identical to the one above, showing the Databricks IDE interface. However, in this version, the 'Sync the files' section is highlighted with an orange circle. The 'Run the app on your computer' section is no longer highlighted. The rest of the interface, including the sidebar and the 'Deploy to Databricks Apps' section, remains the same.