


Software required for installing the CAN services and disabling the Sleep Mode.

WinSCP



[WinSCP :: Official Site :: Free SFTP and FTP client for Windows](#)


Putty

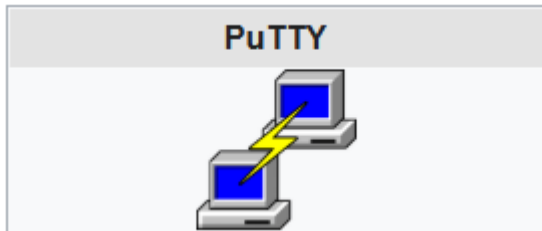

[Download PuTTY: latest release \(0.83\)](#)


Installing and setting up the CAN services

1. Install and run WinSCP
2. Select New Site

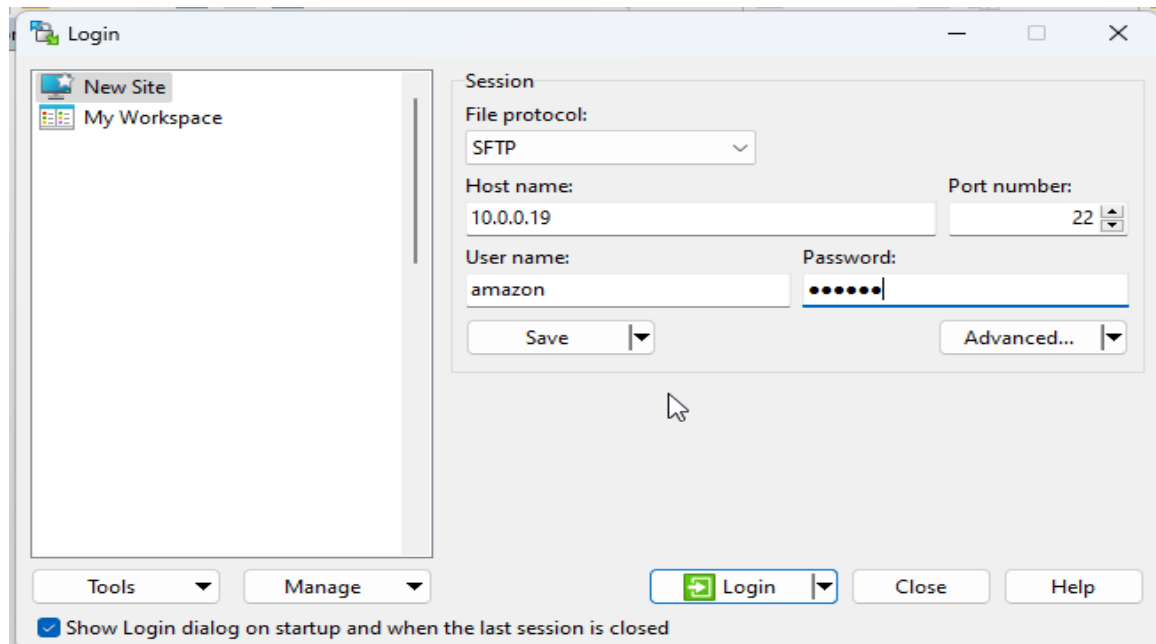


3. Login with IP address, username and password


4. In left window navigate to the CAN services Install Files folder

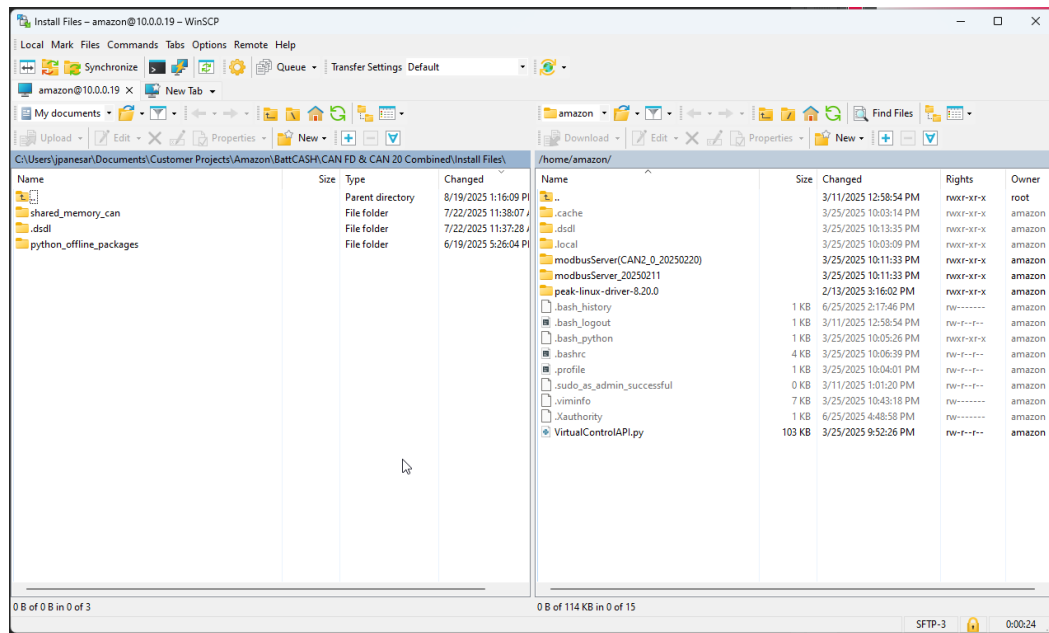

5. In right window Select the old CAN services folders and delete

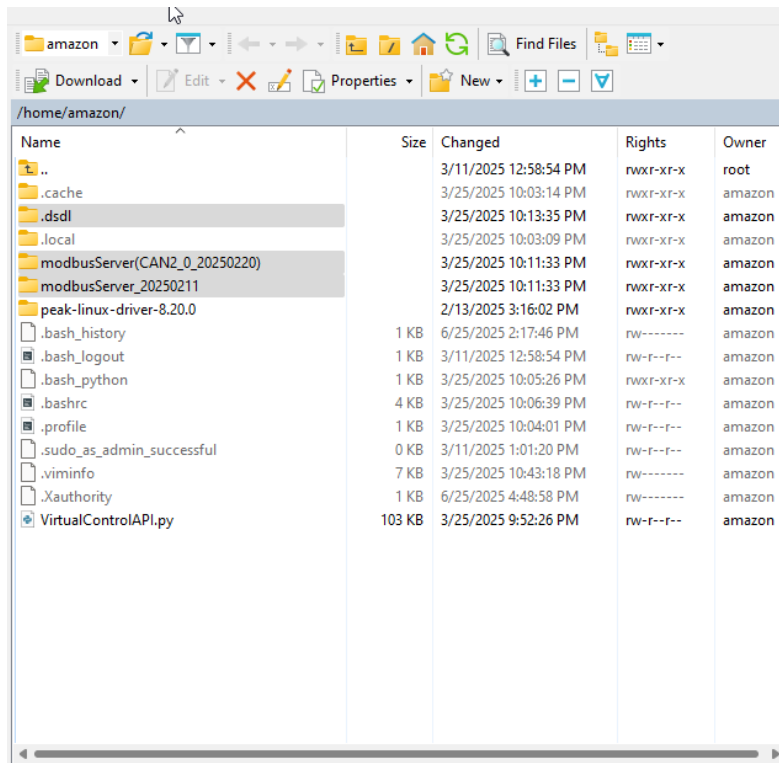


6. In right window Select the new CAN services folders and Upload to PLC

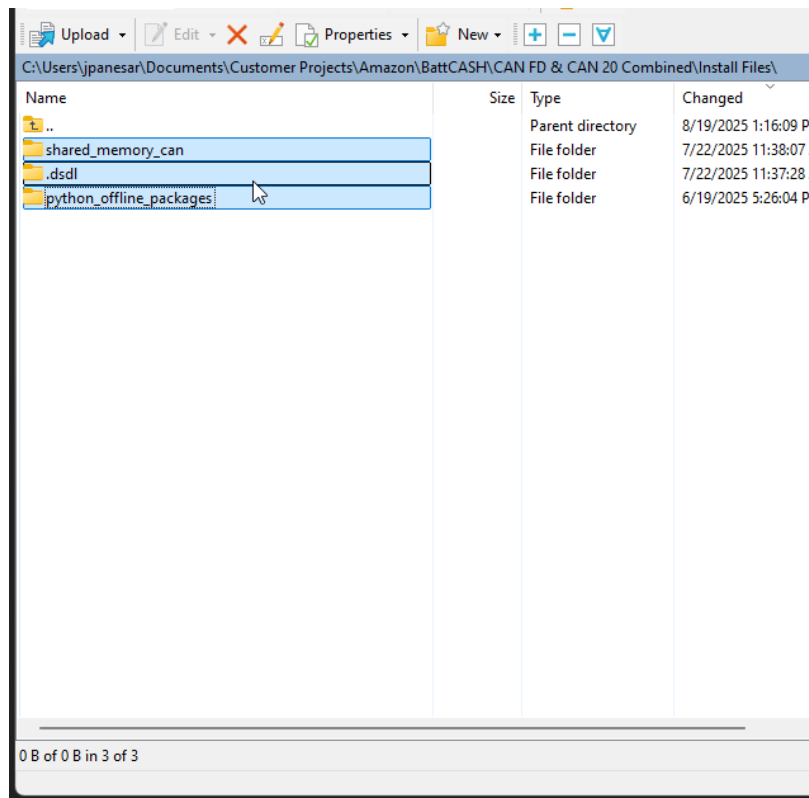


7. After the Upload has finished close WinScp

8. Start Putty and Login with the IP Address, Username and Password

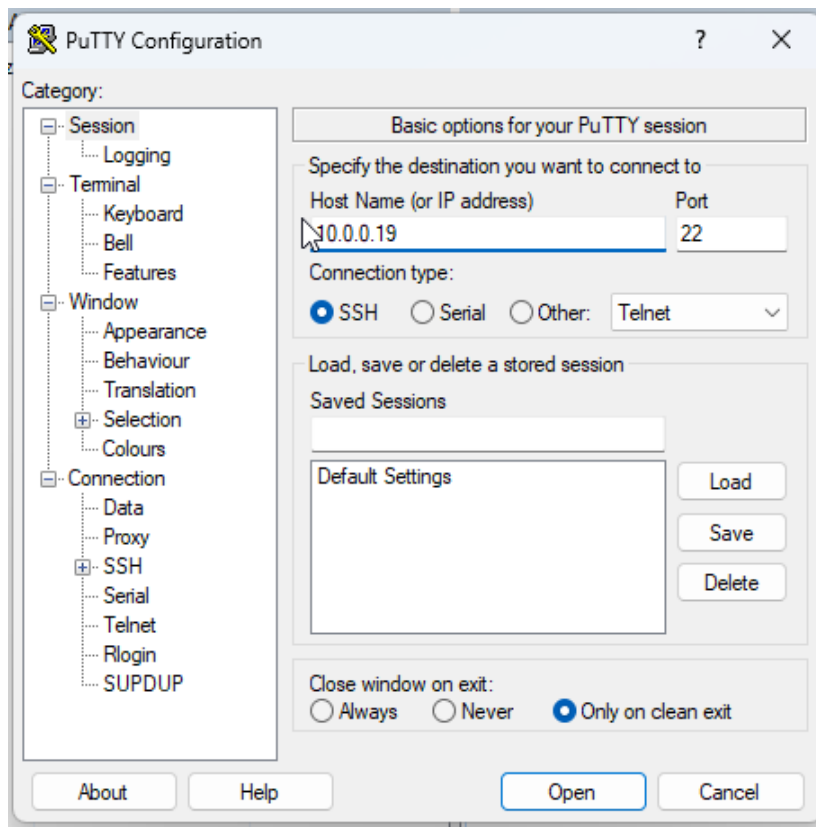

9. When the dialog box appears click on accept to start the terminal

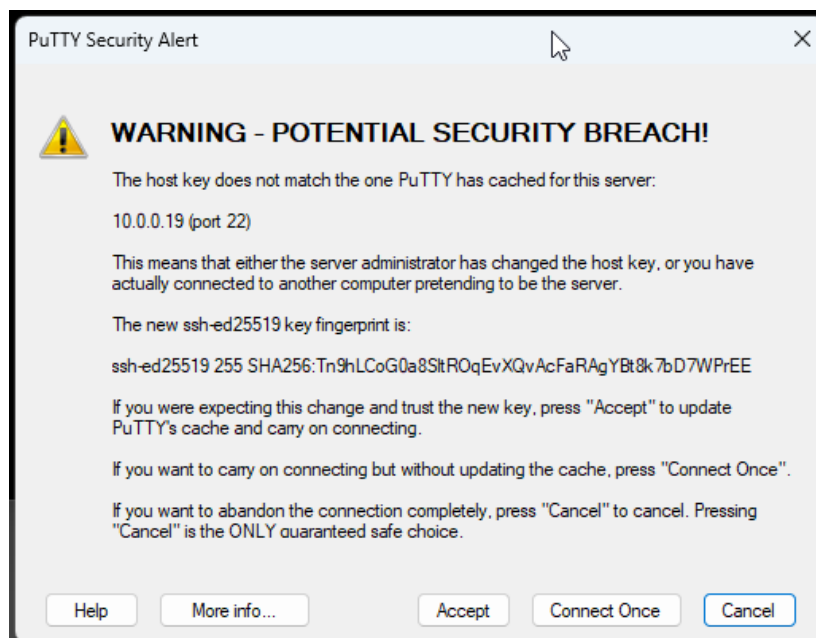

10. Login with the username and password



11. Once logged in maximize the window to the largest size possible. This is important to see all the messages while installing the CAN services.

12. Type the following commands in the terminal window

- a. `cd shared_memory_can/` <ENTER>
- b. `bash install_can_services.sh` <ENTER>
- c. User Password <ENTER>
- d. Select '3' from the options that appear

```
Which CAN version(s) do you want to configure?
1) CAN 2.0 Only
2) CAN FD Only
3) CAN 2.0 and CAN FD (Both)
Enter 1, 2, or 3: 3
```

- e. Select 'n' for the next option

```
Do you want to restart failed services and check status again? (y/n): n
```

- f. Select 'y' for the next option

```
Do you want to start the CoDeSys service now? (y/n): y
```

Disabling Sleep Mode

- g. `sudo nano /etc/systemd/sleep.conf`
- h. Edit the file as shown below

```
[Sleep]
AllowSuspend=no
AllowHibernation=no
AllowSuspendThenHibernate=no
AllowHybridSleep=no
#SuspendMode=
#SuspendState=mem standby freeze
#HibernateMode=platform shutdown
#HibernateState=disk
#HybridSleepMode=suspend platform shutdown
#HybridSleepState=disk
#HibernateDelaySec=
#SuspendEstimationSec=60min
```

- i. `Ctrl + X`

```
Save modified buffer? [Y]
Y Yes
N No      ^C Cancel
```

- j. Select 'Y'

- k. `<ENTER>`

```
File Name to Write: /etc/systemd/sleep.conf
^G Help      M-D DOS Format
^C Cancel    M-M Mac Format
```

- l. `sudo reboot now <ENTER>`