

CORE JAVA

With

SCJP / OCJP

Study Material

Chapter 16: Garbage Collection



DURGA M.Tech

(Sun certified & Realtime Expert)

Ex. IBM Employee

**Trained Lakhs of Students
for last 14 years across INDIA**

India's No.1 Software Training Institute

DURGASOFT

www.durgasoft.com Ph: 9246212143 ,8096969696

JAVA Means DURGASOFT

Garbage Collection

1. Introduction:
 2. The way to make an object eligible for GC
 - i. Nullifying the reference variable
 - ii. Reassign the reference variable
 - iii. Objects created inside a method
 - iv. Island of Isolation
 3. The methods for requesting JVM to run GC
 - i. By System class
 - ii. By Runtime class
 4. Finalization
 - o Case 1 : Just before destroying any object GC calls finalize() method on the object
 - o Case 2 : We can call finalize() method explicitly
 - o Case 3 : finalize() method can be call either by the programmer or by the GC
 - o Case 4 : On any object GC calls finalize() method only once
- Memory leaks

CORE JAVA with
OCJP/SCJP
JAVA CERTIFICATION




Mr. DURGA M.Tech
JAVA EXPERT
 Trained Thousands of Students

One to One
VIDEO
CLASSES

EVERYTHING AT YOUR CONVENIENCE

At your convenient Time

With in your convenient duration

AN ISO 9001:2008 CERTIFIED
DURGA
Software Solutions®
www.durgasoft.com

202, 2nd Floor, HUDA Maitrivanam,
 Ameerpet, Hyd. Ph: 040-64512786,
9246212143, 8096969696

Introduction:

- In old languages like C++ programmer is responsible for both creation and destruction of objects. Usually programmer is taking very much care while creating object and neglect destruction of useless objects. Due to his negligence at certain point of time for creation of new object sufficient memory may not be available and entire application may be crashed due to memory problems.
- But in java programmer is responsible only for creation of new object and his not responsible for destruction of objects.
- Sun people provided one assistant which is always running in the background for destruction at useless objects. Due to this assistant the chance of failing java program is very rare because of memory problems.
- This assistant is nothing but garbage collector. **Hence the main objective of GC is to destroy useless objects.** Grabage Collector is part of jvm.

The ways to make an object eligible for GC:

Java is robust the chance of failing java program is very very less garbage Collectors is also reason for that because chance of failing java program with memory problems is very very less because of garbage collectors so java is robust is also one reason of garbage collectors.


- Even though programmer is not responsible for destruction of objects but it is always a good programming practice to make an object eligible for GC if it is no longer required.
- An object is eligible for GC if and only if it does not have any references.

The following are various possible ways to make an object eligible for GC:

1.Nullifying the reference variable:

If an object is no longer required then we can make eligible for GC by assigning "null" to all its reference variables.

Example:

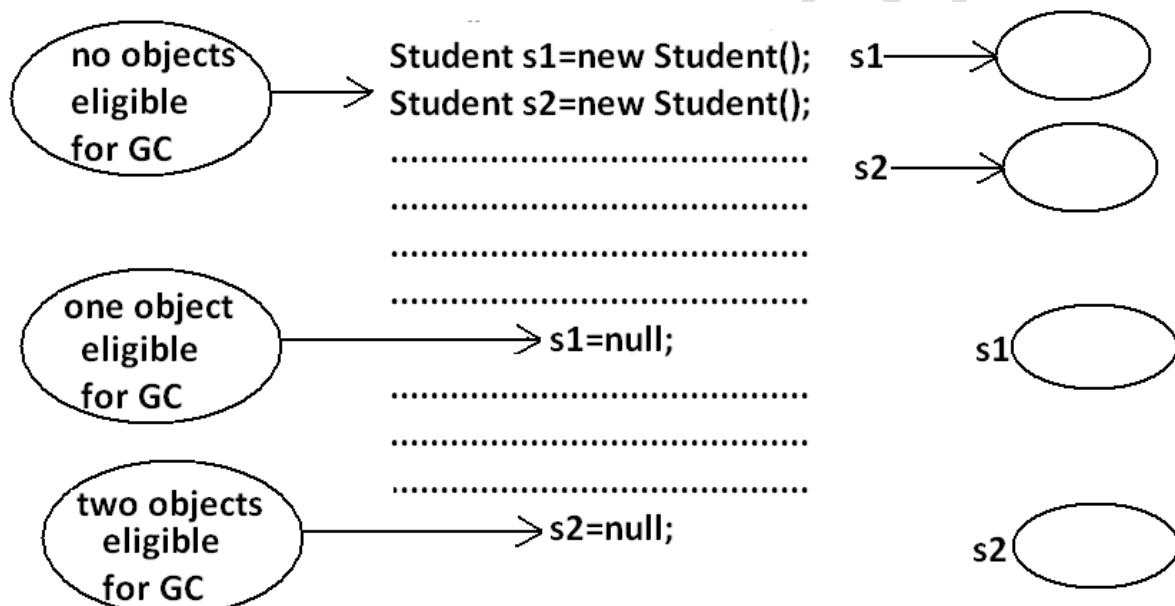

2.Reassign the reference variable:


If an object is no longer required then reassign all its reference variables to some other objects then old object is by default eligible for GC.

Example:

3. Objects created inside a method:

Objects created inside a method are by default eligible for GC once method completes.

Example 1:

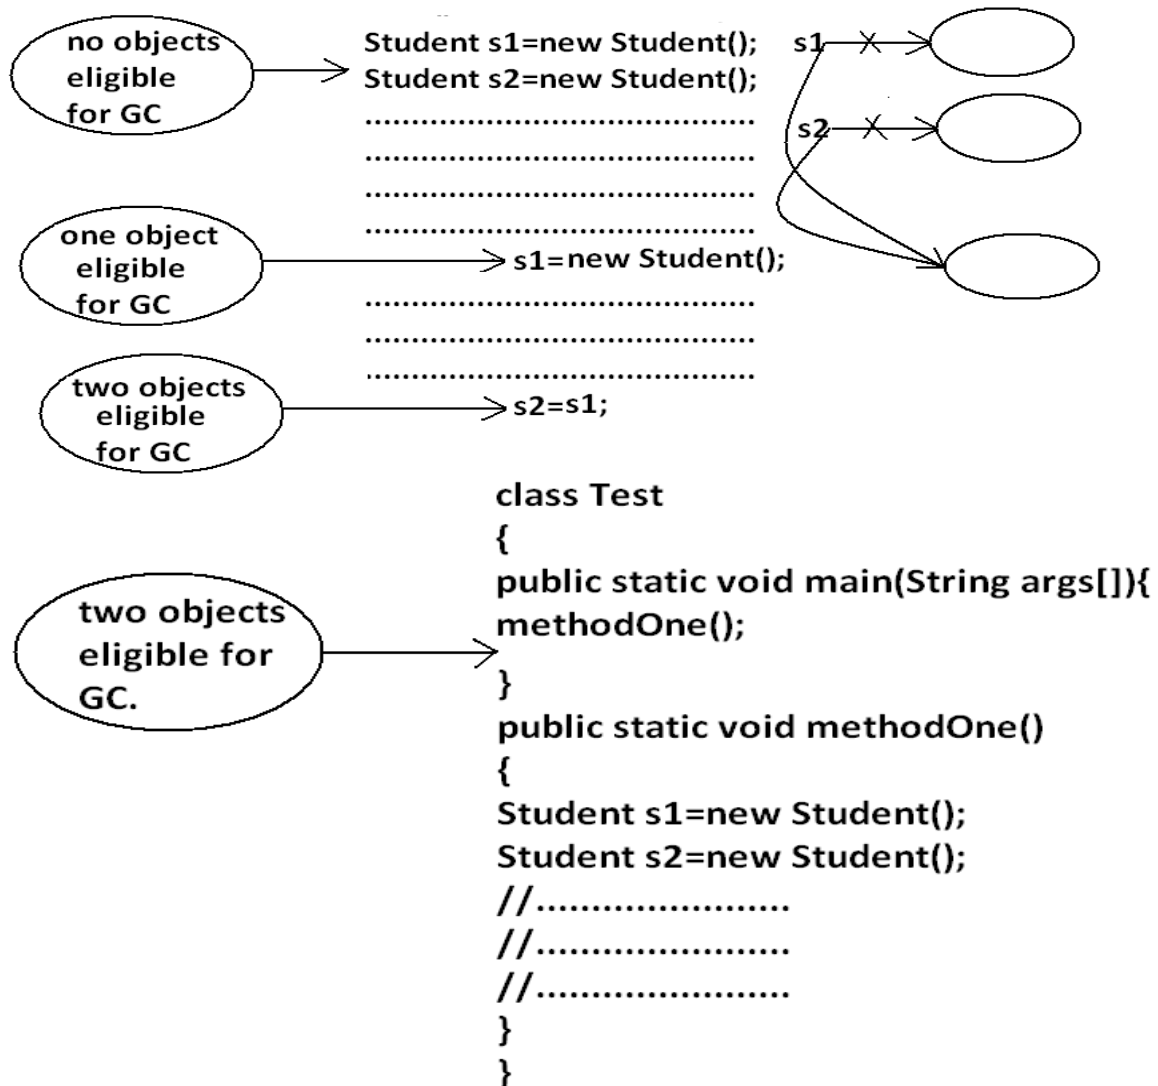

www.durgasoftonlinetraining.com




**Online Training
Pre Recorded Video
Classes Training
Corporate Training**

**Ph: +91-8885252627, 7207212427
+91-7207212428**

 **USA Ph : 4433326786**


E-mail : durgasoftonlinetraining@gmail.com

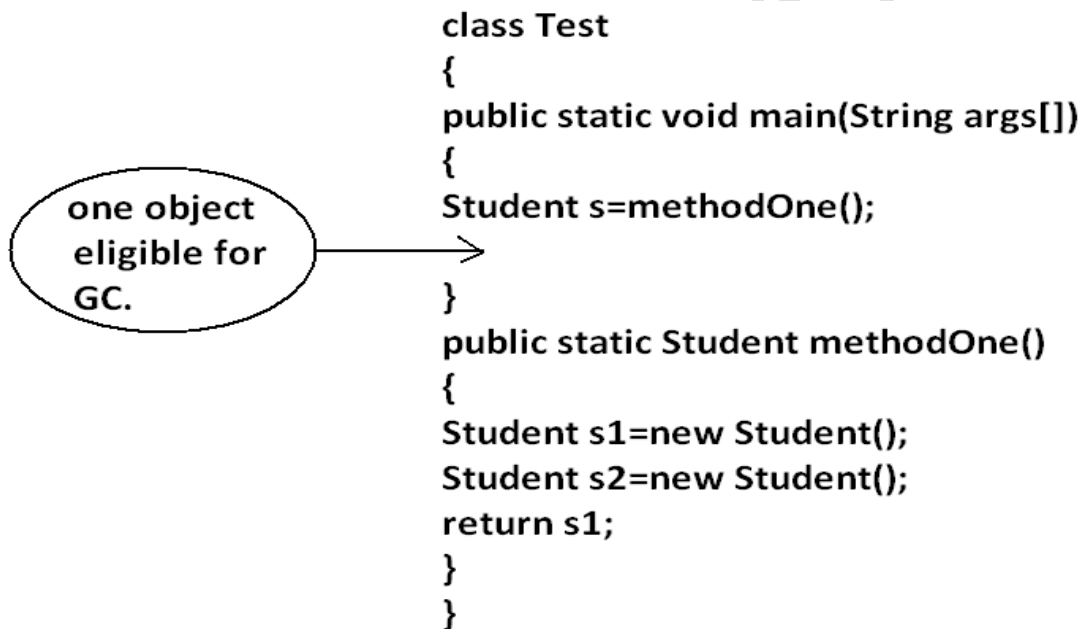Example 2:

FREE TRAINING VIDEOS

You Tube **3000+ VIDEOS**

www.youtube.com/durgasoftware

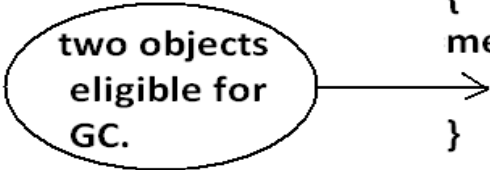Example 3:

two objects eligible for GC.

```
class Test
{
    public static void main(String args[])
    {
        methodOne();
    }
    public static Student methodOne()
    {
        Student s1=new Student();
        Student s2=new Student();
        return s1;
    }
}
```




www.durgajobs.com
Continuous Job Updates for every hour

Fresher Jobs Govt Jobs Bank Jobs
Walk-ins Placement Papers IT Jobs
Interview Experiences

Complete Job information across India

Example 4:

one object
eligible for
GC.

```
class Test {  
    static Student s1 ;  
    public static void main(String args[])  
    {  
        methodOne();  
    }  
    public static void methodOne()  
    {  
        Student s1=new Student();  
        Student s2=new Student();  
    }  
}
```

LEARN FROM EXPERT & DIAMOND FACULTIES OF AMEERPET...

JAVA MEANS DURGASOFT


INDIA'S NO. 1 SOFTWARE TRAINING INSTITUTE

AN ISO 9001:2008 CERTIFIED
DURGA
SOFTWARE SOLUTIONS

#202 2nd FLOOR
www.durgasoft.com

040-64512786
+91 9246212143
+91 8096969696

4.Island of Isolation:

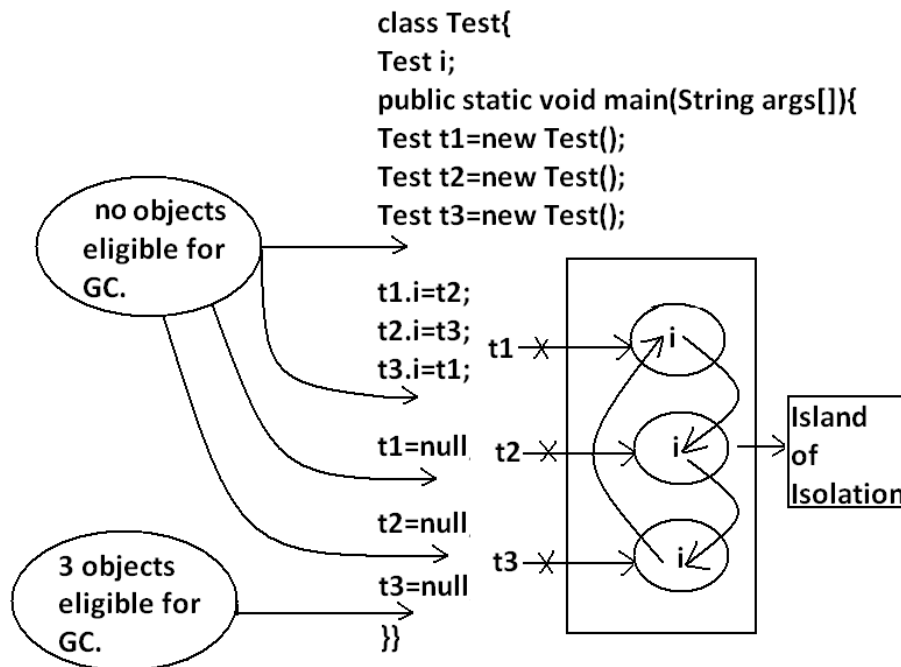

www.durgasoftonlinetraining.com



**Online Training
Pre Recorded Video
Classes Training
Corporate Training**

**Ph: +91-8885252627, 7207212427
+91-7207212428**

 **USA Ph : 4433326786**

E-mail : durgasoftonlinetraining@gmail.com

Note: if an object doesn't have any reference then it always eligible for GC.

Note: Even though object having reference still it is eligible for GC some times.

Example:

island of isolation. (Island of Isolation all references are internal references)

The methods for requesting JVM to run GC:

- Once we made an object eligible for GC it may not be destroyed immediately by the GC. Whenever jvm runs GC then only object will be destroyed by the GC. But when exactly JVM runs GC we can't expect it is vendor dependent.
- We can request jvm to run garbage collector programmatically, but whether jvm accept our request or not there is no guaranty. But most of the times JVM will accept our request.

The following are various ways for requesting jvm to run GC:

By System class:

System class contains a static method GC for this purpose.

Example:

```
System.gc();
```

By Runtime class:

- A java application can communicate with jvm by using Runtime object.
- Runtime class is a singleton class present in java.lang. Package.
- We can create Runtime object by using factory method getRuntime().

Example:

```
Runtime r=Runtime.getRuntime();
```

Once we got Runtime object we can call the following methods on that object.

freeMemory(): returns the free memory present in the heap.

totalMemory(): returns total memory of the heap.

gc(): for requesting jvm to run gc.

Example:

```
import java.util.Date;
class RuntimeDemo
{
    public static void main(String args[]){
        Runtime r=Runtime.getRuntime();
        System.out.println("total memory of the heap :"+r.totalMemory());
        System.out.println("free memory of the heap :"+r.freeMemory());
        for(int i=0;i<10000;i++)
        {
            Date d=new Date();
            d=null;
        }
        System.out.println("free memory of the heap :"+r.freeMemory());
        r.gc();
        System.out.println("free memory of the heap :"+r.freeMemory());
    }
}
```

Output:

Total memory of the heap: 5177344

Free memory of the heap: 4994920
Free memory of the heap: 4743408
Free memory of the heap: 5049776

Note : Runtime class is a singleton class so not create the object to use constructor.

Which of the following are valid ways for requesting jvm to run GC ?

System.gc(); (valid)

Runtime.gc(); (invalid)

(new Runtime).gc(); (invalid)

Runtime.getRuntime().gc(); (valid)

Note: gc() method present in System class is static, where as it is instance method in Runtime class.

Note: Over Runtime class gc() method , System class gc() method is recommended to use.

Note: in java it is not possible to find size of an object and address of an object.



Finalization:

- Just before destroying any object gc always calls finalize() method to perform cleanup activities.
- If the corresponding class contains finalize() method then it will be executed otherwise Object class finalize() method will be executed.

which is declared as follows.

protected void finalize() throws Throwable

Case 1:

Just before destroying any object GC calls finalize() method on the object which is eligible for GC then the corresponding class finalize() method will be executed.

For Example if String object is eligible for GC then String class finalize() method is executed but not Test class finalize() method.

Example:

```

class Test
{
    public static void main(String args[]){
        String s=new String("bhaskar");
        Test t=new Test();
        s=null;
        System.gc();
        System.out.println("End of main.");
    }
    public void finalize(){
        System.out.println("finalize() method is executed");
    }
}

```

Output:

End of main.

In the above program String class finalize() method got executed. Which has empty implementation.

If we replace String object with Test object then Test class finalize() method will be executed .

The following program is an Example of this.

LEARN FROM EXPERT & DIAMOND FACULTIES OF AMEERPET...

JAVA MEANS DURGASOFT

INDIA'S NO. 1 SOFTWARE TRAINING INSTITUTE

AN ISO 9001:2008 CERTIFIED


#202 2nd FLOOR
www.durgasoft.com

040-64512786
+91 9246212143
+91 8096969696

Example:

```

class Test
{
    public static void main(String args[]){
        String s=new String("bhaskar");
        Test t=new Test();
        t=null;
        System.gc();
        System.out.println("End of main.");
    }
    public void finalize(){
        System.out.println("finalize() method is executed");
    }
}

```

Output:

finalize() method is executed
End of main

Case 2:

We can call `finalize()` method explicitly then it will be executed just like a normal method call and object won't be destroyed. But before destroying any object GC always calls `finalize()` method.

Example:

```
class Test
{
    public static void main(String args[]){
        Test t=new Test();
        t.finalize();
        t.finalize();
        t=null;
        System.gc();
        System.out.println("End of main.");
    }
    public void finalize(){
        System.out.println("finalize() method called");
    }
}
```

Output:

```
finalize() method called.
finalize() method called.
finalize() method called.
End of main.
```

In the above program `finalize()` method got executed 3 times in that 2 times explicitly by the programmer and one time by the gc.


Note: In Servlets we can call `destroy()` method explicitly from `init()` and `service()` methods. Then it will be executed just like a normal method call and Servlet object won't be destroyed.

www.durgajobs.com
Continuous Job Updates for every hour

Fresher Jobs	Govt Jobs	Bank Jobs
Walk-ins	Placement Papers	IT Jobs
Interview Experiences		

Complete Job information across India

Diagram:

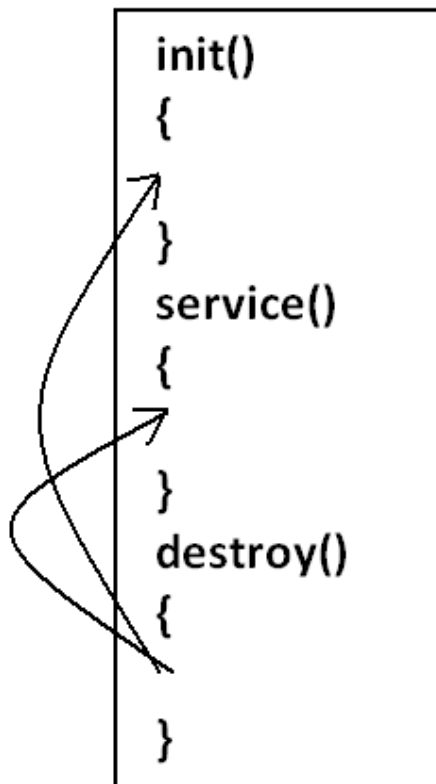

FREE TRAINING VIDEOS

You Tube **3000+ VIDEOS**

www.youtube.com/durgasoftware

Case 3:

`finalize()` method can be call either by the programmer or by the GC .

If the programmer calls explicitly `finalize()` method and while executing the `finalize()` method if an exception raised and uncaught then the program will be terminated abnormally.

If GC calls `finalize()` method and while executing the `finalize()` method if an exception raised and uncaught then JVM simply ignores that exception and the program will be terminated normally.

Example:

```
class Test
{
    public static void main(String args[]){
        Test t=new Test();
        //t.finalize();-----line(1)
        t=null;
        System.gc();
        System.out.println("End of main.");
    }
    public void finalize(){
        System.out.println("finalize() method called");
        System.out.println(10/0);
    }
}
```

If we are not comment line1 then programmer calling `finalize()` method explicitly and while executing the `finalize()` method `ArithmeticException` raised which is uncaught hence the program terminated abnormally.

If we are comment line1 then GC calls `finalize()` method and JVM ignores `ArithmeticException` and program will be terminated normally.

Which of the following is true?

While executing `finalize()` method JVM ignores every exception(Invalid).

While executing `finalize()` method JVM ignores only uncaught exception(valid).

Case 4:

On any object GC calls `finalize()` method only once.

Example:

```
class FinalizeDemo
{
    static FinalizeDemo s;
    public static void main(String args[])throws Exception{
        FinalizeDemo f=new FinalizeDemo();
        System.out.println(f.hashCode());
        f=null;
        System.gc();
        Thread.sleep(5000);
        System.out.println(s.hashCode());
        s=null;
    }
}
```

```
System.gc();
Thread.sleep(5000);
System.out.println("end of main method");
}
public void finalize()
{
    System.out.println("finalize method called");
    s=this;
}
}
```

Output:

```
D:\Enum>java FinalizeDemo
4072869
finalize method called
4072869
End of main method
```

Note:

The behavior of the GC is vendor dependent and varied from JVM to JVM hence we can't expert exact answer for the following.



1. What is the algorithm followed by GC.
2. Exactly at what time JVM runs GC.
3. In which order GC identifies the eligible objects.
4. In which order GC destroys the object etc.
5. Whether GC destroys all eligible objects or not.

for these question we cant provide correct answer.

When ever the program runs with low memory then the JVM runs GC, but we can't except exactly at what time.

Most of the GC's followed mark & sweep algorithm , but it doesn't mean every GC follows the same algorithm.

LEARN FROM EXPERT & DIAMOND FACULTIES OF AMEERPET...

JAVA MEANS DURGASOFT

INDIA'S NO. 1 SOFTWARE TRAINING INSTITUTE

AN ISO 9001:2008 CERTIFIED
DURGA
SOFTWARE SOLUTIONS

#202 2nd FLOOR
www.durgasoft.com

040-64512786
+91 9246212143
+91 8096969696

Memory leaks:

[imp question interviews](#)

- An object which is not using in our application and it is not eligible for GC such type of objects are called "memory leaks".
- In the case of memory leaks GC also can't do anything the application will be crashed due to memory problems.
- In our program if memory leaks present then certain point we will get `OutOfMemoryException`. Hence if an object is no longer required then it's highly recommended to make that object eligible for GC.
- By using monitoring tools we can identify memory leaks.

Example:

HPJ meter

HP ovo

IBM Tivoli

J Probe

Patrol and etc

These are monitoring tools.
(or memory management tools)

CORE JAVA with
OCJP/SCJP
JAVA CERTIFICATION



Mr. DURGA M.Tech
JAVA EXPERT
Trained Thousands of Students



One to One
VIDEO
CLASSES

EVERYTHING AT YOUR CONVENIENCE

At your convenient Time

With in your convenient duration

AN ISO 9001:2008 CERTIFIED
DURGA
Software Solutions®
www.durgasoft.com

202, 2nd Floor, HUDA Maitrivanam,
Ameerpet, Hyd. Ph: 040-64512786,
9246212143, 8096969696

LEARN FROM EXPERTS ...

COMPLETE JAVA

CORE JAVA, ADV. JAVA, ORACLE, STRUTS, HIBERNATE, SPRING, WEB SERVICES,...

COMPLETE .NET

C#.NET, ASP.NET, SQL SERVER, MVC 5 & WCF

TESTING TOOLS

MANUAL + SELENIUM

ORACLE | D2K

MSBI | SHARE POINT

HADOOP | ANDROID

C, C++ , DS, UNIX

CRT & APTITUDE TRAINING

AN ISO 9001:2008 CERTIFIED

DURGA

Software Solutions®

202, 2nd Floor, HUDA Maitrivanam,
Ameerpet, Hyd. Ph: 040-64512786,

9246212143, 8096969696

www.durgasoft.com