

IC 272: DATA SCIENCE - III
LAB ASSIGNMENT – VII
Clustering

Student's Name: Vision Agg.

Mobile No: 6376029099

Roll Number: B20171

Branch: Data Science

1

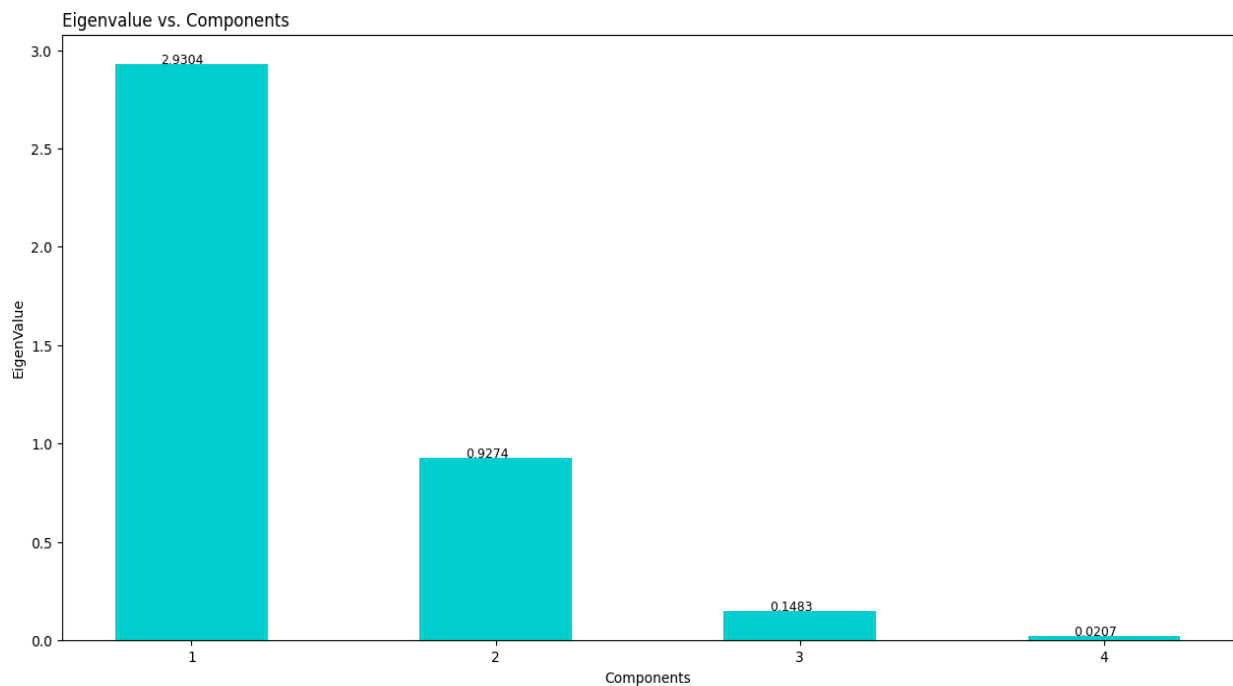


Figure 1 Eigenvalue vs. components

Inferences:

1. Eigen Value is decreasing with every successive increase in component value.
2. Eigen value represent variance of components so, it's natural that some component will have cover more variance compared to other. Highest eigen value represents whole dataset better compared to others.

IC 272: DATA SCIENCE - III
LAB ASSIGNMENT – VII
Clustering

2 a.

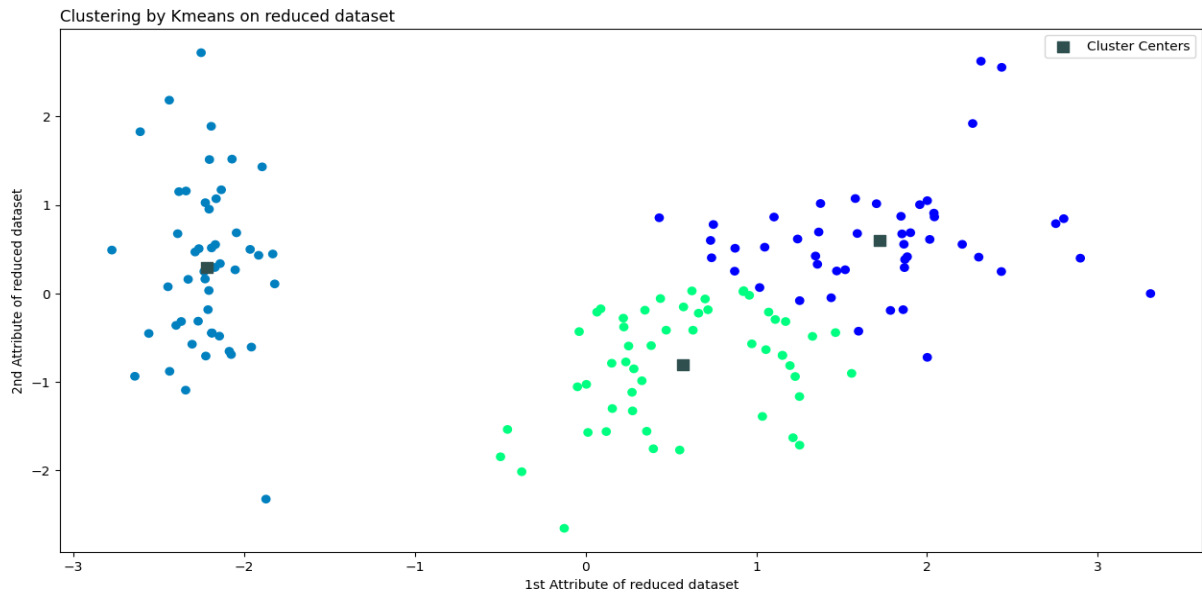


Figure 2 K-means (K=3) clustering on Iris flower dataset

Inferences:

1. Clustering prowess of algorithm is very good.
2. **No**, boundaries of clustering are more in a straight line.

b. The value for distortion measure is **145.525**.

c. The purity score after examples is assigned to the clusters is **0.667**.

IC 272: DATA SCIENCE - III

LAB ASSIGNMENT – VII

Clustering

3

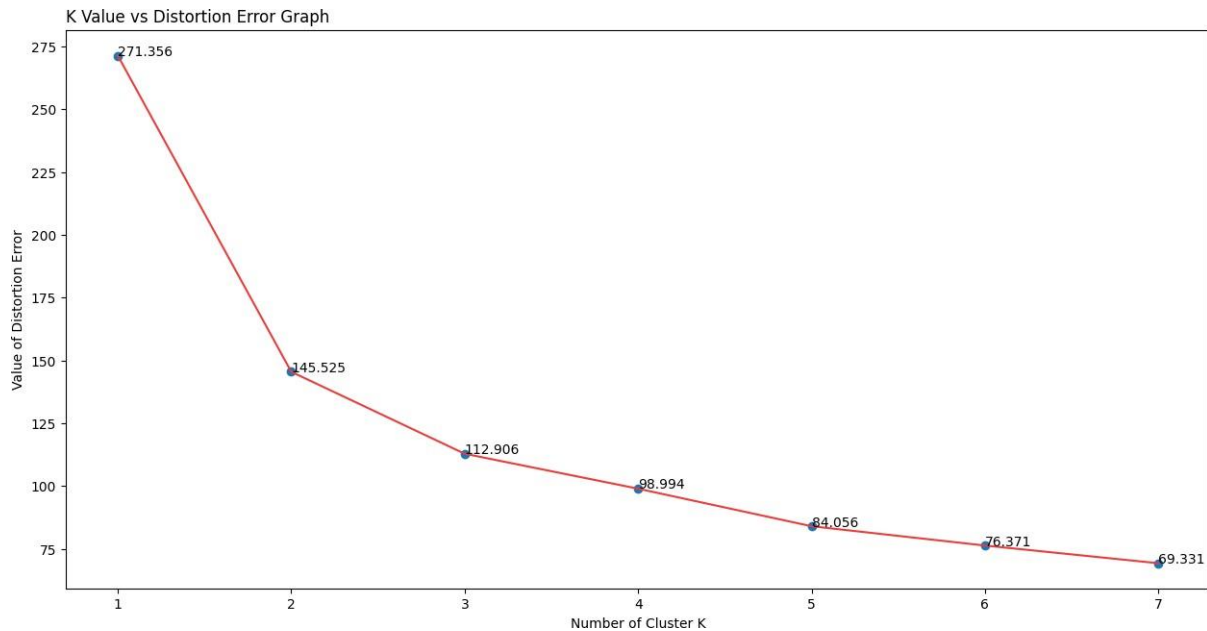


Figure 3 Number of clusters(K) vs. distortion measure

Inferences:

1. Distortion measure decreases with the increase in value of K.
2. Distortion measure is the sum of the square of the distance of each example to its assign cluster center. So, if number of clusters are less than some points will be more far away from their respective cluster centers in comparison to the case in which clusters are more. Hence, distortion measure will be high for a smaller number of clusters.
3. Intuitively, there should be only **3** clusters in the dataset. No, because Kmeans is an unsupervised clustering algorithm means it didn't use the labels of data points and there are only two visible clusters so, it gives 2 as optimal number of clusters.

Table 1 Purity score for K value = 2,3,4,5,6 & 7

K value	Purity score
2	0.667
3	0.833
4	0.667
5	0.547
6	0.507
7	0.453

IC 272: DATA SCIENCE - III

LAB ASSIGNMENT – VII

Clustering

Inferences:

1. The highest purity score is obtained with $K = 3$.
2. By increasing the value of K , purity score decreases.
3. Since, in original dataset there are only 3 labels. So, if we increase the value of k more than 3 than some points will get assigned to which they don't which leads in decrease in purity score.
4. Yes, after maximum value of purity score, its value decreases with the increase in K .

4 a.

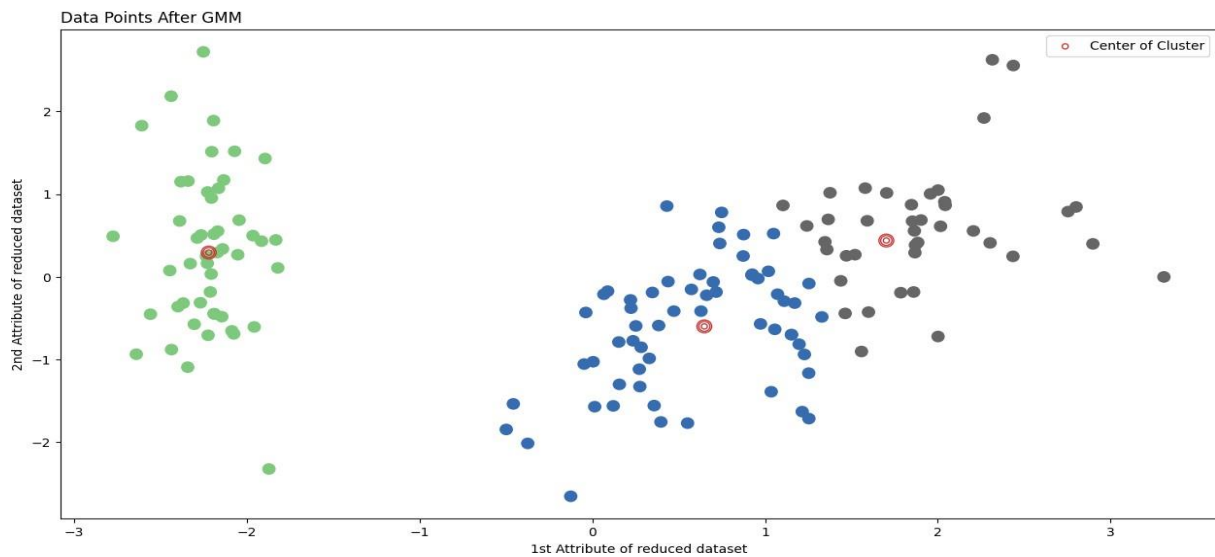


Figure 4 GMM ($K=3$) clustering on Iris flower dataset

Inferences:

1. Clustering prowess of algorithm is very good.
2. No.
3. No.

b. The value for distortion measure is **-379.923**

c. The purity score after examples are assigned to the clusters is **0.867**

IC 272: DATA SCIENCE - III

LAB ASSIGNMENT – VII

Clustering

5

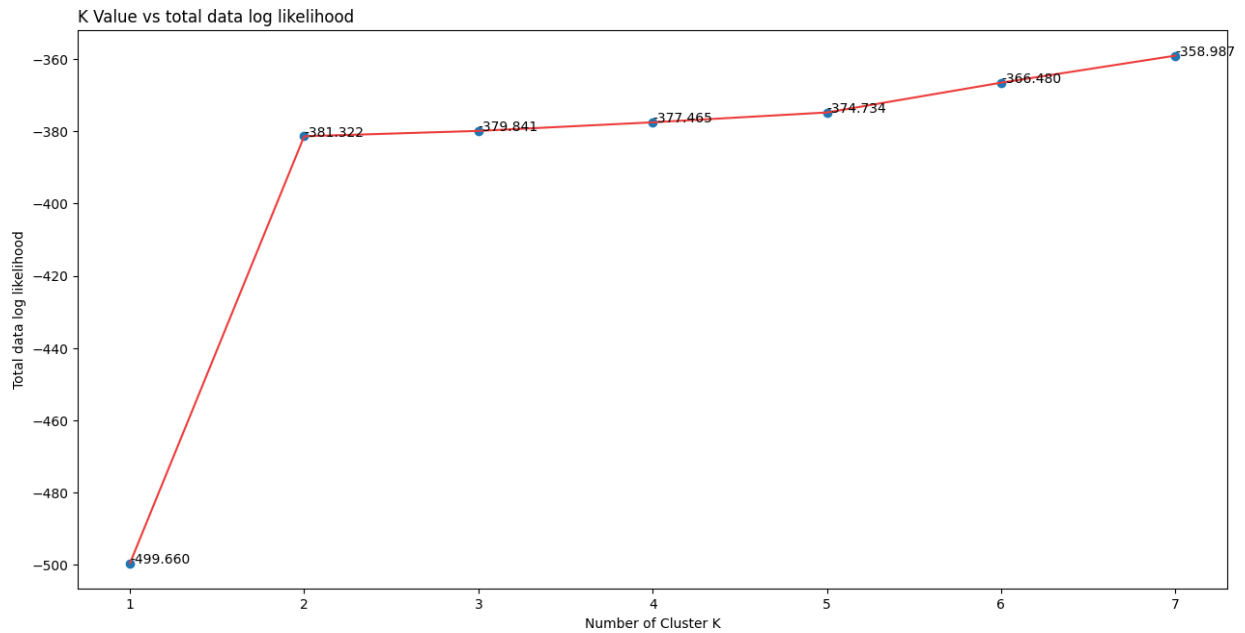


Figure 5 Number of clusters(K) vs. distortion measure

Inferences:

1. Distortion measure decreases with the increase in K value.
2. From the scatter plot of dataset there are only two visible clusters and by using elbow method we get the optimal value of clusters is 2. So, after K = 2 decrease in distortion measure becomes linear.
3. Intuitively, there should be **3** clusters in the dataset. No, because GMM is an unsupervised clustering algorithm means it didn't use the labels of data points and there are only two visible clusters so, it gives 2 as optimal number of clusters.

Table 2 Purity score for K value = 2,3,4,5,6 & 7

K value	Purity score
2	0.667
3	0.893
4	0.740
5	0.647
6	0.673
7	0.493

IC 272: DATA SCIENCE - III

LAB ASSIGNMENT – VII

Clustering

Inferences:

1. The highest purity score is obtained with $K = 3$.
2. With the increase in value of K , purity scores decrease.
3. Same as explained above in the Kmeans.
4. Yes, after maximum value of purity score, its value decreases with the increase in K .
5. Compare K-means and GMM based on inferences in Q3 and Q5.

6

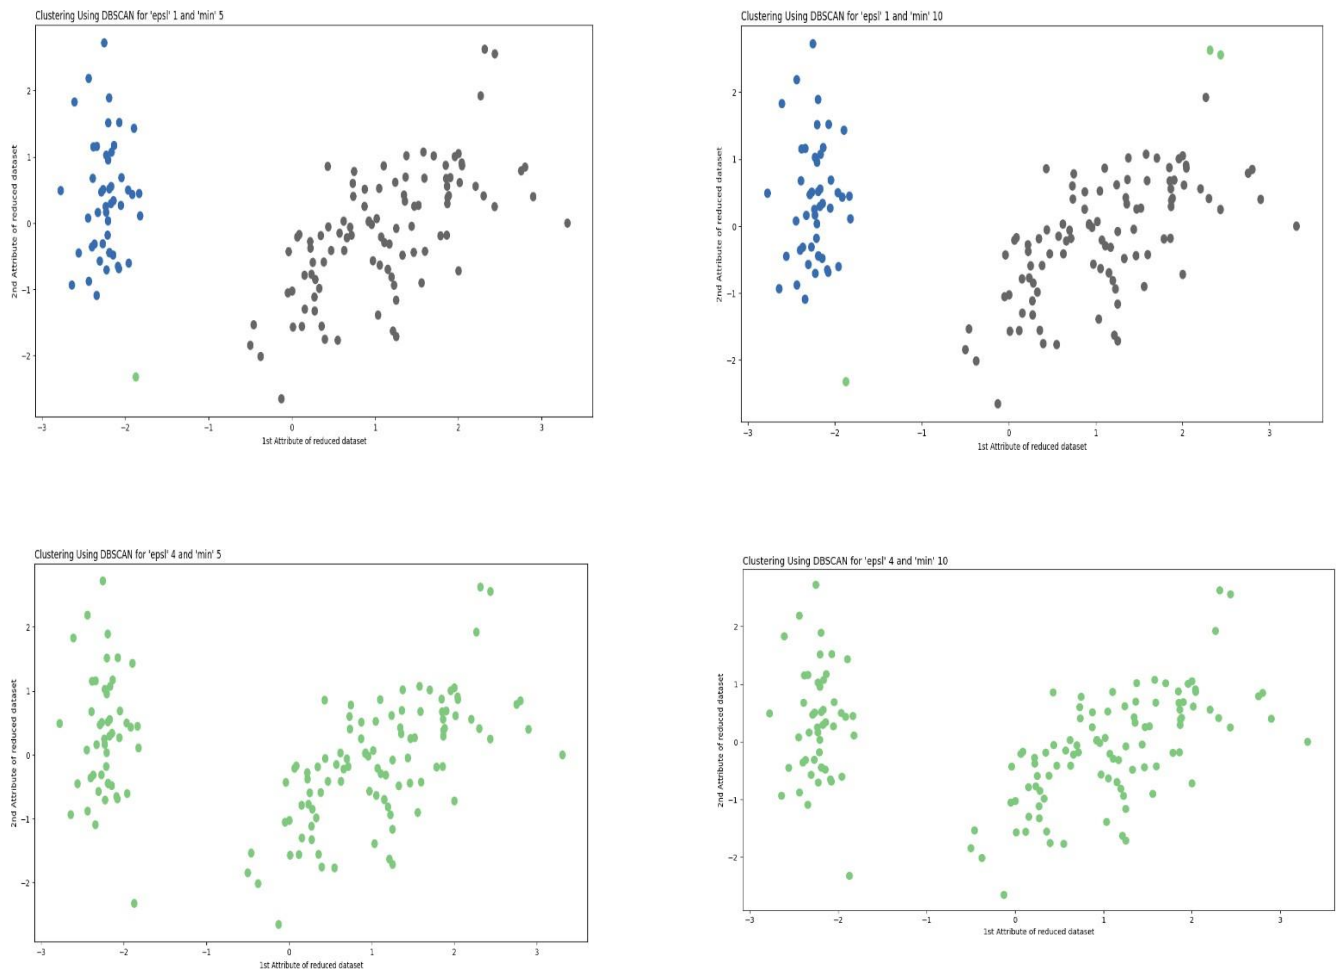


Figure 6 DBSCAN clustering on Iris flower dataset

IC 272: DATA SCIENCE - III
LAB ASSIGNMENT – VII
Clustering

Inferences:

1. If we choose optimal number of epsl and min_points then clustering prowess is very good.
2. Yes, in 2.a and 4.a we have given the value of K. But in 6.a number of clusters is decided by the algorithm itself and since, it's an unsupervised technique due to which means it will cluster datapoints according to similarity not by seeing whether a point belongs to certain label or not. So, it results in the formation of two clusters.
3. **b.**

Eps	Min_samples	Purity Score
1	5	0.660
	10	0.673
4	5	0.333
	10	0.333

Inferences:

1. For the same eps value, increasing min_samples increase purity score.
2. For the same min_samples, increasing eps value decrease purity score.