



CitizenMCP

Greek Government Transparency & Open Data — MCP Service Documentation

A hosted service that gives AI assistants direct, structured access to Diavgeia (Greece's public-sector decision register), data.gov.gr (the national open-data catalog), and ΓΕΜΗ (the business registry) through the Model Context Protocol.

Document type

Service Report — Client Overview

Prepared for

Prospective & existing clients

Date

August 2026

Service endpoint

citizen-mcp.nickdandis96.workers.dev

Source code

github.com/VisionVoyagerX/my-mcp


Contents

- 1** Executive Summary
- 2** What CitizenMCP Is
- 3** Data Sources & Coverage
- 4** Full Endpoint / Tool Reference
- 5** Access & Authentication
- 6** Rate Limiting
- 7** Technical Architecture
- 8** Infrastructure & Where It Runs

A companion product, BusinessMCP, covers e-invoicing (myDATA) and labor data (Ergani) in addition to ΓΕΜΗ, and is documented in a separate report.

1. Executive Summary

CitizenMCP is a hosted server that implements the Model Context Protocol (MCP), an open standard that lets AI assistants call external tools during a conversation. It gives any MCP-compatible assistant direct access to three official Greek government data sources: Diavgeia (public-sector decisions), data.gov.gr (the national open-data catalog), and ΓΕΜΗ (the business registry).

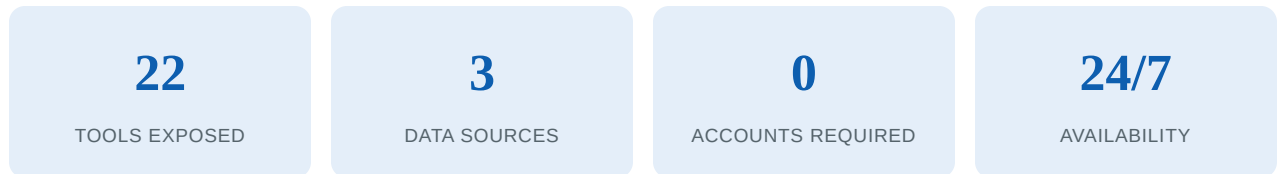

Diavgeia, data.gov.gr, and ΓΕΜΗ are all official government sources. CitizenMCP provides programmatic, conversational access to all three through one interface, so an AI assistant can search and retrieve official data directly rather than a person searching each portal by hand.

Who it's for

- Journalists and researchers tracking public procurement, ministerial decisions, or budget acts.
- Civic-tech and transparency organizations building tools or dashboards on public-sector data.
- Analysts who want to pull open datasets into an AI-assisted workflow.
- Anyone doing quick company/registry lookups (ΓΕΜΗ) alongside transparency data, without needing BusinessMCP's e-invoicing/labor tools.
- Anyone building an AI agent that needs answers grounded in official Greek public-sector data.

2. What CitizenMCP Is

Overview

CitizenMCP is a single hosted web address that an AI assistant connects to. Once connected, the assistant can call a fixed set of actions — for example, "search Diavgeia decisions issued by the Ministry of Finance in the last month," "find open datasets about renewable energy production," or "look up this company's ΓΕΜΗ registry record." The service handles the call to the underlying government API and returns structured results to the assistant.

Why MCP

MCP is an open, standard protocol rather than a proprietary integration. Any MCP-compatible client — Claude or another AI assistant — can connect to CitizenMCP using the same configuration format, without custom integration work per client.

What it is not

- Not a data warehouse or a copy of government data — every call is a live pass-through to the official source, so results are current.
- No Diavgeia or data.gov.gr account, API key, or registration is required for normal use. ΓΕΜΗ is the one exception — see Section 5 — but that key is held server-side, not something an individual caller supplies.
- CitizenMCP is one of two current domain bundles; BusinessMCP additionally covers e-invoicing (myDATA) and labor data (Ergani), which need the caller's own credentials. ΓΕΜΗ itself is shared between both bundles, like Diavgeia, since business-registry data is genuinely cross-domain.

3. Data Sources & Coverage

3.1 Diavgeia

Open · No key required

Diavgeia is the Greek government's official register for publishing public-sector decisions. Administrative acts, decisions, procurement awards, appointments, and budget commitments issued by Greek public bodies — ministries, municipalities, hospitals, universities, state agencies — are published there with a unique tracking code (ΑΔΑ).

CitizenMCP exposes the full read surface of Diavgeia's public API: decision search (full-text and filtered), individual decision lookup and revision history, the organizational directory, signer and position lookups, and the classification taxonomy used to build precise queries. The complete list is in Section 4.

3.2 data.gov.gr (CKAN Open Data Catalog)

Open · Optional token

data.gov.gr is Greece's national open-data portal, built on the CKAN platform. It currently catalogs roughly 22,500 datasets and 87,000 downloadable resources from 482 publishing organizations.

CitizenMCP exposes catalog search, dataset detail lookup, and direct resource access:

`ckan_get_resource_data` downloads a dataset's CSV/XLS/XLSX resource and parses it into rows, so an assistant can analyze the data inside a file directly rather than just its metadata.

3.3 ΓΕΜΗ — Business Registry

Open data · Server key required

ΓΕΜΗ (Γενικό Εμπορικό Μητρώο, the General Commercial Registry) is Greece's official business registry — the record of a company's legal existence, legal form, registration number, status, and filed corporate documents.

CitizenMCP exposes company lookup by tax number (ΑΦΜ), full company record retrieval, filed-document listing, and the registry's reference metadata (legal types, company statuses, registry offices). This is the same client and tool set that powers BusinessMCP; CitizenMCP holds its own separate server-side key so the two services' rate-limit budgets don't collide — see Section 5.

4. Full Endpoint / Tool Reference

Each row below is a distinct callable action exposed to a connected AI assistant.

4.1 Diavgeia — 15 tools

Tool	Purpose
<code>diavgeia_search_decisions</code>	Filtered search over published decisions (organization, unit, decision type, date range, signer, subject, etc.)
<code>diavgeia_simple_search_decisions</code>	Free-text search across decisions
<code>diavgeia_get_decision</code>	Retrieve a single decision by its AΔA tracking code
<code>diavgeia_get_decision_version_log</code>	Retrieve the revision history of a published decision
<code>diavgeia_list_decision_types</code>	List the taxonomy of decision types (e.g. procurement award, appointment)
<code>diavgeia_get_decision_type_details</code>	Get the definition and required fields for one decision type
<code>diavgeia_search_organizations</code>	Search the directory of public-sector organizations
<code>diavgeia_get_organization</code>	Retrieve a single organization's summary record
<code>diavgeia_get_organization_details</code>	Retrieve full profile details for an organization
<code>diavgeia_get_organization_units</code>	List the sub-units belonging to an organization
<code>diavgeia_get_unit</code>	Retrieve a single organizational unit's record
<code>diavgeia_get_signer</code>	Look up a signing official's record
<code>diavgeia_list_positions</code>	List official positions/roles used in the signer directory
<code>diavgeia_get_dictionary</code>	Retrieve subject/keyword dictionary entries used to classify decisions
<code>diavgeia_list_search_terms</code>	List valid search term/filter values for building queries

4.2 data.gov.gr / CKAN — 3 tools

Tool	Purpose
<code>ckan_search_datasets</code>	Free-text search across the open-data catalog
<code>ckan_get_dataset</code>	Retrieve a dataset's full metadata and list of downloadable resources
<code>ckan_get_resource_data</code>	Download a CSV/XLS/XLSX resource and parse it into paginated rows for direct analysis (up to 500 rows per page)

4.3 ΓΕΜΗ — 4 tools

Tool	Purpose
<code>gemi_search_company_by_tin</code>	Find a company by its tax identification number (ΑΦΜ)
<code>gemi_get_company</code>	Retrieve a company's full registry record by its ΓΕΜΗ number
<code>gemi_get_company_documents</code>	Retrieve the list of documents filed for a company
<code>gemi_list_metadata</code>	Retrieve reference metadata — legal types, company statuses, registry offices

5. Access & Authentication

5.1 Diavgeia & data.gov.gr — fully open

Diavgeia and data.gov.gr are both open-read government services, so no login, API key, or registration is required for normal use. A client points an MCP configuration at the service's public web address:

```
{
  "mcpServers": {
    "citizen-mcp": {
      "url": "https://citizen-mcp.nickdandis96.workers.dev"
    }
  }
}
```

An optional, free data.gov.gr token can be configured server-side to raise CKAN's rate ceiling for high-volume use. This is a deployment-level setting, not something an individual user needs to obtain.

5.2 ΓΕΜΗ — server-held key, separate from BusinessMCP's

ΓΕΜΗ requires an `api_key` approved per-applicant by KY ΓΕΜΗ (the registry operator). CitizenMCP holds one such key on the server side as a Cloudflare Worker secret — never a plain configuration value — and every caller of this worker shares that one key and its quota, same as on BusinessMCP.

CitizenMCP and BusinessMCP each hold their own separate `GEMI_API_KEY` — the two workers do not share one, because KY ΓΕΜΗ's 30 requests/minute cap applies per key, and reusing the same key across two independently rate-limited workers would double-book that shared quota. No end user ever sees or handles either key.

6. Rate Limiting

CitizenMCP runs one edge-enforced rate limiter, on ΓΕΜΗ calls:

Limiter	Scope	Ceiling
ΓΕΜΗ	Global — shared across every caller of this worker	30 requests / 60 seconds

The ΓΕΜΗ ceiling matches the quota KY ΓΕΜΗ places on the single approved API key CitizenMCP holds, applied to that key's total usage across all callers of this worker. It runs on Cloudflare's native edge rate-limit binding, checked before a request reaches any application logic. Diavgeia and data.gov.gr are not rate-limited beyond the platform's normal per-IP request handling, since neither imposes a shared-key quota.

7. Technical Architecture

7.1 Request lifecycle

Each incoming HTTP request follows a fixed pipeline:

1. CORS preflight handling, so browser-based MCP clients can connect directly.
2. Path validation — only the root path serves the MCP protocol; any other path returns a 404.
3. Edge rate-limit check — a per-IP check against the caller's IP, plus the ΓEMH-specific global limiter for ΓEMH calls only.
4. A fresh MCP server instance is created for the request, with all three tool sets (Diavgeia, CKAN, ΓEMH) registered.
5. The request is handed to the MCP Streamable HTTP transport, which parses the MCP message, dispatches to the requested tool, and returns the structured result.
6. CORS response headers are applied and the response is returned.

Each request is stateless and self-contained — no session state is kept between requests.

7.2 Shared core library

Tool logic is implemented in a shared internal library ([@my-mcp/core](#)) that also powers the companion BusinessMCP product. This means:

- One client per government service, reused wherever it's needed — Diavgeia's and ΓEMH's clients, for example, are shared verbatim between CitizenMCP and BusinessMCP.
- A single HTTP resilience layer (Section 7.3) underlies every government API call.
- Every tool call is validated against a strict input schema (Zod) before any government API is contacted.

7.3 Outbound networking

Every outbound call to Diavgeia, data.gov.gr, or ΓEMH goes through a shared HTTP client:

- **Timeouts** — 15 seconds by default.
- **Automatic retry with backoff** — HTTP 429 and 5xx responses are retried up to twice with exponential backoff, honoring the server's [Retry-After](#) header when present.
- **Normalized error reporting** — failures are surfaced to the calling assistant as a typed error including the failing URL, HTTP status, and a snippet of the response body.

7.4 Protocol & transport

CitizenMCP speaks MCP's Streamable HTTP transport, the current standard transport for remote MCP servers. The implementation ([WebStandardStreamableHTTPServerTransport](#)) is built on Web Standard APIs, so the same code runs unmodified on Cloudflare Workers, Node.js, Deno, or Bun.

7.5 Codebase

- Written in TypeScript with strict type-checking across the codebase.
- Automated test suites (Vitest) cover the shared HTTP client and each service client, including fixture-based tests against real API responses.
- Linting and formatting are enforced repo-wide (ESLint + Prettier).

8. Infrastructure & Where It Runs

8.1 Cloudflare Workers

CitizenMCP is deployed as a Cloudflare Worker, running on Cloudflare's global edge network rather than a single server in one location.

- **Global reach with low latency** — a request is handled by the Cloudflare location closest to the caller.
- **No idle server cost or cold-start delay** — Workers run in lightweight V8 isolates that start in milliseconds.
- **Automatic scaling** — the platform scales to handle concurrent load without manual capacity planning.

8.2 Live endpoint

Property	Value
Production URL	https://citizen-mcp.nickdandis96.workers.dev
Transport	MCP Streamable HTTP (single endpoint, root path)
Deployment tooling	Wrangler (Cloudflare's official CLI)
Source code	github.com/VisionVoyagerX/my-mcp (public)

8.3 Deployment

Deployments are performed via Cloudflare's `wrangler` CLI. Configuration — rate-limit thresholds, worker name, and platform compatibility settings — lives in a version-controlled `wrangler.toml` file alongside the code, so infrastructure configuration is reviewed and tracked the same way as application code. The GEMH API key itself is set separately as a Worker secret (`wrangler secret put GEMI_API_KEY`), never committed to the repository.