

# **20MCA243 - MOBILE APPLICATION DEVELOPMENT LAB**

*Lab Report Submitted By*

**SANIO LUKE SEBASTIAN**

**Reg. No.: AJC21MCA-2093**

*In Partial fulfilment for the Award of the Degree Of*

**MASTER OF COMPUTER APPLICATIONS (2 Year) (MCA)**

**APJ ABDUL KALAM TECHNOLOGICAL UNIVERSITY**



**AMAL JYOTHI COLLEGE OF ENGINEERING  
KANJIRAPPALLY**

[Affiliated to APJ Abdul Kalam Technological University, Kerala. Approved by AICTE,  
Accredited by NAAC with 'A' grade. Koovapally, Kanjirappally, Kottayam, Kerala –  
686518]

**2022-2023**

**DEPARTMENT OF COMPUTER APPLICATIONS**

**AMAL JYOTHI COLLEGE OF ENGINEERING**

**KANJIRAPPALLY**



**CERTIFICATE**

This is to certify that the lab report, **“20MCA243 MOBILE APPLICATION DEVELOPMENT LAB”** is the bonafide work of **SANIO LUKE SEBASTIAN (AJC21MCA-2093)** in partial fulfilment of the requirements for the award of the Degree of Master of Computer Applications under APJ Abdul Kalam Technological University during the year **2022-23**.

**Ms. Sruthimol Kurian**

**Lab In- Charge**

**Rev. Fr. Dr. Rubin Thottupurathu Jose**

**Head of the Department**

**Internal Examiner**

**External Examiner**

Course Code	Course Name	Syllabus Year	L-T-P-C
20MCA243	Mobile Application Development Lab	2020	0-1-3-2

## VISION

To promote an academic and research environment conducive for innovation centric technical education.

## MISSION

- MS1 - Provide foundations and advanced technical education in both theoretical and applied Computer Applications in-line with Industry demands.
- MS2 - Create highly skilled computer professionals capable of designing and innovating real life solutions.
- MS3 - Sustain an academic environment conducive to research and teaching focused to generate up-skilled professionals with ethical values.
- MS4 - Promote entrepreneurial initiatives and innovations capable of bridging and contributing with sustainable, socially relevant technology solutions.

## COURSE OUTCOME

CO	Outcome	Target
CO1	Design and develop user interfaces for mobile apps using basic building blocks, UI components and application structure using Emulator	60
CO2	Write simple programs and develop small applications using the concepts of UI design, layouts and preferences	60
CO3	Develop applications with multiple activities using intents, array adapter, exceptions and options menu.	60
CO4	Implement activities with dialogs, spinner, fragments and navigation drawer by applying themes	60
CO5	Develop mobile applications using SQLite.	60

## COURSE END SURVEY

CO	Survey Question	Answer Format
CO1	To what extent you are able to design and develop UI using Emulator	Excellent/Very Good/Good Satisfactory/Needs improvement
CO2	To what extent you understood concepts of layouts	Excellent/Very Good/Good Satisfactory/Needs improvement

CO3	To what extent you understood intents, exceptions and menus	Excellent/Very Good/Good Satisfactory/Needs improvement
CO4	To what extent you are able to implement activities applying themes	Excellent/Very Good/Good Satisfactory/Needs improvement
CO5	To what extent you understood to create applications with SQLite	Excellent/Very Good/Good Satisfactory/Needs improvement

## CONTENT

Sl. No.	Experiment	Date	CO	Page No.
1	Design a Login Form with username and password using Linear Layout and toast valid credentials		CO1	
2	Write a program that demonstrates Activity Lifecycle.		CO1	
3	Implementing basic arithmetic operations of a simple calculator		CO1	
4	Implement validations on various UI controls		CO1	
5	Design a registration activity and store registration details in local memory of phone using Intents and SharedPreferences		CO2	
6	Design a simple Calculator using GridLayout and Cascaded LinearLayout		CO2	
7	Create a Facebook page using RelativeLayout; set properties using .xml file		CO2	
8	Develop an application that toggles image using FrameLayout		CO2	
9	Implement Adapters and perform exception handling		CO3	
10	Implement Intent to navigate between multiple activities		CO3	
11	Develop application that works with explicit intents		CO3	
12	Implement Options Menu to navigate to activities		CO3	
13	Develop an application that uses ArrayAdapter with ListView.		CO3	
14	Develop an application that use GridView with images and display Alert box on selection		CO4	

15	Develop an application that implements Spinner component and perform event handling		CO4	
16	Create database using SQLite and perform INSERT and SELECT		CO5	
17	Perform UPDATE and DELETE on SQLite database		CO5	
18	Develop an application as a micro project which uses SQLite database as an assignment		CO5	

## **Experiment No.: 1**

### **Aim**

Design a Login Form with username and password using Linear Layout and toast valid credentials

### **CO1**

Design and develop user interfaces for mobile apps using basic building blocks, UI components and application structure using Emulator

### **Procedure**

#### **activity\_main.xml**

```
<?xml version="1.0" encoding="utf-8"?>
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
    xmlns:app="http://schemas.android.com/apk/res-auto"
    xmlns:tools="http://schemas.android.com/tools"
    android:layout_width="match_parent"
    android:layout_height="match_parent"
    android:gravity="center"
    android:orientation="vertical"
    tools:context=".MainActivity">

    <EditText
        android:id="@+id/username"
        android:layout_width="match_parent"
        android:layout_height="wrap_content"
        android:layout_margin="10dp"
        android:inputType="textPersonName"
        android:hint="Username"/>

    <EditText
        android:id="@+id/password"
        android:layout_width="match_parent"
        android:layout_height="wrap_content"
        android:layout_margin="10dp"
        android:inputType="textPassword"
        android:hint="Password"/>

    <Button
        android:id="@+id/login"
```

```
        android:layout_width="match_parent"
        android:layout_height="wrap_content"
        android:text="Login"
        android:layout_margin="10dp"/>
</LinearLayout>
```

### **MainActivity.java**

```
package com.example.application;

import androidx.appcompat.app.AppCompatActivity;

import android.os.Bundle;
import android.view.View;
import android.widget.Button;
import android.widget.EditText;
import android.widget.Toast;

public class MainActivity extends AppCompatActivity {

    // Variable Creation
    EditText username,password;
    Button login;


    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.activity_main);

        // Variables Initializations
        username= findViewById(R.id.username);
        password= findViewById(R.id.password);
        login= findViewById(R.id.login);

        // Below code works when user clicks on the login button
        login.setOnClickListener(new View.OnClickListener() {
            @Override
            public void onClick(View view) {
                String username_text= username.getText().toString();
                String password_text= password.getText().toString();
                Toast.makeText(MainActivity.this, "Login Successful.\nUsername is : 
"+username_text+"\nPassword is : "+password_text, Toast.LENGTH_LONG).show();
            }
        });
    }
}
```



## Output Screenshot

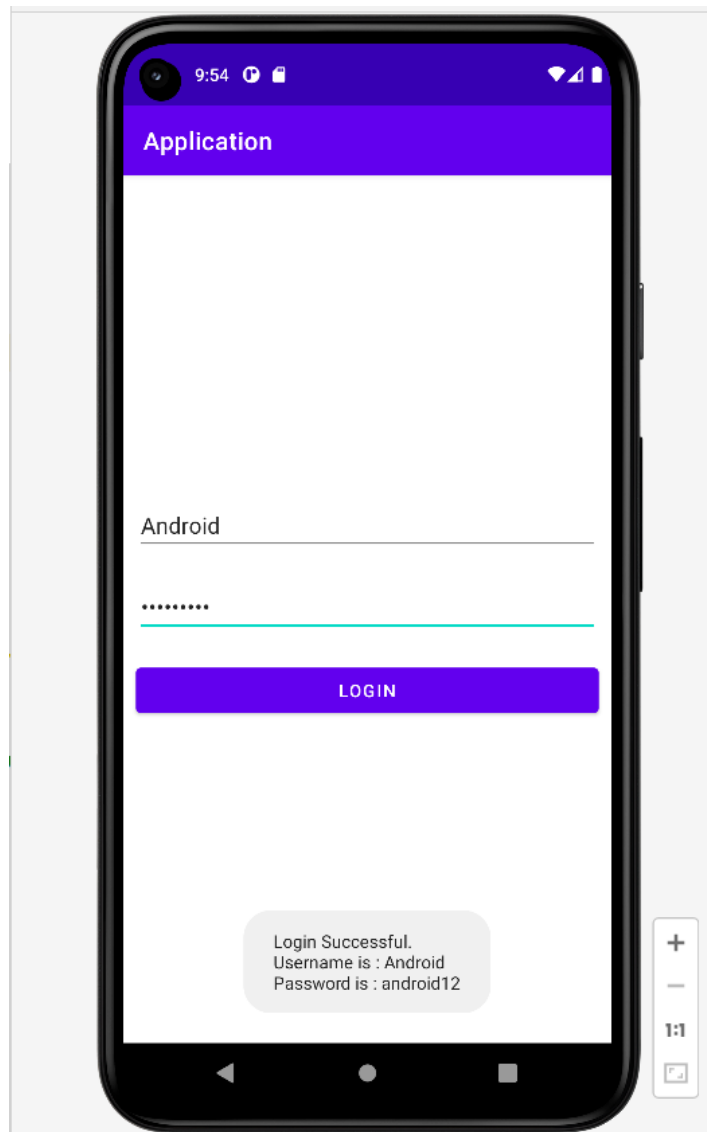

## Result

The program was executed and the result was successfully obtained. Thus, CO1 was obtained.

## **Experiment No.: 2**

### **Aim**

Write a program that demonstrates Activity Lifecycle.

### **CO1**

Design and develop user interfaces for mobile apps using basic building blocks, UI components and application structure using Emulator

### **Procedure**

#### **activity\_ques02.xml**

```
<?xml version="1.0" encoding="utf-8"?>
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
    xmlns:app="http://schemas.android.com/apk/res-auto"
    xmlns:tools="http://schemas.android.com/tools"
    android:layout_width="match_parent"
    android:layout_height="match_parent"
    android:gravity="center"
    tools:context=".Ques02Activity">

    <TextView
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:text="Question explaining the Activity-LifeCycle" />

</LinearLayout>
```

#### **Ques02Activity.java**

```
package com.example.application;

import androidx.appcompat.app.AppCompatActivity;

import android.os.Bundle;
import android.util.Log;
import android.widget.Toast;

public class Ques02Activity extends AppCompatActivity {
```

```
@Override
protected void onCreate(Bundle savedInstanceState) {
    super.onCreate(savedInstanceState);
    setContentView(R.layout.activity_ques02);
    Log.d("lifecycle", "onCreate invoked");
    Toast.makeText(getApplicationContext(), "onCreate invoked", Toast.LENGTH_SHORT).show();
}

@Override
protected void onStart() {
    super.onStart();
    Log.d("lifecycle", "onStart invoked");
    Toast.makeText(getApplicationContext(), "onStart invoked", Toast.LENGTH_SHORT).show();
}

@Override
protected void onResume() {
    super.onResume();
    Log.d("lifecycle", "onResume invoked");
    Toast.makeText(getApplicationContext(), "onResume invoked", Toast.LENGTH_SHORT).show();
}

@Override
protected void onPause() {
    super.onPause();
    Log.d("lifecycle", "onPause invoked");
    Toast.makeText(getApplicationContext(), "onPause invoked", Toast.LENGTH_SHORT).show();
}

@Override
protected void onStop() {
    super.onStop();
    Log.d("lifecycle", "onStop invoked");
    Toast.makeText(getApplicationContext(), "onStop invoked", Toast.LENGTH_SHORT).show();
}

@Override
protected void onRestart() {
    super.onRestart();
    Log.d("lifecycle", "onRestart invoked");
    Toast.makeText(getApplicationContext(), "onRestart invoked", Toast.LENGTH_SHORT).show();
}

@Override
protected void onDestroy() {
    super.onDestroy();
    Log.d("lifecycle", "onDestroy invoked");
    Toast.makeText(getApplicationContext(), "onDestroy invoked", Toast.LENGTH_SHORT).show();
}
```

```
}  
  
}
```

## Output Screenshot



## Result

The program was executed and the result was successfully obtained. Thus, CO1 was obtained.

## **Experiment No.: 3**

### **Aim**

Implementing basic arithmetic operations of a simple calculator

### **CO1**

Design and develop user interfaces for mobile apps using basic building blocks, UI components and application structure using Emulator

### **Procedure**

#### **activity\_ques03.xml**

```
<?xml version="1.0" encoding="utf-8"?>
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
    xmlns:app="http://schemas.android.com/apk/res-auto"
    xmlns:tools="http://schemas.android.com/tools"
    android:layout_width="match_parent"
    android:layout_height="match_parent"
    android:gravity="center"
    android:orientation="vertical"
    android:padding="20dp"
    tools:context=".Ques03Activity">

    <EditText
        android:id="@+id/number1"
        android:layout_width="match_parent"
        android:layout_height="wrap_content"
        android:hint="Enter Number 01"
        android:inputType="numberDecimal" />

    <EditText
        android:id="@+id/number2"
        android:layout_width="match_parent"
        android:layout_height="wrap_content"
        android:layout_marginTop="10dp"
        android:hint="Enter Number 02"
        android:inputType="numberDecimal" />
```

```
<TextView
    android:id="@+id/result_text"
    android:layout_width="match_parent"
    android:layout_height="wrap_content"
    android:layout_marginTop="20dp"
    android:textColor="@color/black"
    android:textSize="17sp"
    android:textStyle="bold" />
```

```
<Button
    android:id="@+id/add_btn"
    android:layout_width="match_parent"
    android:layout_height="wrap_content"
    android:layout_marginTop="10dp"
    android:text="+" />
```

```
<Button
    android:id="@+id/sub_btn"
    android:layout_width="match_parent"
    android:layout_height="wrap_content"
    android:layout_marginTop="10dp"
    android:text="-" />
```

```
<Button
    android:id="@+id/mul_btn"
    android:layout_width="match_parent"
    android:layout_height="wrap_content"
    android:layout_marginTop="10dp"
    android:text="x" />
```

```
<Button
    android:id="@+id/div_btn"
    android:layout_width="match_parent"
    android:layout_height="wrap_content"
    android:layout_marginTop="10dp"
    android:text="/" />
```

```
<Button
    android:id="@+id/clear_btn"
    android:layout_width="match_parent"
    android:layout_height="wrap_content"
    android:layout_marginTop="10dp"
    android:text="clear" />
```

```
</LinearLayout>
```

**Ques03Activity.java**

```
package com.example.application;

import androidx.appcompat.app.AppCompatActivity;

import android.os.Bundle;
import android.view.View;
import android.widget.Button;
import android.widget.EditText;
import android.widget.TextView;
import android.widget.Toast;

public class Ques03Activity extends AppCompatActivity {

    EditText number1, number2;
    TextView result_text;
    Button add_btn, sub_btn, mul_btn, div_btn, clear_btn;

    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.activity_ques03);

        number1= findViewById(R.id.number1);
        number2= findViewById(R.id.number2);
        result_text= findViewById(R.id.result_text);
        add_btn= findViewById(R.id.add_btn);
        sub_btn= findViewById(R.id.sub_btn);
        mul_btn= findViewById(R.id.mul_btn);
        div_btn= findViewById(R.id.div_btn);
        clear_btn= findViewById(R.id.clear_btn);


        add_btn.setOnClickListener(new View.OnClickListener() {
            @Override
            public void onClick(View view) {
                String number1_text= number1.getText().toString();
                String number2_text= number2.getText().toString();
                int num1= Integer.parseInt(number1_text);
                int num2= Integer.parseInt(number2_text);
                float sum= num1+num2;
                result_text.setText("The addition of the two numbers is : "+sum);
                Toast.makeText(getApplicationContext(), "The addition of the two numbers is : "+sum,
                Toast.LENGTH_SHORT).show();
            }
        });
    }
}
```

```
    }  
    });  
  
    sub_btn.setOnClickListener(new View.OnClickListener() {  
        @Override  
        public void onClick(View view) {  
            String number1_text= number1.getText().toString();  
            String number2_text= number2.getText().toString();  
            int num1= Integer.parseInt(number1_text);  
            int num2= Integer.parseInt(number2_text);  
            float sub= num1-num2;  
            result_text.setText("The subtraction of the two numbers is : "+sub);  
            Toast.makeText(getApplicationContext(), "The subtraction of the two numbers is : "+sub,  
Toast.LENGTH_SHORT).show();  
        }  
    });  
  
    mul_btn.setOnClickListener(new View.OnClickListener() {  
        @Override  
        public void onClick(View view) {  
            String number1_text= number1.getText().toString();  
            String number2_text= number2.getText().toString();  
            int num1= Integer.parseInt(number1_text);  
            int num2= Integer.parseInt(number2_text);  
            float mul= num1*num2;  
            result_text.setText("The multiplication of the two numbers is : "+mul);  
            Toast.makeText(getApplicationContext(), "The multiplication of the two numbers is : "+mul,  
Toast.LENGTH_SHORT).show();  
        }  
    });  
  
    div_btn.setOnClickListener(new View.OnClickListener() {  
        @Override  
        public void onClick(View view) {  
            String number1_text= number1.getText().toString();  
            String number2_text= number2.getText().toString();  
            int num1= Integer.parseInt(number1_text);  
            int num2= Integer.parseInt(number2_text);  
            float div= num1/num2;  
            result_text.setText("The division of the two numbers is : "+div);  
            Toast.makeText(getApplicationContext(), "The division of the two numbers is : "+div,  
Toast.LENGTH_SHORT).show();  
        }  
    });
```



```
clear_btn.setOnClickListener(new View.OnClickListener() {  
    @Override  
    public void onClick(View view) {  
        number1.setText("");  
        number2.setText("");  
        result_text.setText("");  
        Toast.makeText(getApplicationContext(), "Inputs cleared...", Toast.LENGTH_SHORT).show();  
    }  
});  
}
```

## Output Screenshot

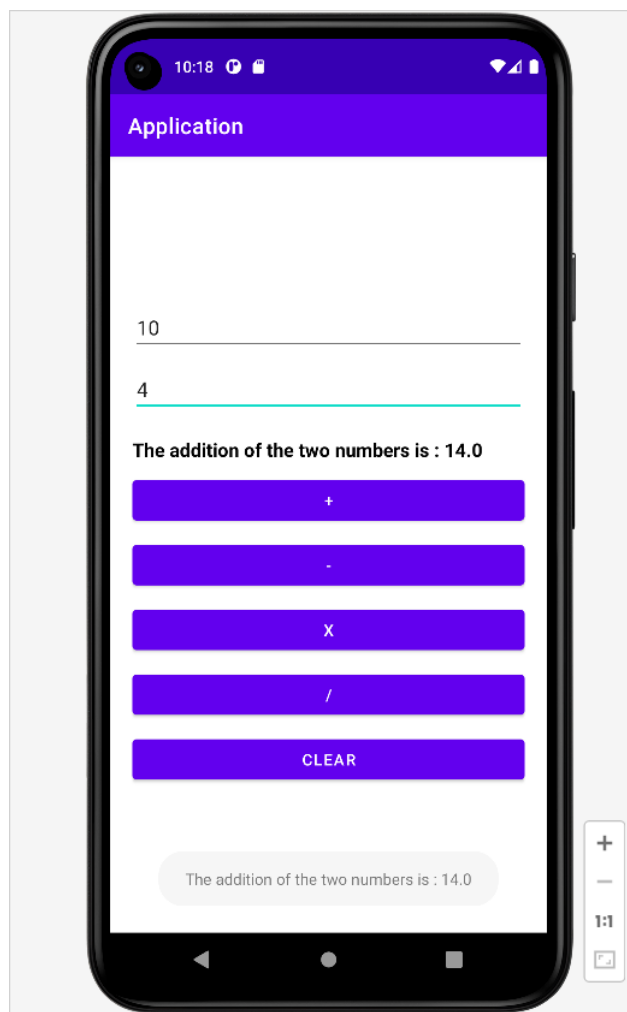

## Result

The program was executed and the result was successfully obtained. Thus, CO1 was obtained.

## **Experiment No.: 4**

### **Aim**

Implement validations on various UI controls

### **CO1**

Design and develop user interfaces for mobile apps using basic building blocks, UI components and application structure using Emulator

### **Procedure**

#### **activity ques04.xml**

```
<?xml version="1.0" encoding="utf-8"?>
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
    xmlns:app="http://schemas.android.com/apk/res-auto"
    xmlns:tools="http://schemas.android.com/tools"
    android:layout_width="match_parent"
    android:layout_height="match_parent"
    android:gravity="center"
    android:orientation="vertical"
    android:paddingHorizontal="20dp"
    tools:context=".Ques04Activity">

    <TextView
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:text="UI Validation Form"
        android:textSize="20sp"
        android:textColor="@color/black"
        android:textStyle="bold"/>

    <EditText
        android:id="@+id/name_et"
        android:layout_width="match_parent"
        android:layout_height="wrap_content"
        android:layout_marginTop="40dp"
        android:hint="Enter your name"
        android:inputType="textPersonName"
        android:minHeight="48dp"
        android:textColorHint="#757575"
```

```
android:importantForAutofill="no" />
```

```
<EditText
```

```
    android:id="@+id/email_et"  
    android:layout_width="match_parent"  
    android:layout_height="wrap_content"  
    android:layout_marginTop="20dp"  
    android:hint="Enter your email ID"  
    android:inputType="textEmailAddress"  
    android:minHeight="48dp"  
    android:textColorHint="#757575"  
    android:importantForAutofill="no" />
```

```
<EditText
```

```
    android:id="@+id/age_et"  
    android:layout_width="match_parent"  
    android:layout_height="wrap_content"  
    android:layout_marginTop="20dp"  
    android:hint="Enter your age (From 18 to 36)"  
    android:inputType="number"  
    android:minHeight="48dp"  
    android:textColorHint="#757575"  
    android:importantForAutofill="no" />
```

```
<LinearLayout
```

```
    android:layout_width="match_parent"  
    android:layout_height="wrap_content"  
    android:layout_marginTop="20dp"  
    android:orientation="vertical">
```

```
<TextView
```

```
    android:layout_width="wrap_content"  
    android:layout_height="wrap_content"  
    android:text="Select your favourites fast foods"/>
```

```
<LinearLayout
```

```
    android:layout_width="match_parent"  
    android:layout_height="wrap_content"  
    android:orientation="horizontal">
```

```
<CheckBox
```

```
    android:id="@+id/pizza_checkbox"  
    android:layout_width="wrap_content"  
    android:layout_height="wrap_content"  
    android:text="Pizza"/>
```

```
<CheckBox
```

```
    android:id="@+id/burger_checkbox"
```

```
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:layout_marginStart="10dp"
    android:text="Burger"/>
```

```
<CheckBox
    android:id="@+id/kfc_checkbox"
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:layout_marginStart="10dp"
    android:text="KFC"/>
</LinearLayout>
```

```
<TextView
    android:id="@+id/food_error"
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:textColor="#DD2C00" />
```

```
</LinearLayout>
```

```
<LinearLayout
    android:layout_width="match_parent"
    android:layout_height="wrap_content"
    android:orientation="vertical"
    android:layout_marginTop="20dp">
```

```
<TextView
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:text="Select your gender"/>
```

```
<RadioGroup
    android:id="@+id/gender_radiogroup"
    android:layout_width="match_parent"
    android:layout_height="wrap_content"
    android:orientation="horizontal"
    android:layout_marginTop="10dp">
```

```
<RadioButton
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:text="Male"/>
```

```
<RadioButton
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:layout_marginStart="10dp"
```

```
        android:text="Female"/>

        <RadioButton
            android:layout_width="wrap_content"
            android:layout_height="wrap_content"
            android:layout_marginStart="10dp"
            android:text="Others"/>

    </RadioGroup>

    <TextView
        android:id="@+id/gender_error"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:textColor="#DD2C00" />

</LinearLayout>

<Button
    android:id="@+id/submit_btn"
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:text="Submit"
    android:layout_marginTop="20dp"/>

</LinearLayout>
```

### **Ques04Activity.java**

```
package com.example.application;

import androidx.appcompat.app.AppCompatActivity;

import android.os.Bundle;
import android.view.View;
import android.widget.Button;
import android.widget.CheckBox;
import android.widget.EditText;
import android.widget.RadioButton;
import android.widget.RadioGroup;
import android.widget.TextView;
import android.widget.Toast;

public class Ques04Activity extends AppCompatActivity {

    EditText name_et, email_et, age_et;
    CheckBox pizza_checkbox, burger_checkbox, kfc_checkbox;
    TextView food_error, gender_error;
```

```
RadioGroup gender_radiogroup;  
Button submit_btn;
```

```
@Override
```


```
protected void onCreate(Bundle savedInstanceState) {  
    super.onCreate(savedInstanceState);  
    setContentView(R.layout.activity_ques04);  
    name_et= findViewById(R.id.name_et);  
    email_et= findViewById(R.id.email_et);  
    age_et= findViewById(R.id.age_et);  
    pizza_checkbox= findViewById(R.id.pizza_checkbox);  
    burger_checkbox= findViewById(R.id.burger_checkbox);  
    kfc_checkbox= findViewById(R.id.kfc_checkbox);  
    food_error= findViewById(R.id.food_error);  
    gender_error= findViewById(R.id.gender_error);  
    gender_radiogroup= findViewById(R.id.gender_radiogroup);  
    submit_btn= findViewById(R.id.submit_btn);  
  
    submit_btn.setOnClickListener(new View.OnClickListener() {  
        @Override  
        public void onClick(View view) {  
            gender_error.setText("");  
            food_error.setText("");  
            name_et.setError(null);  
            age_et.setError(null);  
            email_et.setError(null);  
            String name_txt= name_et.getText().toString();  
            String email_txt= email_et.getText().toString();  
            String age_txt= age_et.getText().toString();  
            int gender_id= gender_radiogroup.getCheckedRadioButtonId();  
            boolean ispizza_checked= pizza_checkbox.isChecked();  
            boolean isburger_checked= burger_checkbox.isChecked();  
            boolean iskfc_checked= kfc_checkbox.isChecked();  
  
            if(name_txt.equals("")){  
                name_et.setError("Please enter your name !!");  
                name_et.requestFocus();  
            }  
            else if(email_txt.equals("")){  
                email_et.setError("Please enter your email ID");  
                email_et.requestFocus();  
            }  
            else if(age_txt.equals("")){  
                age_et.setError("Please enter your age");  
                age_et.requestFocus();  
            }  
            else if(Integer.parseInt(age_txt) < 18 || Integer.parseInt(age_txt) > 36){  
                age_et.setError("Please enter valid a age from between 18 to 36 !!");  
            }  
        }  
    });  
}
```

```

        age_et.requestFocus();
    }
    else if(!ispizza_checked && !isburger_checked && !iskfc_checked){
        food_error.setText("Please select atleast one item !!");
    }
    else if(gender_id < 0){
        gender_error.setText("Please select your gender !!");
    }
    else{
        Toast.makeText(getApplicationContext(), "Form Submitted Successfully...",
Toast.LENGTH_SHORT).show();
    }
}
});
}
}

```

## Output Screenshot

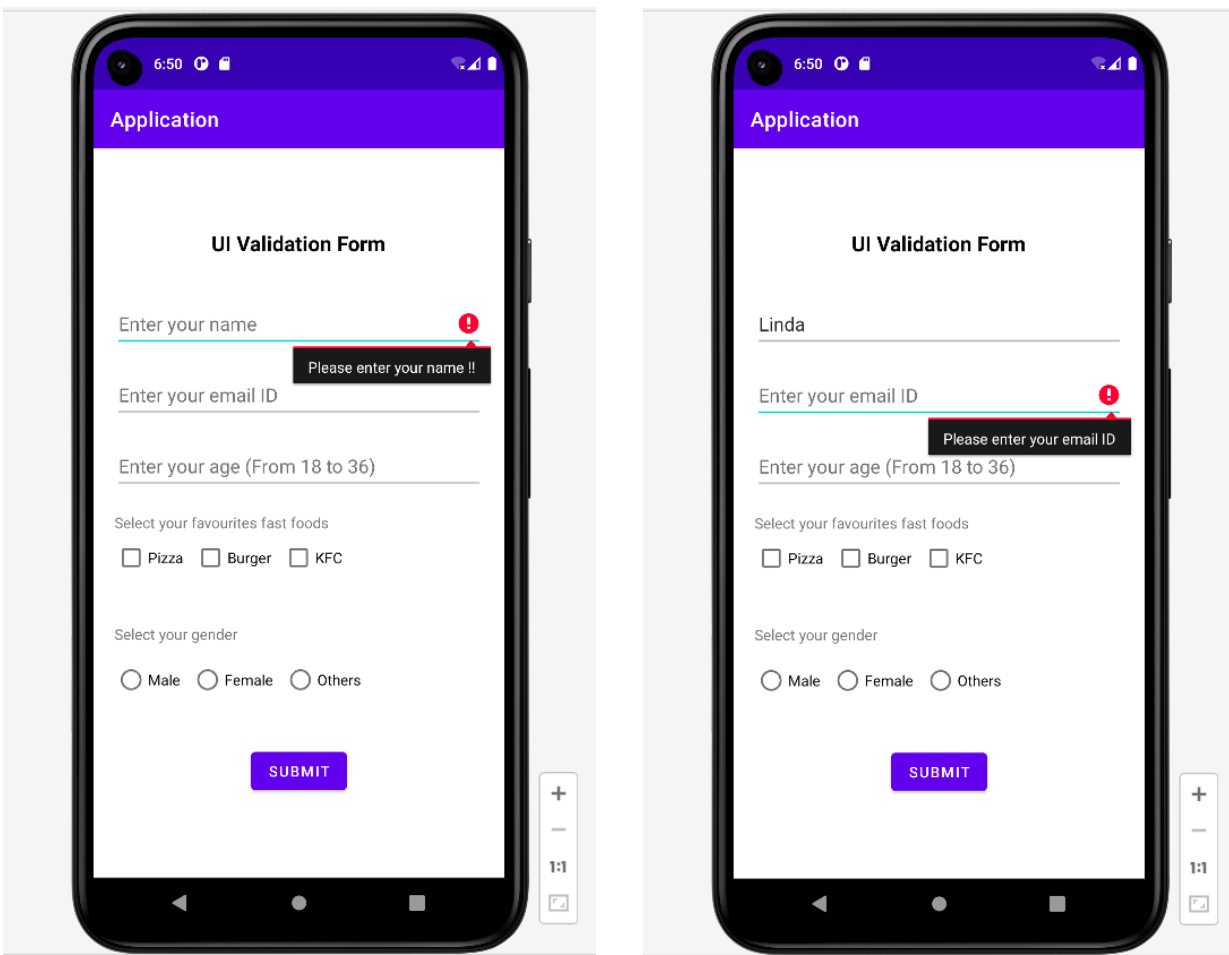

Application

### UI Validation Form

Linda

linda12@gmail.com

Enter your age (From 18 to 36) !

Please enter your age

Select your favourites fast food

☐ Pizza ☐ Burger ☐ KFC

Select your gender

☐ Male ☐ Female ☐ Others

**SUBMIT**

Application

### UI Validation Form

Linda

linda12@gmail.com

2 !

Please enter valid a age from between 18 to 36 !!

Select your favourites

☐ Pizza ☐ Burger ☐ KFC

Select your gender

☐ Male ☐ Female ☐ Others

**SUBMIT**

Application

### UI Validation Form

Linda

linda12@gmail.com

21

Select your favourites fast foods

☐ Pizza ☐ Burger ☐ KFC

Please select atleast one item !!

Select your gender

☐ Male ☐ Female ☐ Others

**SUBMIT**

Application

### UI Validation Form

Linda

linda12@gmail.com

21

Select your favourites fast foods

☒ Pizza ☐ Burger ☐ KFC


Select your gender

☐ Male ☐ Female ☐ Others

Please select your gender !!

**SUBMIT**



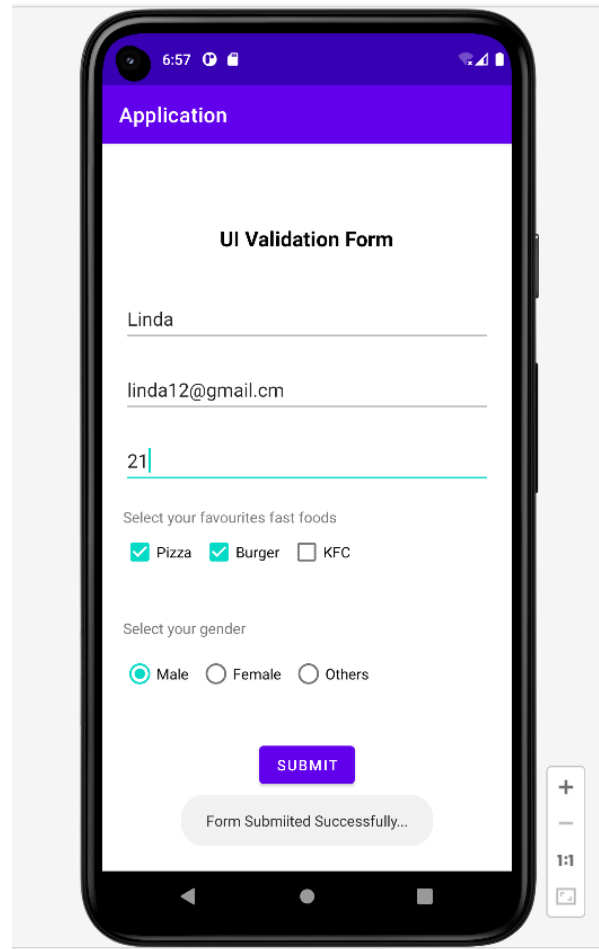

## Result

The program was executed and the result was successfully obtained. Thus CO1 was obtained.

## **Experiment No.: 5**

### **Aim**

Design a registration activity and store registration details in local memory of phone using Intents and SharedPreferences

### **CO2**

Write simple programs and develop small applications using the concepts of UI design, layouts and preferences

### **Procedure**

#### **activity\_ques05.xml**

```
<?xml version="1.0" encoding="utf-8"?>
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
    xmlns:app="http://schemas.android.com/apk/res-auto"
    xmlns:tools="http://schemas.android.com/tools"
    android:layout_width="match_parent"
    android:layout_height="match_parent"
    android:orientation="vertical"
    android:paddingHorizontal="20dp"
    android:id="@+id/main_layout"
    android:paddingVertical="10dp"
    android:gravity="center"
    tools:context=".Ques05Activity">

    <TextView
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:text="Register Page"
        android:textStyle="bold"
        android:textColor="@color/black"
        android:textSize="20sp"/>

    <EditText
        android:id="@+id/fullname"
        android:layout_width="match_parent"
        android:layout_height="wrap_content"
        android:inputType="textPersonName"
        android:layout_marginTop="30dp"
```

```
    android:hint="Full Name"/>
```

```
<EditText
    android:id="@+id/emailid"
    android:layout_width="match_parent"
    android:layout_height="wrap_content"
    android:layout_marginTop="10dp"
    android:inputType="textEmailAddress"
    android:hint="Email ID"/>
```

```
<RadioGroup
    android:id="@+id/gender_radioGroup"
    android:layout_width="match_parent"
    android:layout_height="wrap_content"
    android:layout_marginTop="10dp"
    android:orientation="horizontal">
```

```
<RadioButton
    android:id="@+id/male_gender"
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:text="Male"/>
```

```
<RadioButton
    android:id="@+id/female_gender"
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:layout_marginLeft="10dp"
    android:text="Female"/>
```

```
<RadioButton
    android:id="@+id/others_gender"
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:layout_marginLeft="10dp"
    android:text="Others"/>
```

```
</RadioGroup>
```

```
<TextView
    android:id="@+id/gender_error"
    android:layout_width="match_parent"
    android:layout_height="wrap_content"
    android:textColor="#ff0000"/>
```

```
<EditText
    android:id="@+id/password"
    android:layout_width="match_parent"
```

```
    android:layout_height="wrap_content"
    android:hint="Password"
    android:inputType="textPassword"
    android:layout_marginTop="10dp"/>
```

```
<Button
    android:id="@+id/register_btn"
    android:layout_width="match_parent"
    android:layout_height="wrap_content"
    android:layout_marginTop="10dp"
    android:text="Register"/>
```

```
</LinearLayout>
```

### **Ques05Activity.java**

```
package com.example.application;

import androidx.appcompat.app.AppCompatActivity;

import android.content.Intent;
import android.content.SharedPreferences;
import android.os.Bundle;
import android.util.Patterns;
import android.view.View;
import android.widget.Button;
import android.widget.EditText;
import android.widget.LinearLayout;
import android.widget.RadioButton;
import android.widget.RadioGroup;
import android.widget.TextView;

public class Ques05Activity extends AppCompatActivity {

    EditText fullname, emailid, password;
    RadioGroup gender_radioGroup;
    RadioButton male_gender, female_gender, others_gender;
    Button register_btn;
    TextView gender_error;
    LinearLayout main_layout;

    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.activity_ques05);

        fullname= findViewById(R.id.fullname);
        emailid= findViewById(R.id.emailid);
```

```
password= findViewById(R.id.password);
gender_radioGroup= findViewById(R.id.gender_radioGroup);
male_gender= findViewById(R.id.male_gender);
female_gender= findViewById(R.id.female_gender);
others_gender= findViewById(R.id.others_gender);
register_btn= findViewById(R.id.register_btn);
gender_error= findViewById(R.id.gender_error);
main_layout= findViewById(R.id.main_layout);

register_btn.setOnClickListener(new View.OnClickListener() {
    @Override
    public void onClick(View view) {

        fullname.setError(null);
        emailid.setError(null);
        gender_error.setText("");
        password.setError(null);

        String password_regex = "^(?=.*[0-9])(?=.*[a-z])(?=.*[A-Z])(?=.*[@#$%^&+=])(?=\S+$).{4,}$";
        String fullname_text= fullname.getText().toString();
        String emailid_text= emailid.getText().toString();
        String password_text= password.getText().toString();
        int gender_selected= gender_radioGroup.getCheckedRadioButtonId();
        String gender="Not Available";

        if(gender_selected==R.id.male_gender)
            gender="Male";
        else if(gender_selected==R.id.female_gender)
            gender="Female";
        else if(gender_selected==R.id.others_gender)
            gender="Others";

        if(fullname_text.equals("")){
            fullname.requestFocus();
            fullname.setError("Please enter fullname !!");
        }
        else if(fullname_text.length() < 3){
            fullname.requestFocus();
            fullname.setError("Fullname should be more than 2 characters !!");
        }
        else if(emailid_text.equals("")){
            emailid.requestFocus();
            emailid.setError("Please enter email-id !!");
        }
        else if(!Patterns.EMAIL_ADDRESS.matcher(emailid_text).matches()){
            emailid.requestFocus();
            emailid.setError("Please enter a valid email-id !!");
        }
    }
});
```

```

        else if(gender_selected < 0){
            gender_error.setText("Select anyone of the gender option !!");
        }
        else if(!password_text.matches(password_regex)){
            password.requestFocus();
            password.setError("Password should contain - \na digit must occur at least once\na lower case
letter must occur at least once\nan upper case letter must occur at least once\na special character like
@#$%^&+=\nNo blank spaces allowed\natleast 6 characters");
        }
        else{
            SharedPreferences pref= getSharedPreferences("register_data", MODE_PRIVATE);
            SharedPreferences.Editor pref_edit= pref.edit();
            pref_edit.putString("reg_fullname",fullname_text);
            pref_edit.putString("reg_emailid",emailid_text);
            pref_edit.putString("reg_password",password_text);
            pref_edit.putString("reg_gender",gender);
            pref_edit.apply();

            Intent intent= new Intent(getApplicationContext(),Ques05ResultActivity.class);
            startActivity(intent);
        }
    }
});
}
}
}

```

### **activity ques05 result.xml**

```

<?xml version="1.0" encoding="utf-8"?>
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
    xmlns:app="http://schemas.android.com/apk/res-auto"
    xmlns:tools="http://schemas.android.com/tools"
    android:layout_width="match_parent"
    android:layout_height="match_parent"
    android:orientation="vertical"
    android:gravity="center"
    android:padding="10dp"
    tools:context=".Ques05ResultActivity">

    <TextView
        android:id="@+id/fullname_result"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:layout_marginTop="10dp"
        android:text="Name : "/>

    <TextView
        android:id="@+id/emailid_result"

```

```
android:layout_width="wrap_content"
android:layout_height="wrap_content"
android:layout_marginTop="10dp"
android:text="Name : "/>
```

```
<TextView
    android:id="@+id/gender_result"
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:layout_marginTop="10dp"
    android:text="Gender : "/>
```

```
<TextView
    android:id="@+id/password_result"
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:layout_marginTop="10dp"
    android:text="Password : "/>
```

```
</LinearLayout>
```

### **Ques05ResultActivity.java**

```
package com.example.application;

import androidx.appcompat.app.AppCompatActivity;

import android.content.SharedPreferences;
import android.os.Bundle;
import android.widget.TextView;

public class Ques05ResultActivity extends AppCompatActivity {


    TextView fullname_result, emailid_result, gender_result, password_result;

    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.activity_ques05_result);


        fullname_result= findViewById(R.id.fullname_result);
        emailid_result= findViewById(R.id.emailid_result);
        gender_result= findViewById(R.id.gender_result);
        password_result= findViewById(R.id.password_result);
    }
}
```

```
SharedPreferences pref= getSharedPreferences("register_data", MODE_PRIVATE);  
String name= pref.getString("reg_fullname","Not Available !!");  
String email= pref.getString("reg_emailid","Not Available !!");  
String password= pref.getString("reg_password","Not Available !!");  
String gender= pref.getString("reg_gender","Not Available !!");  
  
fullname_result.setText("Name : "+name);  
emailid_result.setText("Email ID : "+email);  
gender_result.setText("Gender : "+gender);  
password_result.setText("Password : "+password);  
}  
}
```

### Output Screenshot

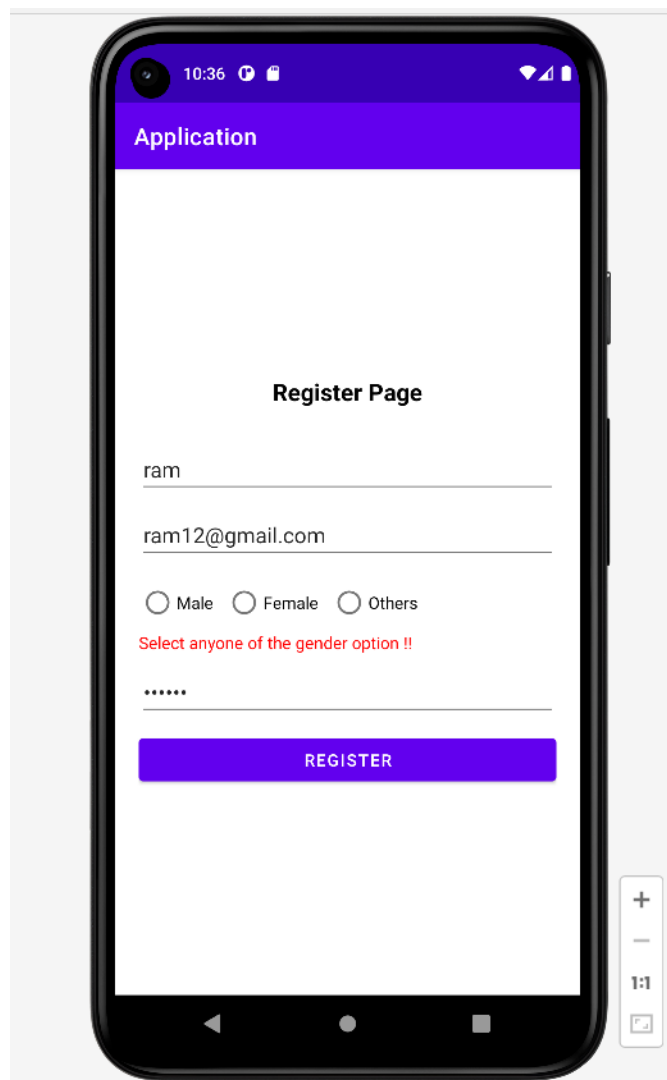



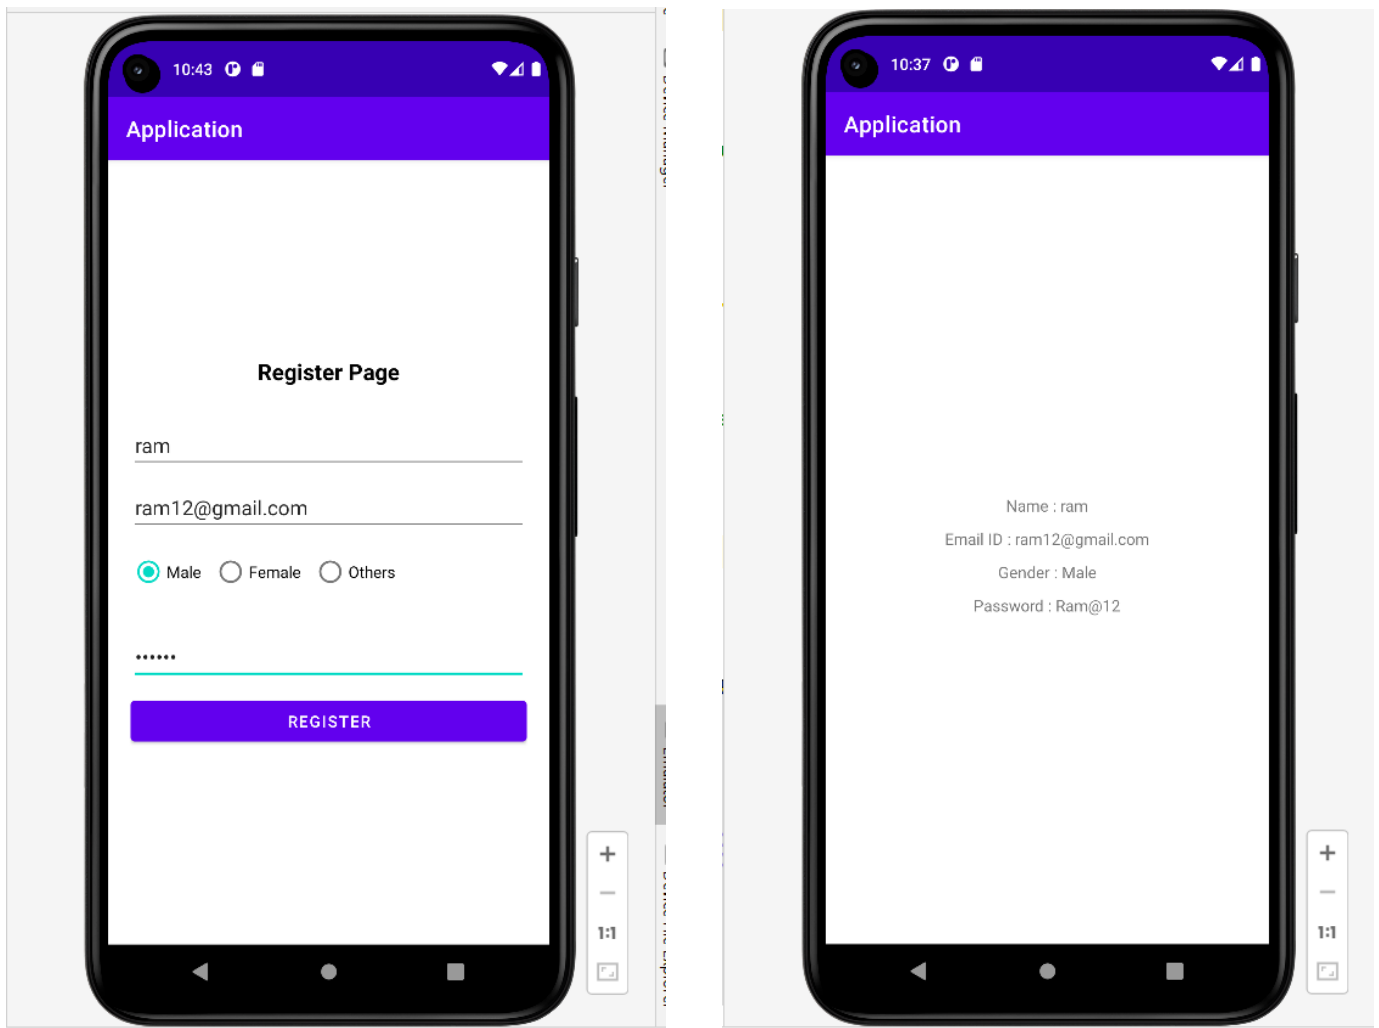

## Result

The program was executed and the result was successfully obtained. Thus, CO2 was obtained.

## **Experiment No.: 6**

### **Aim**

Design a simple Calculator using GridLayout and Cascaded LinearLayout

### **CO2**

Write simple programs and develop small applications using the concepts of UI design, layouts and preferences

### **Procedure**

#### **activity ques06\_cascaded\_layout.xml**

```
<?xml version="1.0" encoding="utf-8"?>
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
    xmlns:app="http://schemas.android.com/apk/res-auto"
    xmlns:tools="http://schemas.android.com/tools"
    android:layout_width="match_parent"
    android:layout_height="match_parent"
    android:orientation="vertical"
    android:id="@+id/calculator_mainlay"
    android:padding="20dp"
    tools:context=".Ques06CascadedLayoutActivity">

    <EditText
        android:layout_width="match_parent"
        android:layout_height="wrap_content"
        android:layout_marginTop="30dp"
        android:hint="Number 01"
        android:inputType="number"/>

    <EditText
        android:layout_width="match_parent"
        android:layout_height="wrap_content"
        android:layout_marginTop="10dp"
        android:hint="Number 02"
        android:inputType="number"/>

    <EditText
        android:layout_width="match_parent"
        android:layout_height="wrap_content"
```

```
android:layout_marginTop="10dp"
android:hint="Result"
android:clickable="false"
android:enabled="false"
android:inputType="number"/>
```

```
<LinearLayout
    android:layout_width="match_parent"
    android:layout_height="match_parent"
    android:orientation="vertical"
    android:layout_marginTop="20dp"
    android:gravity="bottom">
```

```
<LinearLayout
    android:layout_width="match_parent"
    android:layout_height="wrap_content"
    android:orientation="horizontal"
    android:weightSum="4">
```

```
<Button
    android:id="@+id/numclearall_btn"
    android:layout_width="0dp"
    android:layout_height="60dp"
    android:textColor="@color/white"
    android:text="CE"
    android:layout_weight="1"/>
```

```
<Button
    android:id="@+id/numclear_btn"
    android:layout_width="0dp"
    android:layout_height="60dp"
    android:textColor="@color/white"
    android:text="C"
    android:layout_marginStart="10dp"
    android:layout_weight="1"/>
```

```
<Button
    android:id="@+id/nummodulus_btn"
    android:layout_width="0dp"
    android:layout_height="60dp"
    android:textColor="@color/white"
    android:text="%"
    android:layout_marginStart="10dp"
    android:layout_weight="1"/>
```

```
<Button
    android:id="@+id/divide_btn"
    android:layout_width="0dp"
```

```
        android:layout_height="60dp"
        android:textColor="@color/white"
        android:text="/"
        android:layout_marginStart="10dp"
        android:layout_weight="1"/>
```

```
</LinearLayout>
```

```
<LinearLayout
    android:layout_width="match_parent"
    android:layout_height="wrap_content"
    android:orientation="horizontal"
    android:layout_marginTop="10dp"
    android:weightSum="4">
```

```
<Button
    android:id="@+id/num7_btn"
    android:layout_width="0dp"
    android:layout_height="60dp"
    android:textColor="@color/white"
    android:text="7"
    android:layout_weight="1"/>
```

```
<Button
    android:id="@+id/num8_btn"
    android:layout_width="0dp"
    android:layout_height="60dp"
    android:textColor="@color/white"
    android:text="8"
    android:layout_marginStart="10dp"
    android:layout_weight="1"/>
```

```
<Button
    android:id="@+id/num9_btn"
    android:layout_width="0dp"
    android:layout_height="60dp"
    android:textColor="@color/white"
    android:text="9"
    android:layout_marginStart="10dp"
    android:layout_weight="1"/>
```

```
<Button
    android:id="@+id/multiply_btn"
    android:layout_width="0dp"
    android:layout_height="60dp"
    android:textColor="@color/white"
    android:text="x"
```

```
    android:layout_marginStart="10dp"
    android:layout_weight="1"/>
```

```
</LinearLayout>
```

```
<LinearLayout
    android:layout_width="match_parent"
    android:layout_height="wrap_content"
    android:orientation="horizontal"
    android:layout_marginTop="10dp"
    android:weightSum="4">
```

```
<Button
    android:id="@+id/num4_btn"
    android:layout_width="0dp"
    android:layout_height="60dp"
    android:textColor="@color/white"
    android:text="4"
    android:layout_weight="1"/>
```

```
<Button
    android:id="@+id/num5_btn"
    android:layout_width="0dp"
    android:layout_height="60dp"
    android:textColor="@color/white"
    android:text="5"
    android:layout_marginStart="10dp"
    android:layout_weight="1"/>
```

```
<Button
    android:id="@+id/num6_btn"
    android:layout_width="0dp"
    android:layout_height="60dp"
    android:textColor="@color/white"
    android:text="6"
    android:layout_marginStart="10dp"
    android:layout_weight="1"/>
```

```
<Button
    android:id="@+id/substract_btn"
    android:layout_width="0dp"
    android:layout_height="60dp"
    android:textColor="@color/white"
    android:text="-"
    android:layout_marginStart="10dp"
    android:layout_weight="1"/>
```

```
</LinearLayout>
```

```
<LinearLayout
    android:layout_width="match_parent"
    android:layout_height="wrap_content"
    android:orientation="horizontal"
    android:layout_marginTop="10dp"
    android:weightSum="4">

    <Button
        android:id="@+id/num1_btn"
        android:layout_width="0dp"
        android:layout_height="60dp"
        android:textColor="@color/white"
        android:text="1"
        android:layout_weight="1"/>

    <Button
        android:id="@+id/num2_btn"
        android:layout_width="0dp"
        android:layout_height="60dp"
        android:textColor="@color/white"
        android:text="2"
        android:layout_marginStart="10dp"
        android:layout_weight="1"/>

    <Button
        android:id="@+id/num3_btn"
        android:layout_width="0dp"
        android:layout_height="60dp"
        android:textColor="@color/white"
        android:text="3"
        android:layout_marginStart="10dp"
        android:layout_weight="1"/>

    <Button
        android:id="@+id/add_btn"
        android:layout_width="0dp"
        android:layout_height="60dp"
        android:textColor="@color/white"
        android:text="+"
        android:layout_marginStart="10dp"
        android:layout_weight="1"/>

</LinearLayout>

<LinearLayout
    android:layout_width="match_parent"
    android:layout_height="wrap_content"
```

```
android:orientation="horizontal"
android:layout_marginTop="10dp"
android:weightSum="4">
```

```
<Button
    android:id="@+id/numplusminus_btn"
    android:layout_width="0dp"
    android:layout_height="60dp"
    android:textColor="@color/white"
    android:text="+/-"
    android:layout_weight="1"/>
```

```
<Button
    android:id="@+id/num0_btn"
    android:layout_width="0dp"
    android:layout_height="60dp"
    android:textColor="@color/white"
    android:text="0"
    android:layout_marginStart="10dp"
    android:layout_weight="1"/>
```

```
<Button
    android:id="@+id/decimal_btn"
    android:layout_width="0dp"
    android:layout_height="60dp"
    android:textColor="@color/white"
    android:text="."
    android:layout_marginStart="10dp"
    android:layout_weight="1"/>
```

```
<Button
    android:id="@+id/equals_btn"
    android:layout_width="0dp"
    android:layout_height="60dp"
    android:textColor="@color/white"
    android:text="="
    android:layout_marginStart="10dp"
    android:layout_weight="1"/>
```

```
</LinearLayout>
```

```
</LinearLayout>
```

```
</LinearLayout>
```

**Ques06CascadedLayoutActivity.java**

```
package com.example.application;

import androidx.appcompat.app.AppCompatActivity;

import android.os.Bundle;

public class Ques06CascadedLayoutActivity extends AppCompatActivity {

    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.activity_ques06_cascaded_layout);
    }
}
```

**activity\_ques06\_cascaded\_layout.xml**

```
<?xml version="1.0" encoding="utf-8"?>
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
    xmlns:app="http://schemas.android.com/apk/res-auto"
    xmlns:tools="http://schemas.android.com/tools"
    android:id="@+id/calculator_mainlay"
    android:layout_width="match_parent"
    android:layout_height="match_parent"
    android:orientation="vertical"
    android:padding="20dp"
    tools:context=".Ques06GridLayoutActivity">

    <EditText
        android:layout_width="match_parent"
        android:layout_height="wrap_content"
        android:layout_marginTop="30dp"
        android:hint="Number 01"
        android:inputType="number" />

    <EditText
        android:layout_width="match_parent"
        android:layout_height="wrap_content"
        android:layout_marginTop="10dp"
        android:hint="Number 02"
        android:inputType="number" />

    <EditText
```



```
android:layout_width="match_parent"
android:layout_height="wrap_content"
android:layout_marginTop="10dp"
android:clickable="false"
android:enabled="false"
android:hint="Result"
android:inputType="number" />
```

<LinearLayout

```
android:layout_width="match_parent"
android:layout_height="match_parent"
android:gravity="bottom"
android:orientation="vertical">
```

<GridLayout

```
android:layout_width="match_parent"
android:layout_height="wrap_content"
android:layout_marginTop="10dp"
android:columnCount="4"
android:orientation="horizontal"
android:rowCount="5">
```

<Button

```
android:layout_marginTop="20dp"
android:padding="13dp"
android:text="CE"
android:textColor="@color/white" />
```

<Button

```
android:layout_marginStart="10dp"
android:layout_marginTop="20dp"
android:padding="13dp"
android:text="C"
android:textColor="@color/white" />
```

<Button

```
android:layout_marginStart="10dp"
android:layout_marginTop="20dp"
android:padding="13dp"
android:text="%"
android:textColor="@color/white" />
```

<Button

```
android:layout_marginStart="10dp"
android:layout_marginTop="20dp"
android:padding="13dp"
android:text="/"
android:textColor="@color/white" />
```

```
<Button
    android:layout_marginTop="20dp"
    android:padding="13dp"
    android:text="7"
    android:textColor="@color/white" />
```

```
<Button
    android:layout_marginStart="10dp"
    android:layout_marginTop="20dp"
    android:padding="13dp"
    android:text="8"
    android:textColor="@color/white" />
```

```
<Button
    android:layout_marginStart="10dp"
    android:layout_marginTop="20dp"
    android:padding="13dp"
    android:text="9"
    android:textColor="@color/white" />
```

```
<Button
    android:layout_marginStart="10dp"
    android:layout_marginTop="20dp"
    android:padding="13dp"
    android:text="x"
    android:textColor="@color/white" />
```

```
<Button
    android:layout_marginTop="20dp"
    android:padding="13dp"
    android:text="4"
    android:textColor="@color/white" />
```

```
<Button
    android:layout_marginStart="10dp"
    android:layout_marginTop="20dp"
    android:padding="13dp"
    android:text="5"
    android:textColor="@color/white" />
```

```
<Button
    android:layout_marginStart="10dp"
    android:layout_marginTop="20dp"
    android:padding="13dp"
    android:text="6"
    android:textColor="@color/white" />
```

```
<Button
    android:layout_marginStart="10dp"
    android:layout_marginTop="20dp"
    android:padding="13dp"
    android:text="-"
    android:textColor="@color/white" />
```

```
<Button
    android:layout_marginTop="20dp"
    android:padding="13dp"
    android:text="1"
    android:textColor="@color/white" />
```

```
<Button
    android:layout_marginStart="10dp"
    android:layout_marginTop="20dp"
    android:padding="13dp"
    android:text="2"
    android:textColor="@color/white" />
```

```
<Button
    android:layout_marginStart="10dp"
    android:layout_marginTop="20dp"
    android:padding="13dp"
    android:text="3"
    android:textColor="@color/white" />
```

```
<Button
    android:layout_marginStart="10dp"
    android:layout_marginTop="20dp"
    android:padding="13dp"
    android:text="+"
    android:textColor="@color/white" />
```

```
<Button
    android:layout_marginTop="20dp"
    android:padding="13dp"
    android:text="+/-"
    android:textColor="@color/white" />
```

```
<Button
    android:layout_marginStart="10dp"
    android:layout_marginTop="20dp"
    android:padding="13dp"
    android:text="0"
    android:textColor="@color/white" />
```

```
<Button
```

```
        android:layout_marginStart="10dp"
        android:layout_marginTop="20dp"
        android:padding="13dp"
        android:text="."
        android:textColor="@color/white" />
```

```
<Button
    android:layout_marginStart="10dp"
    android:layout_marginTop="20dp"
    android:padding="13dp"
    android:text="="
    android:textColor="@color/white" />
```

```
</GridLayout>
```

```
</LinearLayout>
```

```
</LinearLayout>
```

### **Ques06CascadedLayoutActivity.java**

```
package com.example.application;


import androidx.appcompat.app.AppCompatActivity;

import android.os.Bundle;

public class Ques06GridLayoutActivity extends AppCompatActivity {

    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.activity_ques06_grid_layout);
    }
}
```

## Output Screenshot

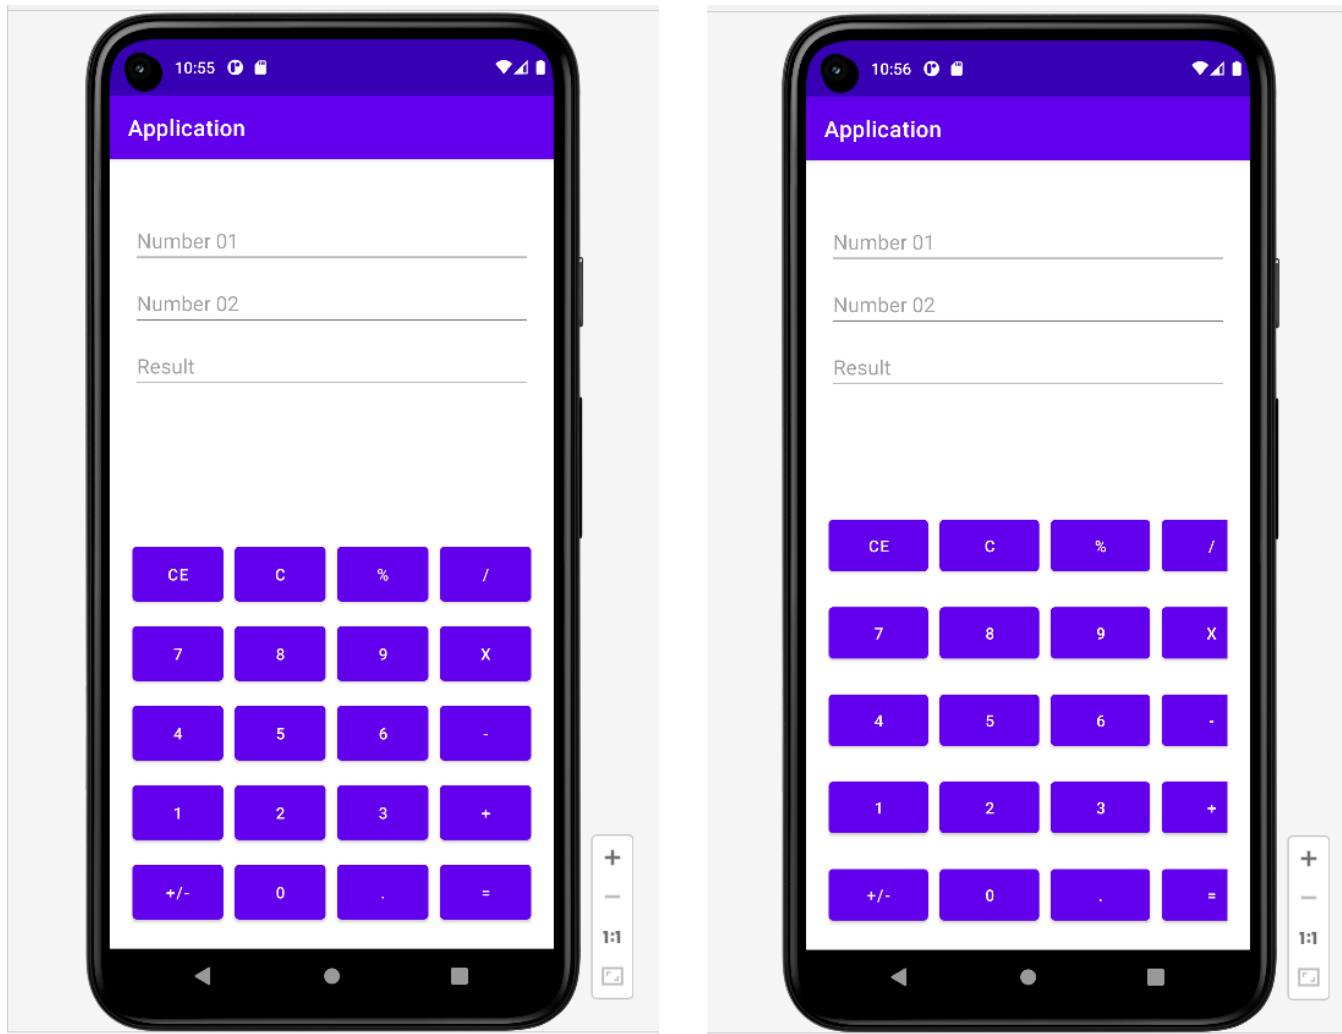

## Result

The program was executed and the result was successfully obtained. Thus CO2 was obtained.

## **Experiment No.: 7**

### **Aim**

Create a Facebook page using RelativeLayout; set properties using .xml file

### **CO2**

Write simple programs and develop small applications using the concepts of UI design, layouts and preferences

### **Procedure**

#### **activity\_ques07.xml**

```
<?xml version="1.0" encoding="utf-8"?>
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
    xmlns:app="http://schemas.android.com/apk/res-auto"
    xmlns:tools="http://schemas.android.com/tools"
    android:layout_width="match_parent"
    android:orientation="vertical"
    android:layout_height="match_parent"
    android:id="@+id/mainlay"
    tools:context=".Ques07Activity">

    <ImageView
        android:layout_width="match_parent"
        android:layout_height="230dp"
        android:src="@drawable/fb_subbg"
        android:scaleType="centerCrop"/>

    <TextView
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:text="Nederlands . Polski . More ..."
        android:textAlignment="center"
        android:layout_marginTop="5dp"
        android:layout_gravity="center"/>

    <LinearLayout
        android:layout_width="match_parent"
        android:layout_height="wrap_content"
        android:paddingHorizontal="30dp"
```

```
android:layout_marginTop="50dp"
android:orientation="vertical">
```

```
<EditText
    android:id="@+id/fb_id"
    android:layout_width="match_parent"
    android:layout_height="wrap_content"
    android:hint="Phone or email"
    android:digits=""
    android:inputType="text"/>
```

```
<EditText
    android:id="@+id/fb_pass"
    android:layout_width="match_parent"
    android:layout_height="wrap_content"
    android:layout_marginTop="20dp"
    android:hint="Password"
    android:inputType="textPassword"/>
```

```
<Button
    android:id="@+id/fb_loginbtn"
    android:layout_width="match_parent"
    android:layout_height="60dp"
    android:text="Log In"
    android:layout_marginTop="20dp"
    android:textAllCaps="false"
    android:backgroundTint="#3F51B5"/>
```

```
<TextView
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:text="Forgot Password?"
    android:textStyle="bold"
    android:textColor="#3F51B5"
    android:textSize="17sp"
    android:textAlignment="center"
    android:layout_gravity="center"
    android:layout_marginTop="10dp"/>
```

```
<LinearLayout
    android:layout_width="match_parent"
    android:layout_height="wrap_content"
    android:orientation="horizontal"
    android:layout_gravity="center"
    android:gravity="center"
    android:layout_marginTop="40dp"
    android:weightSum="3">
```

```
<com.google.android.material.divider.MaterialDivider
    android:layout_width="0dp"
    android:layout_height="1dp"
    android:layout_weight="1.45"
    android:background="#CCCCCC"/>
```

```
<TextView
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:text="OR"
    android:textAlignment="center"
    android:layout_weight="0.2"/>
```

```
<com.google.android.material.divider.MaterialDivider
    android:id="@+id/divider_2"
    android:layout_width="0dp"
    android:layout_height="1dp"
    android:layout_weight="1.45"
    android:background="#CCCCCC"/>
```

```
</LinearLayout>
```

```
<Button
    android:layout_width="match_parent"
    android:layout_height="wrap_content"
    android:text="Create New facebook Account"
    android:layout_marginTop="20dp"
    android:textAllCaps="false"
    android:backgroundTint="#4CAF50"/>
```

```
</LinearLayout>
```

```
</LinearLayout>
```

### **Ques07Activity.java**

```
package com.example.application;

import androidx.appcompat.app.AppCompatActivity;

import android.os.Bundle;


public class Ques07Activity extends AppCompatActivity {

    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.activity_ques07);
    }
}
```



```
}  
}
```

## Output Screenshot

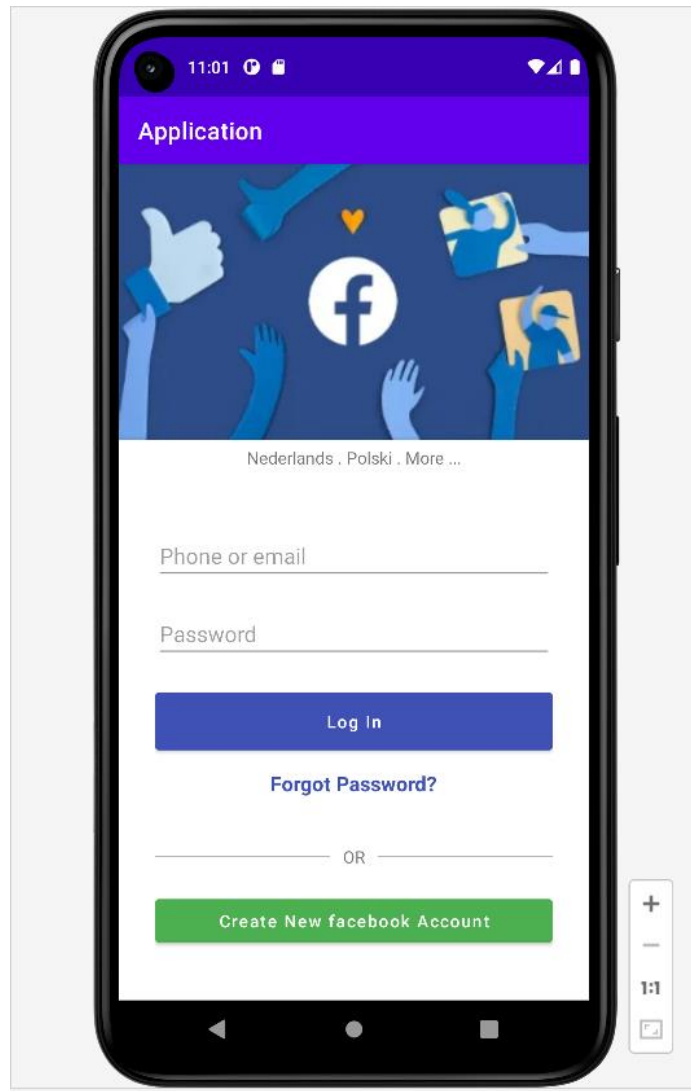

## Result

The program was executed and the result was successfully obtained. Thus CO2 was obtained.

## **Experiment No.: 8**

### **Aim**

Develop an application that toggles image using FrameLayout

### **CO2**

Write simple programs and develop small applications using the concepts of UI design, layouts and preferences

### **Procedure**

#### **activity\_ques08.xml**

```
<?xml version="1.0" encoding="utf-8"?>
<FrameLayout xmlns:android="http://schemas.android.com/apk/res/android"
    xmlns:app="http://schemas.android.com/apk/res-auto"
    xmlns:tools="http://schemas.android.com/tools"
    android:layout_width="match_parent"
    android:layout_height="match_parent"
    android:orientation="vertical"
    tools:context=".Ques08Activity">

    <ToggleButton
        android:id="@+id/toggle_img_btn"
        android:layout_width="60dp"
        android:layout_height="60dp"
        android:textOff=""
        android:textOn=""
        android:background="@drawable/ic_unlocked"
        android:layout_gravity="center"/>

</FrameLayout>
```

**Ques08Activity.java**

```
package com.example.application;

import androidx.appcompat.app.AppCompatActivity;

import android.os.Bundle;
import android.widget.Toast;
import android.widget.ToggleButton;

public class Ques08Activity extends AppCompatActivity {


    ToggleButton toggle_img_btn;

    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.activity_ques08);

        toggle_img_btn= findViewById(R.id.toggle_img_btn);

        toggle_img_btn.setOnClickListener(v->{
            if(toggle_img_btn.isChecked()){
                toggle_img_btn.setBackgroundDrawable(getResources().getDrawable(R.drawable.ic_locked));
                Toast.makeText(getApplicationContext(), "Application Locked Successfully.",
Toast.LENGTH_SHORT).show();
            }
            else{
                toggle_img_btn.setBackgroundDrawable(getResources().getDrawable(R.drawable.ic_unlocked));
                Toast.makeText(getApplicationContext(), "Application Unlocked Successfully.",
Toast.LENGTH_SHORT).show();
            }
        });
    }
}
```

## Output Screenshot

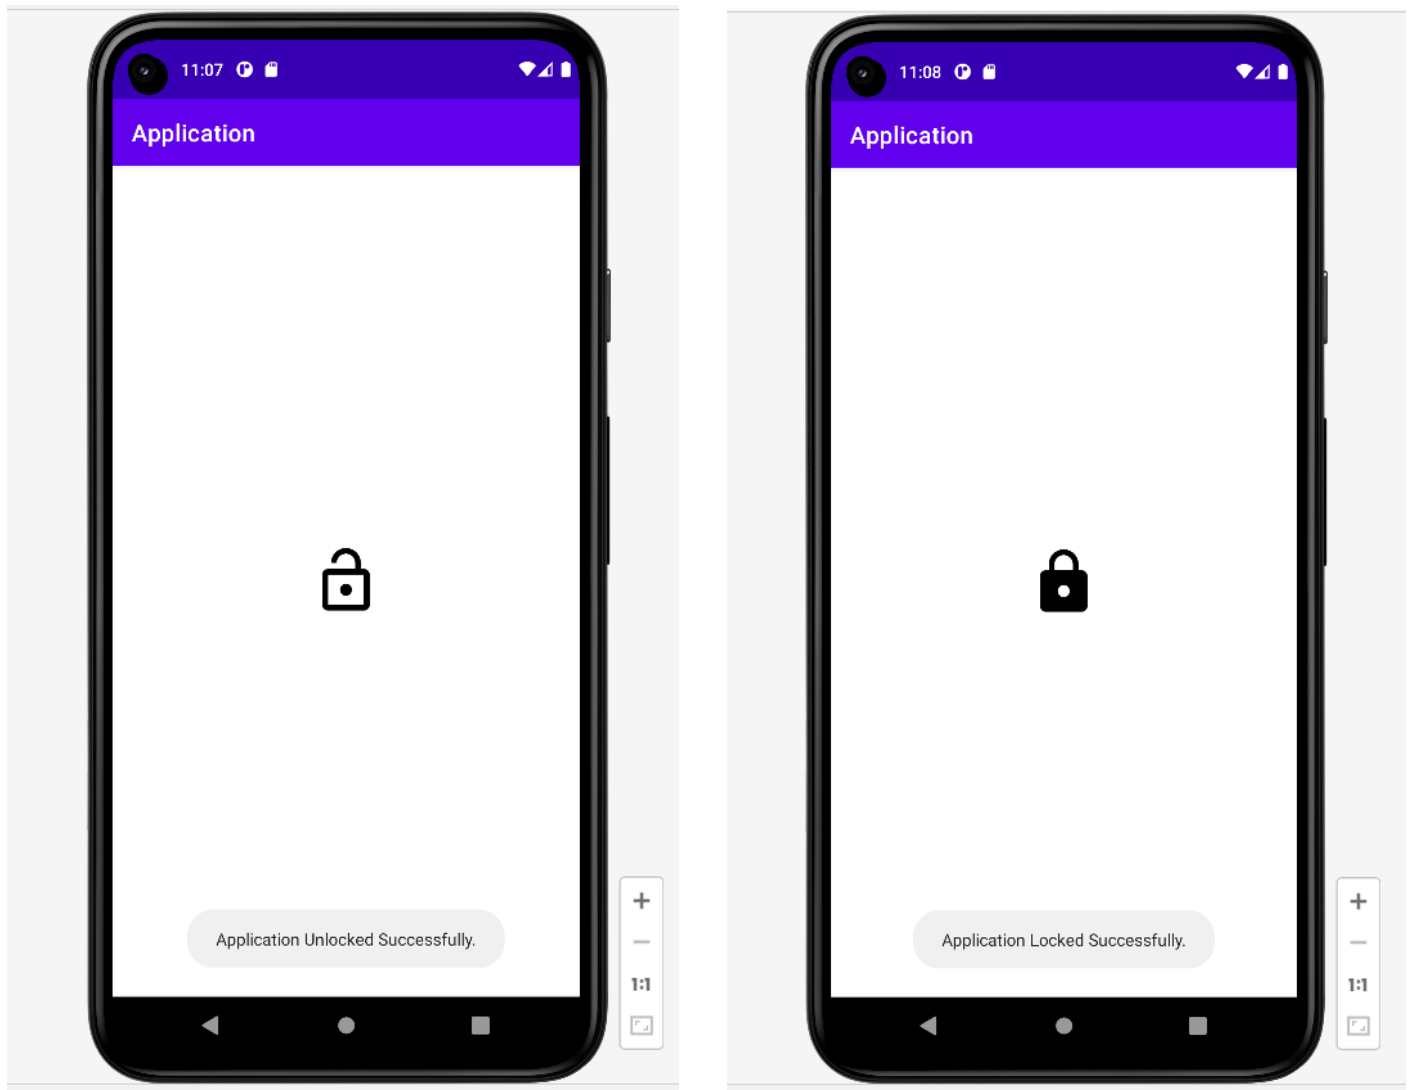

## Result

The program was executed and the result was successfully obtained. Thus, CO2 was obtained.

## **Experiment No.: 9**

### **Aim**

Implement Adapters and perform exception handling

### **CO3**

Develop applications with multiple activities using intents, array adapter, exceptions and options menu.

### **Procedure**

#### **activity\_ques09.xml**

```
<?xml version="1.0" encoding="utf-8"?>
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
    xmlns:app="http://schemas.android.com/apk/res-auto"
    xmlns:tools="http://schemas.android.com/tools"
    android:layout_width="match_parent"
    android:layout_height="match_parent"
    android:gravity="center"
    android:orientation="vertical"
    tools:context=".Ques09Activity">

    <TextView
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:text="Exception Activity"/>

    <TextView
        android:id="@+id/textview"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:layout_marginTop="20dp"
        android:text="Value of 0 / 0 : "/>

</LinearLayout>
```

**Ques09Activity.java**

```
package com.example.application;

import androidx.appcompat.app.AppCompatActivity;

import android.os.Bundle;
import android.widget.TextView;
import android.widget.Toast;

public class Ques09Activity extends AppCompatActivity {

    TextView textview;

    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.activity_ques09);

        textview= findViewById(R.id.textview);

        try{
            int n1=0, n2=0;
            int a= n1/n2;
            textview.setText("Value of 0 / 0 : "+a);
            Toast.makeText(getApplicationContext(), "The value is : "+a, Toast.LENGTH_LONG).show();
        }
        catch (Exception e){
            Toast.makeText(getApplicationContext(), "The caught exception is : "+e.getMessage(),
            Toast.LENGTH_LONG).show();
        }

    }
}
```

## **Output Screenshot**



## **Result**

The program was executed and the result was successfully obtained. Thus, CO3 was obtained.

## **Experiment No.: 10**

### **Aim**

Implement Intent to navigate between multiple activities

### **CO3**

Develop applications with multiple activities using intents, array adapter, exceptions and options menu.

### **Procedure**

#### **activity\_ques10.xml**

```
<?xml version="1.0" encoding="utf-8"?>
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
    xmlns:app="http://schemas.android.com/apk/res-auto"
    xmlns:tools="http://schemas.android.com/tools"
    android:layout_width="match_parent"
    android:layout_height="match_parent"
    android:gravity="center"
    android:orientation="vertical"
    tools:context=".Ques10Activity">

    <TextView
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:text="HOME ACTIVITY PAGE"
        android:textStyle="bold"
        android:textSize="17sp"
        android:textColor="@color/black"/>

    <Button
        android:id="@+id/button"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:text="View AJCE"
        android:layout_marginTop="10dp"/>

</LinearLayout>
```



**Ques10Activity.java**

```
package com.example.application;

import androidx.appcompat.app.AppCompatActivity;

import android.content.Intent;
import android.os.Bundle;
import android.view.View;
import android.widget.Button;

public class Ques10Activity extends AppCompatActivity {

    Button button;

    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.activity_ques10);

        button= findViewById(R.id.button);
        button.setOnClickListener(new View.OnClickListener() {
            @Override
            public void onClick(View view) {
                Intent intent= new Intent(getApplicationContext(), Ques10ResultActivity.class);
                startActivity(intent);
            }
        });
    }
}
```

**activity ques10 result.xml**

```
<?xml version="1.0" encoding="utf-8"?>
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
    xmlns:tools="http://schemas.android.com/tools"
    android:layout_width="match_parent"
    android:layout_height="match_parent"
    android:gravity="center"
    android:padding="20dp"
    android:orientation="vertical"
    tools:context=".Ques10ResultActivity">

    <ImageView
        android:layout_width="match_parent"
        android:layout_height="300dp"
        android:src="@drawable/amal_jyothi"/>

    <TextView
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:text="Amal Jyothi College of Engineering"
        android:textColor="@color/black"
        android:textStyle="bold"
        android:textSize="17sp"/>

</LinearLayout>
```

**Ques10ResultActivity.java**

```
package com.example.application;


import androidx.appcompat.app.AppCompatActivity;

import android.os.Bundle;

public class Ques10ResultActivity extends AppCompatActivity {

    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.activity_ques10_result);
    }
}
```

## Output Screenshot

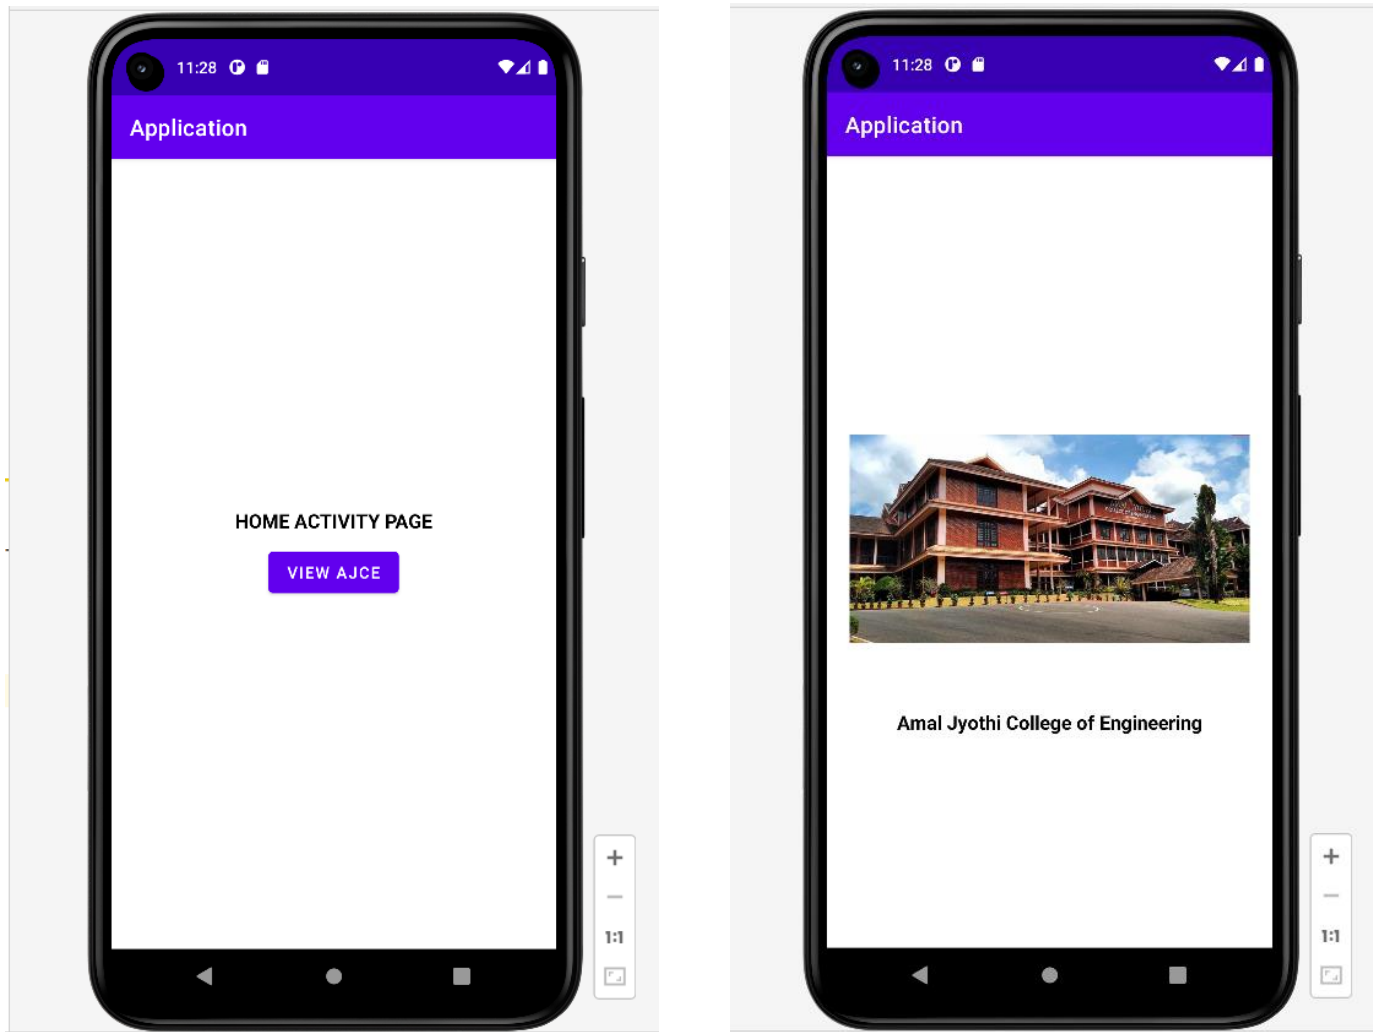

## Result

The program was executed and the result was successfully obtained. Thus CO3 was obtained.

## **Experiment No.: 11**

### **Aim**

Develop application that works with explicit intents

### **CO3**

Develop applications with multiple activities using intents, array adapter, exceptions and options menu.

### **Procedure**

#### **activity\_ques11.xml**

```
<?xml version="1.0" encoding="utf-8"?>
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
    xmlns:app="http://schemas.android.com/apk/res-auto"
    xmlns:tools="http://schemas.android.com/tools"
    android:layout_width="match_parent"
    android:layout_height="match_parent"
    android:gravity="center"
    android:orientation="vertical"
    tools:context=".Ques11Activity">

    <TextView
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:text="First Activity Page" />

    <Button
        android:id="@+id/goto_second_btn"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:text="Go to Second Activity Page"
        android:layout_marginTop="10dp"/>

</LinearLayout>
```

**Ques11Activity.java**

```
package com.example.application;

import androidx.appcompat.app.AppCompatActivity;

import android.content.Intent;
import android.os.Bundle;
import android.view.View;
import android.widget.Button;

public class Ques11Activity extends AppCompatActivity {

    Button goto_second_btn;

    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.activity_ques11);

        goto_second_btn= findViewById(R.id.goto_second_btn);
        goto_second_btn.setOnClickListener(new View.OnClickListener() {
            @Override
            public void onClick(View view) {
                Intent intent= new Intent(getApplicationContext(), Ques11SecondActivity.class);
                startActivity(intent);
            }
        });
    }
}
```

**activity\_ques11.xml**

```
package com.example.application;

import androidx.appcompat.app.AppCompatActivity;

import android.content.Intent;
import android.os.Bundle;
import android.view.View;
import android.widget.Button;

public class Ques11Activity extends AppCompatActivity {

    Button goto_second_btn;

    @Override
```

```

protected void onCreate(Bundle savedInstanceState) {
    super.onCreate(savedInstanceState);
    setContentView(R.layout.activity_ques11);

    goto_second_btn= findViewById(R.id.goto_second_btn);
    goto_second_btn.setOnClickListener(new View.OnClickListener() {
        @Override
        public void onClick(View view) {
            Intent intent= new Intent(getApplicationContext(), Ques11SecondActivity.class);
            startActivity(intent);
        }
    });
}
}

```

### **Ques11SecondActivity.java**

```

<?xml version="1.0" encoding="utf-8"?>
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
    xmlns:app="http://schemas.android.com/apk/res-auto"
    xmlns:tools="http://schemas.android.com/tools"
    android:layout_width="match_parent"
    android:layout_height="match_parent"
    android:gravity="center"
    android:orientation="vertical"
    tools:context=".Ques11SecondActivity">

    <TextView
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:text="Second Activity Page" />

    <Button
        android:id="@+id/goto_third_btn"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:text="Go to Third Page"
        android:layout_marginTop="10dp"/>

</LinearLayout>

```

### **activity\_ques11\_third.xml**

```

<?xml version="1.0" encoding="utf-8"?>
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
    xmlns:app="http://schemas.android.com/apk/res-auto"
    xmlns:tools="http://schemas.android.com/tools"

```

```
android:layout_width="match_parent"
android:layout_height="match_parent"
android:gravity="center"
android:orientation="vertical"
tools:context=".Ques11ThirdActivity">

<TextView
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:text="Third Activity Page" />

<Button
    android:id="@+id/goto_main_btn"
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:text="Go back to Main Activity Page"
    android:layout_marginTop="10dp"/>

</LinearLayout>
```

### **Ques11ThirdActivity.java**

```
package com.example.application;

import android.content.Intent;
import android.os.Bundle;
import android.view.View;
import android.widget.Button;

import androidx.appcompat.app.AppCompatActivity;

public class Ques11ThirdActivity extends AppCompatActivity {



    Button goto_main_btn;

    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.activity_ques11_third);


        goto_main_btn= findViewById(R.id.goto_main_btn);
        goto_main_btn.setOnClickListener(new View.OnClickListener() {
            @Override
            public void onClick(View view) {
                Intent intent= new Intent(getApplicationContext(), Ques11Activity.class);
                startActivity(intent);
            }
        });
    }
}
```

```
}  
}
```

## Output Screenshot

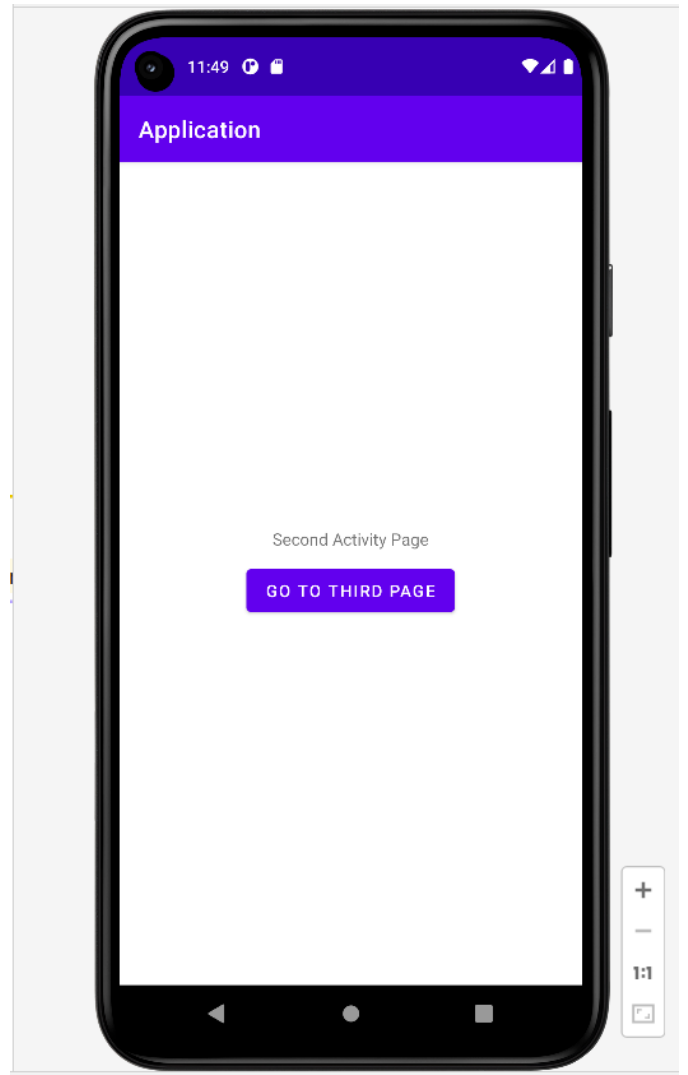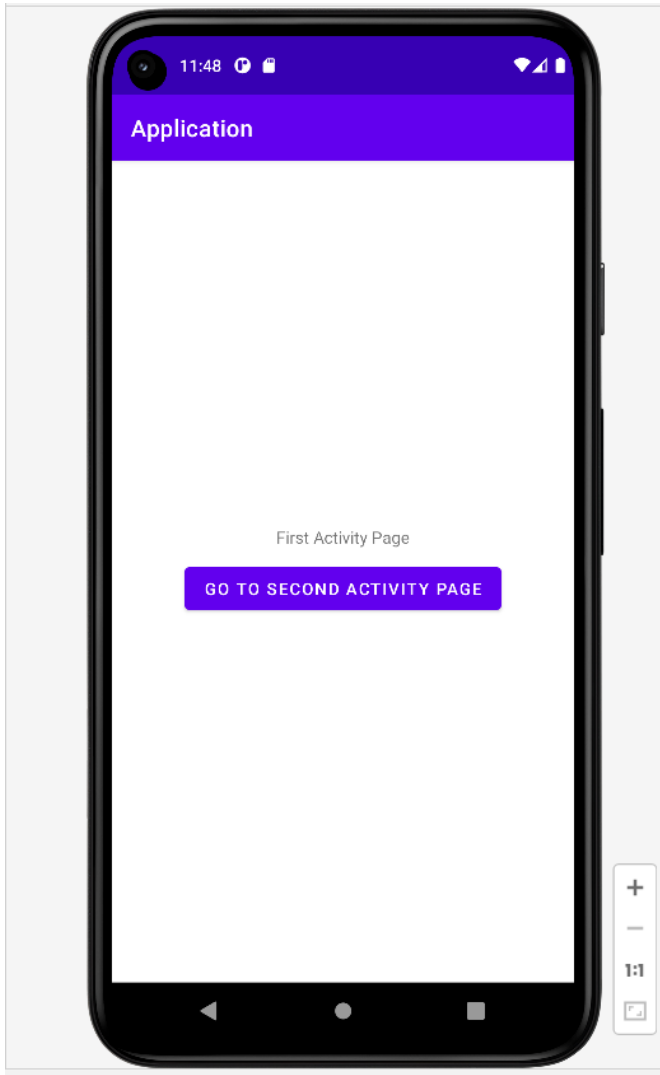



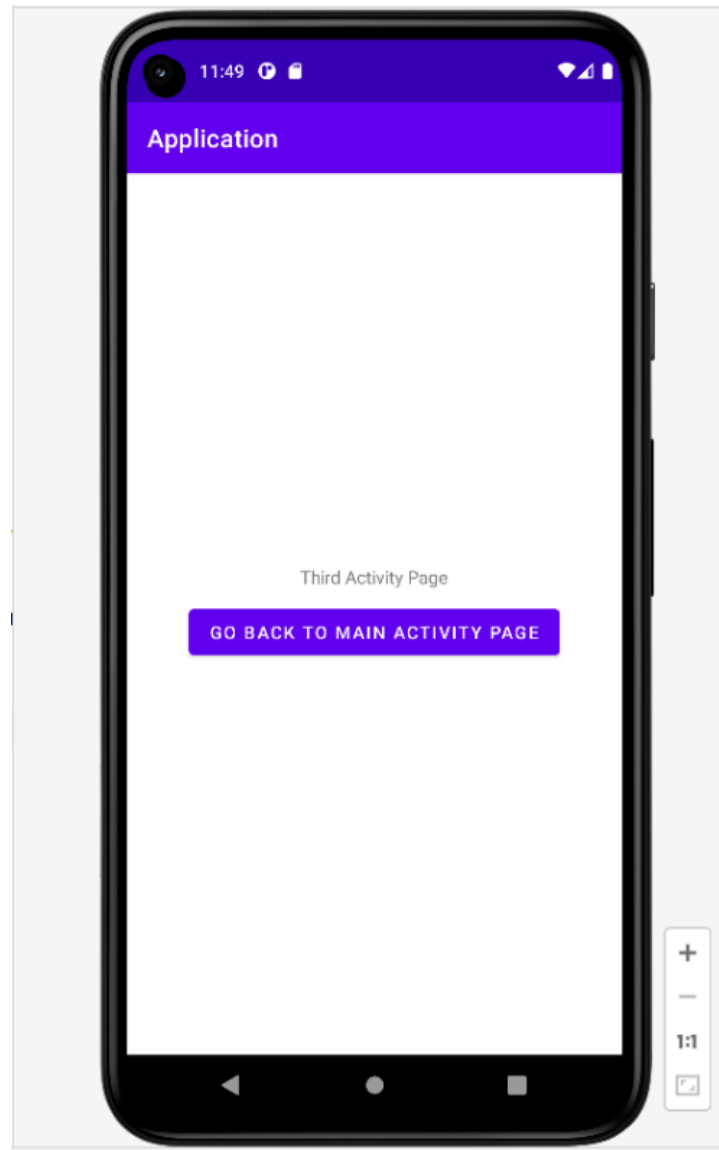

## **Result**

The program was executed and the result was successfully obtained. Thus CO1 was obtained.

## **Experiment No.: 12**

### **Aim**

Implement Options Menu to navigate to activities

### **CO3**

Develop applications with multiple activities using intents, array adapter, exceptions and options menu.

### **Procedure**

#### **activity\_ques12.xml**

```
<?xml version="1.0" encoding="utf-8"?>
<androidx.constraintlayout.widget.ConstraintLayout
xmlns:android="http://schemas.android.com/apk/res/android"
    xmlns:app="http://schemas.android.com/apk/res-auto"
    xmlns:tools="http://schemas.android.com/tools"
    android:layout_width="match_parent"
    android:layout_height="match_parent"
    tools:context=".Ques12Activity">

</androidx.constraintlayout.widget.ConstraintLayout>
```

#### **MainActivity.java**

```
package com.example.application;

import androidx.annotation.NonNull;
import androidx.appcompat.app.AppCompatActivity;

import android.content.Intent;
import android.os.Bundle;
import android.view.Menu;
import android.view.MenuItem;

public class Ques12Activity extends AppCompatActivity {

    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.activity_ques12);
    }
}
```

```

    }

    @Override
    public boolean onOptionsItemSelected(@NonNull MenuItem item) {
        int menu_id= item.getItemId();
        switch (menu_id){
            case R.id.second_activity:{
                Intent intent= new Intent(getApplicationContext(), SecondActivity.class);
                startActivity(intent);
                break;
            }
            case R.id.third_activity:{
                Intent intent= new Intent(getApplicationContext(), ThirdActivity.class);
                startActivity(intent);
                break;
            }
            default:{
                Intent intent= new Intent(getApplicationContext(), Ques12Activity.class);
                startActivity(intent);
                break;
            }
        }
        return true;
    }

    @Override
    public boolean onCreateOptionsMenu(Menu menu) {
        getMenuInflater().inflate(R.menu.menu_items,menu);
        return super.onCreateOptionsMenu(menu);
    }
}

```

### **menu\_items.xml**

```

<?xml version="1.0" encoding="utf-8"?>
<menu xmlns:android="http://schemas.android.com/apk/res/android"
    xmlns:app="http://schemas.android.com/apk/res-auto">
    <group>

        <item
            android:id="@+id/second_activity"
            android:title="Second Activity"
            app:showAsAction="never"
            app:iconTint="@color/white"/>


        <item
            android:id="@+id/third_activity"
            android:title="Third Activity"

```

```
app:showAsAction="never"  
app:iconTint="@color/white"/>
```

```
</group>  
</menu>
```

## **Output Screenshot**

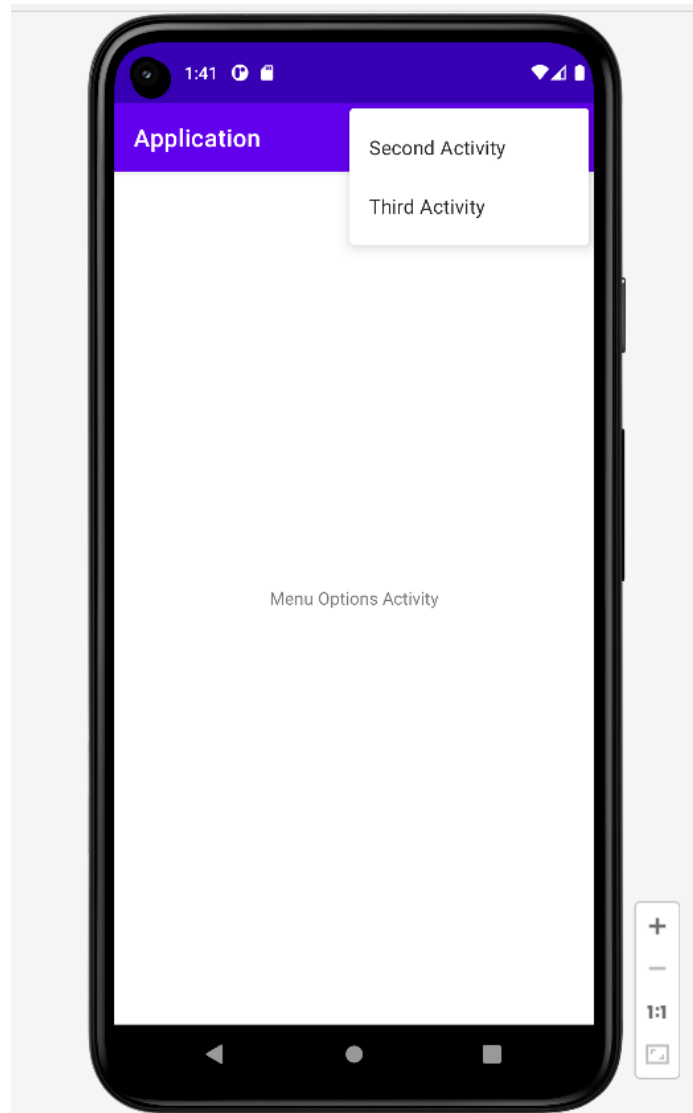

## **Result**

The program was executed and the result was successfully obtained. Thus CO3 was obtained.

## **Experiment No.: 13**

### **Aim**

Develop an application that uses ArrayAdapter with ListView.

### **CO3**

Develop applications with multiple activities using intents, array adapter, exceptions and options menu.

### **Procedure**

#### **activity\_ques13.xml**

```
<?xml version="1.0" encoding="utf-8"?>
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
    xmlns:app="http://schemas.android.com/apk/res-auto"
    xmlns:tools="http://schemas.android.com/tools"
    android:layout_width="match_parent"
    android:layout_height="match_parent"
    tools:context=".MainActivity">
    <ListView
        android:id="@+id/listview"
        android:layout_width="match_parent"
        android:layout_height="match_parent" />

</LinearLayout>
```


#### **Ques13Activity.java**

```
package com.example.application;
import androidx.appcompat.app.AppCompatActivity;
import android.os.Bundle;
import android.widget.ArrayAdapter;
import android.widget.ListView;
import android.widget.Toast;

public class Ques13Activity extends AppCompatActivity {
    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.activity_ques13);
    }
}
```

```
ListView listview;  
String[] person_qualify = {"Front-End Developer", "Data Analyst", "Software Tester", "Software  
Developer", "Programming Analyst", "Web Developer", "Mobile App Developer", "Business Analyst",  
"Database Analyst"};  
listview = findViewById(R.id.listview);  
listview.setAdapter(new  
ArrayAdapter(getApplicationContext(),android.R.layout.simple_expandable_list_item_1, person_qualify));  
listview.setOnItemClickListener((parent, view, position, id) -> {  
    Toast.makeText(this, "The qualification selected is - " + person_qualify[position],  
    Toast.LENGTH_SHORT).show();  
});  
}  
}
```

### Output Screenshot

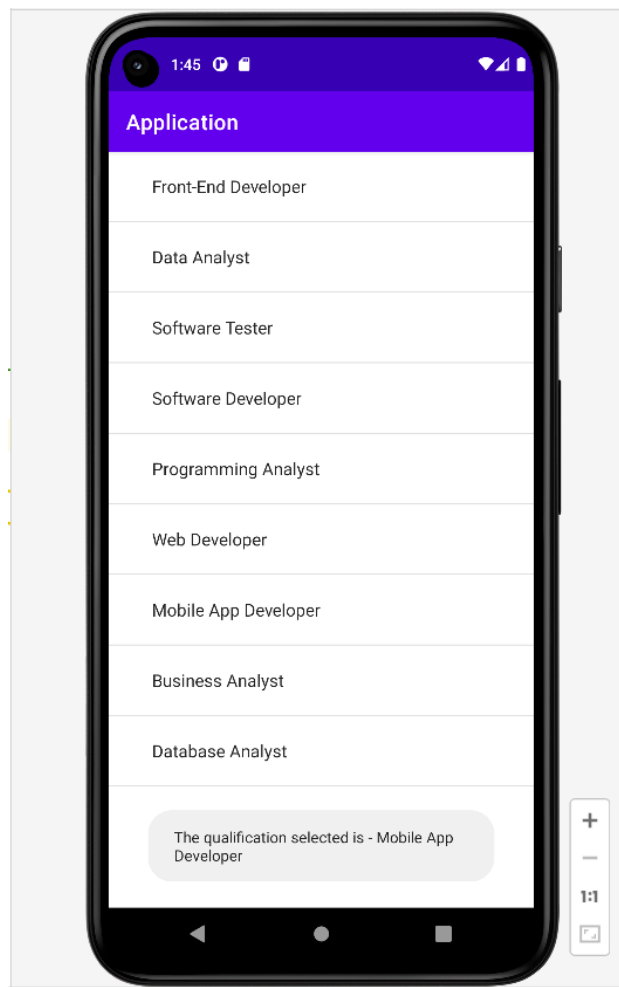

### Result

The program was executed and the result was successfully obtained. Thus, CO3 was obtained.

## **Experiment No.: 14**

### **Aim**

Develop an application that use GridView with images and display Alert box on selection

### **CO4**

Implement activities with dialogs, spinner, fragments and navigation drawer by applying themes

### **Procedure**

#### **activity\_ques14.xml**

```
<?xml version="1.0" encoding="utf-8"?>
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
    xmlns:app="http://schemas.android.com/apk/res-auto"
    xmlns:tools="http://schemas.android.com/tools"
    android:layout_width="match_parent"
    android:layout_height="match_parent"
    android:gravity="center"
    android:orientation="vertical"
    tools:context=".Ques14Activity">

    <TextView
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:text="Mobile Quick-Access Options"
        android:layout_marginTop="30dp"
        android:textColor="@color/black"
        android:textSize="20sp"
        android:textStyle="bold"/>

    <GridLayout
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:layout_marginTop="30dp"
        android:columnCount="3"
        android:orientation="horizontal"
        android:rowCount="3">

        <ImageButton
            android:id="@+id/wifi_btn"
```

```
    android:layout_width="80dp"
    android:layout_height="80dp"
    android:padding="13dp"
    android:src="@drawable/ic_wifi"
    android:textColor="@color/white" />
```

```
<ImageButton
    android:id="@+id/bluetooth_btn"
    android:layout_width="80dp"
    android:layout_height="80dp"
    android:layout_marginStart="10dp"
    android:padding="13dp"
    android:src="@drawable/ic_bluetooth"
    android:textColor="@color/white" />
```

```
<ImageButton
    android:id="@+id/volume_btn"
    android:layout_width="80dp"
    android:layout_height="80dp"
    android:layout_marginStart="10dp"
    android:padding="13dp"
    android:src="@drawable/ic_volume"
    android:textColor="@color/white" />
```

```
</GridLayout>
```

```
</LinearLayout>
```

### **Ques14Activity.java**

```
package com.example.application;

import androidx.appcompat.app.AlertDialog;
import androidx.appcompat.app.AppCompatActivity;

import android.content.DialogInterface;
import android.os.Bundle;
import android.view.View;
import android.widget.ImageButton;
import android.widget.Toast;

public class Ques14Activity extends AppCompatActivity {

    ImageButton wifi_btn, bluetooth_btn, volume_btn;

    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
```



```
setContentView(R.layout.activity_ques14);

wifi_btn= findViewById(R.id.wifi_btn);
bluetooth_btn= findViewById(R.id.bluetooth_btn);
volume_btn= findViewById(R.id.volume_btn);

wifi_btn.setOnClickListener(new View.OnClickListener() {
    @Override
    public void onClick(View view) {
        myAlertBox("Wifi Button");
    }
});

bluetooth_btn.setOnClickListener(new View.OnClickListener() {
    @Override
    public void onClick(View view) {
        myAlertBox("Bluetooth Button");
    }
});

volume_btn.setOnClickListener(new View.OnClickListener() {
    @Override
    public void onClick(View view) {
        myAlertBox("Volume Button");
    }
});
}


public void myAlertBox(String buttonname){
    AlertDialog.Builder builder = new AlertDialog.Builder(Ques14Activity.this);
    builder.setMessage("Are you sure about the selection ?");
    builder.setTitle("Alert !");
    builder.setCancelable(false);
    builder.setPositiveButton("Yes", new DialogInterface.OnClickListener() {
        @Override
        public void onClick(DialogInterface dialogInterface, int i) {
            Toast.makeText(getApplicationContext(), buttonname+" is successfully selected.",
Toast.LENGTH_SHORT).show();
        }
    });


    builder.setNegativeButton("No", (DialogInterface.OnClickListener) (dialog, which) -> {
        dialog.cancel();
    });

    AlertDialog alertDialog = builder.create();
    alertDialog.show();
}
```

```
}  
}
```

## Output Screenshot

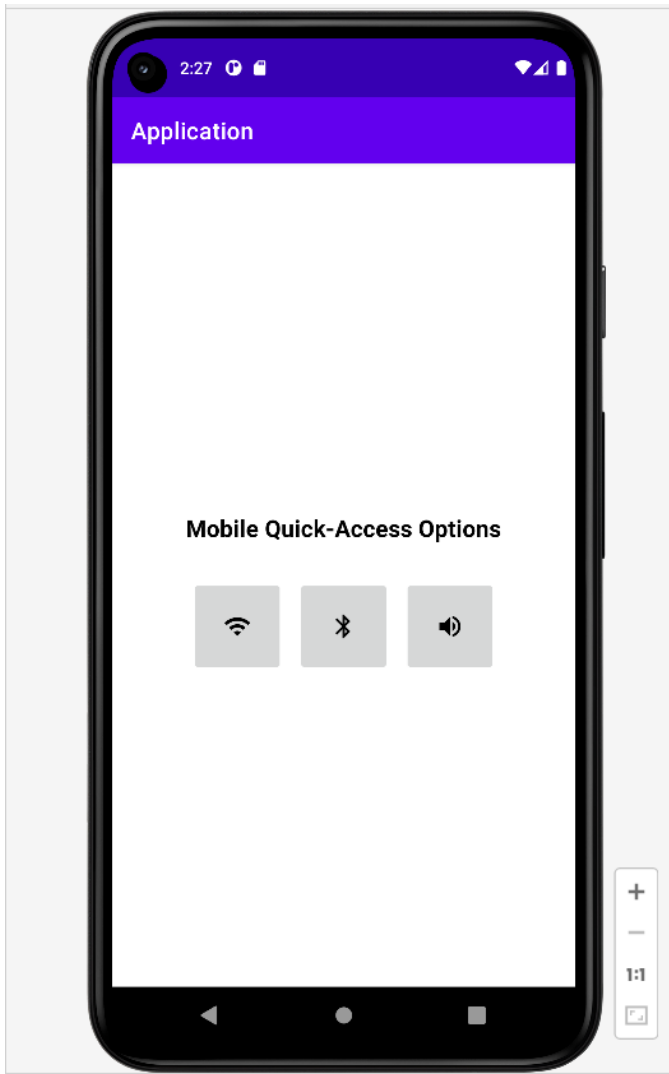

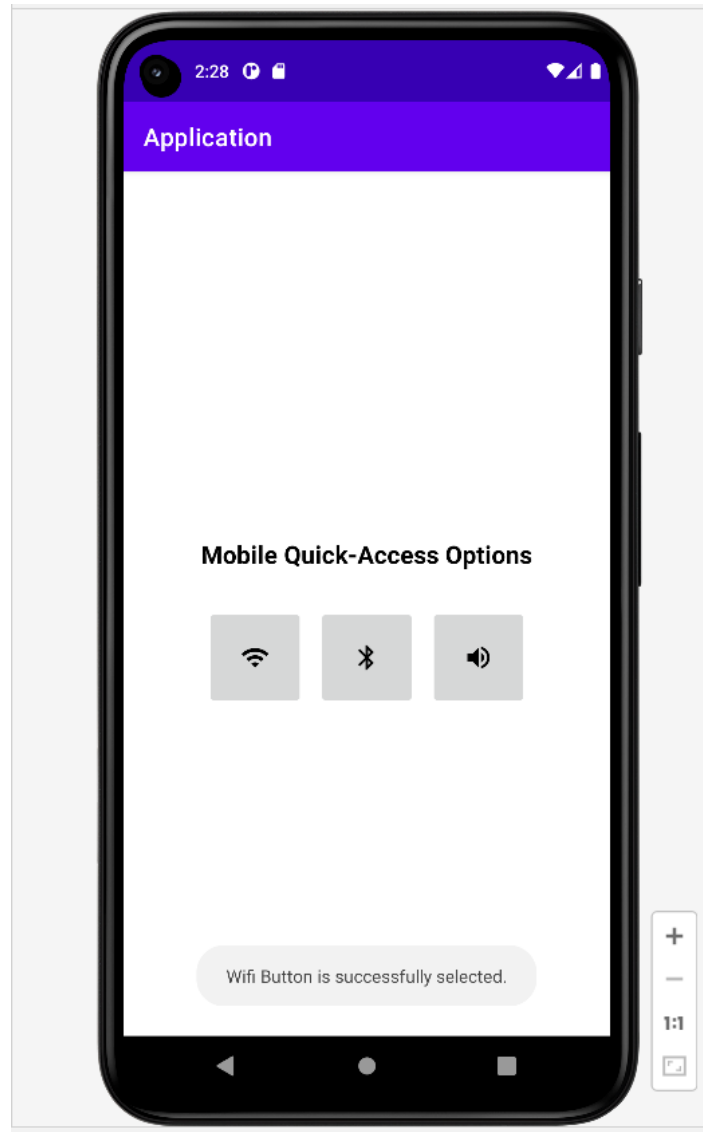

## **Result**

The program was executed and the result was successfully obtained. Thus, CO4 was obtained.

## **Experiment No.: 15**

### **Aim**

Develop an application that implements Spinner component and perform event handling

### **CO4**

Implement activities with dialogs, spinner, fragments and navigation drawer by applying themes

### **Procedure**

#### **activity\_main.xml**

```
<?xml version="1.0" encoding="utf-8"?>
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
    xmlns:app="http://schemas.android.com/apk/res-auto"
    xmlns:tools="http://schemas.android.com/tools"
    android:layout_width="match_parent"
    android:layout_height="match_parent"
    android:gravity="center"
    android:orientation="vertical"
    tools:context=".Ques15Activity">

    <TextView
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:text="Spinner & Event Handling"
        android:textStyle="bold"
        android:textSize="20sp"
        android:textColor="@color/black"/>
    <TextView
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:text="Choose your desired designation"
        android:layout_marginTop="30dp" />
    <Spinner
        android:id="@+id/spinner"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:layout_marginTop="10dp"/>

</LinearLayout>
```

**MainActivity.java**

```
package com.example.application;

import androidx.appcompat.app.AppCompatActivity;

import android.os.Bundle;
import android.view.View;
import android.widget.AdapterView;
import android.widget.AdapterView.Adapter;
import android.widget.AdapterView.OnItemClickListener;
import android.widget.ArrayAdapter;
import android.widget.Spinner;
import android.widget.Toast;

public class Ques15Activity extends AppCompatActivity {

    Spinner spinner;
    String[] designations = {"Front-End Developer", "Data Analyst", "Software Tester", "Software Developer",
"Programming Analyst", "Web Developer", "Mobile App Developer", "Business Analyst", "Database
Analyst"};


    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.activity_ques15);

        spinner= findViewById(R.id.spinner);
        ArrayAdapter adapter = new ArrayAdapter(this, android.R.layout.simple_spinner_item, designations);
        adapter.setDropDownViewResource(android.R.layout.simple_spinner_dropdown_item);
        spinner.setAdapter(adapter);

        spinner.setOnItemClickListener(new AdapterView.OnItemClickListener() {
            @Override
            public void onItemClick(AdapterView<?> adapterView, View view, int i, long l) {
                Toast.makeText(getApplicationContext(), "Selected designation is : "+designations[i],
Toast.LENGTH_LONG).show();
            }

            @Override
            public void onNothingSelected(AdapterView<?> adapterView) { }
        });
    }
}
```

## Output Screenshot

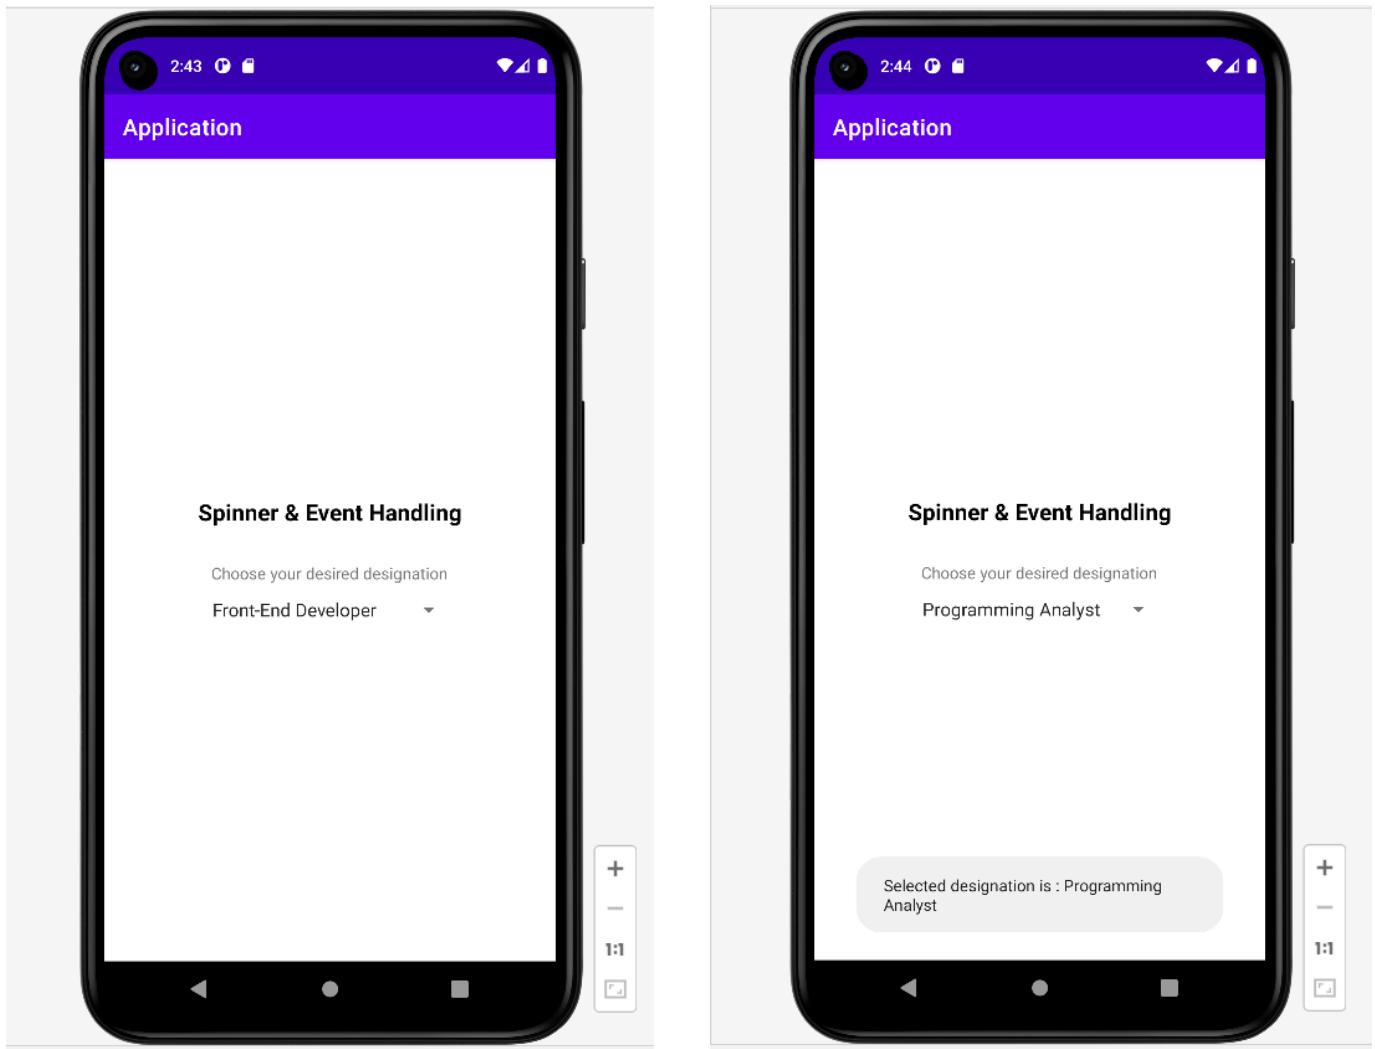

## Result

The program was executed and the result was successfully obtained. Thus CO4 was obtained.

## **Experiment No.: 16**

### **Aim**

Create database using SQLite and perform INSERT and SELECT

### **CO5**

Develop mobile applications using SQLite.

### **Procedure**

#### **activity\_ques16.xml**

```
<?xml version="1.0" encoding="utf-8"?>
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
    xmlns:app="http://schemas.android.com/apk/res-auto"
    xmlns:tools="http://schemas.android.com/tools"
    android:layout_width="match_parent"
    android:layout_height="match_parent"
    android:orientation="vertical"
    tools:context=".Ques15Activity">

    <TextView
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:text="Insert Table"
        android:layout_gravity="center"
        android:layout_marginTop="50dp"
        android:textSize="25sp"
        android:textStyle="bold"
        android:textColor="@color/black"/>

    <EditText
        android:id="@+id/rollno"
        android:layout_width="match_parent"
        android:layout_height="wrap_content"
        android:hint="Enter your roll no"
        android:layout_marginHorizontal="20dp"
        android:layout_marginTop="30dp"/>

    <EditText
        android:id="@+id/name"
```

```
android:layout_width="match_parent"
android:layout_height="wrap_content"
android:hint="Enter your name"
android:layout_marginHorizontal="20dp"
android:layout_marginTop="10dp"/>
```

```
<EditText
    android:id="@+id/email"
    android:layout_width="match_parent"
    android:layout_height="wrap_content"
    android:hint="Enter your email id"
    android:layout_marginHorizontal="20dp"
    android:layout_marginTop="10dp"/>
```

```
<Button
    android:id="@+id/insert_btn"
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:text="Insert"
    android:layout_marginTop="30dp"
    android:layout_gravity="center"/>
```

```
<Button
    android:id="@+id/select_btn"
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:text="View"
    android:layout_marginTop="30dp"
    android:layout_gravity="center"/>
```

```
</LinearLayout>
```

### **MainActivity.java**

```
package com.example.application;

import androidx.appcompat.app.AlertDialog;
import androidx.appcompat.app.AppCompatActivity;

import android.database.Cursor;
import android.os.Bundle;
import android.view.View;
import android.widget.Button;
import android.widget.EditText;
import android.widget.Toast;

public class Ques16Activity extends AppCompatActivity {
```



```
EditText rollno, name, email;  
Button insert_btn, select_btn;  
DBHelper db;
```

```
@Override
```

```
protected void onCreate(Bundle savedInstanceState) {  
    super.onCreate(savedInstanceState);  
    setContentView(R.layout.activity_ques16);  
  
    rollno= findViewById(R.id.rollno);  
    name= findViewById(R.id.name);  
    email= findViewById(R.id.email);  
    insert_btn= findViewById(R.id.insert_btn);  
    select_btn= findViewById(R.id.select_btn);  
    db= new DBHelper(getApplicationContext());  
  
    insert_btn.setOnClickListener(new View.OnClickListener() {  
        @Override  
        public void onClick(View view) {  
            int rollno_num= Integer.parseInt(rollno.getText().toString());  
            String name_txt= name.getText().toString();  
            String email_txt= email.getText().toString();  
  
            boolean insert_result= db.insertToDB(rollno_num, name_txt, email_txt);  
            if(insert_result){  
                Toast.makeText(getApplicationContext(), "Inserted successfully.",  
Toast.LENGTH_LONG).show();  
            }  
            else{  
                Toast.makeText(getApplicationContext(), "Insertion failed !!", Toast.LENGTH_LONG).show();  
            }  
        }  
    });  
  
    select_btn.setOnClickListener(new View.OnClickListener() {  
        @Override  
        public void onClick(View view) {  
            Cursor res = db.selectFromDB();  
            if (res.getCount() == 0) {  
                Toast.makeText(getApplicationContext(), "No entry Exist", Toast.LENGTH_LONG).show();  
            } else {  
                StringBuffer buffer = new StringBuffer();  
                while (res.moveToNext()) {  
                    buffer.append("id : " + res.getString(0) + "\n");  
                    buffer.append("Name : " + res.getString(1) + "\n");  
                    buffer.append("email : " + res.getString(2) + "\n");  
                }  
                AlertDialog.Builder builder = new AlertDialog.Builder(Ques16Activity.this);
```

```

        builder.setCancelable(true);
        builder.setTitle("User Entries");
        builder.setMessage(buffer.toString());
        builder.show();
    }
}
});
}
}

```

### **DBHelper.java**

```
package com.example.application;
```

```
import android.content.ContentValues;
import android.content.Context;
import android.database.Cursor;
import android.database.sqlite.SQLiteDatabase;
import android.database.sqlite.SQLiteOpenHelper;
```

```
import androidx.annotation.Nullable;
```

```
public class DBHelper extends SQLiteOpenHelper {
```

```
    public DBHelper(@Nullable Context context) { super(context, "MyDB", null, 1); }
```

```
    @Override
```

```
    public void onCreate(SQLiteDatabase sqLiteDatabase) {
```

```
        sqLiteDatabase.execSQL("CREATE TABLE userdetails (rollno INTEGER PRIMARY KEY, name TEXT, email TEXT)");
    }
```

```
    @Override
```

```
    public void onUpgrade(SQLiteDatabase sqLiteDatabase, int i, int i1) {
        sqLiteDatabase.execSQL("DROP TABLE IF EXISTS userdetails");
    }
```

```
    public boolean insertToDB(int rollno, String name, String email){
```

```
        SQLiteDatabase db= this.getWritableDatabase();
```

```
        ContentValues values= new ContentValues();
```

```
        values.put("rollno",rollno);
```

```
        values.put("name",name);
```

```
        values.put("email",email);
```

```
        long result= db.insert("userdetails",null,values);
```

```
        if(result>=0){
```

```
            return true;
```


```
        }
```


```
        else {
```

```
            return false;
```

```
}  
}  
  
public Cursor selectFromDB() {  
    SQLiteDatabase DB = this.getWritableDatabase();  
    Cursor cursor = DB.rawQuery("Select * from userdetails", null);  
    return cursor;  
}  
}
```

## Output Screenshot

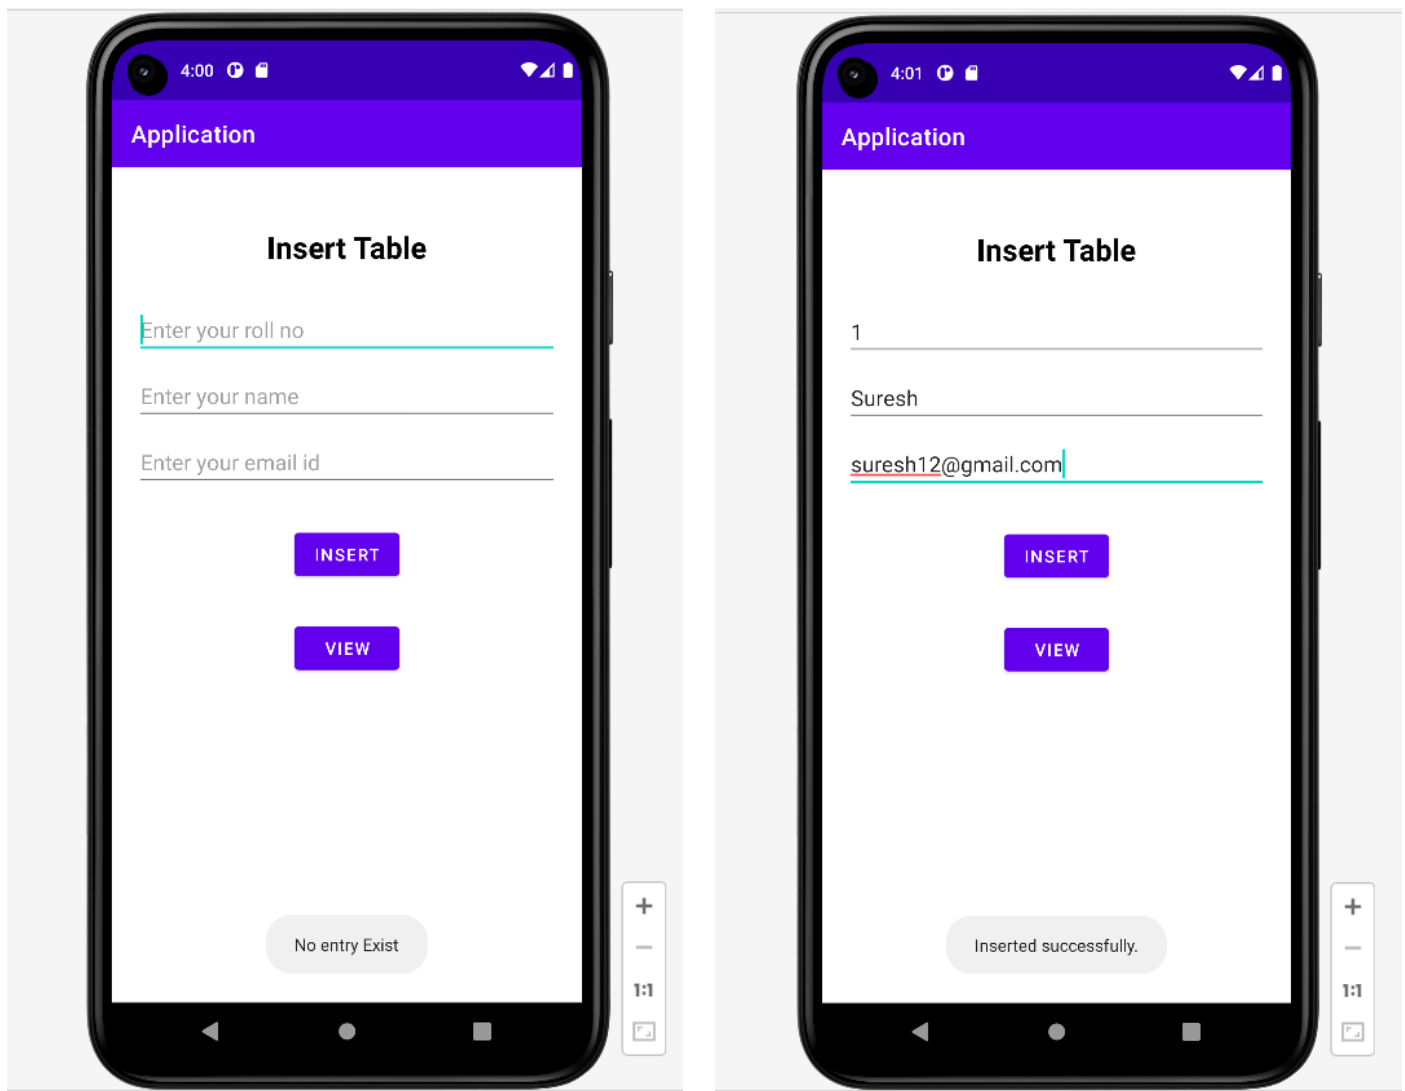

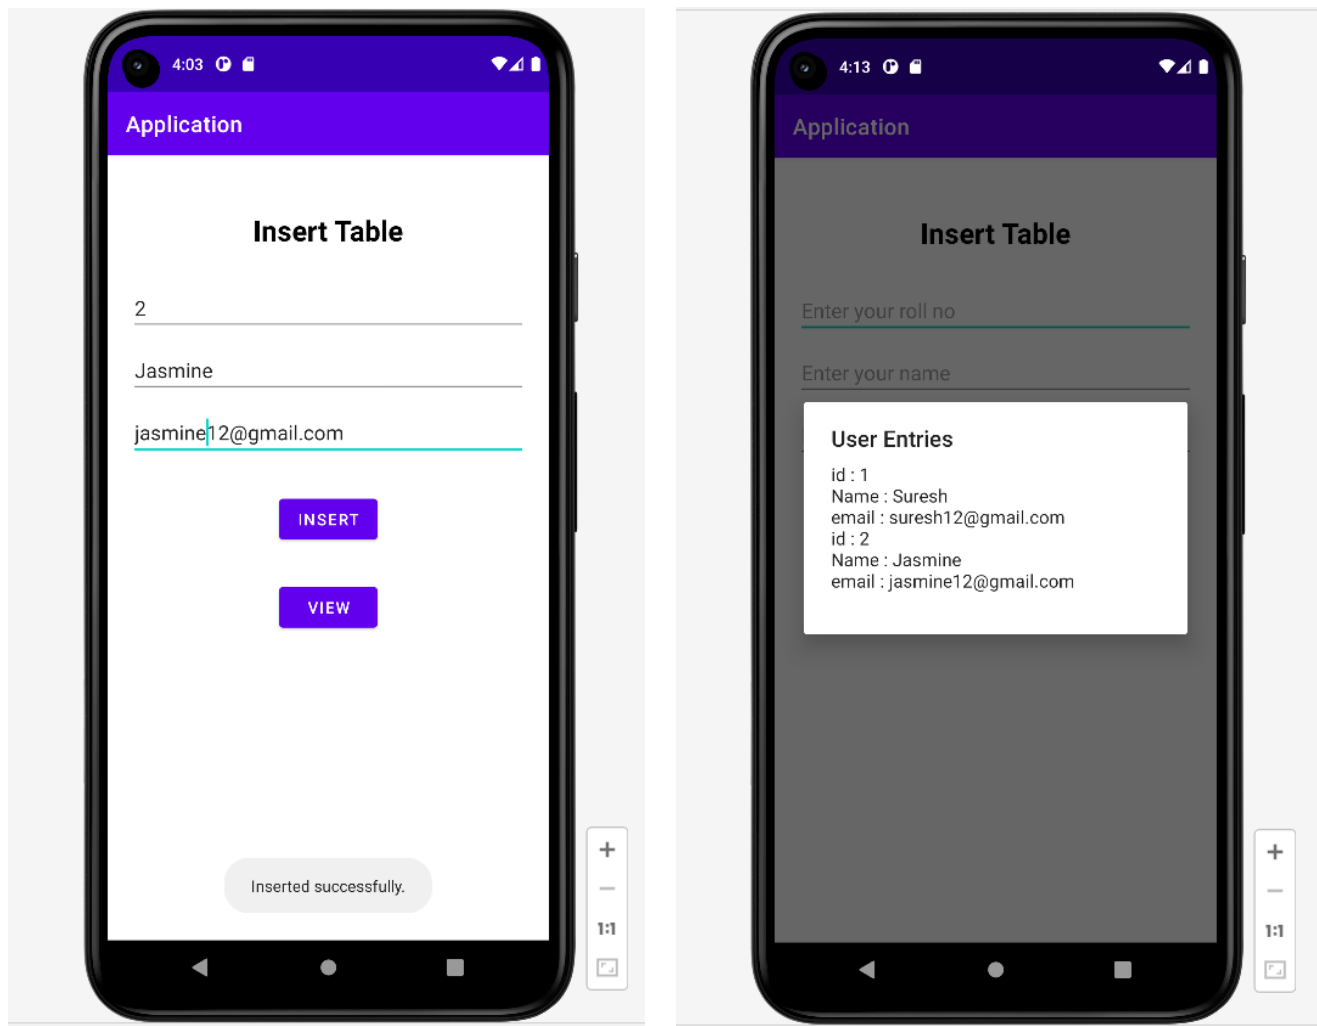

## Result

The program was executed and the result was successfully obtained. Thus CO5 was obtained.

## **Experiment No.: 17**

### **Aim**

Perform UPDATE and DELETE on SQLite database

### **CO5**

Develop mobile applications using SQLite.

### **Procedure**

#### **activity\_main.xml**

```
<?xml version="1.0" encoding="utf-8"?>
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
    xmlns:app="http://schemas.android.com/apk/res-auto"
    xmlns:tools="http://schemas.android.com/tools"
    android:layout_width="match_parent"
    android:layout_height="match_parent"
    android:orientation="vertical"
    tools:context=".Ques15Activity">

    <TextView
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:text="Insert Table"
        android:layout_gravity="center"
        android:layout_marginTop="50dp"
        android:textSize="25sp"
        android:textStyle="bold"
        android:textColor="@color/black"/>

    <EditText
        android:id="@+id/rollno"
        android:layout_width="match_parent"
        android:layout_height="wrap_content"
        android:hint="Enter your roll no"
        android:layout_marginHorizontal="20dp"
        android:layout_marginTop="30dp"/>

    <EditText
        android:id="@+id/name"
```

```
android:layout_width="match_parent"
android:layout_height="wrap_content"
android:hint="Enter your name"
android:layout_marginHorizontal="20dp"
android:layout_marginTop="10dp"/>
```

```
<EditText
```

```
    android:id="@+id/email"
    android:layout_width="match_parent"
    android:layout_height="wrap_content"
    android:hint="Enter your email id"
    android:layout_marginHorizontal="20dp"
    android:layout_marginTop="10dp"/>
```

```
<Button
```

```
    android:id="@+id/update_btn"
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:text="Update Record"
    android:layout_marginTop="30dp"
    android:layout_gravity="center"/>
```

```
<Button
```

```
    android:id="@+id/delete_btn"
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:text="Delete Record"
    android:layout_marginTop="30dp"
    android:layout_gravity="center"/>
```

```
<Button
```

```
    android:id="@+id/select_btn"
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:text="View Record"
    android:layout_marginTop="30dp"
    android:layout_gravity="center"/>
```

```
</LinearLayout>
```

**MainActivity.java**

```
package com.example.application;

import androidx.appcompat.app.AlertDialog;
import androidx.appcompat.app.AppCompatActivity;

import android.database.Cursor;
import android.os.Bundle;
import android.view.View;
import android.widget.Button;
import android.widget.EditText;
import android.widget.Toast;

public class Ques17Activity extends AppCompatActivity {

    EditText rollno, name, email;
    Button update_btn, delete_btn, select_btn;
    DBHelper db;

    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.activity_ques17);

        rollno= findViewById(R.id.rollno);
        name= findViewById(R.id.name);
        email= findViewById(R.id.email);
        update_btn= findViewById(R.id.update_btn);
        delete_btn= findViewById(R.id.delete_btn);
        select_btn= findViewById(R.id.select_btn);
        db= new DBHelper(getApplicationContext());

        update_btn.setOnClickListener(new View.OnClickListener() {
            @Override
            public void onClick(View view) {
                int rollno_num= Integer.parseInt(rollno.getText().toString());
                String name_txt= name.getText().toString();
                String email_txt= email.getText().toString();

                DBHelper db= new DBHelper(getApplicationContext());

                boolean update_result= db.updateToDB(rollno_num, name_txt, email_txt);
                if(update_result){
                    Toast.makeText(getApplicationContext(), "Updated successfully.",
Toast.LENGTH_LONG).show();
                }
            }
        });
    }
}
```

```
        else{
            Toast.makeText(getApplicationContext(), "Updation failed !!", Toast.LENGTH_LONG).show();
        }

    }
});

delete_btn.setOnClickListener(new View.OnClickListener() {
    @Override
    public void onClick(View view) {
        int rollno_num= Integer.parseInt(rollno.getText().toString());
        DBHelper db= new DBHelper(getApplicationContext());

        boolean update_result= db.deleteFromDB(rollno_num);
        if(update_result){
            Toast.makeText(getApplicationContext(), "Deleted successfully.",
Toast.LENGTH_LONG).show();
        }
        else{
            Toast.makeText(getApplicationContext(), "Deletion failed !!", Toast.LENGTH_LONG).show();
        }
    }
});

select_btn.setOnClickListener(new View.OnClickListener() {
    @Override
    public void onClick(View view) {
        Cursor res = db.selectFromDB();
        if (res.getCount() == 0) {
            Toast.makeText(getApplicationContext(), "No entry Exist", Toast.LENGTH_LONG).show();
        } else {
            StringBuffer buffer = new StringBuffer();
            while (res.moveToNext()) {
                buffer.append("id : " + res.getString(0) + "\n");
                buffer.append("Name : " + res.getString(1) + "\n");
                buffer.append("email : " + res.getString(2) + "\n");
            }
            AlertDialog.Builder builder = new AlertDialog.Builder(Ques17Activity.this);
            builder.setCancelable(true);
            builder.setTitle("User Entries");
            builder.setMessage(buffer.toString());
            builder.show();
        }
    }
});
}
```



**DBHelper.java**

```
package com.example.application;

import android.content.ContentValues;
import android.content.Context;
import android.database.Cursor;
import android.database.sqlite.SQLiteDatabase;
import android.database.sqlite.SQLiteOpenHelper;

import androidx.annotation.Nullable;

public class DBHelper extends SQLiteOpenHelper {

    public DBHelper(@Nullable Context context) { super(context, "MyDB", null, 1); }

    @Override
    public void onCreate(SQLiteDatabase sqLiteDatabase) {
        sqLiteDatabase.execSQL("CREATE TABLE userdetails (rollno INTEGER PRIMARY KEY, name
TEXT, email TEXT)");
    }

    @Override
    public void onUpgrade(SQLiteDatabase sqLiteDatabase, int i, int i1) {
        sqLiteDatabase.execSQL("DROP TABLE IF EXISTS userdetails");
    }

    public boolean insertToDB(int rollno, String name, String email){
        SQLiteDatabase db= this.getWritableDatabase();
        ContentValues values= new ContentValues();
        values.put("rollno",rollno);
        values.put("name",name);
        values.put("email",email);
        long result= db.insert("userdetails",null,values);
        if(result>=0){
            return true;
        }
        else {
            return false;
        }
    }

    public Cursor selectFromDB() {
        SQLiteDatabase DB = this.getWritableDatabase();
        Cursor cursor = DB.rawQuery("Select * from userdetails", null);
        return cursor;
    }



    public boolean updateToDB(int rollno, String name, String email){
```


```
        SQLiteDatabase db= this.getWritableDatabase();
        ContentValues values= new ContentValues();
        values.put("name",name);
        values.put("email",email);
        Cursor check_user= db.rawQuery("SELECT * from userdetails WHERE rollno=?",new
String[] {String.valueOf(rollno)});
        if(check_user.getCount() > 0){

            long update_user_query= db.update("userdetails",values,"rollno=?",new
String[] {String.valueOf(rollno)});
            if(update_user_query >= 0){
                return true;
            }
            else{
                return false;
            }
        }
        else{
            return false;
        }
    }

    public boolean deleteFromDB(int rollno){
        SQLiteDatabase db= this.getWritableDatabase();
        Cursor check_user= db.rawQuery("SELECT * FROM userdetails WHERE rollno=?",new
String[] {String.valueOf(rollno)});
        if(check_user.getCount() > 0){
            long delete_user_query= db.delete("userdetails","rollno=?", new String[] {String.valueOf(rollno)});
            if(delete_user_query >= 0){
                return true;
            }
            else{
                return false;
            }
        }
        else{
            return false;
        }
    }
}
```

## Output Screenshot

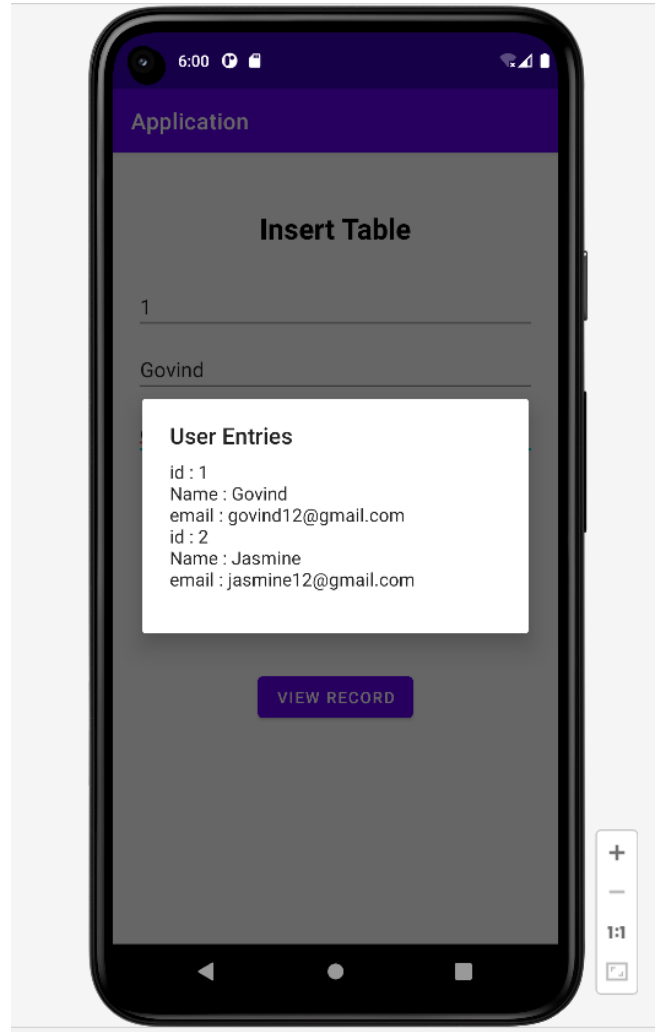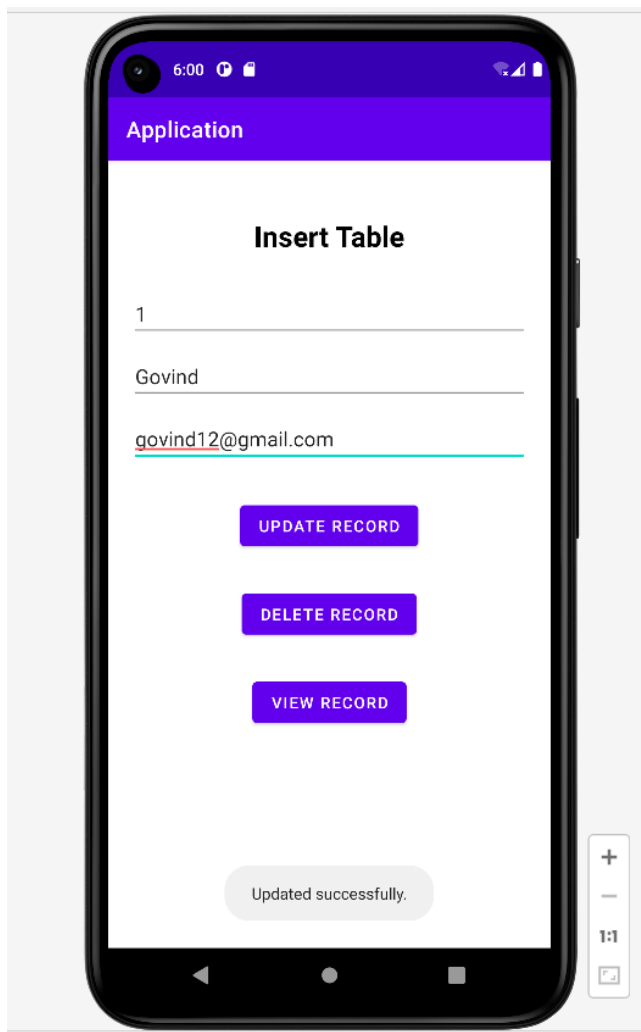

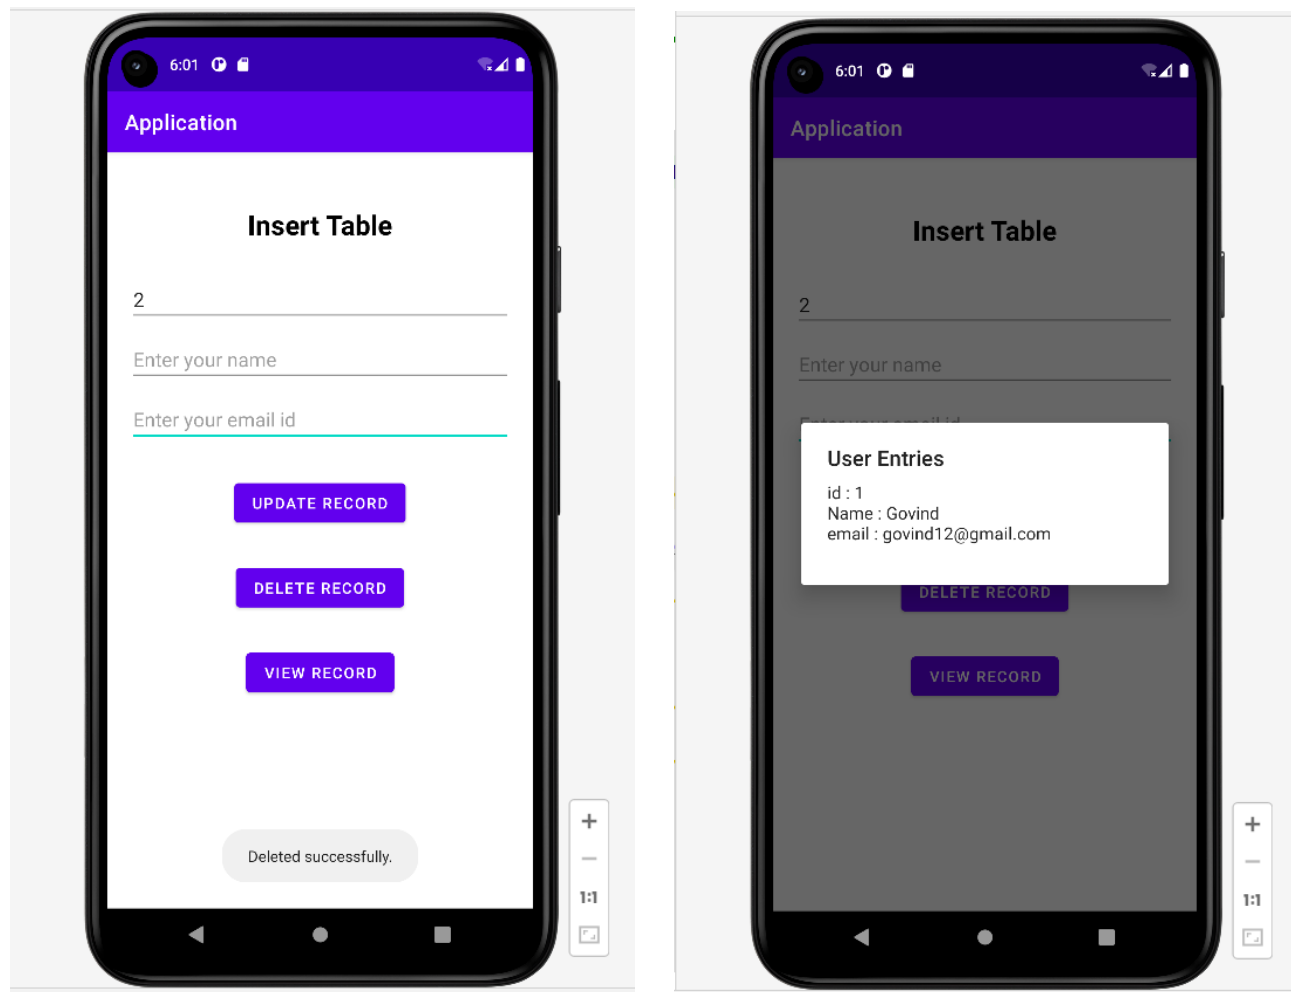

## Result

The program was executed and the result was successfully obtained. Thus CO5 was obtained.

**Experiment No.: 18****Aim**

Develop an application as a micro project which uses SQLite database as an assignment

**CO1**

Develop mobile applications using SQLite.

**Procedure****activity\_main.xml****MainActivity.java****Output Screenshot****Result**

The program was executed and the result was successfully obtained. Thus CO5 was obtained.