
4.1 Persona Matrix

1. Purpose

This section defines the user personas for NewPOPSys v1.38. Each persona represents a distinct user class with specific responsibilities, permission levels, and system interactions. The persona matrix serves as the authoritative reference for role-based access control (RBAC) implementation.

Authoritative Source: SUPP-001 - Shared Foundations - Persona Workflows JTBD Screens

2. Persona Overview

NewPOPSys supports nine (9) distinct personas organized across four hierarchical levels:

Level	Count	Personas
PSP Level	3	Platform Admin, PSP Admin, Production Operator
Brand Level	3	Brand Admin, Campaign Manager, Regional Manager
Store Level	2	Store Manager, Store Operator
System Level	1	Integration User

3. Persona Matrix

3.1 PSP Level Personas

ID	Persona Name	Role Level	Primary Responsibility	Permission Level	Key Screens/Modules
P01	Platform Admin	PSP	Full system configuration, tenant management, user impersonation for support, security and audit access	All Privileged + Impersonate	Tenant config; System settings; User impersonation; Security dashboard; Full audit log
P02	PSP Admin	PSP	Brand onboarding, PSP-level settings, user management, reporting and exports	PSP All Privileged	Brand onboarding; PSP settings; User management; Campaign list/totals; Exports center; Webhook/API logs
P03	Production Operator	PSP	Update order statuses, create shipments and tracking, process batches, view fulfillment queues	Status & Shipping Updates	Store order list+filters; Order detail; Batch manager; Shipments+tracking; Issues/Reorders queue

3.2 Brand Level Personas

ID	Persona Name	Role Level	Primary Responsibility	Permission Level	Key Screens/Modules
P04	Brand Admin	Brand	Full brand configuration, all campaigns access, store management, user permissions	Brand Level Privileged	All Campaign Manager screens + Brand config; Store management; User permissions; Full brand reporting
P05	Campaign Manager	Brand	Build new campaigns, manage assigned campaigns, define kits and photo rules, review proofs and approve	Must be assigned to campaigns	Campaign builder; Store selector; Kit/items editor; Photo rules; Dashboard; Store detail; Review queue; Retake queue; Exports/reports
P06	Regional Manager	Brand	Oversee assigned stores, exception queue management, approve/reject proofs, escalate to Brand Admin	Store Compliance for segment	Exception queue (assigned stores); Store compliance dashboard; Review queue; Retake queue; Waivers/Reopen; Escalation tools


3.3 Store Level Personas

ID	Persona Name	Role Level	Primary Responsibility	Permission Level	Key Screens/Modules
P07	Store Manager	Store	Manage store team, approve replacement requests, view all store campaigns, full execution permissions	Full Store Privileges	All Store Operator screens + Team management; Replacement approvals; Store analytics; Full store campaign history
P08	Store Operator	Store	Complete surveys, update status, request replacements (needs Store Manager approval), view assigned campaigns	View Only + Execution	My tasks; Campaign detail; Receive/verify; Issue/reorder request; Pre-install checklist; Install + proof capture; Completion survey + attestation; Retake queue; Deinstall task

3.4 System Level Personas

ID	Persona Name	Role Level	Primary Responsibility	Permission Level	Key Screens/Modules
P09	Integration User	System	Inbound API writes, webhook consumption, export triggers, MIS integration	API & Webhook Service Account	API endpoints; Webhook subscriptions; Export triggers; Integration logs

4. Permission Hierarchy

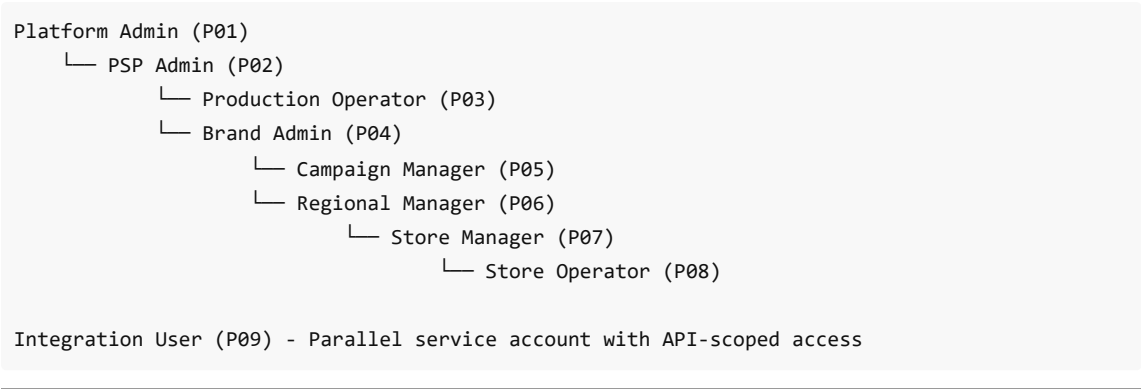

5. Key Constraints

Constraint	Description	Affected Personas
Campaign Assignment	Campaign Managers can only manage campaigns explicitly assigned to them	P05
Store Assignment	Regional Managers only see stores within their assigned segment	P06
Approval Workflow	Store Operators require Store Manager approval for replacement requests	P08
Impersonation	Only Platform Admin may impersonate other users for support	P01

6. References

- **SUPP-001:** Shared Foundations - Persona Workflows JTBD Screens (authoritative source)
- **Section 4.2:** Permission Matrix (detailed RBAC grid)
- **Section 4.3:** Authentication Flows

Document Version: 1.0 Last Updated: 2026-01-01 IEEE 830 Compliant

4.2 Permission Matrix

SRS Section: 4.2 | **Version:** 1.0 | **Status:** Draft **Source:** [SUPP-003 - RBAC and Permissions Matrix](#) **Last Updated:** 2026-01-01

4.2.1 Purpose

This section defines the Role-Based Access Control (RBAC) permission matrix for NewPOPSys v1. It specifies authorized capabilities for each role across system features, completion workflows, and security controls.

4.2.2 Role Enumeration

The system defines eight roles via `role_enum` :

Enum Value	Display Name	Level
PLATFORM_ADMIN	Platform Admin	PSP
PSP_ADMIN	PSP Admin	PSP
PSP_OPS	Production Operator / Support Agent	PSP
BRAND_ADMIN	Brand Admin	Brand
CAMPAIGN_MANAGER	Campaign Manager	Brand
REGIONAL_MANAGER	Regional Manager	Brand
STORE_MANAGER	Store Manager	Store
STORE_OPERATOR	Store Operator	Store

Note: Support Agent uses `PSP_OPS` with `support_scope = true` flag (read-only access).

4.2.3 Permission Matrix by Level

4.2.3.1 PSP Level Permissions

Capability	Platform Admin	PSP Admin	Production Operator	Support Agent
Manage tenant settings	Y	N	N	N
Impersonate users	Y	N	N	Y*
Onboard brand	Y	Y	N	N
Invite/manage PSP users	Y	Y	N	N
View all brands/campaigns	Y	Y	Y	Y
View orders (totals + store)	Y	Y	Y	Y
Update order status	Y	Y	Y	N
Create/update shipments	Y	Y	Y	N
Manage batches	Y	Y	Y	N
Approve/reject issues	Y	Y	Y*	N
Trigger exports	Y	Y	Y*	N
View audit logs	Y	Y	Y*	Y
Webhook/API configuration	Y	Y	N	N
Replay failed webhooks	Y	Y	N	Y*

4.2.3.2 Brand Level Permissions

Capability	Brand Admin	Campaign Manager	Regional Manager
Full brand configuration	Y	N	N
Invite/manage brand users	Y	N	N
Create/edit stores & groups	Y	N	N
Create/edit layouts & surveys	Y	Y*	N
Create campaigns & assign stores	Y	Y	N
Configure verificationMode + SLA	Y	Y*	N
View all campaigns	Y	Y*	Y*
Review/approve/reject proofs	Y	Y*	Y*
Waive missing proofs	Y	N	Y*
Reopen completed store	Y	N	Y*
Force-complete campaign	Y	N	N
Approve/reject issues	Y	Y*	Y*
Trigger exports	Y	Y*	Y*
View audit logs	Y	Y*	Y*

4.2.3.3 Store Level Permissions

Capability	Store Manager	Store Operator
Manage store team	Y	N
View all store campaigns	Y	Y*
Execute tasks (receive/install)	Y	Y
Upload proofs + completion survey	Y	Y
Submit replacement requests	Y	Y*
Approve replacement requests	Y	N
View store reports	Y	N
Trigger exports	Y*	N
View audit logs	Y*	N

4.2.3.4 System (Integration User)

Capability	Integration User
------------	------------------

Inbound API writes (orders/shipments)	Y
Webhook consumption	Y
Export triggers	Y*
Create/edit stores (via API)	Y*
View orders/shipments	Y
Update order status	Y
Create/update shipments	Y

Legend: Y = Full access | Y* = Scoped/limited access | N = No access

4.2.4 Completion Authority Matrix

Action	PLATFORM_ADMIN	PSP_ADMIN	PSP_OPS	BRAND_ADMIN	CAMPAIGN_MANAGER
Normal submit completion	Y	Y	N	Y	Y*
Request replacement items	Y	Y	N	Y	Y*
Approve replacement requests	Y	Y	N	Y	N
Approve/reject photos	Y	Y	N	Y	Y*
Waive missing proofs	Y	Y	N	Y	N
Reopen completed store	Y	Y	N	Y	N
Force-complete campaign	Y	Y	N	Y	N
Approve reorders	Y	Y	Y*	Y	N

Audit Requirements:

- All completion actions require attestation
- Rejection requires reason code
- Waiver/reopen requires written justification

- Force-complete snapshots incomplete stores
-

4.2.5 Security Requirements

4.2.5.1 Multi-Factor Authentication

Role	MFA Requirement
PLATFORM_ADMIN	Required (TOTP/WebAuthn)
PSP_ADMIN	Required (TOTP/WebAuthn)
BRAND_ADMIN	Required (TOTP/WebAuthn)
PSP_OPS	Recommended (tenant policy)
REGIONAL_MANAGER	Recommended (tenant policy)
CAMPAIGN_MANAGER	Optional (brand policy)
STORE_MANAGER	Optional (brand policy)
STORE_OPERATOR	Optional (brand policy)

4.2.5.2 Impersonation Controls

Impersonator	Target Scope	Mode	Session Limit
Platform Admin	All users except Platform Admins	Full	30 min (2 hr max)
Support Agent	Store Users only	Read-only	30 min (2 hr max)

- All impersonation sessions emit audit events (start/end with reason)
- Original user sees banner when being impersonated
- All other roles cannot impersonate

4.2.5.3 API Security

Control	Requirement
API key storage	Hashed; plaintext shown only at creation
Key rotation	Supported with revocation
Idempotency	Required for all integration writes
Rate limiting	Per-key limits with anomaly detection
Audit trail	All permissioned writes emit immutable AuditEvents

4.2.6 Traceability

Requirement ID	Description	Source
----------------	-------------	--------

RBAC-001	Eight-role enumeration	SUPP-003 Section: Default Roles
RBAC-002	PSP-level permission matrix	SUPP-003 Section: PSP Level Permissions
RBAC-003	Brand-level permission matrix	SUPP-003 Section: Brand Level Permissions
RBAC-004	Store-level permission matrix	SUPP-003 Section: Store Level Permissions
RBAC-005	Completion authority rules	SUPP-003 Section: Completion Authority
RBAC-006	MFA requirements	SUPP-003 Section: Authentication
RBAC-007	Impersonation controls	SUPP-003 Section: Impersonation Controls
RBAC-008	API security controls	SUPP-003 Section: API Security

Document Status: Draft | IEEE 830 Compliant

4.3 Authentication Flows

SRS Section: 4.3 | **Version:** 1.0 | **Status:** Draft **System:** NewPOPSys v1.38 **Source:** [SUPP-003 - RBAC and Permissions Matrix](#) **Last Updated:** 2026-01-01

4.3.1 Purpose

This section specifies the authentication mechanisms, session management policies, and security flows for NewPOPSys v1.38. It defines requirements for user authentication (web UI), API key authentication (integrations), multi-factor authentication (MFA), password policies, session lifecycle, and user impersonation.

4.3.2 Scope

This specification covers:

- Session-based authentication for web UI users
- API key authentication for integration accounts
- Multi-factor authentication requirements and flows
- Password complexity and lifecycle policies
- Session management including expiration and refresh
- User impersonation flow for Platform Admin support

4.3.3 Authentication Methods

4.3.3.1 Session-Based Authentication (Web UI)

The primary authentication method for human users accessing NewPOPSys via web browser.

Attribute	Specification
Method	Email + Password
Session Type	Server-side session with secure cookie

Cookie Attributes	HttpOnly, Secure, SameSite=Strict
Session ID	Cryptographically random, 256-bit minimum
Transport	HTTPS only (TLS 1.2+)

4.3.3.2 API Key Authentication (Integrations)

Authentication method for Integration User service accounts and external system integrations.

Attribute	Specification
Method	API Key (Bearer token)
Key Format	Prefix npop_ + 64-character hex string
Header	Authorization: Bearer npop_<key>
Scope	PSP-tenant-wide, with per-key permission set
Storage	bcrypt hash stored; plaintext shown only at creation

4.3.4 Password Policy

4.3.4.1 Password Requirements

Requirement	Specification
Minimum Length	12 characters
Complexity	Must contain: uppercase, lowercase, digit, special character
Prohibited Patterns	Common passwords (dictionary check), username substring, sequential characters
Hash Algorithm	bcrypt with cost factor 12
Salt	Per-password random salt (built into bcrypt)

4.3.4.2 Password Lifecycle

Policy	Admin Roles	Non-Admin Roles
Rotation Period	90 days mandatory	180 days recommended
Password History	Last 12 passwords	Last 6 passwords
Expiration Warning	14 days before	7 days before
Grace Period	None (immediate logout)	7 days (password change required at login)

4.3.4.3 Password Reset Flow

```
sequenceDiagram
    participant U as User
```

```
participant UI as Web UI
participant API as Auth API
participant DB as Database
participant Email as Email Service

U->>UI: Click "Forgot Password"
UI->>API: POST /auth/password-reset/request
API->>DB: Validate email exists
API->>DB: Generate reset token (expires 1 hour)
API->>Email: Send reset link
Email-->>U: Password reset email

U->>UI: Click reset link
UI->>API: GET /auth/password-reset/validate?token=xxx
API->>DB: Validate token not expired
API-->>UI: Token valid, show password form

U->>UI: Enter new password
UI->>API: POST /auth/password-reset/complete
API->>DB: Validate complexity requirements
API->>DB: Check password history
API->>DB: Hash and store new password
API->>DB: Invalidate all active sessions
API->>Email: Send confirmation email
API-->>UI: Password reset successful
```

4.3.5 Multi-Factor Authentication (MFA)

4.3.5.1 MFA Requirements by Role

Role	MFA Requirement	Supported Methods
PLATFORM_ADMIN	Mandatory	TOTP, WebAuthn
PSP_ADMIN	Mandatory	TOTP, WebAuthn
BRAND_ADMIN	Mandatory	TOTP, WebAuthn
PSP_OPS (Production Operator)	Recommended (tenant policy)	TOTP, WebAuthn
PSP_OPS (Support Agent)	Recommended (tenant policy)	TOTP, WebAuthn
REGIONAL_MANAGER	Recommended (tenant policy)	TOTP, WebAuthn
CAMPAIGN_MANAGER	Optional (brand policy)	TOTP
STORE_MANAGER	Optional (brand policy)	TOTP
STORE_OPERATOR	Optional (brand policy)	TOTP

4.3.5.2 MFA Method Specifications

TOTP (Time-Based One-Time Password)

Attribute	Specification
Algorithm	HMAC-SHA1 (RFC 6238)
Digits	6
Period	30 seconds
Drift Tolerance	+/- 1 period (90-second window)
Secret Length	160 bits (32-character base32)
Recovery Codes	10 single-use codes, 16 characters each

WebAuthn (Recommended for Admin Roles)

Attribute	Specification
Authenticator Type	Platform or roaming authenticator
Attestation	None required (privacy-preserving)
User Verification	Required
Resident Key	Preferred but not required
Supported Algorithms	ES256, RS256

4.3.5.3 MFA Enrollment Flow

```
sequenceDiagram
    participant U as User
    participant UI as Web UI
    participant API as Auth API
    participant DB as Database

    U->>UI: Access MFA Setup
    UI->>API: POST /auth/mfa/setup
    API->>DB: Generate TOTP secret
    API-->>UI: Return secret + QR code data

    U->>UI: Scan QR with authenticator app
    U->>UI: Enter verification code
    UI->>API: POST /auth/mfa/verify
    API->>DB: Validate TOTP code
    API->>DB: Generate recovery codes
    API->>DB: Enable MFA for user
    API-->>UI: Return recovery codes (one-time display)

    Note over U,UI: User must save recovery codes
```

4.3.5.4 MFA Login Flow

```
sequenceDiagram
    participant U as User
    participant UI as Web UI
    participant API as Auth API
    participant DB as Database

    U->>UI: Enter email + password
    UI->>API: POST /auth/login (credentials)
    API->>DB: Validate credentials
    API->>DB: Check MFA status

    alt MFA Required
        API-->>UI: 200 OK, mfa_required: true
        UI->>U: Prompt for MFA code
        U->>UI: Enter TOTP code
        UI->>API: POST /auth/mfa/challenge
        API->>DB: Validate TOTP code

        alt Valid Code
            API->>DB: Create session
            API-->>UI: 200 OK + session cookie
        else Invalid Code
            API->>DB: Increment failure count
            API-->>UI: 401 Invalid MFA code
        end
    end

    else MFA Not Configured
        API->>DB: Create session
        API-->>UI: 200 OK + session cookie
    end
end
```

4.3.6 Session Management

4.3.6.1 Session Lifecycle Parameters


Parameter	Web UI Sessions	API Sessions
Session Duration	8 hours	N/A (stateless)
Idle Timeout	30 minutes	N/A
Absolute Timeout	24 hours	N/A
Refresh Window	Last 15 minutes of session	N/A
Concurrent Sessions	5 per user	Unlimited API keys

4.3.6.2 Session Token Specifications

Attribute	Specification
Session ID Format	UUID v4

Token Entropy	256 bits minimum
Storage	Server-side (Redis/database)
Client Cookie	Session ID only (no sensitive data)

4.3.6.3 Session Refresh Flow

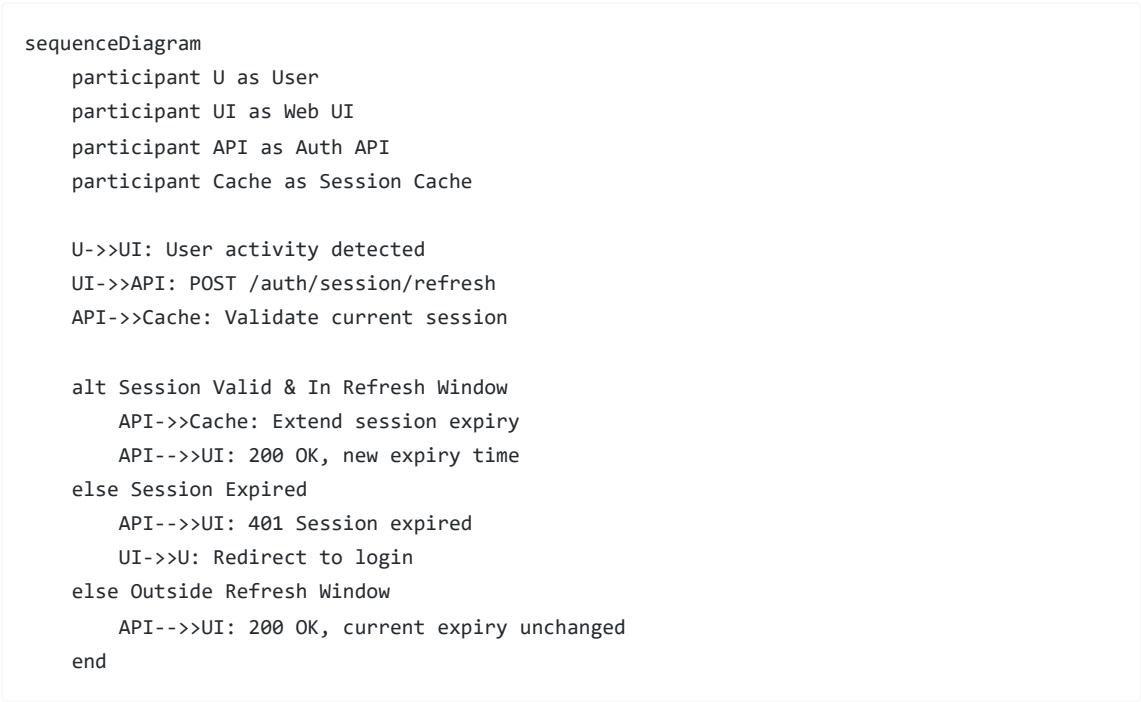

4.3.6.4 Session Invalidation Triggers

Trigger	Action	Audit Event
User logout	Invalidate current session	user.logout
Password change	Invalidate all sessions	user.password_changed
Password reset	Invalidate all sessions	user.password_reset
MFA enrollment/reset	Invalidate all sessions	user.mfa_updated
Admin-initiated	Invalidate specific session	session.admin_terminated
Account suspension	Invalidate all sessions	user.suspended
Role change	Invalidate all sessions	user.role_changed

4.3.7 Account Security Controls

4.3.7.1 Failed Login Handling

Threshold	Action
-----------	--------

3 failures	CAPTCHA challenge required
5 failures	Account lockout (15 minutes)
10 failures (cumulative)	Account lockout (1 hour) + admin notification
20 failures (24-hour period)	Account disabled + security team notification

4.3.7.2 Lockout Recovery Flow




4.3.8 API Key Authentication

4.3.8.1 API Key Lifecycle

Operation	Access	Audit Event
Create key	PSP Admin, Platform Admin	api_key.created
View key (masked)	Key owner, PSP Admin	None
Rotate key	Key owner, PSP Admin	api_key.rotated
Revoke key	Key owner, PSP Admin	api_key.revoked
Delete key	PSP Admin	api_key.deleted

4.3.8.2 API Key Creation Flow

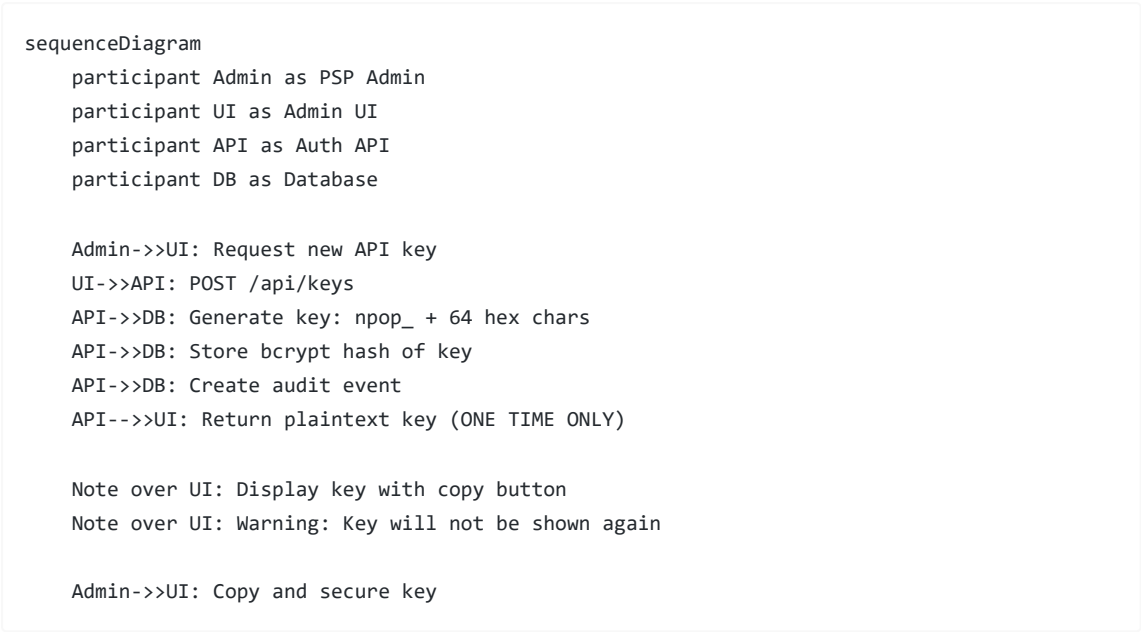

4.3.8.3 API Key Permission Scoping

Scope Level	Description
Tenant-wide	Access to all brands within PSP tenant (default)
Brand-scoped	Restricted to specific brand(s) (v1.1 consideration)
Endpoint-scoped	Restricted to specific API endpoints

4.3.8.4 API Rate Limiting

Tier	Requests/Minute	Burst Limit	Anomaly Threshold
Standard	100	150	500% of baseline
High-volume	500	750	300% of baseline
Unlimited	No limit	N/A	1000% of baseline

4.3.9 User Impersonation

4.3.9.1 Impersonation Authorization

Impersonator Role	Target Scope	Session Mode	Time Limit
PLATFORM_ADMIN	All users except other Platform Admins	Full access	30 min (2 hr max)

Support Agent (PSP_OPS + support_scope)	Store Users only	Read-only	30 min (2 hr max)
All other roles	Cannot impersonate	N/A	N/A

4.3.9.2 Impersonation Flow

```
sequenceDiagram
    participant PA as Platform Admin
    participant UI as Admin UI
    participant API as Auth API
    participant DB as Database
    participant TU as Target User

    PA->>UI: Select user to impersonate
    UI->>API: POST /auth/impersonate
    Note right of API: Request includes target_user_id, reason

    API->>DB: Validate impersonator permissions
    API->>DB: Validate target is not Platform Admin
    API->>DB: Create impersonation session
    API->>DB: Emit audit event: impersonation.started
    API-->>UI: Return impersonation session token

    Note over UI: UI shows impersonation banner
    Note over UI: Banner shows: "Viewing as [User Name]"

    PA->>UI: Perform actions as target user
    UI->>API: API calls with impersonation context
    API->>DB: All actions logged with impersonator_id

    alt Manual End
        PA->>UI: Click "End Impersonation"
        UI->>API: POST /auth/impersonate/end
    else Timeout (30 min)
        API->>DB: Auto-terminate session
    else Hard Limit (2 hr)
        API->>DB: Force-terminate session
    end

    API->>DB: Emit audit event: impersonation.ended
    API-->>UI: Return to admin session
```

4.3.9.3 Impersonation Session Constraints

Constraint	Specification
Visible Actions	Target user sees banner "Your account is being accessed by support"
Action Attribution	All actions show impersonator in audit trail

Prohibited Actions	Cannot change password, MFA, or security settings of target
Session Inheritance	Impersonator inherits target's permissions (not elevated)
Concurrent Limit	One impersonation session per impersonator

4.3.9.4 Impersonation Audit Trail

All impersonation sessions generate the following audit events:

Event	Data Captured
impersonation.started	impersonator_id, target_user_id, reason, session_id, timestamp
impersonation.action	session_id, action_type, resource, timestamp
impersonation.ended	session_id, end_reason (manual/timeout/hard_limit), timestamp

4.3.10 Authentication Flow Diagrams

4.3.10.1 Complete Login Flow

```

flowchart TD
    A[User Access Login Page] --> B{Valid Credentials?}
    B -->|No| C[Increment Failure Counter]
    C --> D{Failures >= 5?}
    D -->|Yes| E[Lock Account 15min]
    D -->|No| F[Show Error Message]
    E --> G[Return to Login]
    F --> G
    G --> G

    B -->|Yes| H{MFA Enabled?}
    H -->|No| I{MFA Required for Role?}
    I -->|Yes| J[Force MFA Enrollment]
    I -->|No| K[Create Session]
    J --> K

    H -->|Yes| L[Prompt MFA Code]
    L --> M{Valid MFA?}
    M -->|No| N[Increment MFA Failures]
    N --> O{MFA Failures >= 3?}
    O -->|Yes| E
    O -->|No| L

    M -->|Yes| K
    J --> K
    K --> P[Set Session Cookie]
    P --> Q[Redirect to Dashboard]
    Q --> R[Emit user.login Audit Event]

```

4.3.10.2 API Authentication Flow

```

flowchart TD
    A[API Request Received] --> B{Authorization Header?}
    B -->|No| C[401 Unauthorized]

    B -->|Yes| D{Valid Bearer Format?}
    D -->|No| C

    D -->|Yes| E[Extract API Key]
    E --> F{Key Prefix = npop_?}
    F -->|No| C

    F -->|Yes| G[Hash Key with bcrypt]
    G --> H[Lookup in Database]
    H --> I{Key Exists?}
    I -->|No| J[Log Failed Attempt]
    J --> C

    I -->|Yes| K{Key Active?}
    K -->|No| L[401 Key Revoked]

    K -->|Yes| M{Rate Limit OK?}
    M -->|No| N[429 Too Many Requests]

    M -->|Yes| O{Endpoint Authorized?}
    O -->|No| P[403 Forbidden]

    O -->|Yes| Q[Process Request]
    Q --> R[Log Request in Audit Trail]

```

4.3.10.3 Session Lifecycle State Machine

```

stateDiagram-v2
    [*] --> Created: User authenticates

    Created --> Active: Session initialized
    Active --> Active: User activity (refresh idle timer)
    Active --> Refreshed: Refresh in last 15 min
    Refreshed --> Active: New expiry set

    Active --> IdleExpired: 30 min no activity
    Active --> AbsoluteExpired: 24 hours since creation
    Refreshed --> AbsoluteExpired: 24 hours since creation

    Active --> Terminated: User logout
    Active --> Terminated: Admin action
    Active --> Terminated: Password/MFA change
    Active --> Terminated: Account suspended

    IdleExpired --> [*]

```

AbsoluteExpired --> [*]
Terminated --> [*]

4.3.11 Security Requirements Summary

4.3.11.1 Cryptographic Requirements

Function	Algorithm	Key Size
Password hashing	bcrypt	Cost factor 12
Session tokens	CSPRNG	256 bits
API keys	CSPRNG	256 bits (64 hex chars)
TOTP secrets	CSPRNG	160 bits
TLS	TLS 1.2+	256-bit AES minimum

4.3.11.2 Compliance Requirements

Requirement	Implementation
Audit logging	All authentication events logged immutably
Log retention	7 years per COMPLIANCE retention class
Failed attempt tracking	Stored per account with expiration
Session termination	Immediate on security-relevant changes

4.3.12 Traceability Matrix

Requirement ID	Description	Source
AUTH-001	Email + password authentication (v1)	SUPP-003: Locked Inputs
AUTH-002	bcrypt password hashing with cost factor 12	SUPP-003: Security Requirements
AUTH-003	Password complexity (12+ chars, complexity)	SUPP-003: Authentication
AUTH-004	90-day password rotation for admin roles	SUPP-003: Authentication
AUTH-005	MFA mandatory for Platform/PSP/Brand Admins	SUPP-003: Authentication
AUTH-006	MFA methods: TOTP and WebAuthn	SUPP-003: Authentication
AUTH-007	5-failure lockout with 15-min cooldown	SUPP-003: Audit & Compliance
AUTH-008	Impersonation: Platform Admin full, Support read-only	SUPP-003: Impersonation Controls

AUTH-009	Impersonation session 30-min limit (2-hr max)	SUPP-003: Impersonation Controls
AUTH-010	Impersonation audit trail (start/end with reason)	SUPP-003: Impersonation Controls
AUTH-011	API keys hashed, shown only at creation	SUPP-003: API Security
AUTH-012	API key rotation and revocation supported	SUPP-003: API Security
AUTH-013	Rate limits and anomaly detection per API key	SUPP-003: API Security
AUTH-014	Audit log retention 7 years	SUPP-003: Audit & Compliance

4.3.13 References

- **Section 4.1:** Persona Matrix (user classes)
- **Section 4.2:** Permission Matrix (RBAC authorization)
- **Section 12.2:** Security Non-Functional Requirements
- **SUPP-003:** Shared Foundations - RBAC and Permissions Matrix

Document Version: 1.0 Last Updated: 2026-01-01 IEEE 830 Compliant

PSP Admin Persona

Document ID: SRS-4.4.2 **Version:** 1.0 **Date:** 2026-01-01 **System:** NewPOPSys v1.38 **Category:** PSP Level Persona

1. Persona Overview

Attribute	Value
Persona ID	PSP-002
Role Name	PSP Admin
Level	PSP (Platform & Print Service Provider)
Primary Responsibility	Brand onboarding, PSP-level settings, user management, reporting and exports
Permission Level	PSP All Privileged

1.1 Role Description

The PSP Admin manages operations for a Print Service Provider tenant within the NewPOPSys platform. This persona handles brand client onboarding, configures PSP-level settings, manages internal users, oversees reporting, and maintains integration configurations. The PSP Admin serves as the primary administrative contact between the PSP organization and its brand clients.

2. Jobs to Be Done (JTBD)

2.1 Primary Jobs

Job ID	Job Statement	Priority
JTBD-PSPA-01	Onboard new brand clients to the PSP tenant	Critical
JTBD-PSPA-02	Configure and maintain PSP-level settings	High
JTBD-PSPA-03	Manage PSP user accounts and permissions	High
JTBD-PSPA-04	Generate and export operational reports	High
JTBD-PSPA-05	Monitor campaign totals and fulfillment status	Medium
JTBD-PSPA-06	Configure and monitor API/webhook integrations	Medium

2.2 Job Details

JTBD-PSPA-01: Brand Onboarding

- When a new brand client signs with our PSP, I want to onboard them quickly so that they can begin creating campaigns and managing their stores.

JTBD-PSPA-02: PSP Configuration

- When operational requirements change, I want to update PSP settings so that our workflows align with business needs.

JTBD-PSPA-03: User Management

- When team members join or leave, I want to manage their access efficiently so that security is maintained and operations continue smoothly.

JTBD-PSPA-04: Reporting and Exports

- When stakeholders need operational data, I want to generate comprehensive reports so that informed decisions can be made.

JTBD-PSPA-06: Integration Management

- When connecting to external systems (MIS, ERP), I want to configure reliable integrations so that data flows automatically between systems.

3. Primary Workflows

3.1 Brand Onboarding Workflow

1. Receive brand onboarding request with requirements
2. Create brand configuration in PSP tenant
3. Configure brand-specific settings and defaults
4. Create Brand Admin user account(s)
5. Provide onboarding documentation and training resources
6. Verify brand access and initial configuration
7. Hand off to Brand Admin for store and campaign setup

3.2 User Management Workflow

- 1. Receive user access request or change notification
- 2. Verify authorization for requested access level
- 3. Create, modify, or deactivate user account
- 4. Assign appropriate role and permissions
- 5. Notify user of account status
- 6. Document changes in system log

3.3 Reporting and Export Workflow

- 1. Identify reporting requirements
- 2. Access exports center
- 3. Configure report parameters and filters
- 4. Generate report or schedule recurring export
- 5. Review output for accuracy
- 6. Distribute to stakeholders or integrate with external systems

3.4 Integration Configuration Workflow

- 1. Receive integration requirements
- 2. Configure API credentials and endpoints
- 3. Set up webhook subscriptions
- 4. Test integration connectivity
- 5. Monitor API/webhook logs for issues
- 6. Troubleshoot and resolve integration errors

4. Key Screens Accessed

Screen/Module	Purpose	Access Frequency
Brand Onboarding	Create and configure new brand clients	As needed
PSP Settings	Manage PSP-level configuration	Weekly
User Management	Create and manage user accounts	Weekly
Campaign List/Totals	Overview of all campaigns and metrics	Daily
Exports Center	Generate and manage data exports	Daily
Webhook/API Logs	Monitor integration health and debug issues	Daily

5. Permission Scope

5.1 Permission Summary

Permission Category	Access Level
PSP Configuration	Full Read/Write
Brand Onboarding	Full CRUD
User Management	PSP-level users
Campaign Visibility	All PSP campaigns (read)

Reporting	Full Access
Exports	Full Access
API/Webhook Config	Full Read/Write
Audit Logs	PSP-level access

5.2 Permission Constraints

- Cannot access Platform Admin functions
- Cannot impersonate users in other PSP tenants
- Cannot modify system-wide platform settings
- Brand-level campaign editing requires Brand Admin delegation

6. Success Metrics

Metric ID	Metric Name	Target	Measurement Method
PSPA-M01	Brand Onboarding Time	< 24 hours	Time from request to active brand
PSPA-M02	User Provisioning Time	< 2 hours	Time from request to active account
PSPA-M03	Report Generation Success	100%	Successful export completions
PSPA-M04	Integration Uptime	99.5%	API/webhook availability
PSPA-M05	Support Ticket Resolution	< 4 hours	Time to resolve brand-reported issues

7. Related Documents

- SRS-4.2 Permission Matrix
- SRS-4.1 Persona Matrix
- SRS-4.4.1 Platform Admin Persona
- SUPP-001 Shared Foundations - Persona Workflows JTBD Screens

Document generated per IEEE 830 SRS format for NewPOPSys v1.38

Production Operator Persona

Document ID: SRS-4.4.3 **Version:** 1.0 **Date:** 2026-01-01 **System:** NewPOPSys v1.38 **Category:** PSP Level Persona

1. Persona Overview

Attribute	Value
Persona ID	PSP-003
Role Name	Production Operator
Level	PSP (Platform & Print Service Provider)

Primary Responsibility	Update order statuses, create shipments and tracking, process batches, view fulfillment queues
Permission Level	Status and Shipping Updates

1.1 Role Description

The Production Operator is responsible for the day-to-day fulfillment operations within a PSP. This persona manages the production lifecycle from campaign publication through final shipment, including batch processing, order status management, shipment creation, tracking updates, and handling issues and reorders. The Production Operator ensures timely and accurate delivery of campaign materials to stores.

2. Jobs to Be Done (JTBD)

2.1 Primary Jobs

Job ID	Job Statement	Priority
JTBD-PO-01	Review campaign totals and plan production/kitting	Critical
JTBD-PO-02	Assign and manage production batches	Critical
JTBD-PO-03	Progress order statuses through fulfillment stages	Critical
JTBD-PO-04	Create shipments and add tracking information	Critical
JTBD-PO-05	Process issues, reorders, and replacement shipments	High
JTBD-PO-06	Export fulfillment data packages	Medium

2.2 Job Details

JTBD-PO-01: Production Planning

- When a campaign is published, I want to review store orders and totals so that I can plan production and kitting efficiently.

JTBD-PO-02: Batch Management

- When processing orders, I want to assign them to batches (PRODUCTION, PICK_PACK, SHIP_WAVE, CUSTOM) so that I can track and manage work in logical groups.

JTBD-PO-03: Order Status Management

- When orders progress through production, I want to update statuses accurately so that stakeholders have visibility into fulfillment progress.

JTBD-PO-04: Shipment Creation

- When orders are ready to ship, I want to create shipments with tracking so that stores can monitor delivery and we have proof of shipment.

JTBD-PO-05: Issue Resolution

- When stores report issues or request replacements, I want to process them according to campaign approval policy so that stores receive correct materials.

3. Primary Workflows

3.1 Canonical Fulfillment Workflow

1. Campaign published triggers system to generate assignments and store orders
2. Receive notification (email/webhook/in-app) of new campaign orders
3. Review campaign totals and store orders
4. Confirm production/kitting plan
5. Assign batches (PRODUCTION / PICK_PACK / SHIP_WAVE / CUSTOM)
6. Progress order statuses through fulfillment stages
7. Create shipments (partial shipments allowed)
8. Add tracking numbers to shipments
9. Update shipment and order status (UI or API)
10. Close fulfillment when complete

3.2 Issues and Reorders Workflow

1. Receive issue or reorder request from queue
2. Review request details and supporting evidence
3. Verify approval per campaign approval policy
4. Approve or reject request
5. If approved, create replacement order
6. Process replacement through fulfillment
7. Ship replacement with tracking
8. Update request status to resolved

3.3 Export Workflow

1. Identify export requirements (orders/shipments/execution/reorders)
2. Access export function
3. Configure export parameters and date ranges
4. Generate export package
5. Distribute to stakeholders or integrate with external systems (MIS)
6. Archive export for records

4. Key Screens Accessed

Screen/Module	Purpose	Access Frequency
Store Order List + Filters	View and filter all store orders	Continuous
Order Detail	View complete order information and update status	Continuous
Batch Manager	Create, assign, and manage production batches	Daily
Shipments + Tracking	Create shipments and add tracking numbers	Daily
Issues/Reorders Queue	Process replacement requests and issues	Daily

5. Permission Scope

5.1 Permission Summary

Permission Category	Access Level
Order Viewing	All PSP orders (read)
Order Status Updates	Full Write
Batch Management	Full CRUD
Shipment Creation	Full CRUD
Tracking Updates	Full Write
Issues/Reorders	Approve/Fulfill per policy
Exports	Fulfillment packages
Campaign Configuration	No Access
User Management	No Access

5.2 Permission Constraints

- Cannot modify campaign configurations or settings
 - Cannot access user management functions
 - Cannot access PSP or platform administrative settings
 - Issue/reorder approvals limited by campaign approval policy
 - Cannot delete orders (only update status)
-

6. Success Metrics

Metric ID	Metric Name	Target	Measurement Method
PO-M01	Order Processing Time	< 48 hours	Time from order creation to shipment
PO-M02	Shipment Accuracy	99.5%	Correct items shipped vs ordered
PO-M03	Tracking Update Timeliness	< 4 hours	Time from shipment to tracking entry
PO-M04	Issue Resolution Time	< 24 hours	Time from issue report to resolution
PO-M05	Late Shipment Rate	< 2%	Shipments past campaign shipping SLA
PO-M06	Batch Completion Rate	100%	Batches completed within target date

7. Batch Types Reference

Batch Type	Description
PRODUCTION	Items in active production/printing
PICK_PACK	Items being picked and packed for shipment
SHIP_WAVE	Items grouped for shipping wave

CUSTOM	User-defined batch type for special handling
--------	--

8. Related Documents

- SRS-4.2 Permission Matrix
- SRS-4.1 Persona Matrix
- SRS-4.4.1 Platform Admin Persona
- SRS-4.4.2 PSP Admin Persona
- SUPP-001 Shared Foundations - Persona Workflows JTBD Screens

Document generated per IEEE 830 SRS format for NewPOPSys v1.38

Platform Admin Persona

Document ID: SRS-4.4.1 **Version:** 1.0 **Date:** 2026-01-01 **System:** NewPOPSys v1.38 **Category:** PSP Level Persona

1. Persona Overview

Attribute	Value
Persona ID	PSP-001
Role Name	Platform Admin
Level	PSP (Platform & Print Service Provider)
Primary Responsibility	Full system configuration, tenant management, user impersonation for support, security and audit access
Permission Level	All Privileged + Impersonate

1.1 Role Description

The Platform Admin is the highest-privilege user within the NewPOPSys platform. This persona is responsible for system-wide configuration, multi-tenant management, security oversight, and provides escalated support through user impersonation capabilities. Platform Admins ensure the platform operates securely and reliably across all PSP tenants.

2. Jobs to Be Done (JTBD)

2.1 Primary Jobs

Job ID	Job Statement	Priority
JTBD-PA-01	Configure and maintain system-wide platform settings	Critical
JTBD-PA-02	Manage PSP tenant onboarding and configuration	Critical
JTBD-PA-03	Provide escalated support via user impersonation	High

JTBD-PA-04	Monitor security events and system audit logs	Critical
JTBD-PA-05	Manage platform-level user accounts and permissions	High

2.2 Job Details

JTBD-PA-01: System Configuration

- When I need to configure platform behavior, I want to access centralized settings so that all tenants operate under consistent policies.

JTBD-PA-02: Tenant Management

- When a new PSP joins the platform, I want to onboard them efficiently so that they can begin operations with proper isolation and configuration.

JTBD-PA-03: Support Escalation

- When a user reports an issue I cannot reproduce, I want to impersonate their session so that I can diagnose and resolve problems accurately.

JTBD-PA-04: Security Oversight

- When security events occur, I want immediate visibility into audit logs so that I can respond to threats and maintain compliance.
-

3. Primary Workflows

3.1 Tenant Onboarding Workflow

1. Receive new PSP onboarding request
2. Create tenant configuration in system settings
3. Configure tenant-specific settings and limits
4. Create initial PSP Admin user account
5. Verify tenant isolation and access controls
6. Document configuration in audit log

3.2 User Impersonation Workflow

1. Receive escalated support request
2. Verify request legitimacy and document reason
3. Access user impersonation interface
4. Impersonate target user session
5. Diagnose reported issue
6. Exit impersonation and document findings
7. Resolve issue or escalate further

3.3 Security Monitoring Workflow

1. Access security dashboard
 2. Review security events and alerts
 3. Investigate anomalous activities
 4. Take corrective action as needed
 5. Document findings and actions in audit log
 6. Update security policies if required
-

4. Key Screens Accessed

Screen/Module	Purpose	Access Frequency
Tenant Config	Create and manage PSP tenant configurations	As needed
System Settings	Configure platform-wide settings and policies	Weekly
User Impersonation	Access user sessions for support purposes	As needed
Security Dashboard	Monitor security events and threats	Daily
Full Audit Log	Review comprehensive system activity logs	Daily

5. Permission Scope

5.1 Permission Summary

Permission Category	Access Level
System Configuration	Full Read/Write
Tenant Management	Full CRUD
User Management	All tenants
Audit Logs	Full Access
User Impersonation	Enabled
Security Settings	Full Read/Write
API/Webhook Configuration	Full Access

5.2 Permission Constraints

- All impersonation sessions are logged with reason codes
 - Security-critical changes require confirmation
 - Audit log entries cannot be deleted or modified
 - Password and credential access is restricted even during impersonation
-

6. Success Metrics

Metric ID	Metric Name	Target	Measurement Method
PA-M01	Tenant Onboarding Time	< 4 hours	Time from request to active tenant
PA-M02	Support Escalation Resolution	< 2 hours	Time to resolve impersonation-assisted tickets
PA-M03	Security Incident Response	< 30 minutes	Time from alert to initial response

PA-M04	System Uptime	99.9%	Platform availability monitoring
PA-M05	Audit Log Completeness	100%	Verification of logged actions

7. Related Documents

- SRS-4.2 Permission Matrix
- SRS-4.1 Persona Matrix
- SUPP-001 Shared Foundations - Persona Workflows JTBD Screens

Document generated per IEEE 830 SRS format for NewPOPSys v1.38

Brand Admin Persona

Document ID: SRS-4.4.1 **Version:** 1.0 **System:** NewPOPSys v1.38 **Category:** Brand Level Persona **Last Updated:** 2026-01-01

1. Persona Overview

1.1 Role Definition

The Brand Admin is the highest-authority user within a brand's organizational hierarchy. This persona has full administrative control over brand configuration, campaign management, store operations, and user permissions. Brand Admins serve as the primary point of accountability for all POP marketing execution activities within their brand.

1.2 Primary Responsibility

Full brand configuration, all campaigns access, store management, and user permissions administration.

1.3 Permission Level

Brand Level Privileged - Complete read/write access to all brand resources, including:

- All campaign data regardless of assignment
- All store records within the brand
- All user accounts at brand and store levels
- Brand-wide configuration settings
- Full reporting and export capabilities

2. Jobs to Be Done (JTBD)

2.1 Primary Jobs

Job ID	Job Statement	Priority
BA-J01	Configure brand-level settings and defaults to ensure consistent campaign execution	Critical

BA-J02	Manage all campaigns across the brand portfolio without assignment restrictions	Critical
BA-J03	Administer user accounts and permission assignments for Campaign Managers and Regional Managers	Critical
BA-J04	Monitor brand-wide compliance and performance through comprehensive reporting	High
BA-J05	Apply waivers or force-complete campaigns when business exceptions require (with audit trail)	High
BA-J06	Escalate critical issues to PSP Admin when platform-level intervention is needed	Medium

2.2 Functional Requirements

- **FR-BA-001:** The system shall provide Brand Admin access to all campaigns without requiring explicit assignment.
- **FR-BA-002:** The system shall allow Brand Admin to create, modify, and deactivate user accounts at brand and store levels.
- **FR-BA-003:** The system shall enable Brand Admin to configure brand-wide defaults for photo rules, verification modes, and SLAs.
- **FR-BA-004:** The system shall generate audit logs for all waiver and force-complete actions performed by Brand Admin.

3. Primary Workflows

3.1 Campaign Management Workflow

1. Define campaign parameters: type (expiring vs. core branding), timeline, instructions, verificationMode (STRICT/FAST), verification SLA, deinstall rules.
2. Define kit contents: items with required location slot mappings; attach mockups/reference images; configure photo rules (defaults + overrides).
3. Select target stores using all/region/group/custom includes and exclusions; preview selection recipe.
4. Publish campaign to initiate store assignments and order generation.
5. Monitor dashboard metrics: completion percentage, late shipping, anomalies, issue counts, rejection counts.
6. Review proofs (photo + slot packet); reject specific photos with reason codes; approve when satisfied.
7. Apply waivers or force-complete when business conditions require (reason + audit mandatory).

3.2 User Administration Workflow

1. Access brand user management interface.
2. Create or modify Campaign Manager accounts with campaign assignments.
3. Create or modify Regional Manager accounts with store segment assignments.
4. Review and adjust permission levels as organizational needs change.
5. Deactivate user accounts upon role termination.

4. Key Screens Accessed

Screen/Module	Purpose	Access Frequency
---------------	---------	------------------

Campaign Builder	Create and configure new campaigns	Weekly
Store Selector	Define store participation for campaigns	Weekly
Kit/Items Editor	Configure kit contents and location mappings	Weekly
Photo Rules	Set brand defaults and campaign overrides	As needed
Dashboard	Monitor campaign performance metrics	Daily
Store Detail	View individual store execution status	Daily
Review Queue	Approve or reject proof submissions	Daily
Retake Queue	Monitor and manage photo retake requests	Daily
Brand Config	Configure brand-level settings and defaults	Monthly
Store Management	Administer store records and attributes	As needed
User Permissions	Manage brand and store user accounts	As needed
Full Brand Reporting	Generate comprehensive performance reports	Weekly
Exports/Reports	Export data for external analysis	As needed

5. Permission Scope

5.1 Data Access

Resource Type	Create	Read	Update	Delete
Brand Configuration	Yes	Yes	Yes	No
Campaigns (All)	Yes	Yes	Yes	Yes
Stores	Yes	Yes	Yes	Yes
Users (Brand Level)	Yes	Yes	Yes	Yes
Users (Store Level)	Yes	Yes	Yes	Yes
Reports	Yes	Yes	N/A	N/A
Audit Logs	No	Yes	No	No

5.2 Administrative Actions

- Assign/unassign Campaign Managers to campaigns
- Assign/unassign Regional Managers to store segments
- Apply completion waivers with mandatory reason documentation
- Force-complete campaigns with mandatory reason documentation
- Configure verification mode (STRICT/FAST) per campaign
- Set brand-wide photo rule defaults

6. Success Metrics

6.1 Key Performance Indicators

Metric ID	Metric Name	Target	Measurement Frequency
BA-KPI-01	Campaign Completion Rate	>= 95%	Per campaign
BA-KPI-02	Average Time to Proof Approval	<= 24 hours	Weekly
BA-KPI-03	Exception Resolution Time	<= 48 hours	Weekly
BA-KPI-04	User Account Accuracy	100% active users valid	Monthly
BA-KPI-05	Waiver Usage Rate	<= 5% of completions	Per campaign
BA-KPI-06	Late Shipping Incidents	<= 3% of orders	Per campaign

6.2 Quality Indicators

- Zero unauthorized access incidents from misconfigured permissions
- Complete audit trail for all administrative actions
- All waivers documented with valid business justification

7. References

- SUPP-001: Shared Foundations - Persona Workflows JTBD Screens
- SRS-4.1: Persona Matrix
- SRS-4.2: Permission Matrix

Document Control: This persona specification is part of the NewPOPSys v1.38 SRS documentation suite.

Campaign Manager Persona

Document ID: SRS-4.4.2 **Version:** 1.0 **System:** NewPOPSys v1.38 **Category:** Brand Level Persona **Last Updated:** 2026-01-01

1. Persona Overview

1.1 Role Definition

The Campaign Manager is responsible for building, configuring, and managing POP marketing campaigns within assigned scope. This persona focuses on campaign creation, kit definition, store selection, proof review, and performance monitoring. Campaign Managers operate with restricted access limited to campaigns explicitly assigned to them by a Brand Admin.

1.2 Primary Responsibility

Build new campaigns, manage assigned campaigns, define kits and photo rules, review proofs, and approve campaign completions.

1.3 Permission Level

Must be assigned to campaigns - Access is explicitly scoped to:

- Campaigns where the user has been granted assignment
 - Stores participating in assigned campaigns
 - Execution data related to assigned campaigns only
 - No access to brand-wide configuration or user management
-

2. Jobs to Be Done (JTBD)

2.1 Primary Jobs

Job ID	Job Statement	Priority
CM-J01	Build and configure new campaigns with complete specifications	Critical
CM-J02	Define kit contents with accurate item-to-location slot mappings	Critical
CM-J03	Select appropriate stores for campaign participation	Critical
CM-J04	Review and approve/reject proof photo submissions	Critical
CM-J05	Monitor campaign performance and identify execution issues	High
CM-J06	Manage retake requests and ensure photo quality standards	High
CM-J07	Generate campaign-specific reports for stakeholder communication	Medium

2.2 Functional Requirements

- **FR-CM-001:** The system shall restrict Campaign Manager access to only campaigns with explicit assignment.
 - **FR-CM-002:** The system shall provide Campaign Manager with full campaign builder capabilities for assigned campaigns.
 - **FR-CM-003:** The system shall enable Campaign Manager to reject specific photos with mandatory reason codes.
 - **FR-CM-004:** The system shall display real-time campaign metrics on the Campaign Manager dashboard.
 - **FR-CM-005:** The system shall allow Campaign Manager to export reports for assigned campaigns only.
-

3. Primary Workflows

3.1 Campaign Creation Workflow

1. Define Campaign Parameters

- Set campaign type: expiring (promotional) or core branding (permanent)
- Configure timeline: start date, end date, key milestones
- Write installation instructions and special handling notes
- Select verification mode: STRICT (requires review) or FAST (auto-complete)
- Set verification SLA (time allowed for proof review)
- Define deinstall rules if applicable

2. Define Kit Configuration

- Add items to campaign kit
- Map each item to required location slots
- Attach mockup images and reference photos
- Configure photo rules: required angles, minimum count, quality standards
- Set defaults and define any campaign-specific overrides

3. Select Target Stores

- Choose selection method: all stores, by region, by group, or custom list
- Apply inclusion criteria
- Apply exclusion criteria
- Preview final store selection recipe
- Validate store count and distribution

4. Publish Campaign

- Review complete campaign configuration
- Initiate publish action
- System generates store assignments and orders
- PSP receives notification for production planning

3.2 Proof Review Workflow

1. Access Review Queue for assigned campaigns.
2. Open proof submission (photo + slot packet).
3. Evaluate photos against quality standards and mockup references.
4. For acceptable submissions: approve proof to complete store execution.
5. For unacceptable submissions:
 - Reject specific photos (not entire submission)
 - Select mandatory reason code for each rejection
 - Store receives retake notification
6. Monitor Retake Queue for resubmissions.
7. Repeat review process until satisfied or waiver applied (by Brand Admin).

3.3 Campaign Monitoring Workflow

1. Access Dashboard for assigned campaigns.
2. Review key metrics: completion %, late shipping, anomalies, issue counts, rejection counts.
3. Drill into Store Detail for underperforming locations.
4. Identify patterns requiring intervention.
5. Generate reports for stakeholder updates.
6. Escalate systemic issues to Brand Admin.

4. Key Screens Accessed

Screen/Module	Purpose	Access Frequency
Campaign Builder	Create and configure campaign parameters	Weekly
Store Selector	Define store participation criteria	Weekly
Kit/Items Editor	Configure kit contents and slot mappings	Weekly
Photo Rules	Set photo requirements and quality standards	Weekly

Dashboard	Monitor campaign performance metrics	Daily
Store Detail	View individual store execution status	Daily
Review Queue	Approve or reject proof submissions	Daily
Retake Queue	Monitor and manage photo retake requests	Daily
Exports/Reports	Generate campaign-specific reports	Weekly

5. Permission Scope

5.1 Data Access

Resource Type	Create	Read	Update	Delete
Campaigns (Assigned)	Yes	Yes	Yes	No
Campaigns (Unassigned)	No	No	No	No
Kits (Assigned Campaigns)	Yes	Yes	Yes	Yes
Stores (Assigned Campaigns)	No	Yes	No	No
Proofs (Assigned Campaigns)	No	Yes	Yes	No
Reports (Assigned Campaigns)	Yes	Yes	N/A	N/A
Brand Configuration	No	No	No	No
User Management	No	No	No	No

5.2 Campaign Actions

- Create new campaigns (pending Brand Admin assignment for activation)
- Modify campaign configuration before and during execution
- Approve proof submissions
- Reject individual photos with reason codes
- Request retakes from stores
- Export campaign data and reports

5.3 Restricted Actions

- Cannot access campaigns without explicit assignment
 - Cannot apply completion waivers (Brand Admin only)
 - Cannot force-complete campaigns (Brand Admin only)
 - Cannot manage user accounts or permissions
 - Cannot modify brand-level configuration
-

6. Success Metrics

6.1 Key Performance Indicators

Metric ID	Metric Name	Target	Measurement Frequency
-----------	-------------	--------	-----------------------

CM-KPI-01	Campaign On-Time Launch Rate	100%	Per campaign
CM-KPI-02	Proof Review Turnaround	< = 24 hours	Daily
CM-KPI-03	First-Pass Approval Rate	> = 80%	Per campaign
CM-KPI-04	Retake Resolution Time	< = 48 hours	Weekly
CM-KPI-05	Campaign Completion Rate	> = 95%	Per campaign
CM-KPI-06	Store Participation Accuracy	100% correct selection	Per campaign

6.2 Quality Indicators

- Zero campaigns launched with incomplete kit definitions
- All rejections include valid reason codes
- Dashboard reviewed daily for active campaigns
- Escalations to Brand Admin documented appropriately

7. References

- SUPP-001: Shared Foundations - Persona Workflows JTBD Screens
- SRS-4.1: Persona Matrix
- SRS-4.2: Permission Matrix

Document Control: This persona specification is part of the NewPOPSys v1.38 SRS documentation suite.

Regional Manager Persona

Document ID: SRS-4.4.3 **Version:** 1.0 **System:** NewPOPSys v1.38 **Category:** Brand Level Persona **Last Updated:** 2026-01-01

1. Persona Overview

1.1 Role Definition

The Regional Manager operates with an exception-first workflow, focusing on store compliance within an assigned geographic segment or store group. This persona monitors execution quality, manages exception queues, reviews proofs, and escalates critical issues to Brand Admin. Regional Managers serve as the primary compliance oversight for their assigned store portfolio.

1.2 Primary Responsibility

Oversee assigned stores, manage exception queues, approve/reject proofs, and escalate issues to Brand Admin.

1.3 Permission Level

Store Compliance for segment - Access scoped to:

- Stores explicitly assigned to the Regional Manager's segment
- Campaign execution data for assigned stores only
- Exception and compliance queues filtered to assigned stores

- Limited administrative actions (waivers where policy allows)
-

2. Jobs to Be Done (JTBD)

2.1 Primary Jobs

Job ID	Job Statement	Priority
RM-J01	Monitor exception queue to identify and resolve store execution issues	Critical
RM-J02	Review and approve/reject proof submissions for assigned stores	Critical
RM-J03	Track store compliance rates across assigned segment	Critical
RM-J04	Request retakes and reopen stores for corrective action	High
RM-J05	Apply completion waivers where policy allows (with documented reason)	High
RM-J06	Escalate critical issues to Brand Admin via in-app notification	High
RM-J07	Identify patterns of non-compliance for regional coaching	Medium

2.2 Functional Requirements

- **FR-RM-001:** The system shall filter all queues and dashboards to show only stores assigned to the Regional Manager.
 - **FR-RM-002:** The system shall prioritize exception queue items by severity and time overdue.
 - **FR-RM-003:** The system shall enable Regional Manager to apply waivers only where brand policy permits.
 - **FR-RM-004:** The system shall provide in-app escalation with comment and notification trigger to Brand Admin.
 - **FR-RM-005:** The system shall log all waiver applications with user ID, timestamp, and mandatory reason.
-

3. Primary Workflows

3.1 Exception Queue Workflow (Primary)

The Regional Manager operates from an exception-first model, prioritizing resolution of issues over routine monitoring.

1. Access Exception Queue

- View filtered list of stores with outstanding exceptions
- Sort by severity: critical > high > medium > low
- Sort by time: most overdue first

2. Exception Types Handled

- **Overdue Execution:** Store has not completed installation by deadline
- **Missing Proofs:** Installation marked complete but photos not submitted
- **Rejected Proofs:** Photos previously rejected, awaiting retake
- **Deinstall Overdue:** Campaign expired, deinstall not completed (if enabled)
- **Severe Anomalies:** Significant discrepancies flagged by system

3. Resolution Actions

- Contact store for status update (external to system)
- Request retakes for quality issues
- Reopen store execution for corrective action
- Apply completion waiver (where policy allows, reason required)
- Escalate to Brand Admin for issues beyond authority

3.2 Proof Review Workflow

1. Access Review Queue filtered to assigned stores.
2. Open proof submission (photo + slot packet).
3. Evaluate photos against quality standards and requirements.
4. For acceptable submissions: approve to complete store execution.
5. For unacceptable submissions:
 - Reject specific photos with reason codes
 - Store receives retake notification automatically
6. Monitor Retake Queue for resubmissions.
7. Escalate persistent quality issues to Brand Admin.

3.3 Escalation Workflow

1. Identify issue requiring Brand Admin intervention:
 - Policy exceptions beyond Regional Manager authority
 - Systemic issues affecting multiple stores
 - Critical compliance failures
 - Resource or timeline conflicts
2. Initiate in-app escalation:
 - Add detailed comment describing issue
 - Select escalation type/category
 - System triggers notification to Brand Admin
3. Track escalation status in queue.
4. Receive resolution notification and implement as directed.

4. Key Screens Accessed

Screen/Module	Purpose	Access Frequency
Exception Queue	Primary work queue for compliance issues	Multiple times daily
Store Compliance Dashboard	Overview of segment performance metrics	Daily
Review Queue	Approve or reject proof submissions	Daily
Retake Queue	Monitor and manage photo retake requests	Daily
Waivers/Reopen	Apply waivers and reopen store execution	As needed
Escalation Tools	Initiate and track Brand Admin escalations	As needed

5. Permission Scope

5.1 Data Access

Resource Type	Create	Read	Update	Delete
Stores (Assigned Segment)	No	Yes	Limited	No
Stores (Other Segments)	No	No	No	No
Campaigns	No	Yes	No	No
Proofs (Assigned Stores)	No	Yes	Yes	No
Exception Queue (Assigned)	No	Yes	Yes	No
Waivers	Yes*	Yes	No	No
Escalations	Yes	Yes	Yes	No

*Waiver creation restricted by brand policy configuration.

5.2 Compliance Actions

- Approve proof submissions for assigned stores
- Reject individual photos with reason codes
- Request retakes from stores
- Reopen store execution for corrective action
- Apply completion waivers (where brand policy allows)
- Create escalations to Brand Admin with comments

5.3 Restricted Actions

- Cannot modify campaign configuration
 - Cannot access stores outside assigned segment
 - Cannot manage user accounts or permissions
 - Cannot override brand policy restrictions on waivers
 - Cannot force-complete without waiver authority
-

6. Success Metrics

6.1 Key Performance Indicators

Metric ID	Metric Name	Target	Measurement Frequency
RM-KPI-01	Exception Queue Clearance Rate	>= 90% within SLA	Daily
RM-KPI-02	Segment Compliance Rate	>= 95%	Weekly
RM-KPI-03	Proof Review Turnaround	<= 24 hours	Daily
RM-KPI-04	Escalation Resolution Time	<= 48 hours	Weekly
RM-KPI-05	Waiver Usage Rate	<= 5% of completions	Per campaign

RM-KPI-06	Repeat Exception Rate	<= 10%	Monthly
-----------	-----------------------	--------	---------

6.2 Quality Indicators

- Exception queue reviewed minimum twice daily
- All waivers documented with valid business justification
- Escalations include complete context for Brand Admin
- Zero stores in segment exceed maximum overdue threshold

7. References

- SUPP-001: Shared Foundations - Persona Workflows JTBD Screens
- SRS-4.1: Persona Matrix
- SRS-4.2: Permission Matrix

Document Control: This persona specification is part of the NewPOPSys v1.38 SRS documentation suite.

Store Manager Persona Specification

Document ID: SRS-PERSONA-STORE-MGR Version: 1.0 Date: 2026-01-01 System: NewPOPSys v1.38 Classification: Store Level

1. Persona Overview

1.1 Role Definition

The Store Manager is the primary authority at the store level, responsible for team management, campaign execution oversight, and approval workflows within their assigned store location.

1.2 Primary Responsibility

Manage store team, approve replacement requests, view all store campaigns, and exercise full execution permissions for store-level operations.

1.3 Permission Level

Full Store Privileges - Complete access to all store-level functions including team management, approval workflows, analytics, and campaign history.

2. Jobs to be Done (JTBD)

Job ID	Job Statement	Priority
JTBD-SM-01	Oversee and manage store team members executing campaigns	High
JTBD-SM-02	Approve or reject replacement requests submitted by Store Operators	High
JTBD-SM-03	Monitor all active and historical campaigns for the store	Medium
JTBD-SM-04	Ensure timely completion of campaign installations and surveys	High

JTBD-SM-05	Review store analytics and performance metrics	Medium
JTBD-SM-06	Escalate issues requiring Brand or Regional Manager intervention	Low

3. Primary Workflows

3.1 Campaign Execution Workflow

1. Receive campaign notification and review instructions, mockups, and due dates
2. Receive/Verify: confirm order-level receipt; record item-level anomalies (missing/damaged/incorrect) with photos/evidence as required
3. Submit major packaging damage as a single request (PSP may expand into item lines)
4. Complete pre-install checklist: safety, old campaign removal, readiness acknowledgements
5. Install per item and location slot; upload proof photos as-you-go; meet brand's required minimums and suggested angles
6. Complete completion survey with attestation checkbox (userId + timestamp)
7. If photos rejected: retake only rejected photos; resubmit until satisfied/waived
8. If campaign expires: complete deinstall task and end survey

3.2 Approval Workflow

1. Review pending replacement requests from Store Operators
2. Evaluate request validity against campaign requirements
3. Approve or reject with documented reason
4. Track approved requests through fulfillment

3.3 Team Management Workflow

1. View team roster and role assignments
2. Monitor individual operator task progress
3. Reassign tasks as needed for coverage

4. Key Screens/APIs Accessed

4.1 Screens

Screen	Purpose	Access Level
My Tasks	View and manage personal task assignments	Full
Campaign Detail	Review campaign instructions, mockups, timeline	Full
Receive/Verify	Confirm order receipt and record anomalies	Full
Issue/Reorder Request	Submit and manage replacement requests	Full
Pre-Install Checklist	Complete safety and readiness checks	Full
Install + Proof Capture	Execute installation with photo documentation	Full
Completion Survey + Attestation	Submit final survey and attestation	Full
Retake Queue	Manage rejected photo retakes	Full

Deinstall Task	Execute campaign removal when required	Full
Team Management	Manage store team roster and assignments	Full
Replacement Approvals	Review and approve/reject operator requests	Full
Store Analytics	View store performance metrics	Full
Store Campaign History	Access historical campaign records	Full

4.2 API Endpoints

Endpoint Category	Operations	Access
/store/team	GET, POST, PUT	Full
/store/campaigns	GET	Full
/store/orders	GET, PUT	Full
/store/replacements	GET, POST, PUT (approve/reject)	Full
/store/surveys	GET, POST, PUT	Full
/store/proofs	GET, POST	Full
/store/analytics	GET	Full

5. Permission Scope

5.1 Permission Matrix

Permission	Granted	Notes
View all store campaigns	Yes	Full visibility
Execute campaign tasks	Yes	All workflow steps
Submit replacement requests	Yes	Direct submission
Approve replacement requests	Yes	For Store Operator requests
Manage store team	Yes	Roster and assignments
View store analytics	Yes	Performance dashboards
View campaign history	Yes	Full historical access
Escalate to Brand/Regional	Yes	Via in-app comments
Access other stores	No	Single store scope
Brand configuration	No	Store level only

5.2 Data Scope

- **Store Scope:** Single assigned store
- **Campaign Visibility:** All campaigns assigned to store
- **User Management:** Store team members only
- **Historical Access:** Full store history

6. Success Metrics

Metric ID	Metric	Target	Measurement
SM-M01	Campaign completion rate	> = 95%	Completed on-time / Total assigned
SM-M02	Replacement approval turnaround	< 4 hours	Request to decision time
SM-M03	Photo rejection rate	< 10%	Rejected photos / Total submitted
SM-M04	Team task completion	> = 90%	Operator tasks completed on-time
SM-M05	Anomaly documentation rate	100%	Anomalies with photos / Total anomalies
SM-M06	Deinstall compliance	> = 98%	On-time deinstalls / Required deinstalls

7. References

- SUPP-001: Shared Foundations - Persona Workflows JTBD Screens
- SRS 4.1: Persona Matrix
- SRS 4.2: Permission Matrix

Document Control

Version	Date	Author	Description
1.0	2026-01-01	System	Initial persona specification

Store Operator Persona Specification

Document ID: SRS-PERSONA-STORE-OPR **Version:** 1.0 **Date:** 2026-01-01 **System:** NewPOPSys v1.38 **Classification:** Store Level

1. Persona Overview

1.1 Role Definition

The Store Operator is the front-line execution role responsible for completing campaign surveys, performing installations, and documenting proof of execution at the store level.

1.2 Primary Responsibility

Complete surveys, update status, request replacements (requires Store Manager approval), and view assigned campaigns.

1.3 Permission Level

View Only + Execution - Limited to viewing assigned campaigns and executing designated workflow tasks. Replacement requests require Store Manager approval.

2. Jobs to be Done (JTBD)

Job ID	Job Statement	Priority
JTBD-SO-01	Complete campaign installation tasks according to brand specifications	High
JTBD-SO-02	Capture and upload proof photos meeting quality requirements	High
JTBD-SO-03	Document item anomalies (missing/damaged/incorrect) with evidence	High
JTBD-SO-04	Submit replacement requests for defective or missing items	Medium
JTBD-SO-05	Complete pre-install checklists and safety acknowledgements	High
JTBD-SO-06	Retake rejected photos until approved or waived	Medium
JTBD-SO-07	Execute deinstall tasks when campaigns expire	Medium

3. Primary Workflows

3.1 Campaign Execution Workflow

1. Receive campaign notification and review instructions, mockups, and due dates
2. Receive/Verify: confirm order-level receipt; record item-level anomalies (missing/damaged/incorrect) with photos/evidence as required
3. Submit major packaging damage as a single request (PSP may expand into item lines)
4. Complete pre-install checklist: safety, old campaign removal, readiness acknowledgements
5. Install per item and location slot; upload proof photos as-you-go; meet brand's required minimums and suggested angles
6. Complete completion survey with attestation checkbox (userId + timestamp)
7. Submission goes to review if STRICT mode, or completes immediately if FAST mode
8. If photos rejected: retake only rejected photos; resubmit until satisfied/waived
9. If campaign expires: complete deinstall task and end survey; proof optional/required per campaign

3.2 Replacement Request Workflow

1. Identify missing, damaged, or incorrect item during receive/verify
2. Document issue with required photos/evidence
3. Submit replacement request
4. Request enters Store Manager approval queue
5. Track request status (pending/approved/rejected)
6. Receive replacement upon fulfillment

3.3 Photo Retake Workflow

1. Receive notification of rejected photos with reason codes
2. Navigate to retake queue
3. Capture new photos addressing rejection reasons
4. Submit retakes for re-review

5. Repeat until approved or waived by reviewer

4. Key Screens/APIs Accessed

4.1 Screens

Screen	Purpose	Access Level
My Tasks	View personal task assignments and deadlines	View + Execute
Campaign Detail	Review campaign instructions, mockups, timeline	View Only
Receive/Verify	Confirm order receipt and record anomalies	Execute
Issue/Reorder Request	Submit replacement requests (requires approval)	Execute
Pre-Install Checklist	Complete safety and readiness checks	Execute
Install + Proof Capture	Execute installation with photo documentation	Execute
Completion Survey + Attestation	Submit final survey and attestation	Execute
Retake Queue	View and address rejected photo retakes	Execute
Deinstall Task	Execute campaign removal when required	Execute

4.2 API Endpoints

Endpoint Category	Operations	Access
/store/campaigns	GET (assigned only)	Read
/store/tasks	GET, PUT (own tasks)	Read/Update
/store/orders	GET (assigned)	Read
/store/replacements	POST (submit only)	Create
/store/surveys	GET, POST, PUT (own)	Full
/store/proofs	GET, POST (own)	Full
/store/checklists	GET, POST, PUT	Execute

5. Permission Scope

5.1 Permission Matrix

Permission	Granted	Notes
View assigned campaigns	Yes	Assigned campaigns only
Execute campaign tasks	Yes	Own task assignments
Submit replacement requests	Yes	Requires Store Manager approval

Approve replacement requests	No	Store Manager only
Manage store team	No	Store Manager only
View store analytics	No	Store Manager only
View campaign history	Limited	Own completed tasks only
Escalate to Brand/Regional	No	Via Store Manager
Access other stores	No	Single store scope
View other operator tasks	No	Own tasks only

5.2 Data Scope

- **Store Scope:** Single assigned store
- **Campaign Visibility:** Assigned campaigns only
- **Task Visibility:** Own assignments only
- **Historical Access:** Own completed work only

6. Success Metrics

Metric ID	Metric	Target	Measurement
SO-M01	Task completion rate	> = 95%	Completed on-time / Total assigned
SO-M02	Photo quality pass rate	> = 90%	Approved first-try / Total submitted
SO-M03	Anomaly documentation compliance	100%	Documented with photos / Total reported
SO-M04	Checklist completion rate	100%	Completed / Required
SO-M05	Retake turnaround time	< 24 hours	Rejection to retake submission
SO-M06	Survey completion accuracy	> = 98%	Valid submissions / Total submissions

7. References

- SUPP-001: Shared Foundations - Persona Workflows JTBD Screens
- SRS 4.1: Persona Matrix
- SRS 4.2: Permission Matrix

Document Control

Version	Date	Author	Description
1.0	2026-01-01	System	Initial persona specification

Integration User Persona Specification

Document ID: SRS-PERSONA-SYS-INT **Version:** 1.0 **Date:** 2026-01-01 **System:** NewPOPSys v1.38 **Classification:** System Level

1. Persona Overview

1.1 Role Definition

The Integration User is a system-level service account persona designed for automated machine-to-machine communication, enabling external systems to interact with NewPOPSys via APIs and webhooks.

1.2 Primary Responsibility

Inbound API writes, webhook consumption, export triggers, and MIS (Management Information System) integration.

1.3 Permission Level

API & Webhook Service Account - Programmatic access for system integration operations without interactive UI access.

2. Jobs to be Done (JTBD)

Job ID	Job Statement	Priority
JTBD-INT-01	Receive and process inbound data from external MIS systems	High
JTBD-INT-02	Consume webhook events for real-time system synchronization	High
JTBD-INT-03	Trigger and retrieve bulk data exports	Medium
JTBD-INT-04	Write order and shipment updates from fulfillment systems	High
JTBD-INT-05	Synchronize store and campaign data with external platforms	Medium
JTBD-INT-06	Provide audit trail for all automated operations	High

3. Primary Workflows

3.1 Inbound Data Synchronization Workflow

- External system authenticates via API credentials (service account token)
- System validates request payload against schema
- Data written to appropriate NewPOPSys entities
- Validation and business rule checks applied
- Success/failure response returned with transaction ID
- Operation logged to audit trail

3.2 Webhook Consumption Workflow

- NewPOPSys event triggers webhook dispatch
- External system endpoint receives webhook payload

- 3. Integration User credentials validate origin
- 4. External system processes event data
- 5. Acknowledgment returned to NewPOPSys
- 6. Retry logic applied for failed deliveries

3.3 Export Trigger Workflow

- 1. Integration User initiates export request via API
- 2. System validates export scope and permissions
- 3. Export job queued for processing
- 4. Completion webhook dispatched when ready
- 5. Export package retrieved via secure download URL
- 6. Export logged with access audit

3.4 Order/Shipment Update Workflow

- 1. Fulfillment system authenticates as Integration User
- 2. Order status update or shipment creation submitted
- 3. System validates against existing order records
- 4. Status progression rules enforced
- 5. Affected records updated with timestamps
- 6. Downstream notifications triggered (stores, brands)

4. Key Screens/APIs Accessed

4.1 Screens

The Integration User persona does not access interactive UI screens. All operations are conducted via programmatic API interfaces.

Screen	Purpose	Access Level
N/A	Service account - no UI access	None

4.2 API Endpoints

Endpoint Category	Operations	Access
/api/v1/orders	GET, POST, PUT	Full
/api/v1/shipments	GET, POST, PUT	Full
/api/v1/tracking	POST, PUT	Full
/api/v1/stores	GET	Read
/api/v1/campaigns	GET	Read
/api/v1/exports	POST, GET	Full
/api/v1/webhooks	GET, POST (registration)	Full
/api/v1/status	PUT	Update
/api/v1/batches	GET, POST, PUT	Full

4.3 Webhook Events

Event Category	Direction	Description
order.created	Outbound	New order generated
order.status_changed	Outbound	Order status transition
shipment.created	Outbound	Shipment record created
shipment.tracking_updated	Outbound	Tracking information added
campaign.published	Outbound	Campaign activated
export.completed	Outbound	Export package ready
store.data_sync	Inbound	Store data from external system
fulfillment.update	Inbound	Status from fulfillment system

5. Permission Scope

5.1 Permission Matrix

Permission	Granted	Notes
API authentication	Yes	Service account tokens
Inbound data writes	Yes	Validated payloads only
Webhook registration	Yes	Own endpoints only
Export initiation	Yes	Scoped by tenant
Order status updates	Yes	Valid transitions only
Shipment creation	Yes	Linked to valid orders
Interactive UI access	No	API only
User management	No	System operations only
Configuration changes	No	Data operations only
Impersonation	No	Own identity only

5.2 Data Scope

- **Tenant Scope:** Configured per service account
- **Operation Scope:** API and webhook operations only
- **Audit Scope:** All operations logged with service account identity
- **Rate Limiting:** Subject to API rate limits per account

5.3 Security Requirements

Requirement	Specification
-------------	---------------

Authentication	Bearer token (OAuth 2.0 client credentials)
Token Expiry	Configurable, default 1 hour
IP Allowlisting	Optional per service account
Request Signing	HMAC-SHA256 for webhook payloads
TLS	Required (TLS 1.2+)
Audit Logging	All operations with timestamp, IP, payload hash

6. Success Metrics

Metric ID	Metric	Target	Measurement
INT-M01	API availability	>= 99.9%	Uptime percentage
INT-M02	API response time (p95)	< 500ms	95th percentile latency
INT-M03	Webhook delivery rate	>= 99.5%	Successful / Attempted
INT-M04	Data validation pass rate	>= 99%	Valid payloads / Total
INT-M05	Export completion rate	100%	Completed / Initiated
INT-M06	Authentication failure rate	< 0.1%	Failed auth / Total requests
INT-M07	Rate limit compliance	100%	Requests within limits

7. Integration Patterns

7.1 Supported Integration Types

Pattern	Description	Use Case
REST API	Synchronous request/response	Real-time data operations
Webhooks	Event-driven push notifications	Status change notifications
Batch Export	Scheduled bulk data extraction	Reporting, analytics
Batch Import	Bulk data ingestion	Store/campaign sync

7.2 Error Handling

Scenario	Behavior
Invalid payload	400 Bad Request with validation errors
Authentication failure	401 Unauthorized
Rate limit exceeded	429 Too Many Requests with Retry-After

Server error	500 with correlation ID for support
Webhook delivery failure	Exponential backoff retry (max 5 attempts)

8. References

- SUPP-001: Shared Foundations - Persona Workflows JTBD Screens
 - SRS 4.1: Persona Matrix
 - SRS 4.2: Permission Matrix
 - API Specification Documentation
-

Document Control

Version	Date	Author	Description
1.0	2026-01-01	System	Initial persona specification