

**What follows is a working draft of dotenvx's whitepaper.**

Please leave any thoughts or comments at:

<https://github.com/dotenvx/dotenvx/issues/526>

# Dotenvx: A Cryptographic Approach to Reducing Secrets Risk

Scott Motte  
mot@dotenvx.com  
www.dotenvx.com

**Abstract.** An ideal secrets solution would not only centralize secrets but also contain the fallout of a breach. While secrets managers offer centralized storage and distribution, their design creates a large blast radius, risking exposure of thousands or even millions of secrets. We propose a solution that reduces the blast radius by splitting secrets management into two distinct components: an encrypted secrets file and a separate decryption key.

## 1. Introduction

Modern software relies on secrets to operate—API keys, tokens, and credentials are essential for applications to interact with services like Stripe, Twilio, and AWS. The majority of these secrets are stored in platform-native secrets managers such as AWS Secrets Manager, Vercel Environment Variables, and Heroku Config Vars. These systems offer convenience by centralizing secrets and seamlessly injecting them into runtime environments. However, this centralization introduces significant risks. If breached, they expose all secrets stored within, resulting in a blast radius where thousands or even millions of secrets may be leaked. At the same time, alternatives such as .env files minimize blast radius but lack the safeguards necessary to prevent unauthorized access. Developers are left choosing between simplicity with higher risk or complexity with a larger blast radius.

What is needed is a secrets system based on hybrid cryptography instead of trust, allowing a developer to encrypt secrets without relying on any third party to remain secure. In this paper, we propose a solution to these risks using a library that decrypts an encrypted secrets file at runtime with a private key stored separately in the platform's secrets manager. This approach contains the blast radius of a breach while maintaining the simplicity of .env files. Even if one component—either the encrypted file or the secrets manager—is compromised, secrets remain secure. Only simultaneous access to both can expose them.

## 2. Secrets

We define a secret as a token or string value, typically issued by a third-party

service like Stripe, Twilio, or AWS, and used by applications to interact with their APIs. Secrets are essential for modern application functionality, enabling critical operations such as processing payments, sending emails, and accessing cloud resources.


To ensure secrets are available to the application at runtime, they must be stored in a way that the codebase can access them.




### 3. Storage

Not long ago, secrets were primarily stored as plaintext in code. If a codebase was breached, so were its secrets. The Twelve Factor App rightly introduced the concept of “strict separation of config from code,” helping contain this fallout. If a codebase was breached, its secrets remained safe—since they were injected as environment variables. [1]

This, however, still required a place to store secrets at rest before injecting them into env. For development, .env files became the standard, and for production, platform-native secrets managers emerged. Heroku Config Vars is the canonical example—providing both a CLI and UI to set production secrets. When code is deployed, Heroku Config Vars reads these secrets from storage and injects them into the running process as env. Today, this remains the standard for all secrets managers, aside from certain file-based methods we address later in this paper.

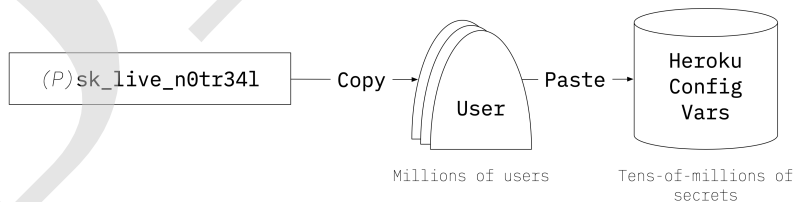

These solutions work well enough but rely on trust—trust that a secrets manager will remain uncompromised, and trust that a .env file will not be exposed. However, history has repeatedly shown this trust to be fragile. [2][3][4] A single point of access—whether a secrets manager or a .env file—means that a breach at that point exposes every secret stored there.

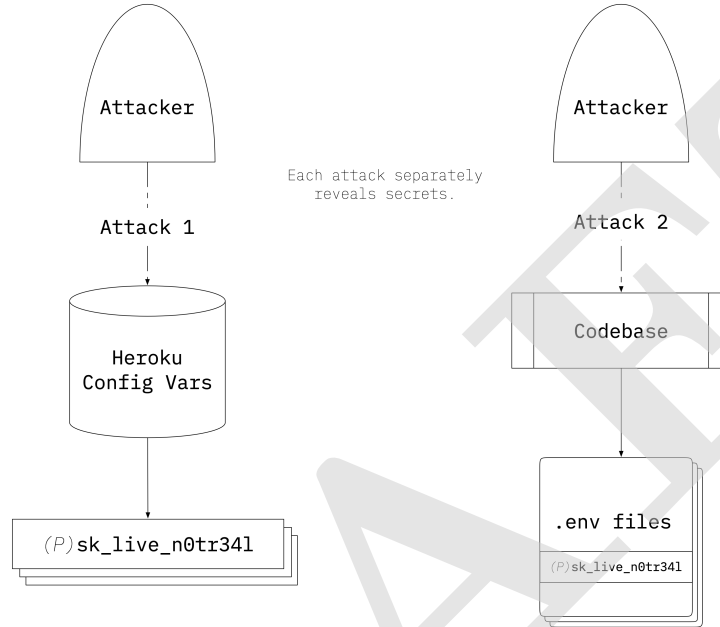


Secrets managers centralize storage, making them high-value targets. If breached, they reveal all secrets at once. Conversely, .env files are often scattered across local machines and repositories, increasing the likelihood of accidental exposure, but with a smaller blast radius.

#### 4. Splitting Secrets

To reduce the blast radius of a breach, secrets should not exist in a single, retrievable location. Instead, they should be split into two parts. By ensuring that neither part is stored together, access to one does not grant access to the original secret.


Our solution uses Elliptic Curve Integrated Encryption Scheme (ECIES) to achieve this separation. When a secret is encrypted, the process follows these steps:

- 1) A random symmetric key is generated for the secret.
- 2) The secret is encrypted using this key, producing a ciphertext.
- 3) The key itself is encrypted using an asymmetric public key.
- 4) The encrypted key and ciphertext are stored together in a .env file.

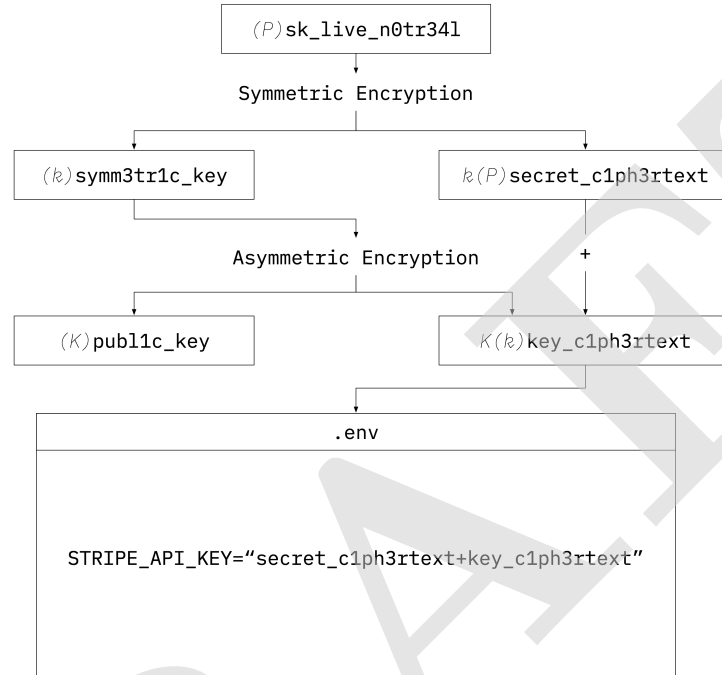

At this point, the decryption key—the private key associated with the public key—is not stored in the codebase. Instead, it is kept separately in a `.env.keys` file or a platform-native secrets manager. This means:

- The `.env` file contains encrypted secrets but lacks the means to decrypt them.
- The `.env.keys` file holds the decryption key but contains no secret values.
- Neither the codebase nor the secrets manager alone can reconstruct the secrets—both are required.

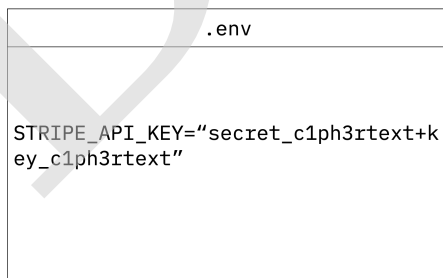

*Committed to code*



*Separate, stays on machine*

By structuring secrets this way, we eliminate the risks associated with storing secrets in either the codebase or a secrets manager. A breach of one component is insufficient; an attacker would need access to both the encrypted `.env` file and the `.env.keys` file to recover the secrets.


## 5. Runtime

We will need a way to bring the two parts back together at runtime. A runtime library is designed to be installed anywhere and acts as a lightweight wrapper around the application process. Instead of secrets being known and injected by the platform-native secrets manager, the library retrieves the encrypted .env file, pulls only the private key from the .env.keys file or platform-native secrets manager, decrypts the secrets, and injects them into env just-in-time.

To securely handle this process, the runtime follows a straightforward sequence of operations [9]:

- 1) Retrieve private key from .env.keys file, platform-native secrets manager, or pre-existing env.
- 2) Retrieve encrypted .env file.
- 3) Decrypt encrypted .env file with private key.
- 4) Inject decrypted secrets into process env.
- 5) Application runs, accessing secrets from env.

Here is a real-world example you can run yourself:

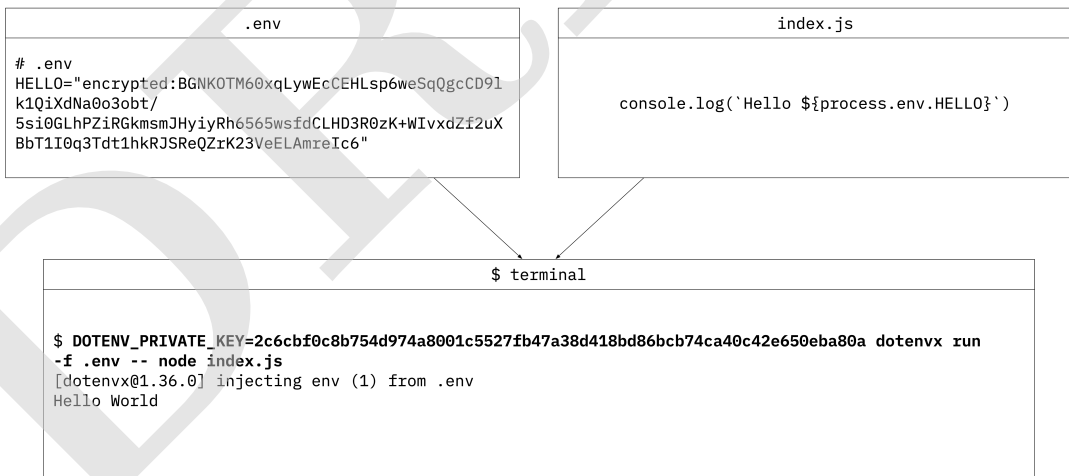


This approach ensures maximum compatibility, working in any environment where secrets are traditionally injected into env, while guaranteeing that secrets exist in plaintext only during runtime (within the process's isolated environment), never persisting in third-party storage or intermediary locations.

## 6. Dual Breach

Our solution significantly reduces the risks associated with isolated breaches. If the platform-native secrets manager is compromised, the attacker would gain access only

to the private key, which is useless without the encrypted secrets file. Conversely, if the codebase or .env file is exposed, the attacker would only obtain encrypted secrets, which cannot be decrypted without the private key. This separation ensures that a single point of failure does not expose plaintext secrets.

However, no system is entirely immune to all threats. In the case of a dual breach, where both the encrypted secrets file and the private key are compromised, the attacker can decrypt the secrets. That said, this setup still raises the bar for an attacker. The attacker must compromise two independent systems—both the platform-native secrets manager and the codebase—often maintained by separate teams or governed by different security policies. Furthermore, even if the attacker gains the encrypted file, they must identify and locate the corresponding private key in a separate system, which might not be trivially linked.

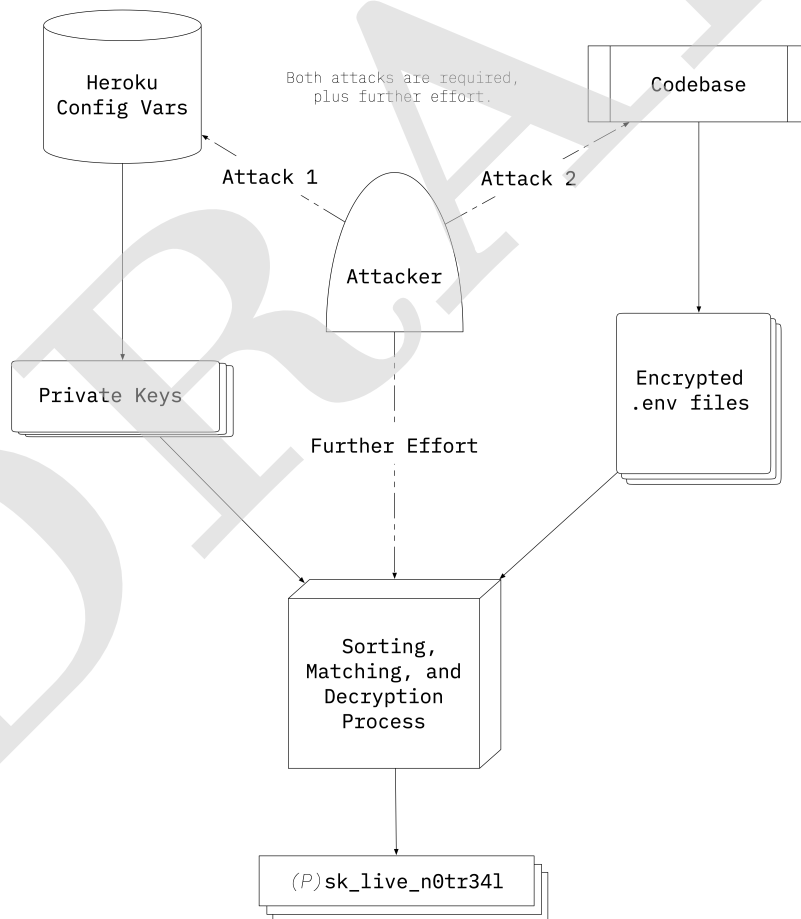

## 7. Version Control

Secrets have traditionally been excluded from version control due to security risks, forcing teams to rely on manual distribution of .env files or third-party secrets

managers. By encrypting .env files, secrets can now be committed safely alongside code, ensuring they follow the same versioning and history as application changes. Unlike full-file encryption approaches, which obscure both keys and values, only the values are encrypted, keeping the keys visible. This allows teams to track which secrets exist while keeping their actual contents protected [5].

This method aligns with the Twelve-Factor App principle of separating config from code—secrets remain encrypted in the repository, requiring a private key stored separately in a secrets manager to decrypt them. Additionally, teams can choose to store encrypted .env files in a separate repository or deploy them independently, maintaining a clear separation from the application code while still benefiting from version control. As a result, secrets can be tracked and reviewed without compromising security, and changes remain transparent without exposing sensitive values.

```
.env (commit f440ed)

23 # Logging
24
25 LOG_LEVEL="encrypted:BKzfW56VHobMDtfq+iU+MsjVIPDdiKYoJmKLMIUKzsds
5dHWjY+GcKbUx7V54jX21kVa6kuBclNNmP/DwXZA2VSb6q8zhMU/
Go59aQWqmoqlp6jB8DTxc8GjxUF4lWO3PLWJqk8="
26 +
27 + # AWS
28 + AWS_ACCESS_KEY_ID="encrypted:BLaoR6cP/
E3v4Cw4a5+OhY7vPXt6jZah+MQ1SPm3BZhBgOfdJ3AUUGK9kNzdkMZBE9JEN
TmgR0WNQwtVtoll9LhK6HlBFSJaVn2mlxF3aA8sZ1VhZY/Ftwp+IM5h5V5t6q/
doVTF7eDDZg=="
29 +
30 + AWS_SECRET_ACCESS_KEY="encrypted:BKsNjF95d2Eux9wdzLntOzoLQVoGN
M6YQkTIDF3wig7xzn5x8xQUGQDs98TTglApwtTCaMbdfF5FZEth6gnUkz0Yq5/
dH13kNHjy3eS/S+n/OOuYAfgoNDV5C+ZmzMbLG+vsLLSQ0ngwg=="
```

## 8. Pull Requests

Pull requests are a cornerstone of modern software development, providing a structured way for teams to review, discuss, and approve changes before merging them into production. They serve as a crucial checkpoint for maintaining code quality, enforcing best practices, and catching potential issues early in the development lifecycle. Secrets management has been disconnected from this workflow, leading to secrets sprawl—where secrets are scattered across local machines, chat messages, shared documents, and different secrets managers without clear visibility or control. [6]

By encrypting .env files and storing them in version control, teams can now bring secrets management into their existing pull request workflows. When a new secret is added, modified, or removed, these changes become visible as part of the pull request diff, ensuring that secrets are tracked and reviewed in the same way as code. This introduces several benefits:



- *Reduces Secrets Sprawl*: Instead of secrets being manually distributed across multiple locations, they are centralized in an encrypted .env file, versioned alongside code, and protected within the same workflow.
- *Built-in Approval Process*: Secrets changes now require the same level of review and approval as code changes, ensuring that production credentials are validated before deployment.
- *Collaboration Between Dev and Ops*: Development teams can propose secrets as part of their pull requests, while DevOps or security teams can verify and approve them, ensuring correct values are set in production before merging.
- *Prevention of Shadow Secrets*: Since all secret changes go through a review process, undocumented or improperly stored credentials are less likely to emerge, improving overall security posture. [7]

This approach enforces an approval process for secrets changes while reducing the risks associated with secrets sprawl. Instead of secrets being an afterthought or handled informally, they become an integrated part of the development workflow, ensuring they are controlled, reviewed, and properly managed.

Pull Request

```

23 # Logging
24
25 LOG_LEVEL="encrypted:BKzfW56VHobMDtfq+iU+MsjVIPDdiKYJmKLMiUKzsds
5dHWjY+GeKbUx7V54jX21kVa6kuBclNNmP/DwXZA2VSb6q8zhMU/
Go59aQWqmoqip6jB8DTxc8GjxUF4IWO3PLWJqk8="
26 +
27 + # AWS
28 + AWS_ACCESS_KEY_ID="encrypted:BLaoR6cP/
E3v4Cw4a5+OhY7vPXt6jZah+MQ1SPm3BZhBgOfdJ3AUUGK9kNzdkMZBE9jEN
TmgR0WNQwtVtol9LhK6HIBFSJaVn2mlxF3aA8sZ1VhZY/Ftwp+IM5h5V5t6q/
doVTF7eDDZg=="
29 +
30 + AWS_SECRET_ACCESS_KEY="encrypted:BKsNjf95d2Eux9wdzLntOzoLQVoGN
M6YQkTIDF3wig7xzn5x8xQUGDsq8TTgILApwtTCaMbdFF5FZEth6gnUkz0Yq5/
dH13kNHjy3eS/S+n/OOuYAfgoNDV5C+ZmzMbLG+vsLLSQ0ngwg=="

```

**motdotla** 2 minutes ago

hey @devops, can you set this key for production?

**devops** 1 minute ago

yes, added. all set for prod!

✓ 2 Development secrets added

✓ 2 Production secrets set

Merge pull request

## 9. Decryption At Access

While injecting secrets into env is the standard approach for most secrets managers, it is not without risks. Environment variables, though convenient, can be accessed by any process with sufficient privileges, making them a potential attack vector in case of a system compromise. Additionally, some file-based secrets management solutions, such as Docker Secrets, mitigate some risks by mounting secrets as files instead of using environment variables, but they still leave secrets exposed in plaintext at rest on the filesystem.

Our solution offers an alternative mode of operation—*decryption at access*. Instead of injecting decrypted secrets into env at process startup, this approach defers decryption until the moment a secret is needed. The runtime library reads the encrypted .env file, retrieves the corresponding private key from the secrets manager, and decrypts the secret just-in-time before returning it to the application. [11]

```
app.js

const dotenvx = require('@dotenvx/dotenvx')
const express = require('express')

const app = express()
const port = 3000

app.get('/', (req, res) => {
  const hello = dotenvx.get('HELLO') // decryption-at-access
  res.send('Hello, ${hello}!')
})

// simulates a badly controlled (leaky) log - leaking env
app.get('/leakylog', (req, res) => {
  // this will NOT leak because using `dotenvx.get` (decryption-at-access) does not
  // inject to env
  const env = JSON.stringify(process.env, null, 2)
  res.send(env)
})

app.listen(port, () => {
  console.log(`Server running at http://localhost:${port}`)
})
```

This method provides additional security advantages:

- *Minimizes Secrets Exposure*: Secrets only exist in plaintext in memory for the brief moment they are being used, rather than persisting in environment variables or plaintext files.
- *Beyond Docker Secrets*: Unlike Docker Secrets, which stores secrets in plaintext on disk once retrieved, this approach ensures secrets remain encrypted at rest and only become readable when needed.
- *Defends Against Memory Scraping Attacks*: Because secrets do not persist as environment variables, attackers relying on inspecting process environments (e.g., env or /proc/PID/environ) will find nothing of value.
- *Enables Audit Logging*: Every decryption event can be logged, providing a

traceable record of when and how secrets are accessed. This enhances observability and aids in detecting anomalous behavior or unauthorized access attempts.

- *Supports Dynamic Secret Reloading*: Since secrets are decrypted on demand, applications can reload them dynamically without restarting the process. This is particularly useful for long-running services, such as real-time voice or video applications, where secret rotation must occur without service disruption.

This is not the default mode, as most workflows prioritize performance and compatibility with existing env-based practices. However, for teams operating in high-security environments, decryption at access provides an extra layer of protection—ensuring secrets remain encrypted until the precise moment they are required, and never lingering in env or plaintext files.

## 10. Write-Only Access

Write-only access is *"the idea that I can change [a secret] or I can add [a secret] of some sort, but I can't necessarily read it back out again"*. [8] This property is useful for limiting exposure, ensuring that even those with permission to store or update secrets do not automatically gain the ability to retrieve them. It reduces the risk of accidental leaks and unauthorized access, enforcing a stricter separation of duties.

Our approach inherently enables write-only access—by default. The public key is embedded in the encrypted .env file, allowing anyone with access to encrypt new secrets while only the private key holder can decrypt them. This decouples secret storage from retrieval, preventing unauthorized decryption while enabling external systems, such as CI/CD pipelines or third-party services, to inject encrypted secrets without ever having read access to existing ones.

```
.env

1  #/-----[DOTENV_PUBLIC_KEY]-----/
2  #/          public-key encryption for .env files          /
3  #/          [how it works](https://dotenvx.com/encryption) /
4  #/-----/
5  DOTENV_PUBLIC_KEY="026d4945b6513baec60f68b207f203ba534fb54d2b0c99
6  52557d240815e42a7d83"
7
8  # .env
9  # Database configuration
10 DB_HOST="encrypted:BM083g2fEtr66gcFvUs2+/
    ZuccCQuBbZwSW3JfCLvoUiACmusxCbTfG2dvc2LxenPhUtGwap08f9BCcBVAcTnMc
    rd3kndvk+acWytRjIWRUvSSezdD340/OT5EQgbqJtwXfuRz0i2t8PVA=="
    DB_USER="encrypted:BBxVv55qxA19sEqqNnZzS/
    C0WguVk6R0QmfxnGhBhafLoc0XwpKprk/
    J3hJCVq7s45WyBSXGUz9U9rHxCBeVkl27WFzzgZkDewX0gBLt+Cc37K0EVU2hZ1GP
    bax5mzpI5Jwwi65be6+"

```

## **11. Encryption**

Describe actual encryption implementation here.

## **12. Calculations**

WIP

## References

- [1] A. Wiggins, "The Twelve-Factor App," <https://12factor.net>, 2011.
- [2] R. Zuber, "CircleCI security alert: Rotate any secrets stored in CircleCI, " <https://circleci.com/blog/january-4-2023-security-alert>, 2023.
- [3] NIST, "CVE-2021-41077", <https://nvd.nist.gov/vuln/detail/CVE-2021-41077>, 2021.
- [4] M. Kelley, S. Johnstone, W. Gamazo, N. Quist, "Leaked Environment Variables Allow Large-Scale Extortion Operation in Cloud Environments", <https://unit42.paloaltonetworks.com/large-scale-cloud-extortion-operation/>, 2024.
- [5] G. Lederrey, "My griefs with hiera-gpg", <https://slashdevslashrandom.wordpress.com/2013/06/03/my-griefs-with-hiera-gpg/>, 2013.
- [6] A. Dadgar, "What is "secret sprawl" and why is it harmful?", [https://www.hashicorp.com/en/resources/what-is-secret-sprawl-why-is-it-harmful?utm\\_source=chatgpt.com](https://www.hashicorp.com/en/resources/what-is-secret-sprawl-why-is-it-harmful?utm_source=chatgpt.com), 2018.
- [7] J. Marshall, "A guide to developer secrets and shadow IT for security teams", <https://blog.1password.com/secrets-management-for-developers/>, 2024.
- [8] L. Rice, "Your Secret's Safe with Me. Securing Container Secrets with Vault", <https://youtu.be/j3QJRdiTr1I?t=270>, 2017.
- [9] S. Motte, "Dotenvx Whitepaper Examples", <https://github.com/dotenvx/whitepaper-examples/tree/main>, 2025.
- [10] S. Motte, "Decryption At Access Example", <https://github.com/dotenvx/decryption-at-access-example>, 2025.