


ebb-ai v0.7.1 — Release Notes

Vitalii Borovyk

ebb-ai v0.7.1 release notes

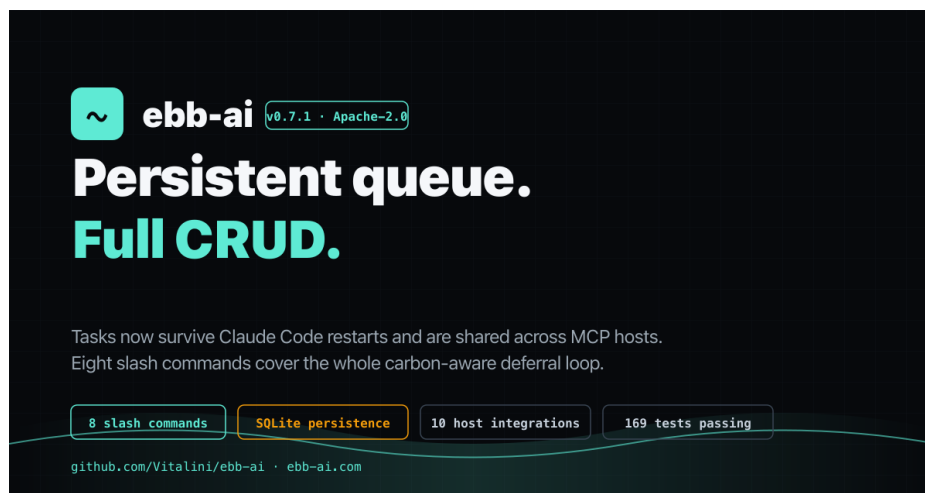

ebb-ai v0.7.1 — Persistent queue. Full CRUD.

Date: 2026-05-14 **Tag:** v0.7.1 **Affected packages:** @ebb-ai/mcp@0.7.1 (others unchanged at 0.7.0) **Affected plugin:** ebb-ai@0.7.1 (Claude Code marketplace)

TL;DR

v0.7.1 fixes two UX bugs reported within hours of the v0.7.0 plugin ship:

1. **The queue is no longer in-memory by default** — tasks queued via `/ebb-ai:defer` now persist to `~/ .ebb-ai/queue.db` and survive Claude Code restarts.
2. **Full CRUD via slash commands** — the v0.7.0 plugin only exposed `defer / check / grid`; the MCP server already had eight tools, but the rest required asking Claude verbally to call the right MCP tool. v0.7.1 adds five more slash commands and one new bulk tool.

No @ebb-ai/core or @ebb-ai/cli changes — only @ebb-ai/mcp got a patch bump.

What's new

1. Persistent queue by default

The MCP server opens a SQLite-backed TaskStore at `~/.ebb-ai/queue.db` on first call.

- Tasks queued in one Claude Code session are visible in another, and in Claude Desktop / Cursor / Cline / Zed / OpenClaw.
- `schedule_task` now defaults to `dispatch=true` — the request body is a real `provider_call` spec that `ebb tick` can dispatch, rather than an in-memory closure that dies with the process.
- Override the location with `EBB_DB_PATH=/path/to/queue.db` in your plugin's `.mcp.json` env block.
- Opt out entirely with `EBB_DB_PATH=:memory:` (better-sqlite3 treats `:memory:` as an ephemeral database — useful for tests).

Sharp edge

The MCP server **queues** tasks; it does not run a clock. Actual dispatch at the chosen window requires the **ebb tick daemon**. v0.7.1 does not auto-install it (modifying `launchd` / `systemd` at plugin-install time felt too aggressive for a v0.x patch). Install manually:

```
npm install -g @ebb-ai/cli
ebb install      # registers launchd (macOS) / systemd (Linux)
                  cron-tick
```

Without the daemon, tasks pile up in `~/.ebb-ai/queue.db` waiting for someone to call `ebb tick --once`. The `/ebb-ai:defer` response now includes a one-paragraph reminder of this.

2. Full CRUD slash commands

Eight commands total in the plugin now:

<code>/ebb-ai:defer</code>	queue a deferrable LLM task
<code>/ebb-ai:plan</code>	preview the chosen window without committing
<code>/ebb-ai:check</code>	list / detail of queued tasks
<code>/ebb-ai:cancel</code>	drop a task; <code>--all</code> for bulk
<code>/ebb-ai:expedite</code>	run a task now, bypass the carbon window
<code>/ebb-ai:reschedule</code>	change the deadline, re-score
<code>/ebb-ai:retry</code>	re-dispatch a failed task
<code>/ebb-ai:grid</code>	look at the grid, no task involved

`/ebb-ai:defer` got two new flags:

- `--output <abs-path>` — write `{ taskId, result, receipt }` as JSON to that path when the task completes. Pair with `tail -f`, `fswatch`, or `entr` to get a desktop-grade “task done” surface.
- `--provider <anthropic|openai>` — pick provider explicitly. Default remains `anthropic`.

3. New MCP tool: `cancel_all`

Bulk-cancel every queued/scheduled task at once. Optional status filter (queued or scheduled). Running/completed/failed/cancelled tasks are left alone.

```
/ebb-ai:cancel --all
```

4. Updated skill

carbon-aware-coding now teaches Claude the full eight-command surface, mentions the SQLite path, and explicitly coaches the “daemon not installed → tasks won’t dispatch” diagnostic so it can help users debug.

Compatibility

- v0.7.0 plugin installs are forward-compatible — the marketplace publishes 0.7.1 automatically; users just need to restart Claude Code (or run `/reload-plugins`).
 - `npx -y @ebb-ai/mcp` resolves to the latest 0.7.1 on next invoke — no manual reinstall needed.
 - Tasks queued under v0.7.0 (in-memory closure mode) are lost on upgrade (they were already lost on every restart). Anything queued via `dispatch=true` in v0.7.0 will be readable from `~/.ebb-ai/queue.db` if the user set `EBB_DB_PATH` manually.
-

Upgrade

```
# In any Claude Code session
/reload-plugins
```

Or restart `claude`. The marketplace pulls the new `marketplace.json` on every reload; the MCP `npx -y @ebb-ai/mcp` resolves to the latest version on each spawn. No manual `claude plugin update` needed.

Credits

Persistence-by-default and the full CRUD command set were both flagged within minutes of the v0.7.0 launch when the maintainer test-drove the install path on a fresh machine. Faster feedback loop than the average open-source project gets in a week; this release would have taken three days otherwise.