Unlocking Insights: A Swiggy Case Study

Deep diving into customer behavior, restaurant performance, and operational efficiency.

Agenda: Data-Driven Strategies

This presentation explores key data analytics insights from Swiggy's operations, focusing on:

- Customer Engagement & Demographics
- Restaurant Performance & Revenue
- Operational Efficiency & Delivery Partners
- Advanced Customer Profiling

1. Display all customers who live in 'Delhi'.

```sql
select * from
customers
where city = "delhi";
```

customer_id	name	email	phone_number	city	address
2	Rohini Verma	rohini.verma@yahoo.com	9823456789	Delhi	B-23, Saket
5	Manish Kumar	NULL	9834567890	Delhi	D-45, Lajpat Nagar
18	Sonali Mishra	NULL	9878345678	Delhi	N-54, Karol Bagh
NULL	NULL	NULL	NULL	NULL	NULL

2. Find the average rating of all restaurants in 'Mumbai'.

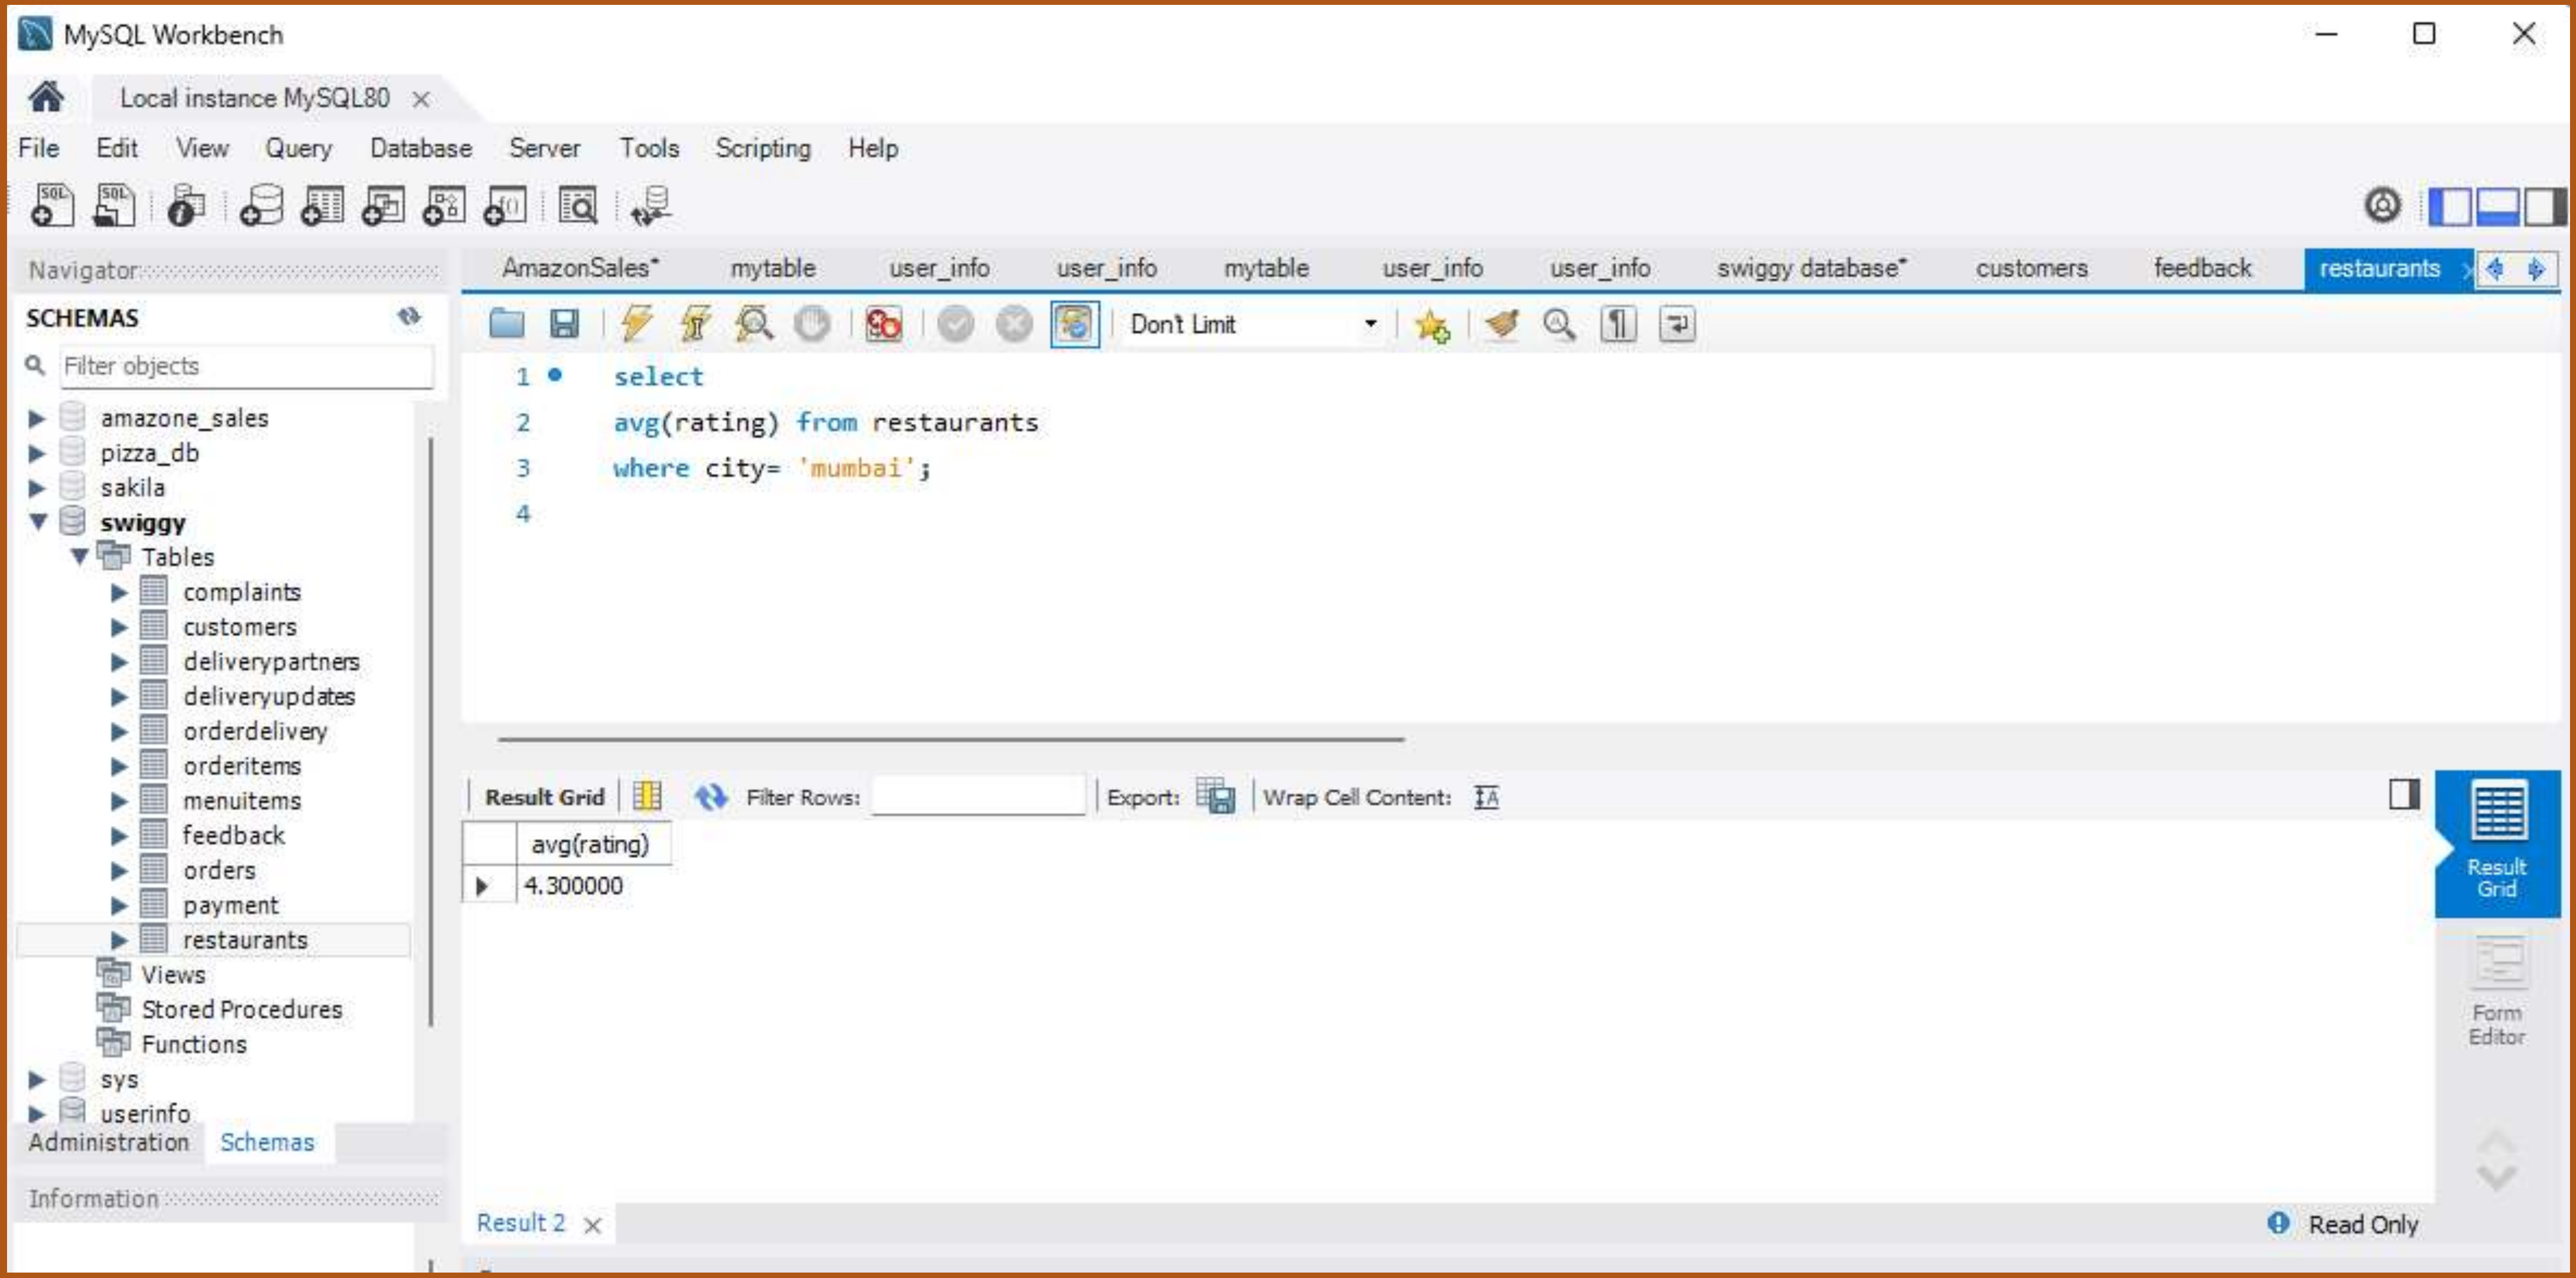

3. List all customers who have placed at least one order

```sql
SELECT
    Customers.name,
    COUNT(Orders.order_id) AS total_orders
FROM Customers
JOIN Orders ON Customers.customer_id = Orders.customer_id
GROUP BY Customers.customer_id, Customers.name
HAVING COUNT(Orders.order_id) >= 1;
```

Result Grid | Filter Rows: | Export: | Wrap Cell Content:

name	total_orders
Amit Sharma	2
Rohini Verma	3
Rajesh Gupta	3
Sneha Mehta	2
Manish Kumar	4
Priya Singh	3
Vikas Reddy	3
Anjali Patel	3

Result 2

4. Display the total number of orders placed by each customer.

Don't Limit

```sql
SELECT Customers.customer_id, Customers.name, COUNT(Orders.order_id) AS total_orders
FROM Customers
LEFT JOIN Orders ON Customers.customer_id = Orders.customer_id
GROUP BY Customers.customer_id, Customers.name;
```

Result Grid | Filter Rows: | Export: | Wrap Cell Content:

customer_id	name	total_orders
1	Amit Sharma	2
2	Rohini Verma	3
3	Rajesh Gupta	3
4	Sneha Mehta	2
5	Manish Kumar	4
6	Priya Singh	3
7	Vikas Reddy	3
8	Anjali Patel	3

Result 8

5. Find the total revenue generated by each restaurant.

Don't Limit

```sql
SELECT Restaurants.restaurant_id, Restaurants.name, SUM(Orders.total_amount) AS total_revenue
FROM Restaurants
JOIN Orders ON Restaurants.restaurant_id = Orders.restaurant_id
WHERE Orders.status = 'Completed'
GROUP BY Restaurants.restaurant_id, Restaurants.name;
```

Result Grid | Filter Rows: | Export:

restaurant_id	name	total_revenue
3	Biryani House	5300.00
5	Taste of Punjab	600.00
7	Coastal Delight	2100.00
2	Tandoori Flames	1200.00
8	Veggie Delight	1600.00
9	Gujarat Express	2550.00
6	Royal Biryani	650.00
12	Flavours of Bengal	1950.00

Result 9

6. Find the top 5 restaurants with the highest average rating.

```sql
SELECT Restaurants.name, Restaurants.city, Restaurants.rating
FROM Restaurants
WHERE Restaurants.rating IS NOT NULL
ORDER BY Restaurants.rating DESC
LIMIT 5;
```

name	city	rating
Biryani House	Hyderabad	4.80
Paradise Biryani	Hyderabad	4.80
Lucknowi Nawabi	Lucknow	4.70
Royal Biryani	Kolkata	4.70
Flavours of Bengal	Kolkata	4.60

7. Display all customers who have never placed an order.

Don't Limit

```sql
USE SwiggyDB;

SELECT Customers.customer_id, Customers.name, Customers.city
FROM Customers
LEFT JOIN Orders ON Customers.customer_id = Orders.customer_id
WHERE Orders.order_id IS NULL;
```

Result Grid | Filter Rows:

customer_id	name	city
24	Sonal Kaur	Amritsar
25	Vivek Malhotra	Thane
26	Divya Iyer	Bangalore
27	Rakesh Yadav	Varanasi
28	Mona Sharma	Ranchi
29	Sudha Pillai	Kozhikode
30	Gaurav Khanna	Gwalior

Result 11

8. Find the number of orders placed by each customer in 'Mumbai'.

```sql
SELECT Customers.customer_id, Customers.name, COUNT(Orders.order_id) AS total_orders
FROM Customers
JOIN Orders ON Customers.customer_id = Orders.customer_id
WHERE Customers.city = 'Mumbai'
GROUP BY Customers.customer_id, Customers.name;
```

Result Grid

customer_id	name	total_orders
1	Amit Sharma	2
3	Rajesh Gupta	3
19	Arjun Desai	2
23	Ravi Singh	2

9. Display all orders placed in the last 30 days.

```
SELECT *
FROM Orders
WHERE Orders.order_date >= CURDATE() - INTERVAL 30 DAY;
```

Result Grid | Filter Rows: | Edit: | Export/Import:

order_id	customer_id	restaurant_id	order_date	total_amount	status
NULL	NULL	NULL	NULL	NULL	NULL

10. List all delivery partners who have completed more than 1 delivery.

Don't Limit

```sql
SELECT DeliveryPartners.partner_id, DeliveryPartners.name, COUNT(OrderDelivery.order_id) AS deliveries
FROM DeliveryPartners
JOIN OrderDelivery ON DeliveryPartners.partner_id = OrderDelivery.partner_id
JOIN DeliveryUpdates ON OrderDelivery.order_id = DeliveryUpdates.order_id
WHERE DeliveryUpdates.status = 'Delivered'
GROUP BY DeliveryPartners.partner_id, DeliveryPartners.name
HAVING COUNT(OrderDelivery.order_id) > 1;
```

Result Grid | Filter Rows:

partner_id	name	deliveries
4	Suresh Reddy	3
5	Anita Desai	2
2	Ravi Kumar	2
12	Reena Rao	2

11. Find the customers who have placed orders on exactly three different days.

Don't Limit

```sql
USE Swiggy;

SELECT Customers.customer_id, Customers.name
FROM Customers
JOIN Orders ON Customers.customer_id = Orders.customer_id
GROUP BY Customers.customer_id, Customers.name
HAVING COUNT(DISTINCT DATE(Orders.order_date)) = 3;
```

Result Grid | Filter Rows:

customer_id	name
2	Rohini Verma
6	Priya Singh
8	Anjali Patel
14	Nidhi Saxena
15	Ashok Kumar
18	Sonali Mishra

12. Find the delivery partner who has worked with the most different customers.

```
USE Swiggy;

SELECT DeliveryPartners.partner_id, DeliveryPartners.name, COUNT(DISTINCT Orders.customer_id) AS unique_customers
FROM DeliveryPartners
JOIN OrderDelivery ON DeliveryPartners.partner_id = OrderDelivery.partner_id
JOIN Orders ON OrderDelivery.order_id = Orders.order_id
GROUP BY DeliveryPartners.partner_id, DeliveryPartners.name
ORDER BY unique_customers DESC
LIMIT 1;
```

partner_id	name	unique_customers
4	Suresh Reddy	6

13. Identify customers who have the same city and have placed orders at the same restaurants, but on different dates.

```sql
USE Swiggy;

SELECT Customers1.customer_id AS customer1_id, Customers1.name AS customer1_name,
       Customers2.customer_id AS customer2_id, Customers2.name AS customer2_name,
       Customers1.city, Restaurants.name AS restaurant
FROM Orders AS Orders1
JOIN Customers AS Customers1 ON Orders1.customer_id = Customers1.customer_id
JOIN Orders AS Orders2 ON Orders1.restaurant_id = Orders2.restaurant_id
                      AND Orders1.customer_id <> Orders2.customer_id
JOIN Customers AS Customers2 ON Orders2.customer_id = Customers2.customer_id
JOIN Restaurants ON Orders1.restaurant_id = Restaurants.restaurant_id
WHERE Customers1.city = Customers2.city
  AND DATE(Orders1.order_date) <> DATE(Orders2.order_date);
```

customer1_id	customer1_name	customer2_id	customer2_name	city	restaurant
5	Manish Kumar	18	Sonali Mishra	Delhi	Biryani House
18	Sonali Mishra	5	Manish Kumar	Delhi	Biryani House
18	Sonali Mishra	5	Manish Kumar	Delhi	Biryani House
19	Arjun Desai	23	Ravi Singh	Mumbai	Veggie Delight
5	Manish Kumar	18	Sonali Mishra	Delhi	Biryani House
23	Ravi Singh	19	Arjun Desai	Mumbai	Veggie Delight

THANKS FOR READING

By VIVEK KUMAR