





# JS Engine

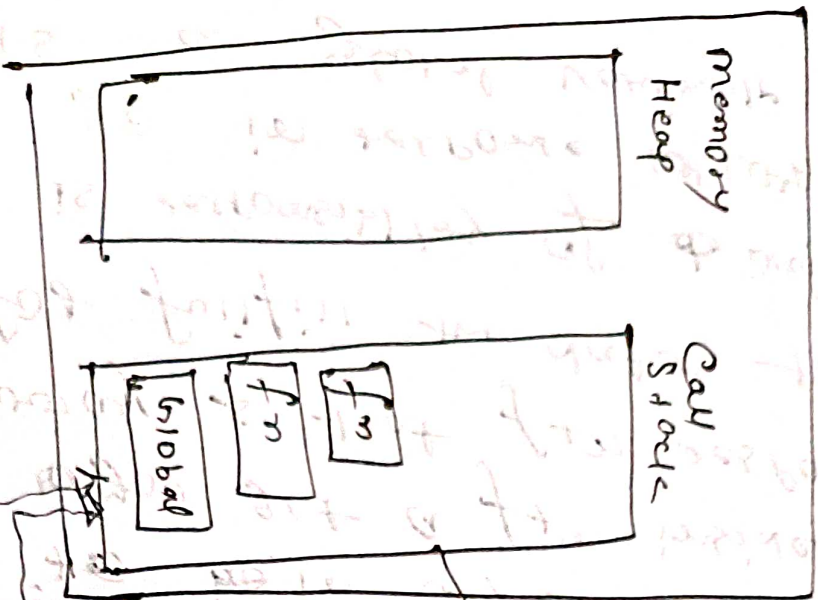

## web API

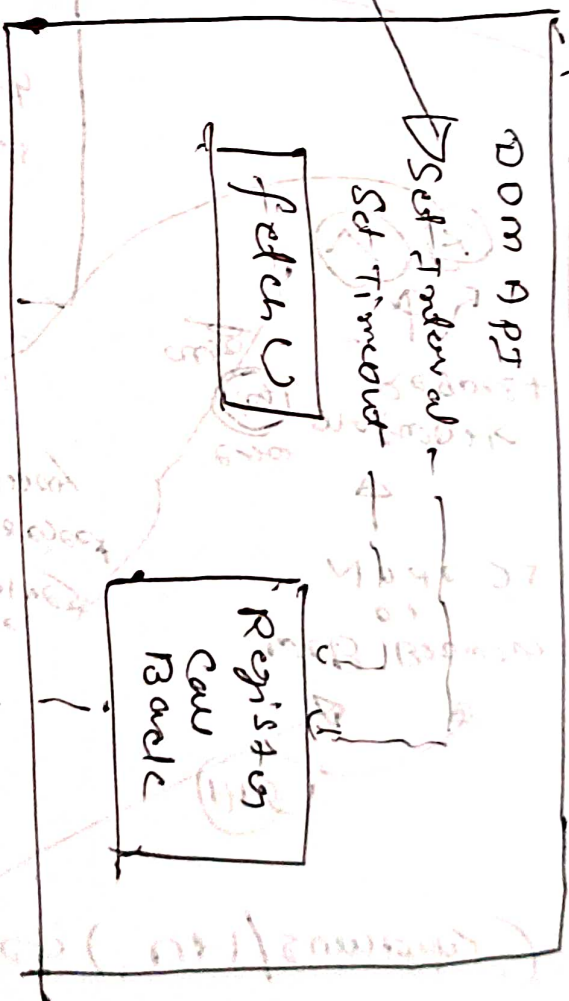

### Microtask Queue

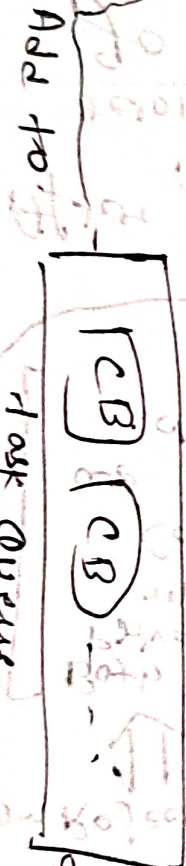


Call Stack

Add to

Task Queue

Event loop [check length task queue is full or empty]

response = fetch('url/something')

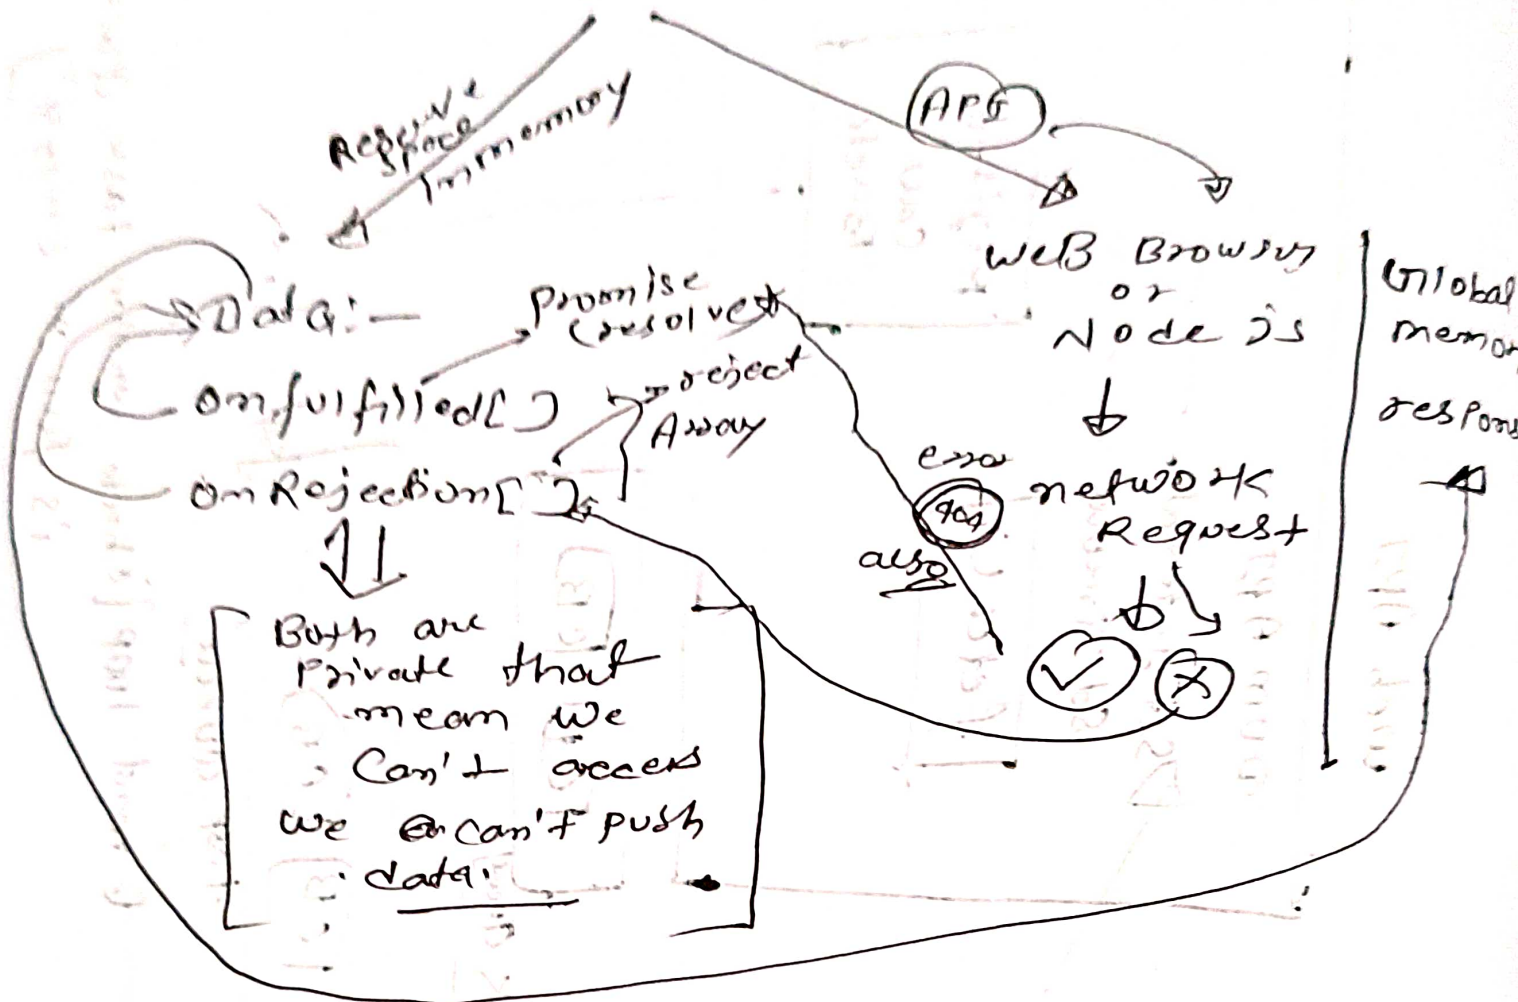

→ After getting network request either resolve or reject then it will go to ~~to~~ in any one array & you get a fn inside array is that fn responsible for fulfill the data then it is responsibility of ~~of~~ data to go in response ~~of~~ which is a global variable.