

In [1]:

```
import pandas as pd
from matplotlib import pyplot as plt
%matplotlib inline
```

In [2]:

```
df=pd.read_csv(r"C:\Users\jo\Downloads\Income.csv")
df
```

Out[2]:

	Gender	Age	Income(\$)
0	Male	19	15
1	Male	21	15
2	Female	20	16
3	Female	23	16
4	Female	31	17
...	...	...	...
195	Female	35	120
196	Female	45	126
197	Male	32	126
198	Male	32	137
199	Male	30	137

200 rows × 3 columns

In [3]:

```
df.head()
```

Out[3]:

	Gender	Age	Income(\$)
0	Male	19	15
1	Male	21	15
2	Female	20	16
3	Female	23	16
4	Female	31	17

In [4]:

```
df.tail()
```

Out[4]:


	Gender	Age	Income(\$)
195	Female	35	120
196	Female	45	126
197	Male	32	126
198	Male	32	137
199	Male	30	137

In [5]:

```
plt.scatter(df["Age"],df["Income($)"])  
plt.xlabel("Age")  
plt.ylabel("Income($)")
```

Out[5]:

Text(0, 0.5, 'Income(\$)')

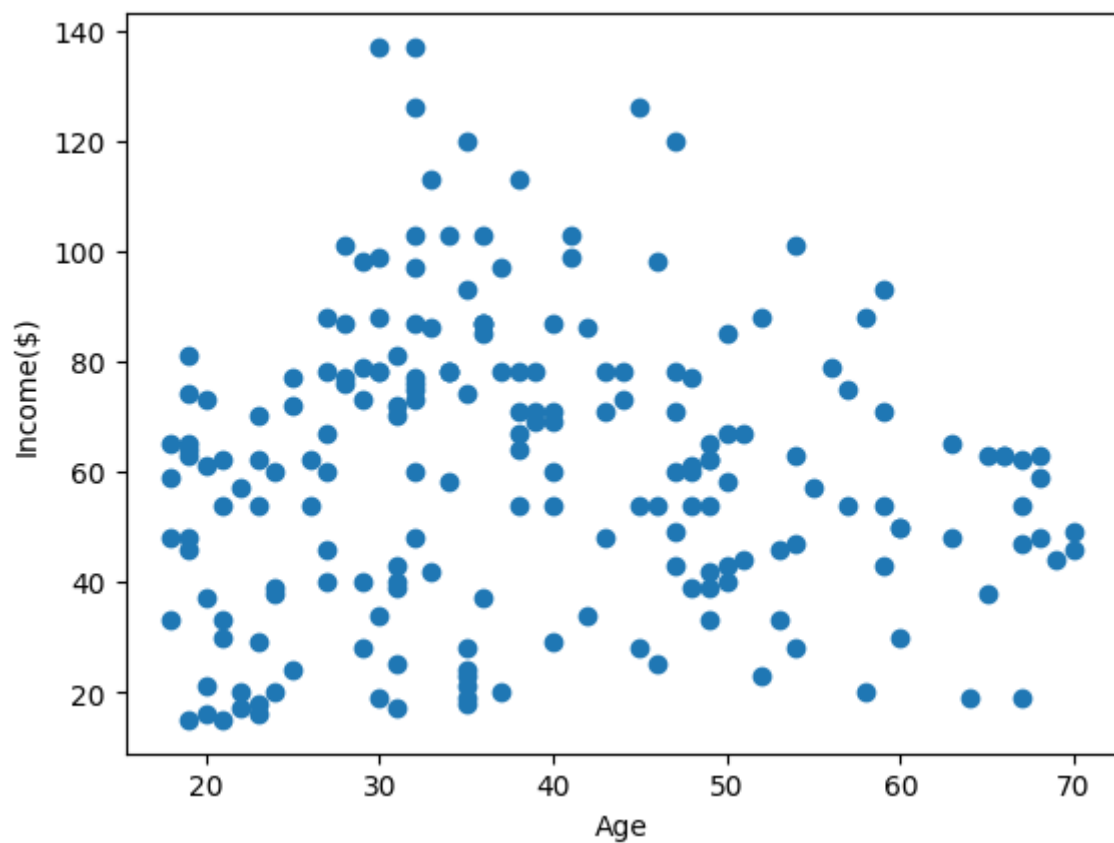

In [6]:

```
from sklearn.cluster import KMeans
km=KMeans()
km
```

Out[6]:

▼ KMeans

KMeans()

In [7]:

```
y_predicted=km.fit_predict(df[["Age","Income($)"]])
y_predicted
```

C:\Users\krish\AppData\Local\Programs\Python\Python310\lib\site-packages\sklearn\cluster\\_kmeans.py:870: FutureWarning: The default value of `n\_init` will change from 10 to 'auto' in 1.4. Set the value of `n\_init` explicitly to suppress the warning  
warnings.warn(

Out[7]:

```
array([4, 4, 4, 4, 4, 4, 4, 4, 3, 4, 3, 4, 3, 4, 4, 4, 4, 4, 3, 4, 4, 4,
       3, 4, 3, 4, 3, 4, 4, 4, 3, 4, 3, 4, 3, 4, 3, 4, 4, 4, 3, 4, 3, 4,
       3, 4, 3, 4, 4, 4, 3, 4, 0, 3, 3, 3, 3, 2, 0, 3, 2, 0, 2, 3, 2, 0,
       7, 2, 0, 0, 2, 7, 2, 2, 2, 0, 7, 7, 0, 7, 2, 7, 2, 7, 0, 7, 7, 0,
       0, 7, 2, 0, 7, 7, 0, 0, 7, 0, 7, 0, 0, 7, 2, 0, 7, 0, 2, 7, 2, 2,
       2, 0, 7, 0, 0, 0, 2, 7, 7, 7, 6, 7, 7, 6, 6, 6, 7, 6, 7, 6, 7, 6,
       6, 6, 6, 6, 7, 6, 6, 6, 7, 6, 6, 6, 6, 6, 7, 6, 6, 6, 6, 6, 6, 6,
       6, 6, 6, 6, 6, 6, 7, 6, 6, 6, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1,
       1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 5, 5, 5, 5, 5, 5,
       5, 5])
```

In [8]:

```
df["cluster"]=y_predicted
df.head()
```

Out[8]:


	Gender	Age	Income(\$)	cluster
0	Male	19	15	4
1	Male	21	15	4
2	Female	20	16	4
3	Female	23	16	4
4	Female	31	17	4

In [9]:

```
df1=df[df.cluster==0]
df2=df[df.cluster==1]
df3=df[df.cluster==2]
plt.scatter(df1["Age"],df1["Income($)"],color="red")
plt.scatter(df2["Age"],df2["Income($)"],color="green")
plt.scatter(df3["Age"],df3["Income($)"],color="blue")
plt.xlabel("Age")
plt.ylabel("Income($)")
```

Out[9]:

Text(0, 0.5, 'Income(\$)')

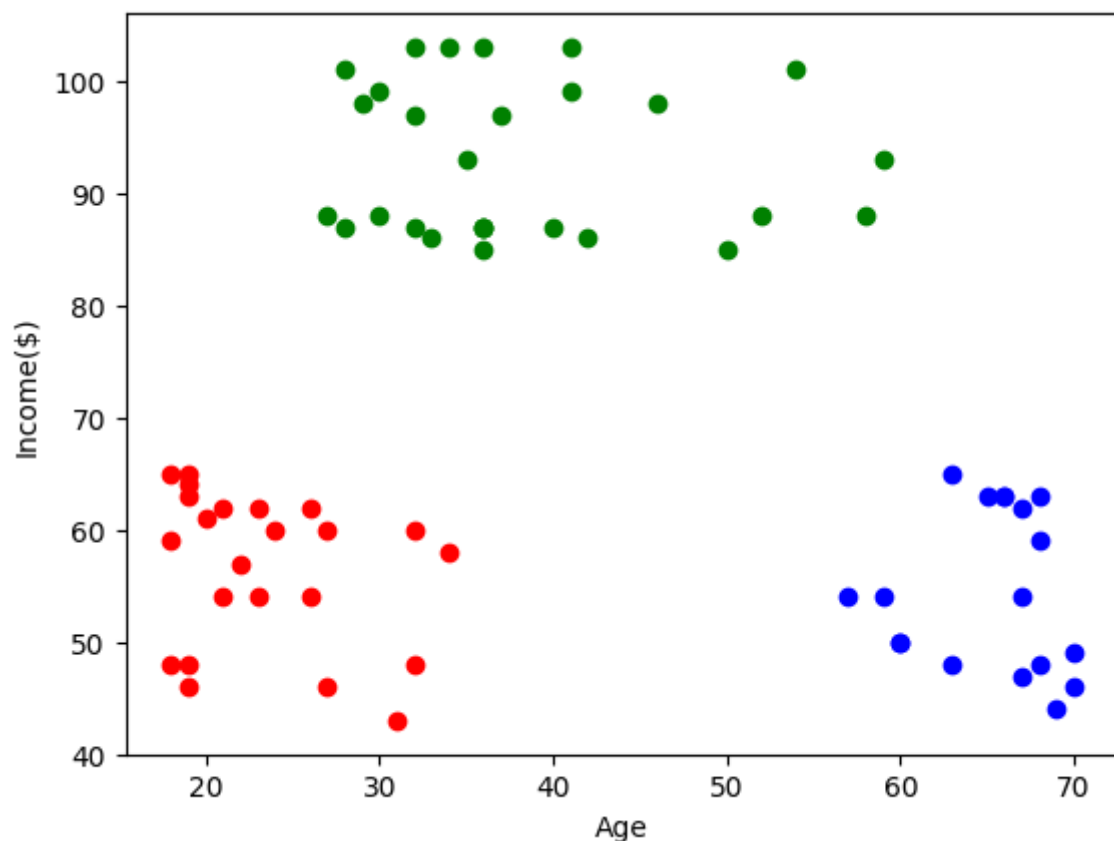

In [10]:

```
from sklearn.preprocessing import MinMaxScaler
scaler=MinMaxScaler()
scaler.fit(df[["Income($)"]])
df["Income($)"]=scaler.transform(df[["Income($)"]])
df.head()
```

Out[10]:

	Gender	Age	Income(\$)	cluster
0	Male	19	0.000000	4
1	Male	21	0.000000	4
2	Female	20	0.008197	4
3	Female	23	0.008197	4
4	Female	31	0.016393	4

In [11]:

```
scaler.fit(df[["Age"]])
df["Age"]=scaler.transform(df[["Age"]])
df.head()
```

Out[11]:

	Gender	Age	Income(\$)	cluster
0	Male	0.019231	0.000000	4
1	Male	0.057692	0.000000	4
2	Female	0.038462	0.008197	4
3	Female	0.096154	0.008197	4
4	Female	0.250000	0.016393	4

In [12]:

```
km=KMeans()
```

In [13]:

```
y_predicted=km.fit_predict(df[["Age", "Income($)"]])
y_predicted
```

C:\Users\krish\AppData\Local\Programs\Python\Python310\lib\site-packages\sklearn\cluster\\_kmeans.py:870: FutureWarning: The default value of `n\_init` will change from 10 to 'auto' in 1.4. Set the value of `n\_init` explicitly to suppress the warning

```
warnings.warn(
```

Out[13]:

```
array([6, 6, 6, 6, 5, 6, 5, 6, 3, 5, 3, 5, 2, 6, 5, 6, 5, 6, 2, 5, 5, 6,
        2, 5, 2, 5, 2, 5, 5, 6, 3, 6, 2, 6, 2, 6, 2, 5, 5, 6, 3, 6, 2, 5,
        2, 6, 2, 5, 5, 5, 2, 5, 5, 3, 2, 2, 2, 3, 1, 2, 3, 1, 3, 2, 3, 1,
        2, 3, 1, 5, 3, 2, 3, 3, 3, 1, 0, 7, 1, 0, 3, 7, 3, 0, 1, 0, 0, 1,
        7, 0, 3, 1, 0, 7, 7, 1, 0, 1, 0, 1, 1, 0, 3, 1, 0, 1, 3, 0, 3, 3,
        3, 1, 7, 1, 1, 1, 3, 0, 0, 0, 1, 7, 7, 7, 1, 7, 0, 7, 0, 7, 0, 7,
        1, 7, 1, 7, 0, 7, 1, 7, 0, 7, 7, 7, 1, 7, 0, 7, 7, 7, 0, 7, 0, 7,
        0, 7, 7, 7, 7, 7, 0, 7, 1, 7, 0, 7, 7, 7, 7, 7, 7, 7, 7, 0, 7,
        0, 7, 0, 7, 4, 4, 4, 4, 4, 4, 0, 4, 4, 4, 4, 4, 4, 4, 4, 4, 4,
        4, 4])
```

In [14]:

```
df["New Cluster"]=y_predicted
df.head()
```

Out[14]:


	Gender	Age	Income(\$)	cluster	New Cluster
0	Male	0.019231	0.000000	4	6
1	Male	0.057692	0.000000	4	6
2	Female	0.038462	0.008197	4	6
3	Female	0.096154	0.008197	4	6
4	Female	0.250000	0.016393	4	5

In [15]:

```
df1=df[df["New Cluster"]==0]
df2=df[df["New Cluster"]==1]
df3=df[df["New Cluster"]==2]
plt.scatter(df1["Age"],df1["Income($)"],color="red")
plt.scatter(df2["Age"],df2["Income($)"],color="green")
plt.scatter(df3["Age"],df3["Income($)"],color="blue")
plt.xlabel("Age")
plt.ylabel("Income($)")
```

Out[15]:

Text(0, 0.5, 'Income(\$)' )

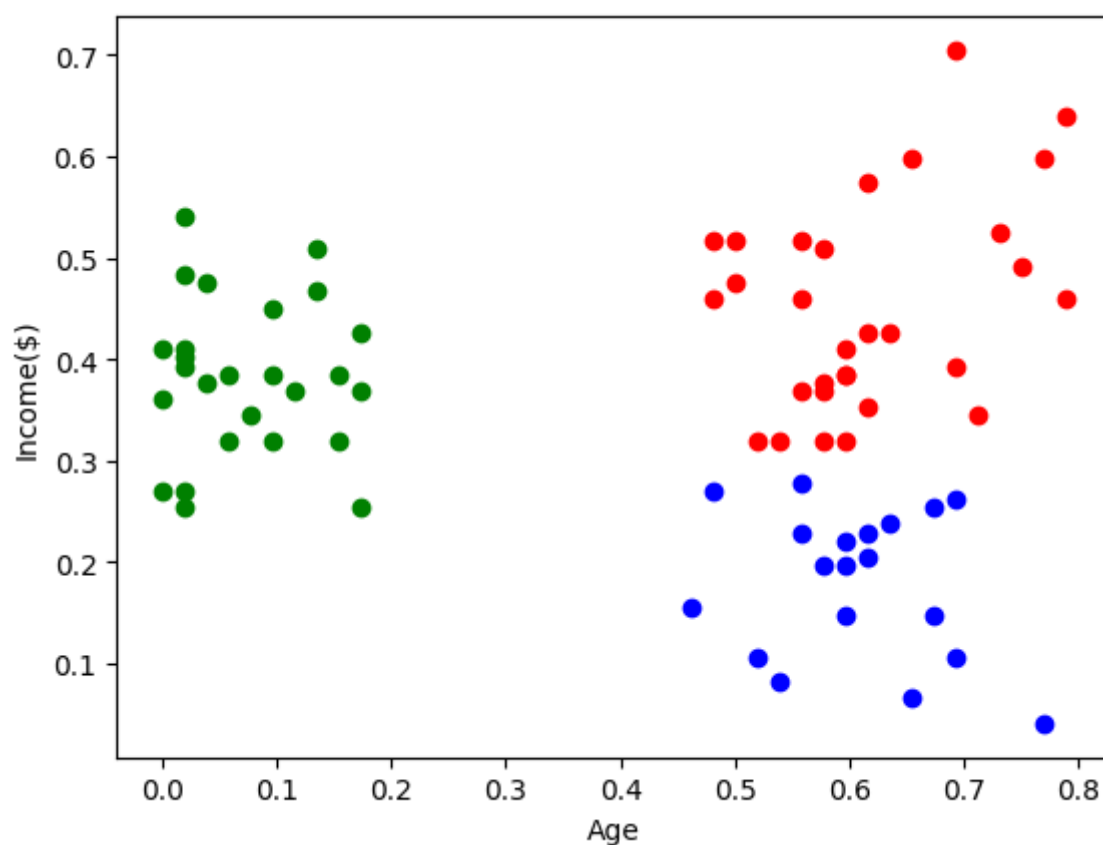

In [16]:

```
km.cluster_centers_
```

Out[16]:


```
array([[0.61474359, 0.45191257],  
       [0.07322485, 0.38272383],  
       [0.60526316, 0.18075928],  
       [0.89799331, 0.28011404],  
       [0.34008097, 0.77998274],  
       [0.28388278, 0.1245121 ],  
       [0.07239819, 0.08003857],  
       [0.31196581, 0.50018215]])
```

In [17]:

```
df1=df[df["New Cluster"]==0]  
df2=df[df["New Cluster"]==1]  
df3=df[df["New Cluster"]==2]  
plt.scatter(df1["Age"],df1["Income($)"],color="red")  
plt.scatter(df2["Age"],df2["Income($)"],color="green")  
plt.scatter(df3["Age"],df3["Income($)"],color="blue")  
plt.scatter(km.cluster_centers_[0],km.cluster_centers_[1],color="orange",marker="+")  
plt.xlabel("Age")  
plt.ylabel("Income($)")
```

Out[17]:

```
Text(0, 0.5, 'Income($)')
```

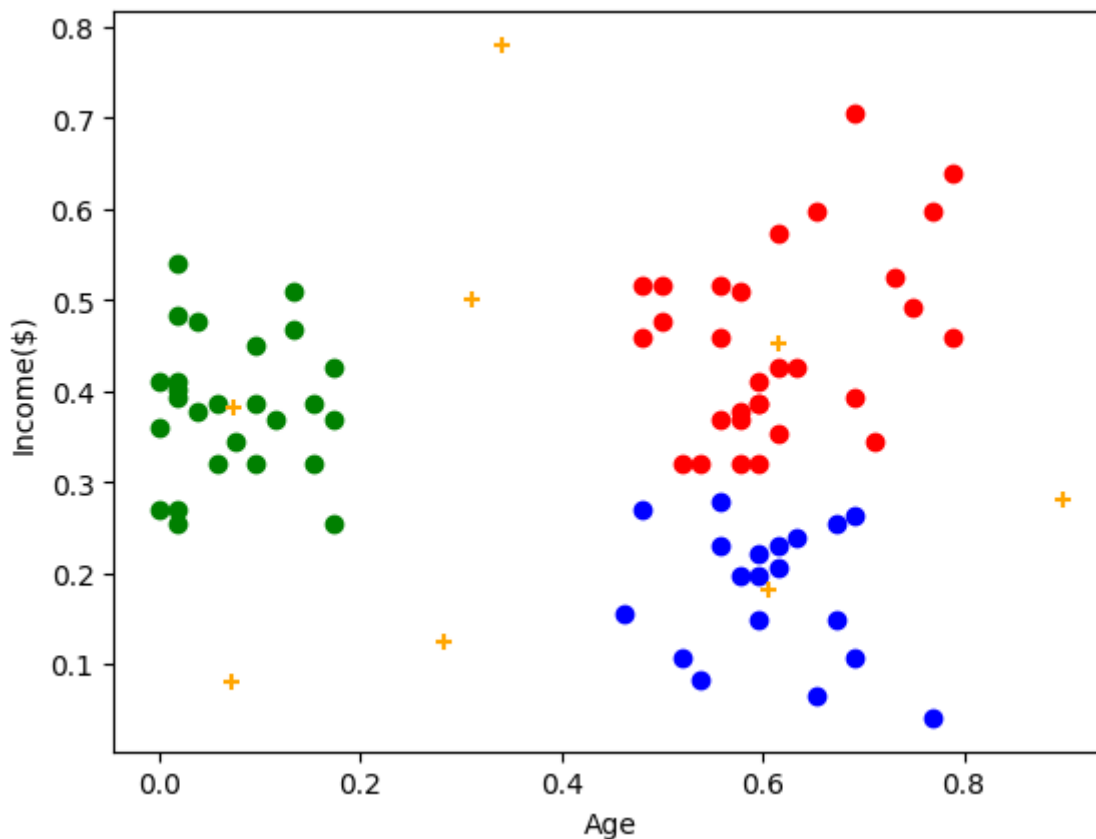

In [18]:

```
k_rng=range(1,10)  
sse=[]
```



In [19]:

```

for k in k_rng:
    km=KMeans(n_clusters=k)
    km.fit(df[["Age", "Income($)"]])
    sse.append(km.inertia_)
#km.inertia_ will give you the value of sum of square error
print(sse)
plt.plot(k_rng,sse)
plt.xlabel("K")
plt.ylabel("Sum of Squared Error")

```

C:\Users\krish\AppData\Local\Programs\Python\Python310\lib\site-packages\sklearn\cluster\\_kmeans.py:870: FutureWarning: The default value of `n\_init` will change from 10 to 'auto' in 1.4. Set the value of `n\_init` explicitly to suppress the warning

```
warnings.warn(
```

C:\Users\krish\AppData\Local\Programs\Python\Python310\lib\site-packages\sklearn\cluster\\_kmeans.py:870: FutureWarning: The default value of `n\_init` will change from 10 to 'auto' in 1.4. Set the value of `n\_init` explicitly to suppress the warning

```
warnings.warn(
```

C:\Users\krish\AppData\Local\Programs\Python\Python310\lib\site-packages\sklearn\cluster\\_kmeans.py:870: FutureWarning: The default value of `n\_init` will change from 10 to 'auto' in 1.4. Set the value of `n\_init` explicitly to suppress the warning

```
warnings.warn(
```

C:\Users\krish\AppData\Local\Programs\Python\Python310\lib\site-packages\sklearn\cluster\\_kmeans.py:870: FutureWarning: The default value of `n\_init` will change from 10 to 'auto' in 1.4. Set the value of `n\_init` explicitly to suppress the warning

```
warnings.warn(
```

C:\Users\krish\AppData\Local\Programs\Python\Python310\lib\site-packages\sklearn\cluster\\_kmeans.py:870: FutureWarning: The default value of `n\_init` will change from 10 to 'auto' in 1.4. Set the value of `n\_init` explicitly to suppress the warning

```
warnings.warn(
```

C:\Users\krish\AppData\Local\Programs\Python\Python310\lib\site-packages\sklearn\cluster\\_kmeans.py:870: FutureWarning: The default value of `n\_init` will change from 10 to 'auto' in 1.4. Set the value of `n\_init` explicitly to suppress the warning

```
warnings.warn(
```

C:\Users\krish\AppData\Local\Programs\Python\Python310\lib\site-packages\sklearn\cluster\\_kmeans.py:870: FutureWarning: The default value of `n\_init` will change from 10 to 'auto' in 1.4. Set the value of `n\_init` explicitly to suppress the warning

```
warnings.warn(
```

C:\Users\krish\AppData\Local\Programs\Python\Python310\lib\site-packages\sklearn\cluster\\_kmeans.py:870: FutureWarning: The default value of `n\_init` will change from 10 to 'auto' in 1.4. Set the value of `n\_init` explicitly to suppress the warning

```
warnings.warn(
```

C:\Users\krish\AppData\Local\Programs\Python\Python310\lib\site-packages\sklearn\cluster\\_kmeans.py:870: FutureWarning: The default value of `n\_init` will change from 10 to 'auto' in 1.4. Set the value of `n\_init` explicitly to suppress the warning

```
warnings.warn(
```


```

[23.583906150363607, 13.028938428018286, 7.49210786858601, 6.0728847287425
53, 4.713416604872824, 3.857891822164646, 3.0547174363693586, 2.6539134876
195334, 2.3135720353543285]

```

Out[19]:

Text(0, 0.5, 'Sum of Squared Error')

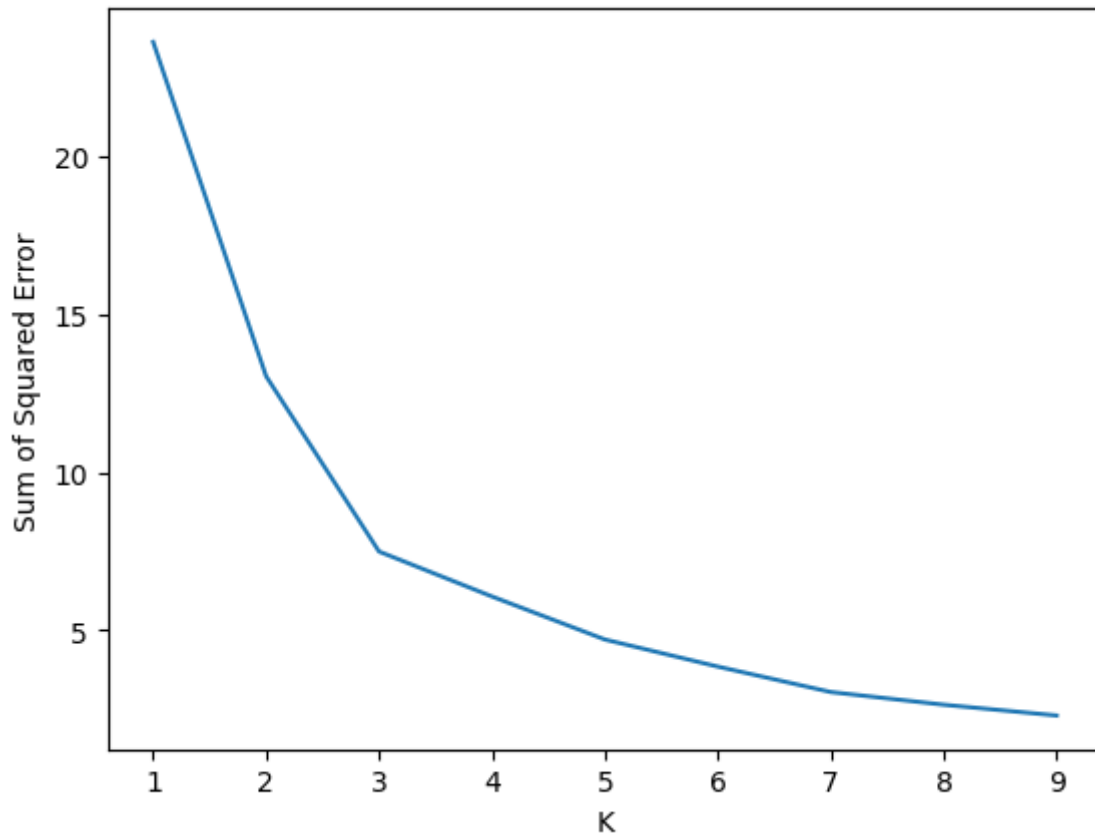

In [ ]: