

A Case for Hybrid Modular Data Availability (HMDA)

LayerEdge

1st Ayush Gupta

LayerEdge

ayush@layeredge.io

Abstract—The Blocksize War marked a significant chapter in Bitcoin’s history, ultimately leading to the adoption of smaller block sizes and the development of Layer 2 solutions. Despite the advantages of maintaining decentralization and security, the increasing proliferation of Layer 2 and Layer 1 applications on Bitcoin has led to anticipated data congestion and rising transaction fees. This paper introduces Hybrid Modular Data Availability (HMDA) as a solution to these emerging challenges. HMDA combines the robustness of Bitcoin’s Proof of Work (PoW) consensus mechanism with modular data availability frameworks to enhance scalability and security.

The paper explores the role of Bitcoin timestamping in HMDA, which mitigates long-range attacks and allows for faster unbonding of staked assets. Through the implementation of checkpoints and the recording of block hashes and staking set votes on the Bitcoin blockchain, HMDA ensures data integrity and resilience. This mechanism not only reduces withdrawal timeframes but also provides an additional layer of data integrity verification.

One of the key benefits of HMDA’s Hybrid DA Layer approach is the significant reduction in block time and finality, with block times of 12-20 seconds compared to Bitcoin’s 10 minutes. This rapid finality provides several advantages, including improved efficiency in transaction processing and smart contract execution, enhanced responsiveness for interactive applications, and better scalability by processing more transactions per unit of time.

If all Layer 1 dApps and Layer 2 solutions posted their data directly on Bitcoin, it would lead to severe data clogging, exacerbating congestion and dramatically increasing transaction fees, making it unsustainable for the network to handle the growing demand. By storing large data on modular data availability solutions and state proofs on the Bitcoin blockchain, HMDA creates a synergistic framework that leverages the strengths of both systems. This dual approach enhances data availability, scalability, and security, making it a robust solution for future blockchain applications. The paper concludes by discussing the potential impact of HMDA on Bitcoin and the broader blockchain ecosystem, highlighting its prospects for wider adoption and its role in advancing blockchain technology.

I. INTRODUCTION

A. Background

1) The Blocksize War:

- The Blocksize War was a critical conflict within the Bitcoin community from 2015 to 2017, centered around

how to scale the Bitcoin network to accommodate more transactions.

- Proponents of larger blocks argued that increasing the block size limit would allow more transactions to be processed per block, reducing transaction fees and improving network speed.
- Proponents of smaller blocks emphasized maintaining a decentralized network where the majority of nodes could afford to store the full blockchain, ensuring security and robustness.

2) Large Block Size vs. Small Block Size Debate:

- **Large Block Size:** Supporters, including some major miners and companies, suggested increasing the block size from 1 MB to up to 8 MB to accommodate more transactions.
- **Small Block Size:** Supporters, including many developers and decentralization advocates, argued for keeping the block size at 1 MB and focusing on second-layer solutions like the Lightning Network to handle transaction throughput.

3) Conclusion of the War:

- The debate concluded with the adoption of Segregated Witness (SegWit) in 2017, which effectively increased the block size limit by changing how transaction data is stored, effectively allowing more transactions to fit into each block without increasing the actual block size limit of 1 MB, and paved the way for the development of the Lightning Network.

B. Current Scenario

1) Rise of Layer 2 and Layer 1 Applications on Bitcoin:

- The integration of Layer 2 solutions (e.g., Lightning Network) and various Layer 1 applications (e.g., sidechains like Liquid and RSK) on Bitcoin has dramatically increased the volume of transactions and data demands on the Bitcoin network.

2) Anticipated Data Congestion and Rising Gas Fees:

- As more applications and users leverage the Bitcoin network, the transaction volume is expected to outpace the capacity of the network, leading to data congestion and skyrocketing transaction fees.

3) *Introduction to HMDA as a Solution:*

- Hybrid Modular Data Availability (HMDA) emerges as a potential solution to these issues, offering a scalable and secure framework for data availability by integrating Bitcoin's robust security with modular data storage solutions.
- If all Layer 1 decentralized applications (dApps) and Layer 2 solutions post their data directly on Bitcoin, it would lead to severe data clogging, exacerbating congestion and dramatically increasing transaction fees, making it unsustainable for the network to handle the growing demand.

II. OVERVIEW OF HYBRID MODULAR DATA AVAILABILITY (HMDA)

A. *Definition and Purpose*

1) *What is HMDA?:*

- HMDA is a framework designed to enhance data availability and scalability for blockchain networks. It combines modular data storage solutions with robust security measures, leveraging Bitcoin's immutability and economic security.

2) *Objectives of HMDA:*

- The primary objectives of HMDA are to maintain the security and immutability of Bitcoin while providing a scalable solution for data-heavy applications, addressing the limitations of both small block size and the increasing demand for data throughput.

B. *Key Features of HMDA*

1) *Integration with Bitcoin's Security and Immutability:*

- HMDA leverages Bitcoin's Proof of Work (PoW) consensus mechanism to ensure the integrity and resistance to censorship, capitalizing on Bitcoin's established security model.

2) *Leveraging Proof of Work (PoW):*

- By integrating PoW, HMDA inherits Bitcoin's economic security, making it highly resistant to attacks and ensuring that data stored within the framework is immutable.

3) *Efficient Consensus Protocol Resistant to Censorship:*

- HMDA employs a consensus protocol designed to be efficient and resistant to censorship, maintaining high levels of security and reliability.

4) *Rapid Finality:*

- One of the key benefits of the Hybrid DA Layer approach is the significant reduction in block time and finality. While Bitcoin has a block confirmation time of 10 minutes, the project's Hybrid DA Layer is designed to have block times of 12-20 seconds.
- **Efficiency:** Faster block confirmation times allow the network to process transactions and execute smart contracts more efficiently, improving the overall user experience.

- **Responsiveness:** The quick finality enables more responsive and interactive applications to be built on top of the blockchain, as users don't have to wait as long for their transactions to be confirmed.
- **Scalability:** The faster block times help alleviate some of the scalability challenges faced by Bitcoin, as more transactions can be processed per unit of time.

III. BITCOIN TIMESTAMPING

A. *Importance of Bitcoin Timestamping*

1) *Mitigating Long-Range Attacks:*

- Bitcoin timestamping helps mitigate long-range attacks by creating checkpoints that invalidate any forks originating before them, ensuring the network's history remains secure and tamper-proof.

B. *Implementation of Checkpoints*

1) *Recording Block Hashes:*

- Checkpoints involve recording block hashes, creating a tamper-proof record of the network's state and ensuring that all participants can verify the integrity of the data.

2) *Invalidation of Forks Before Checkpoints:*

- These checkpoints invalidate any forks that originate before the checkpoint, ensuring the integrity and consistency of the blockchain and preventing malicious actors from rewriting history.

C. *Security Enhancements*

1) *Extra Layer of Data Integrity Verification:*


- Checkpoints provide an additional layer of data integrity verification, ensuring that data stored on the network is accurate and trustworthy, and providing an additional security measure against data tampering.

2) *Restoration of Data Using Full Nodes and Checkpoints:*

- Even in the event of network collapse, data can be restored using full nodes and checkpoints submitted on the Bitcoin blockchain, ensuring that the network can recover and maintain data integrity even under adverse conditions.

3) *Invalidation of Forks Before Checkpoints:*

- These checkpoints invalidate any forks that originate before the checkpoint, ensuring the integrity and consistency of the blockchain and preventing malicious actors from rewriting history.

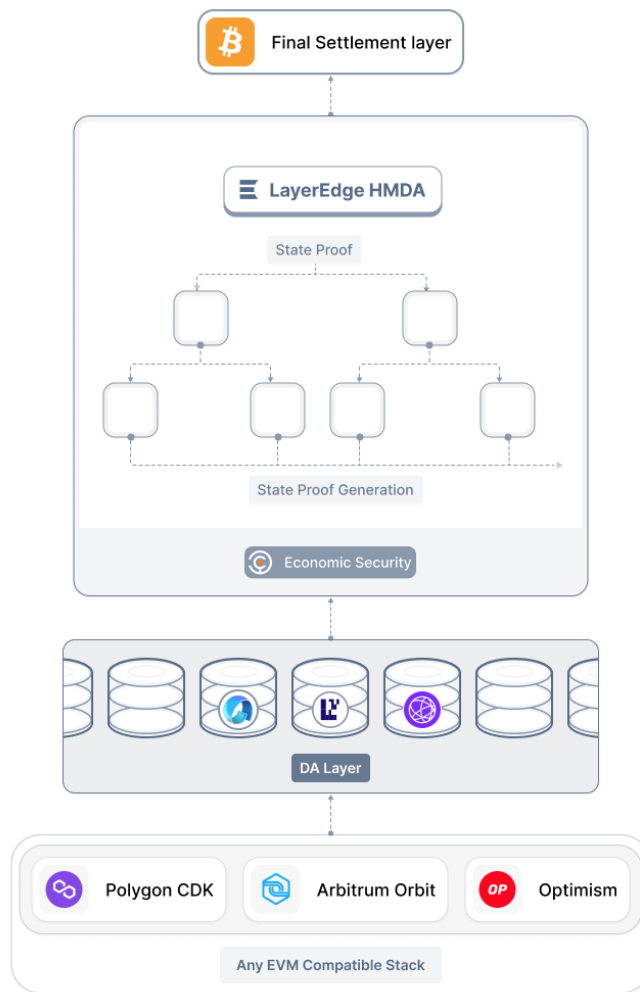

IV. BITCOIN STAKING WITH BABYLON

A. Concept of Bitcoin Staking

1) Participation in Proof of Stake (PoS) Blockchains:

- Bitcoin staking allows Bitcoin holders to participate directly in PoS blockchains, leveraging their existing Bitcoin holdings to secure the network without the need for third-party custody services or complex token wrapping mechanisms.

2) Elimination of Third-Party Custody Services:

- This direct participation model eliminates the reliance on third-party custody services, reducing risks associated with asset mismanagement and increasing overall network security.

B. Economic Security Measures

1) Enforcement within PoS Networks:

- Bitcoin staking integrates strong economic security measures that are enforceable within PoS networks, ensuring that the staked assets are secure and protected against malicious activities.

2) Improved Liquidity for Bitcoin Stakers:

- The quick release of staked assets improves liquidity for Bitcoin stakers, enabling more dynamic participation in the network and reducing the financial burden associated with long-term asset locking.

C. Extractable One-Time Signatures (EOTS)

1) Functionality of EOTS:

- EOTS are cryptographic mechanisms that provide accountability by revealing the secret key if a signature is duplicated across different blocks, ensuring that validators are held accountable for their actions.

2) Ensuring Accountability and Security:

- This mechanism deters malicious behavior by ensuring that any attempt to duplicate signatures across blocks results in the exposure of the validator's secret key, thereby enhancing network security.

3) Earnings for Stakers Acting in Good Faith:

- Stakers who act in good faith are rewarded with block rewards and transaction fees, creating a financial incentive for honest participation and contributing to the overall security and stability of the network.

V. THE BENEFITS OF HMDA

A. Combining the Best of Both Worlds

1) Storing Large Data on Modular DA:

- HMDA allows for the storage of large amounts of data on modular data availability solutions, optimizing storage efficiency and scalability, and ensuring that the network can handle high volumes of data without compromising performance.

2) Storing State Proofs on Bitcoin:

- By storing state proofs on the Bitcoin blockchain, HMDA ensures that the data's integrity and security are maintained, leveraging Bitcoin's immutability and robust security model to protect critical data.

B. Guarding Against Long-Range Attacks

1) Checkpoints and Timestamping Mechanisms:

- The use of checkpoints and timestamping mechanisms provides robust protection against long-range attacks, ensuring network stability and security by invalidating any forks that originate before the checkpoints.

2) Enhanced Security and Resilience:

- These mechanisms enhance the overall security and resilience of the network, making it more robust against potential threats and ensuring that the network can maintain data integrity even under adverse conditions.

VI. CONCLUSION

A. Recap of HMDA's Advantages

1) Integration with Bitcoin's Security Features:

- HMDA integrates seamlessly with Bitcoin's security features, leveraging its PoW consensus and immutability to provide a secure and scalable data availability solution.

2) Efficient and Secure Data Availability:

- HMDA provides a scalable and secure solution for data availability, addressing the challenges posed by increasing data demands and ensuring that the network can handle high volumes of data without compromising performance.

B. Future Implications

1) Potential Impact on Bitcoin and Blockchain Technology:

- HMDA has the potential to significantly impact Bitcoin and the broader blockchain ecosystem by providing a scalable and secure data availability solution, paving the way for more complex and data-intensive applications.

2) Prospects for Wider Adoption of HMDA:

- The innovative approach of HMDA paves the way for its wider adoption, offering substantial benefits for various blockchain applications and contributing to the overall advancement of blockchain technology.

REFERENCES

- [1] Buterin, V. (2024, May 31). Some reflections on the Bitcoin block size war. <https://vitalik.eth.limo/general/2024/05/31/blocksize.html>
- [2] Nakamoto, S. (2008). Bitcoin: A peer-to-peer electronic cash system.
- [3] Christian Decker, Rusty Russell, and Olaoluwa Osuntokun. 2018. eltoo: A Simple Layer2 Protocol for Bitcoin. <https://blockstream.com/eltoo.pdf>.
- [4] Christian Decker and Roger Wattenhofer. 2015. A Fast and Scalable Payment Network with Bitcoin Duplex Micropayment Channels. In Stabilization, Safety, and Security of Distributed Systems - 17th International Symposium, SSS 2015, Edmonton, AB, Canada, August 18-21, 2015, Proceedings. Springer, 3–18. https://doi.org/10.1007/978-3-319-21741-3_1
- [5] Christoph Egger, Pedro Moreno-Sanchez, and Matteo Maffei. 2019. Atomic Multi-Channel Updates with Constant Collateral in Bitcoin-Compatible Payment-Channel Networks. In Proceedings of the 2019 ACM SIGSAC Conference on Computer and Communications Security, CCS 2019, London, UK, November 11-15, 2019. ACM, 801–815. <https://doi.org/10.1145/3319535.3345666>
- [6] Mike Hearn. 2013. Micro-payment channels implementation now in bitcoinj. <https://bitcointalk.org/index.php?topic=244656.0>. Last accessed on September 20, 2023.
- [7] Joseph Poon and Thaddeus Dryja. 2016. The Bitcoin Lightning Network: Scalable Off-Chain Instant Payments, Version 0.5.9.2. <https://lightning.network/lightning-network-paper.pdf>. Last accessed on September 20, 2023.

VII. GLOSSARY

- **Blocksize War:** A historical conflict within the Bitcoin community focused on the optimal block size for the Bitcoin blockchain, which concluded with a preference for smaller block sizes and the adoption of Segregated Witness (SegWit).
- **Layer 1 Applications:** Decentralized applications (dApps) that run directly on the base layer of a blockchain, such as Bitcoin.
- **Layer 2 Solutions:** Secondary chain or protocols built on top of a blockchain to improve its scalability and efficiency, such as the Lightning Network.
- **Data Congestion:** The overload of transactions and data on a blockchain, leading to slower processing times and higher fees.
- **Gas Fees:** Transaction fees required to process and validate transactions on a blockchain network.
- **Hybrid Modular Data Availability (HMDA):** A framework combining modular data storage solutions with Bitcoin's security features to enhance data availability, scalability, and security for blockchain networks.
- **Proof of Work (PoW):** A consensus mechanism used by Bitcoin that requires network participants (miners) to perform computational work to validate transactions and secure the network.
- **Consensus Protocol:** A system used to achieve agreement on a single data value among distributed processes or systems, ensuring data consistency and security.
- **Bitcoin Staking:** A process where Bitcoin holders can participate in Proof of Stake (PoS) blockchains by staking their assets to secure the network, eliminating the need for third-party custody services.
- **Proof of Stake (PoS):** A consensus mechanism where validators are chosen to produce blocks based on the amount of cryptocurrency they hold and are willing to "stake" as collateral.
- **Extractable One-Time Signatures (EOTS):** Cryptographic signatures that reveal the secret key if duplicated across different blocks, ensuring validator accountability.
- **Bitcoin Timestamping:** A method of recording block hashes and staking set votes on the Bitcoin blockchain to create tamper-proof checkpoints, enhancing security against long-range attacks.
- **Checkpoints:** Points in the blockchain where data is recorded to prevent forks and ensure network integrity.
- **Long-Range Attacks:** Attacks where an adversary attempts to rewrite a blockchain's history by creating an alternative chain fork, typically after the unbonding period in PoS networks.
- **Rapid Finality:** The quick confirmation of transactions in a blockchain network, significantly reducing block times from minutes to seconds.
- **Block Time:** The time it takes to generate a new block in a blockchain, which affects transaction confirmation speed.