



Pentru a rula Oracle local, folosind Docker, puteți începe prin a instala varianta potrivită de Docker Desktop:

<https://www.docker.com/products/docker-desktop/>

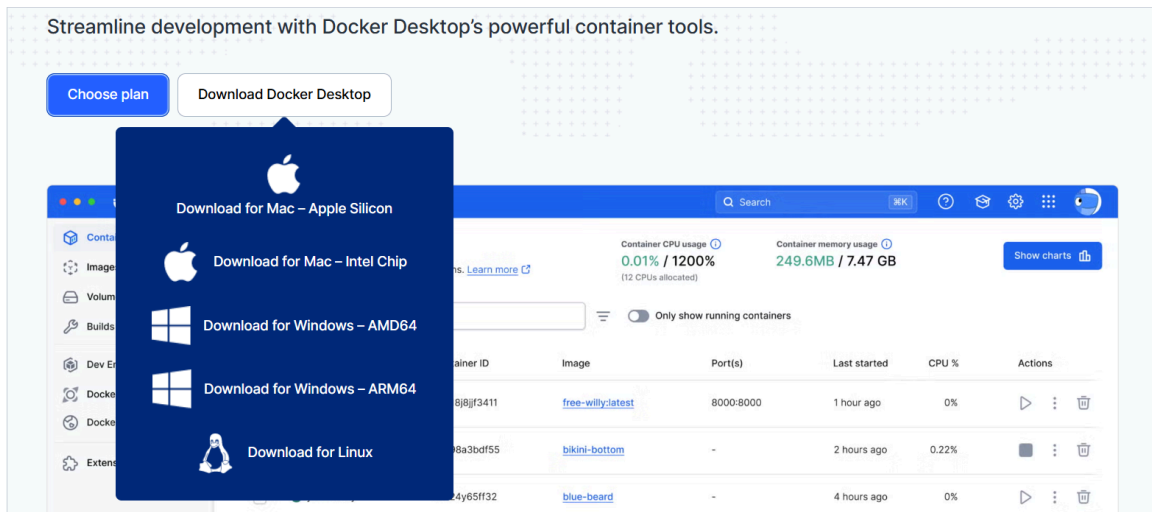

Dacă aveți un astfel de mesaj la rularea installer-ului:

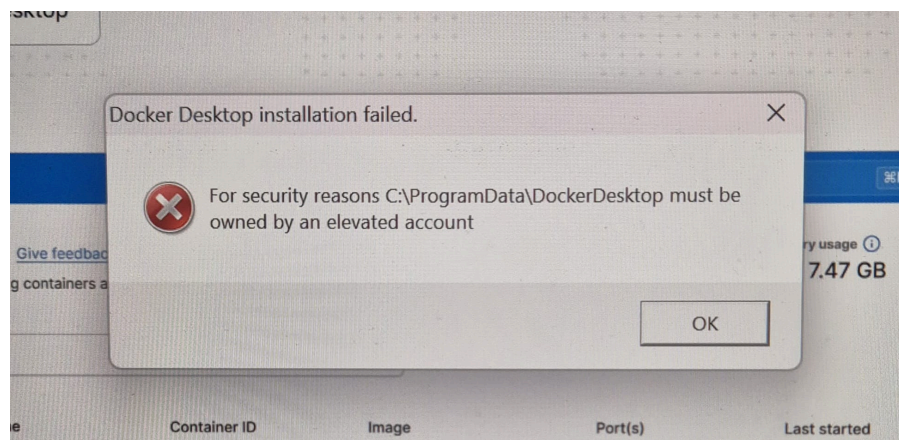


- stergeți folderul C:\ProgramData\DockerDesktop
- deschideți terminalul ca administrator
- schimbați directorul curent în directorul în care se afla installer-ul
- Rulați comanda de mai jos:

```
Administrator: Windows PowerShell
Windows PowerShell
Copyright (C) Microsoft Corporation. All rights reserved.


Install the latest PowerShell for new features and improvements! https://aka.ms/PSWindows

PS C:\Users\maras> cd "C:\GMRV\Docker"
PS C:\GMRV\Docker> Start-Process "Docker Desktop Installer.exe" -Wait -Verb RunAs
----->8
```


Se va afișa următoarea fereastră. Se va face instalarea, iar ulterior va fi nevoie să restartați calculatorul.

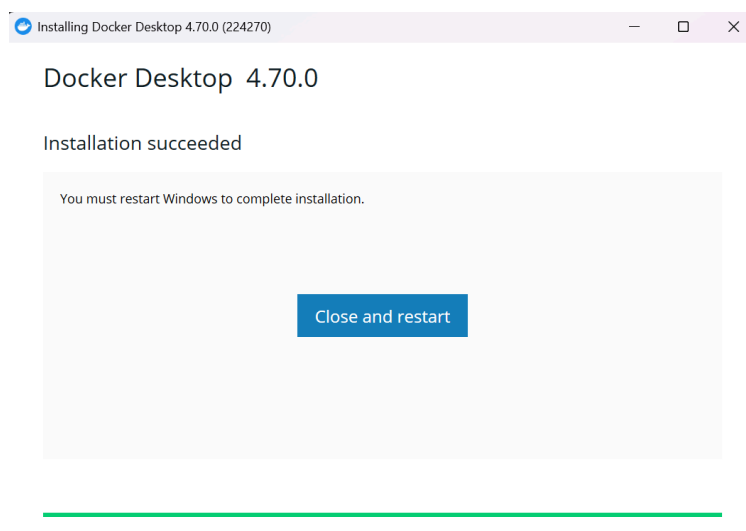


După restart, se va deschide Docker Desktop.

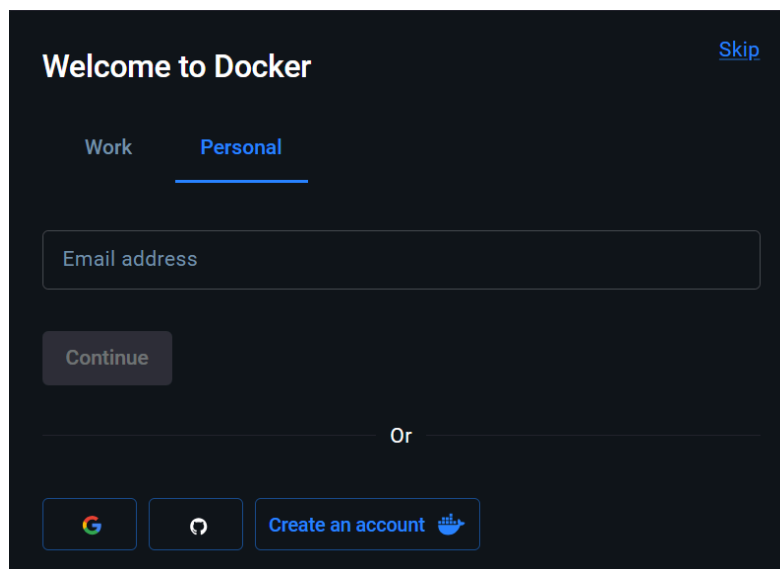

Puteți crea un cont prin orice metodă doriți.

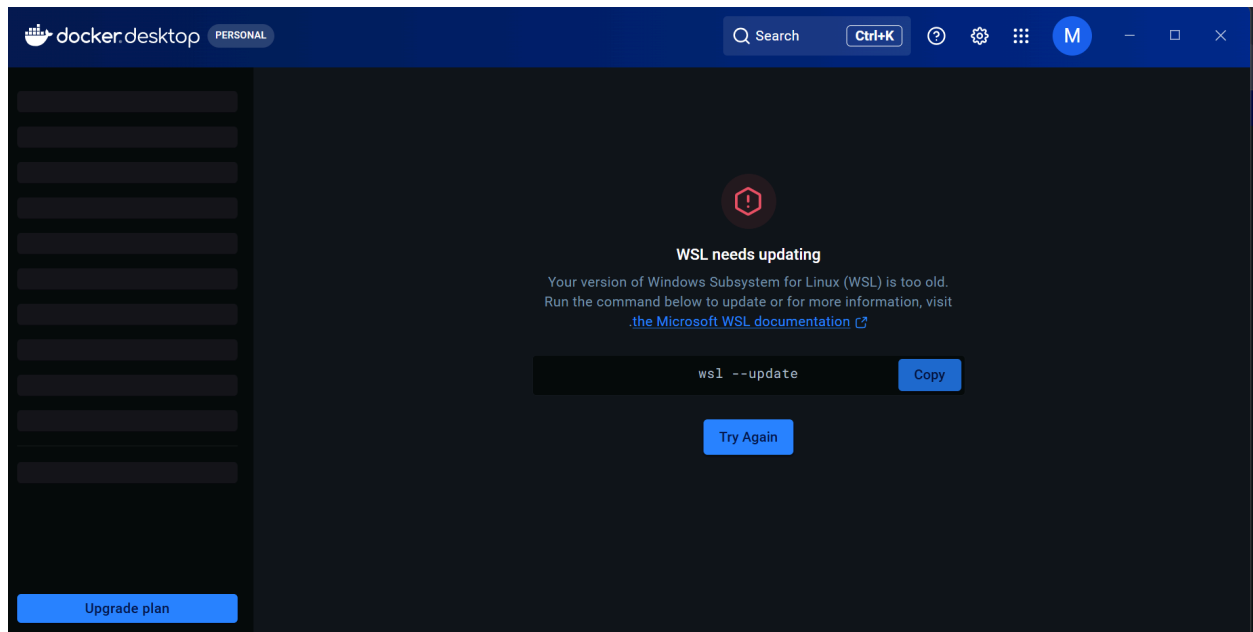

După logare, dacă apare acest mesaj, rulați comanda `wsl --update` în terminal, cu drepturi de administrator.

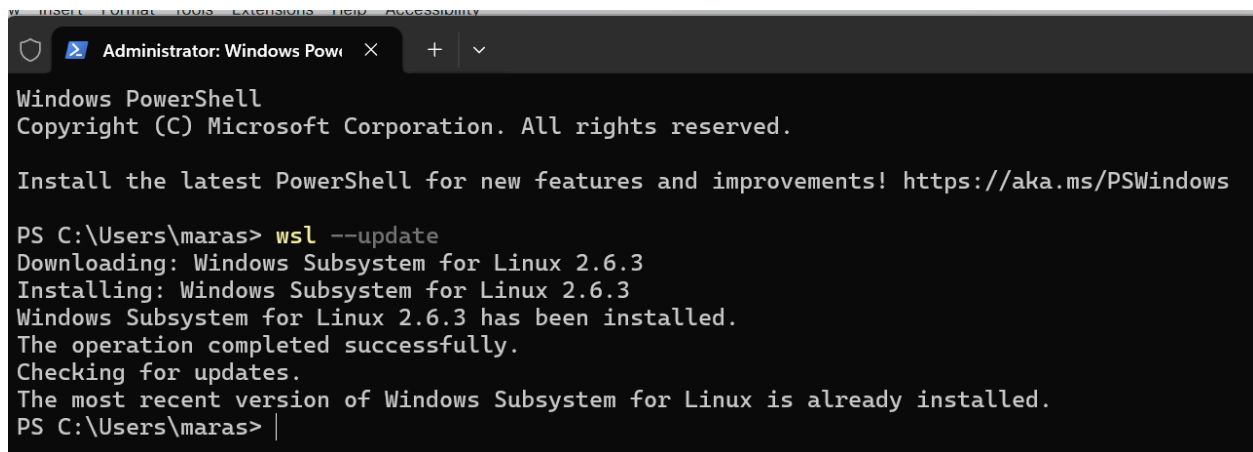

Oracle oferă imagini Docker, dar procesul e mai complex:

<https://github.com/oracle/docker-images>

Imaginile oficiale Oracle necesită cont Oracle și pași suplimentari de configurare.

Pentru uz didactic, puteți utiliza imaginile Docker preconfigurate (ex: gvenzl/oracle-xe), care nu necesită cont Oracle și sunt mai ușor de utilizat.

```
Administrator: Windows PowerShell
Windows PowerShell
Copyright (C) Microsoft Corporation. All rights reserved.


Install the latest PowerShell for new features and improvements! https://aka.ms/PSWindows

PS C:\WINDOWS\system32> docker run -d --name oracle-db -p 1521:1521 -e ORACLE_PASSWORD=parola123 gvenzl/oracle-xe
Unable to find image 'gvenzl/oracle-xe:latest' locally
latest: Pulling from gvenzl/oracle-xe
bb57cd9362b1: Pull complete
991bead44798: Pull complete
871558e78a27: Pull complete
f5cde12d8f01: Pull complete
db5c2b7644d0: Pull complete
ba63154293b2: Pull complete
Digest: sha256:c2682a4216b0fe65537912c4a049c7e5c15a85bb7c94bb8137d5f2d2eef60603
Status: Downloaded newer image for gvenzl/oracle-xe:latest
a3fc4f97ede2eae925834ae0d3448a5f8e698477fa988014eed3b94ae60097c2

What's next:
  Debug this container error with Gordon → docker ai "help me fix this container error"
docker: Error response from daemon: ports are not available: exposing port TCP 0.0.0.0:1521 -> 127.0.0.1:0: listen tcp 0.0.0.0:1521: bind: Only one usage of each socket address (protocol/network address/port) is normally permitted.

Run 'docker run --help' for more information
PS C:\WINDOWS\system32>
```

După rularea acestei comenzi, in Docker, la secțiunea Containers, va apărea imaginea:

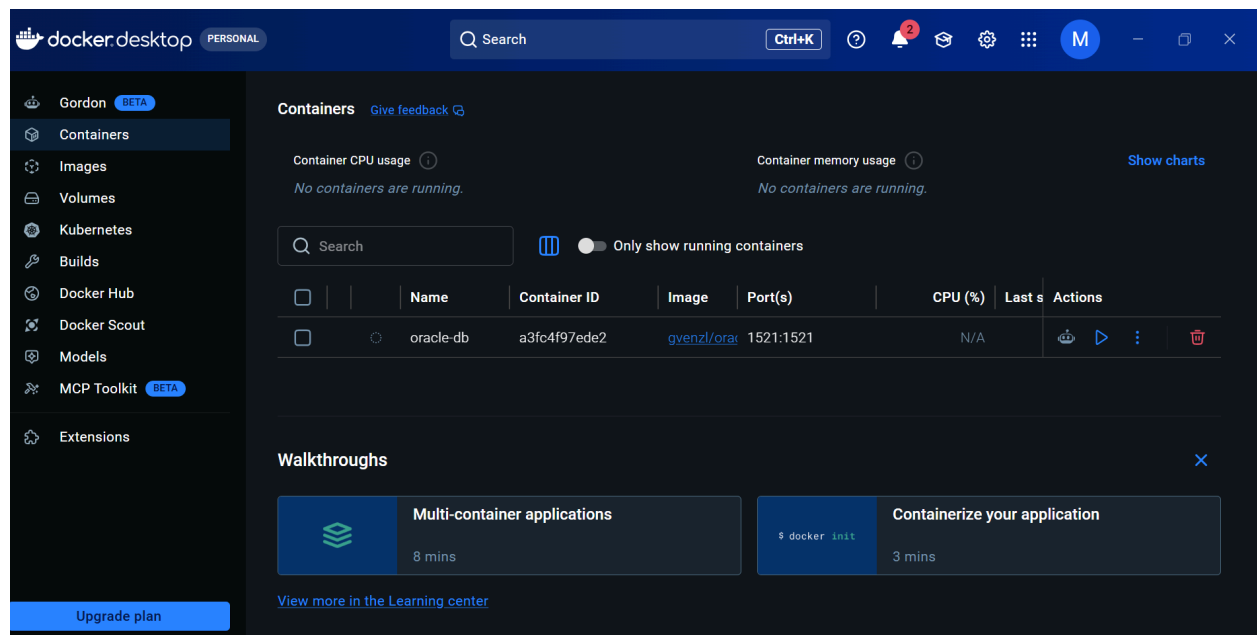

(HTTP code 500) server error - ports are not available: exposing port TCP 0.0.0.0:1521 -> 127.0.0.1:0: listen tcp 0.0.0.0:1521: bind: Only one usage of each socket address (protocol/network address/port) is normally permitted.


Dacă portul este deja ocupat, puteți schimba 1521 în 1522 astfel:

```
Administrator: Windows PowerShell
Windows PowerShell
Copyright (C) Microsoft Corporation. All rights reserved.

Install the latest PowerShell for new features and improvements! https://aka.ms/PSWindows

PS C:\WINDOWS\system32> docker rm oracle-db
oracle-db
PS C:\WINDOWS\system32> docker run -d --name oracle-db -p 1522:1521 -e ORACLE_PASSWORD=parola123 gvenzl/oracle-xe
de4b09010f40ca34568aa2241808a25c5f1a8fee378de14fafd1eaae9d3552a2
PS C:\WINDOWS\system32> SS
```

Acum, container-ul va putea fi pornit.

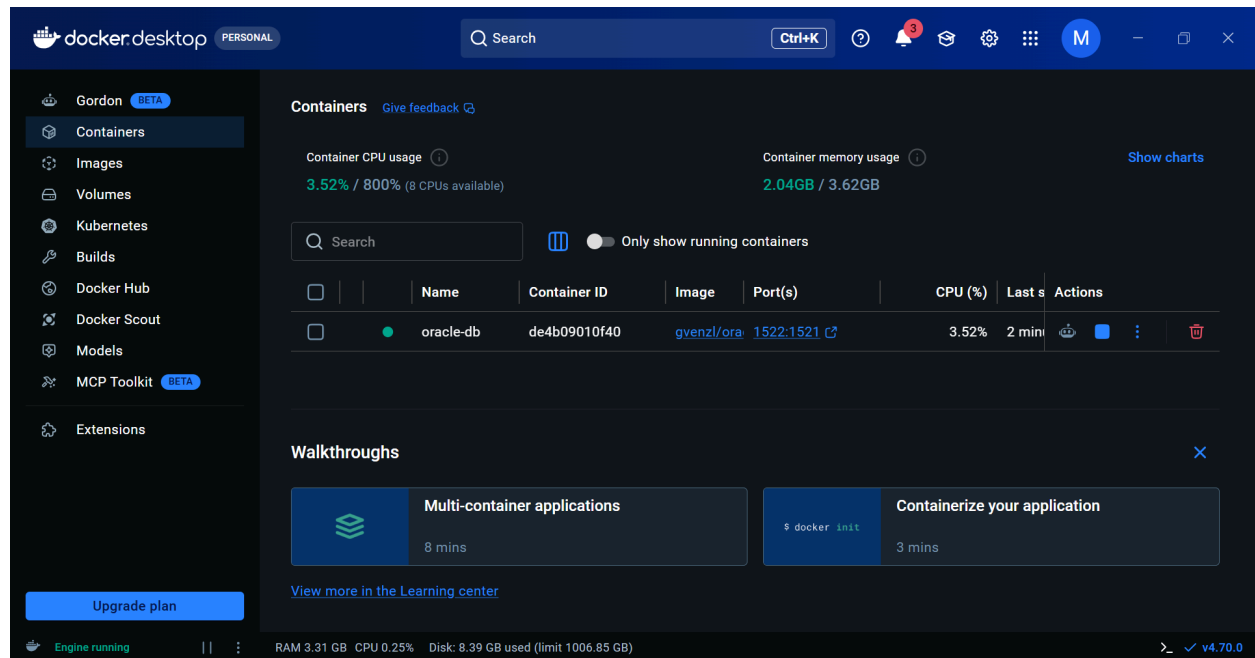

Mai departe, puteți deschide Oracle SQL Developer și adaugă o nouă conexiune:

The screenshot shows the 'New / Select Database Connection' dialog box in Oracle SQL Developer. The dialog is divided into two main sections. On the left, there is a table listing existing connections:

Connection Name	Connection Details
grupa141	grupa141@//193...
grupa142	grupa142@//193...
hr_copy	SYS@//localhost:...
my_db	SYS@//localhost:...

On the right, there are configuration fields for a new connection. The 'Name' field is empty. The 'Database Type' is set to 'Oracle'. The 'User Info' section shows 'Proxy User' as the user, 'Default' as the authentication type, 'system' as the username, and 'default' as the role. The password field is masked with dots. The 'Connection Type' is set to 'Basic'. The 'Details' tab is active, showing 'localhost' as the hostname, '1522' as the port, and 'XE' as the SID. The 'Service name' field is empty. At the bottom, there are buttons for 'Help', 'Save', 'Clear', 'Test' (highlighted with an orange border), 'Connect', and 'Cancel'. The status bar at the bottom left indicates 'Status : Success'.

Puteți testa conexiunea folosind Test, și vă puteți conecta prin Connect.