DOKUMENTACIJA

Yummi - restaurant website

Web programiranje PHP 2 Kredencijali za admina:

Email: admin@gmail.com

Password: 123456

Vladimir Lobanov 84/21
Smer: Internet Tehnologije
Modul: Web programiranje

Predmet: Web programiranje PHP 2

Sadrzaj

- 1. Uvod
 - 1.1. Korisceni programski jezici
 - 1.2. Opis funkcionalnosti
 - 1.3. Baza podataka
- 2. Organizacija
 - 2.1. Mapa sajta
 - 2.2. Slike stranica I opis funkcionalnosti
- 3. Kodovi
 - 3.1. PHP(Laravel framework)

VIEWS/LAYOUTS

3.2. Layout.blade.php

VIEWS

- 3.3. Home.blade.php
- 3.4. Menu.blade.php
- 3.5. Gallery.blade.php
- 3.6. Contact.blade.php
- 3.7. Author.blade.php

VIEWS/FIXED

- 3.8. Head.blade.php
- 3.9. Header.blade.php
- 3.10. Scripts.blade.php
- 3.11. Footer.blade.php

VIEWS/COMPONENTS

- 3.12. AboutUs.blade.php
- 3.13. Admin-blocks.blade.php
- 3.14. Book-table.blade.php
- 3.15. Chefs.blade.php
- 3.16. Choose-us-blocks.blade.php
- 3.17. Counter-stats.blade.php
- 3.18. Gallery.blade.php
- 3.19. Gallery-pictures.blade.php
- 3.20. Hero-section.blade.php
- 3.21. Testimonials.blade.php

VIEWS/AUTH

- 3.22. Login.blade.php
- 3.23. Register.blade.php

VIEWS/ADMIN

3.24. adminLogout.blade.php

- 3.25. allUsers.blade.php
- 3.26. Dashboard.blade.php
- 3.27. editFoodForm.blade.php
- 3.28. editUserForm.blade.php
- 3.29. progressBar.blade.php
- 3.30. resetPassword.blade.php
- 3.31. showBookedTables.blade.php
- 3.32. showMenu.blade.php
- 3.33. showMessages.blade.php
- 3.34. showNewProduct.blade.php

VIEWS/ADMIN/LAYOUTS

3.35. adminLayout.blade.php

VIEWS/ADMIN/FIXED

- 3.36. adminFooter.blade.php
- 3.37. adminHead.blade.php
- 3.38. adminScripts.blade.php
- 3.39. adminSideBar.blade.php
- 3.40. adminTopBar.blade.php

VIEWS/ADMIN/ALLUSERSINCLUDES

3.41. Head.blade.php

ROUTES

3.42. Web.php

CONTROLLERS

- 3.43. AdminController.php
- 3.44. AuthController.php
- 3.45. AuthorController.php
- 3.46. BaseController.php
- 3.47. ContactController.php
- 3.48. GalleryController.php
- 3.49. HomeController.php
- 3.50. MenuController.php

MIDDLEWARES

- 3.51. isAdmin.php
- 3.52. NoCacheMiddleware.php
- 3.53. PreventLogout.php

MODELS

- 3.54. Category.php
- 3.55. Chef.php
- 3.56. ChooseUs.php
- 3.57. CustomerCounter.php

- 3.58. Menu.php
- 3.59. Message.php
- 3.60. Navigation.php
- 3.61. Product.php
- 3.62. Reservations.php
- 3.63. Role.php
- 3.64. Testimonial.php
- 3.65. User.php

DATABASE/MIGRATIONS

- 3.66. Create users table.php
- 3.67. Create_navigations_table.php
- 3.68. Create_choose_us_blocks_table.php
- 3.69. Create_customers_counters_table.php
- 3.70. Create_testimonials_table.php
- 3.71. Create chefs table.php
- 3.72. Create_menus_table.php
- 3.73. Create_categories_table.php
- 3.74. Create products table.php
- 3.75. Create roles table.php
- 3.76. Create reservations table.php
- 3.77. Create_messages_table.php

DATABASE/SEEDERS

- 3.78. CategorySeeder.php
- 3.79. chefSeeder.php
- 3.80. ChooseUsSeeder.php
- 3.81. customerCounterSeeder.php
- 3.82. menuSeeder.php
- 3.83. navigationSeeder.php
- 3.84. productSeeder.php
- 3.85. roleSeeder.php
- 3.86. testimonialsSeeder.php

Korisceni programski jezici


Prilikom izrade sajta koristio sam PHP - laravel framework, JavaScript,JQuery, HTML, CSS koje sam obradjivao koristeci template I povezivanje sa bazom na phpmyadmin koristeci ORM.

Opis funkcionalnosti

Od funkcionalnosti koje sajt sadrzi su sledece:

- CRUD operacije nad podacima na sajtu
- Dinamicki ucitani svi repetitivni blokovi iz baze
- Forma za registraciju I logovanje I omogucavanje sesije ulogovanog korisnika
- Admin panel sa kompletnim CRUD operacijama nad korisnicima I ostalim elementima sajta(odrzavanje menija, menjanje cena, slika,...)
- Resetovanje lozinke admina
- Prikazivanje poruka na admin panelu I oznacavanje procitanih I neprocitanih poruka
- ◆ Cuvanje slika u bazi I njihovo ucitavanje I menjanje
- ◆ Razliciti vidovi filtriranja nad podacima
- ◆ Validacija svih podataka koristeci PHP validacije
- Koriscenje AJAX-a pri kljucnim operacijama na sajtu.

Baza podataka

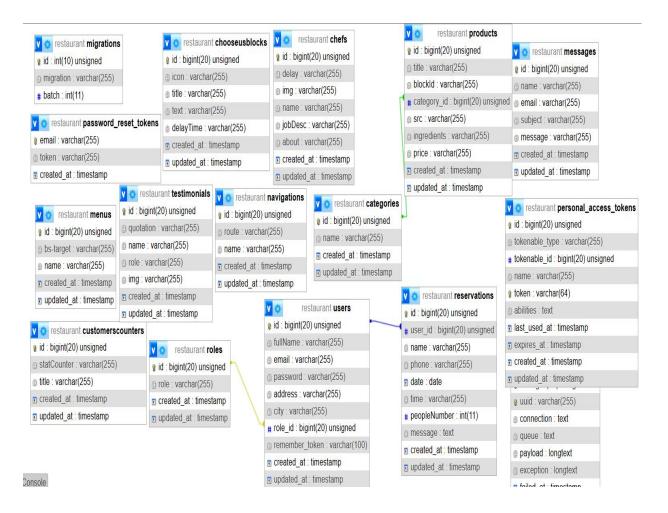

ORGANIZACIJA


Mapa sajta


```
<url>
    <loc>http://localhost:8080/menu</loc>
    <changefreq>weekly</changefreq>
    <priority>0.9</priority>
 </url>
 <url>
    <loc>http://localhost:8080/gallery</loc>
    <changefreq>weekly</changefreq>
    <priority>0.9</priority>
 </url>
 <url>
    <loc>http://localhost:8080/contact</loc>
    <changefreq>monthly</changefreq>
    <priority>0.8</priority>
 </url>
 <url>
    <loc>http://localhost:8080/author</loc>
    <changefreq>yearly</changefreq>
    <priority>0.6</priority>
 </url>
 <url>
    <loc>http://localhost:8080/admin</loc>
    <changefreq>weekly</changefreq>
    <priority>0.9</priority>
 </url>
 <url>
   <loc>http://localhost:8080/admin/dashboard</loc>
    <changefreq>weekly</changefreq>
    <priority>0.9</priority>
 </url>
</urlset>
```


Slike stranica I opis funkcionalnosti


Home.blade.php

Pocetni prikaz web-sajta gde korisnik moze da pogleda ukratku ponudu I promo video sajta, zajedno sa istorijom I podacima koji su dinamicki ucitani iz baze, kao I brojac podataka I njihovi stats. Testimonials je takodje ucitan iz baze, kao I sefovi koji su zaduzeni za izvanredna jela. Header sajta je odvojena komponenta gde se prikazuju dostupni linkovi korisniku.

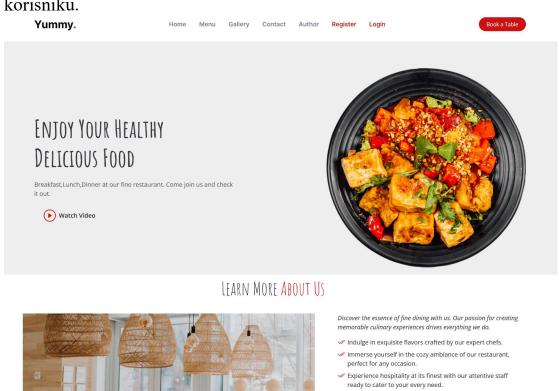

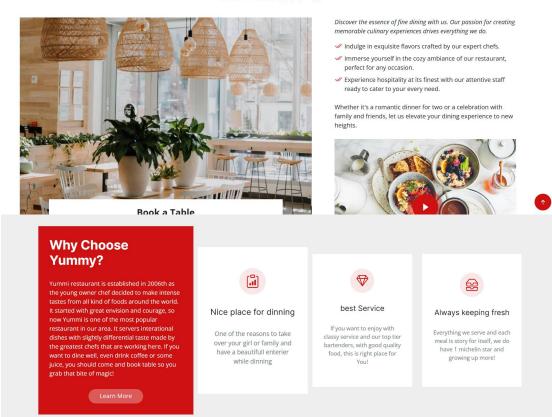


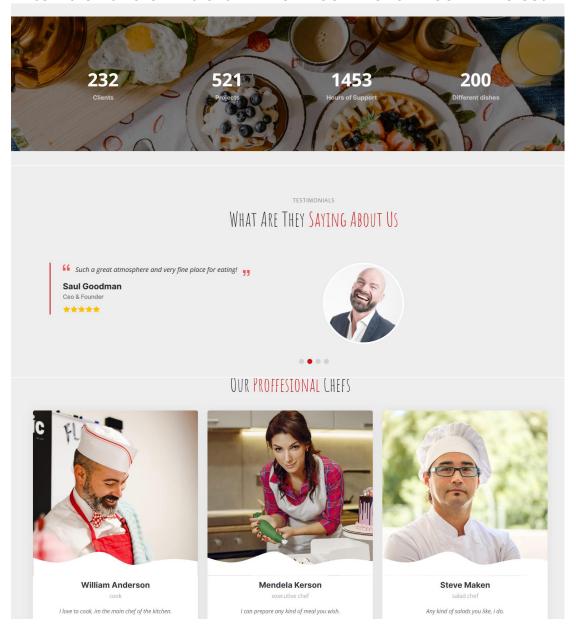




Menu.blade.php

Korisnik ima uvid u jelovnik sajta gde moze da filtrira odabir na osnovu starters,breakfast,lunch I dinner jelovnika. U zavisnosti od klika korisniku se prikazuje zeljeni repertoar jela.

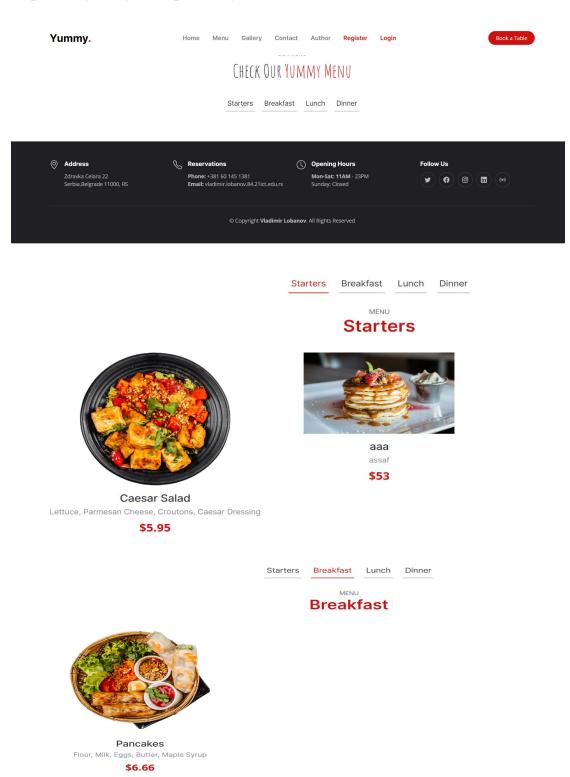

Gallery.blade.php


Stranica gde korisnik moze da pogleda galeriju slika dinamicki ucitanih iz baze, I da se odabere za paket I rezervaciju odredjene proslave u restoranu.

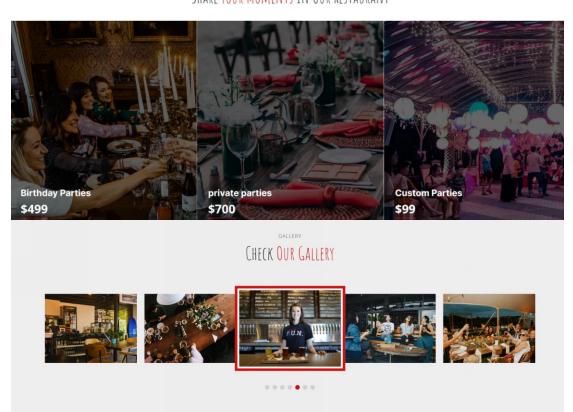

SHARE YOUR MOMENTS IN OUR KESTAURANT

Contact.blade.php

Kontakt stranica gde korisnik salje poruku administratoru sajta, kako bi se dodatno informisao ili pitao razlicita pitanja. Takodje ova stranica je dostupna za ne-autorizovane korisnike koji nisu prosli proces autentifikacije. Ukoliko je korisnik sve ispravno uneo podatke koji su bootstrap-ovim template-om definisani prikazuje se poruka za uspesno poslatu poruku administratoru.

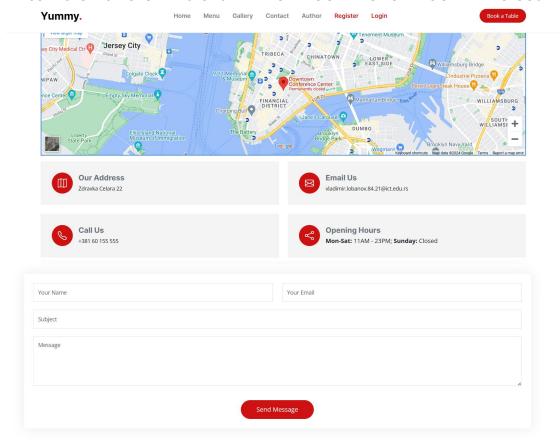

Prikaz uspesno poslate poruke administratoru sajta.



Author.blade.php

Staticki pojam web-sajta gde se prikazuju informacije I kratka biografija autora sajta.

About me Full-Stack Junior Developer -Software engineer

My name is Vladimir Lobanov and i am the owner of this website and the only author. I enjoy coding and mastering my skills through making websites, and also debugging them. I do want to expertise in SQL databases and to keep my way to complete back-end developer. I am at 3rd year of Vocational studies at ICT, web development course. In my free time i love playing video games, watching entertaining videos and training. My passion is kickbox training. Vladimir Lobanov Broj indeksa: 84/21





Register.blade.php

Forma za registrovanje novih korisnika, gde se podaci unose u input polja, I ukoliko su neispravno uneti podaci ili je email adresa vec registrovana, korisniku se ispisuju greske ispod forme o preostalim neispravnim podacima.


Takodje ukoliko je korisnik uspesno registrovan prikazuje mu se poruka nakon cega je redirektovan na stranicu za login

Register now and book table online!

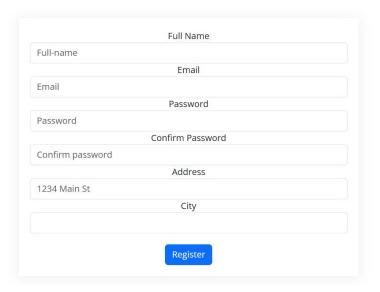

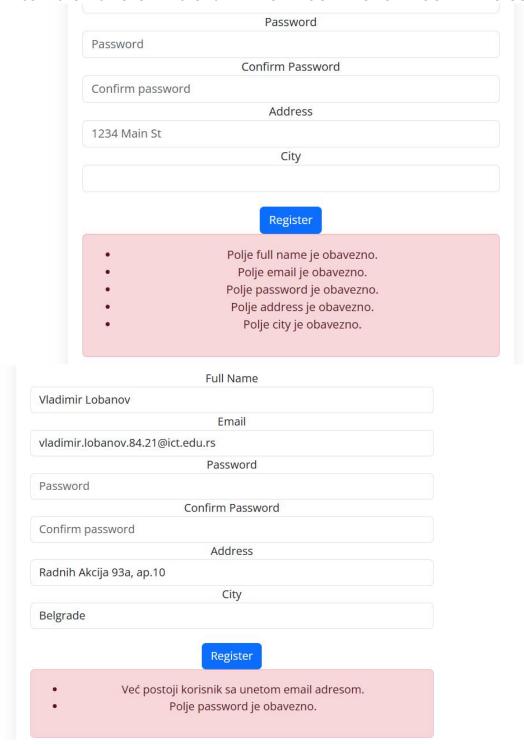


Prikaz uspesne registracije I redirektovanje korisnika na stranicu za login. Takodje prikazan login.blade.php

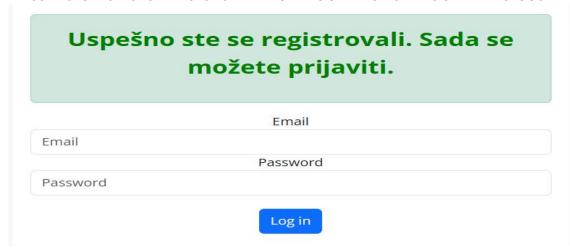


BookTable.blade.php

Ova stranica se korisniku ne prikaze dok nije ulogovan, tj registrovan. Ukoliko se pokusa anonimni korisnik prijaviti I rezervisati sto, izbacuje se greska gde se korisnik redirektuje na stranicu za login.

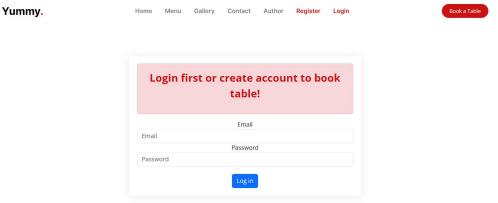

Ukoliko je korisnik uspesno ulogovan, nakon kreiranja naloga, aktivira se sesija gde se prikazuje ime I prezime korisnika I opcija za logout. Takodje korisnik moze pristupiti stranici booktable.blade.php gde ukoliko ne ispuni ispavno podatke forme izbacuju mu se greske.



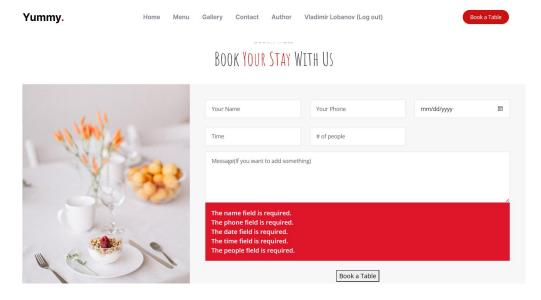

Nakon uspesnog popunjavanja forme I zakazivanje rezervacije, podaci se cuvaju u bazi I korisniku se prikazuje poruka o uspesnoj registraciji.

Your reservation has been successfully booked!


ADMIN

Prilikom logovanja admina, prikazuje se dodatni link ka dashboard, gde se pristupa admin panelu u kojem se izvrsavaju sve CRUD operacije vezane za sajt, kao I pracenje statitstike korisnika I poruka ka adminu.




Dashboard.blade.php

Inicijalni prikaz dashboard-a, tj. Admin panela gde admin ima repetitivne blokove ucitane iz baze, o korisnicima, jelima, porukama I rezervisanim stolovima. Takodje stats dijagram koji pokazuje statistiku svih podataka vezanih za korisnike jela itd...

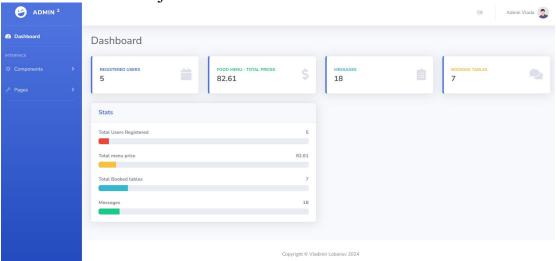


showUsers.blade.php

Stranica namenjena adminu gde ima uvid u sve korisnike I upravljanje nad korisnicima, brisanje I izmenu korisnika. Klikom na dugme delete(kantica) izbacuje se confirm dijalog gde se potvrduje brisanje korisnika I nakon toga se prikazuje redukovana tabela kada je korisnik izbrisan.

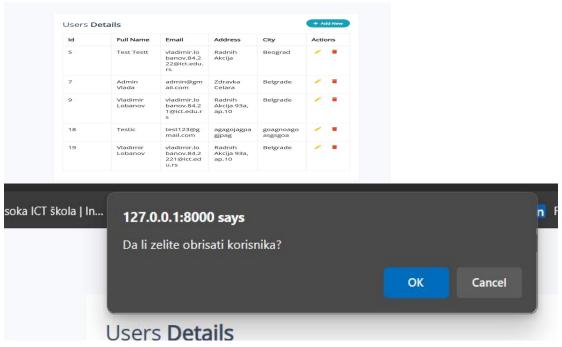


Kao modal se izbacuje novi prozor za dodavanje novog korisnika. Ukoliko se ne ispune svi input-I forme izbacuju se greske validirane od strane php-a I ne dodaje se novi zapis u bazu. Nakon uspesnog dodavanja realizovanog ajax-om korisnik se dodaje u tabelu novih korisnika.

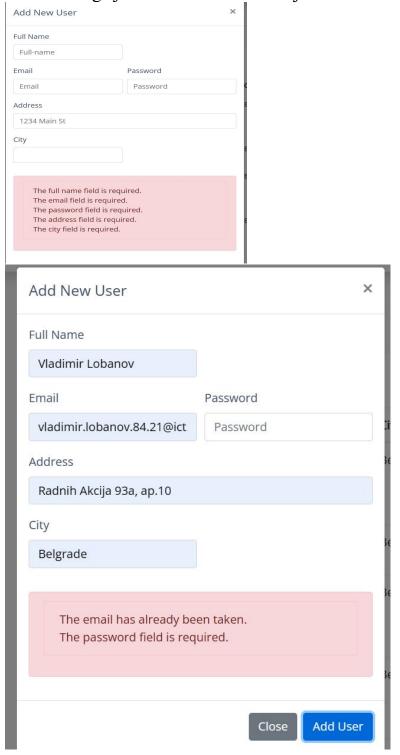

20	Vladimir Lobanov	vladimir.lo banobbv.8 4.21@ict.ed u.rs	Radnih Akcija 93a, ap.10	Belgrade	/ 1

editUser/{id}


Ukoliko se klikne na zut olovku vrsi se editovanje korisnika. Otvara se nova forma gde admin moze neke od opcija korisnika update-ovati I izmeniti zapis u bazi. Realizovano ajaxom I koriscenjem PUT metoda za izmenu zahteva.

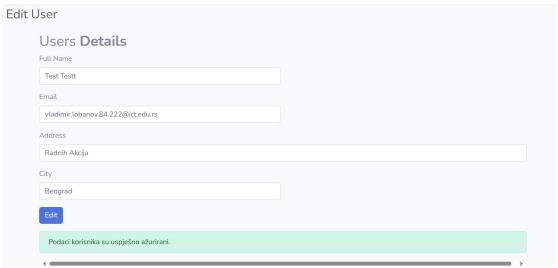

showMenu.blade.php

Slicne funkcionalnosti realizovane za stranicu o jelima I izmeni menija. Admin moze dodati novo jelo, update-ovati staro Ili obrisati zapis iz baze I ukloniti jelo sa menija.


Neispravno popunjeni podaci u formi dovode do prikazivanja gresaka, nakon kojih ukoliko je uspesno popunjena forma se izbacuje poruka o dodatom redu. Omoguceno cuvanje slike I izmena iste.

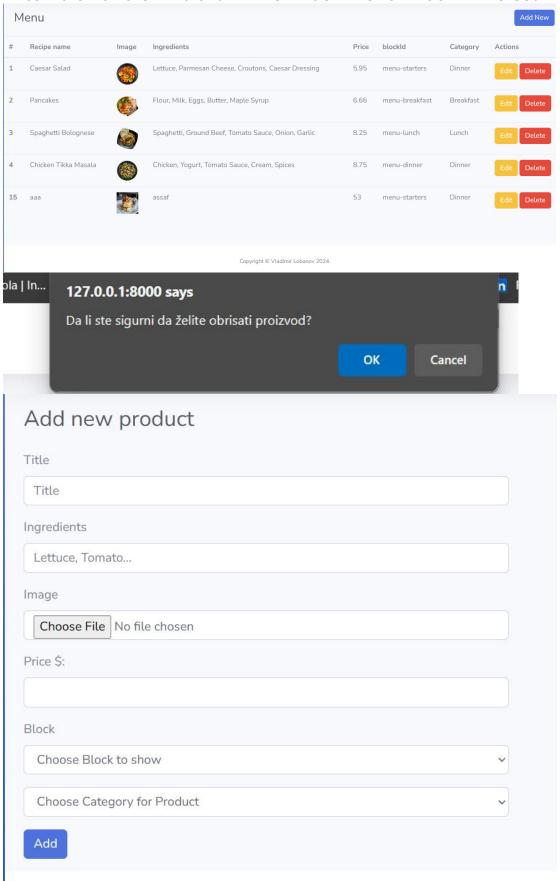

Add new product The title field is required. The ingredients field is required. The img field is required. The price field is required. The selected blok dodavanja is invalid. The selected kategorija is invalid.


showMessages.blade.php

Informacije o porukama od strane korisnika. Admin moze da selektuje zeljenu poruku I da je oznaci kao procitanu. U tom slucaju se pozadina bloka boji zelenom bojom I brojac poruka se smanjuje. Admin moze obrisati poruke koje su procitane cime se one uklanjaju iz liste poruka.

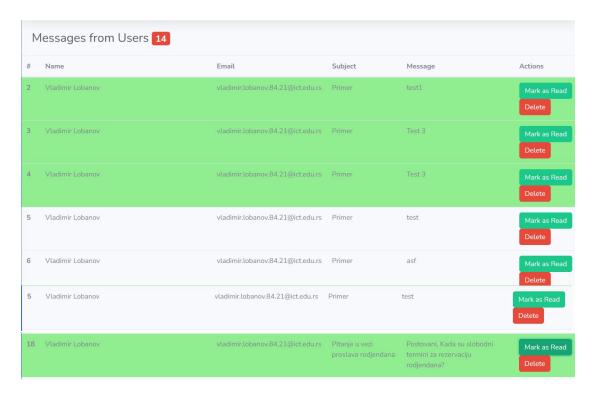


bookedTables/filter?filter={parametar}

Stranica koja adminu sluzi da pregleda rezervacije stolova I na osnovu prosledjenog parametra GET metodom kroz URL adresu da se filtrira po datumu. Moze se filtrirati I po datumu I po zeljenom vremenu rezervacije, nakon cega se tabela prikazuje sa azuriranim filterom.

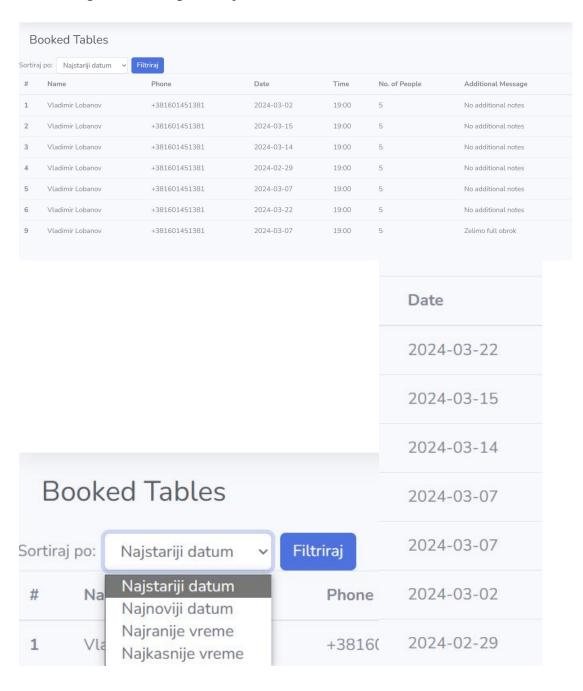

Dodatne stavke admin panela

SideBar I TopBar za brzi pristup delovima sajta preko admin panela.

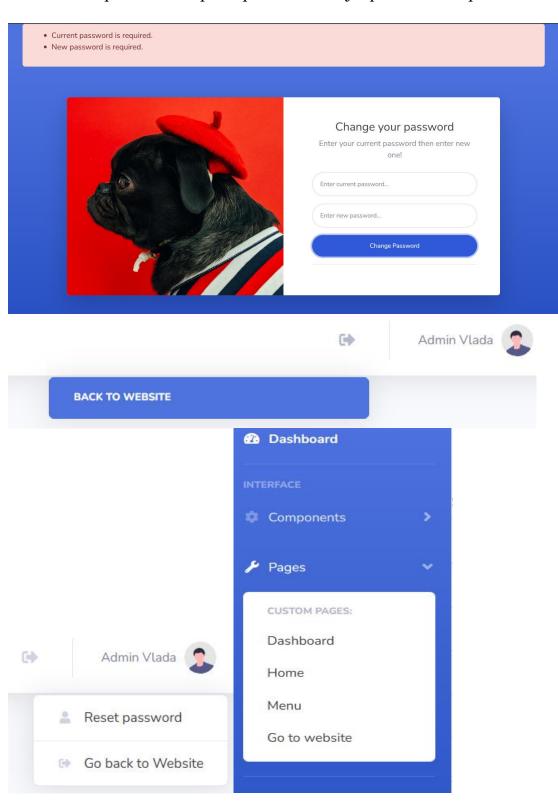

KODOVI

3.87. Layout.blade.php

```
<!DOCTYPE html>
<a href="html">html lang="en">
@include('fixed.head')
<body>
@include('fixed.header')
@vield('content')
@include('fixed.footer')
@include('fixed.scripts')
</body>
</html>
```

Home.blade.php

```
@extends('layouts.layout')
@section('title') Yummi Home @endsection
@section('description') Home Page of Yummi Restaurant @endsection
@section('keywords')
Home, Restaurant, Food, Menu, Breakfast, Dinner, Lunch, Salads
@endsection
@section('content')
  <!-- ===== Hero Section ====== -->
  <section id="hero" class="hero d-flex align-items-center section-bg">
  @include('components.hero-section')
  </section><!-- End Hero Section -->
  <main id="main">
    <!-- ===== About Section ====== -->
    @include('components.about-us')
    <!-- ===== Why Us Section ======= -->
    @include('components.choose-us-blocks')
    <!-- ===== Stats Counter Section ====== -->
    <section id="stats-counter" class="stats-counter">
       <div class="container" data-aos="zoom-out">
         <div class="row gy-4">
           @foreach($data['counter'] as $c)
              <x-counter-
stats :pureCounter="$c['statCounter']" :title="$c['title']" />
           @endforeach
         </div>
      </div>
```

```
</section>
    <!-- ===== Testimonials Section ====== -->
    <section id="testimonials" class="testimonials section-bg">
      @include('components.testimonials')
    </section><!-- End Testimonials Section -->
    <!-- ===== Chefs Section ====== -->
    <section id="chefs" class="chefs section-bg">
      <div class="container" data-aos="fade-up">
         <div class="section-header">
           <h2>Chefs</h2>
           Our <span>Proffesional</span> Chefs
         <div class="row gy-4">
         @include('components.chefs')
         </div>
      </div>
    </section><!-- End Chefs Section -->
  </main><!-- End #main -->
  <a href="#" class="scroll-top d-flex align-items-center justify-content-
center"><i class="bi bi-arrow-up-short"></i>
  <div id="preloader"></div>
@endsection
```

Menu.blade.php

```
@extends('layouts.layout')
@section('title') Menu Yummi @endsection
<section id="menu" class="menu">
 <div class="container" data-aos="fade-up">
   <div class="section-header">
     <h2>Our Menu</h2>
     Check Our <span>Yummy Menu</span>
   </div>
   aos="fade-up" data-aos-delay="200">
     @foreach($data['menuProducts'] as $m)
       <a class="nav-link" data-bs-toggle="tab" href="{{$m['bs-
target']}}">
           <h4>{{$m['name']}}</h4>
```

```
@endforeach
    </u1>
    <div class="tab-content" data-aos="fade-up" data-aos-delay="300">
      @foreach($data['menuProducts'] as $m)
        <div class="tab-pane fade" id="{{ substr($m['bs-target'],</pre>
1) }}">
          <div class="tab-header text-center">
             Menu
            <h3>{{$m['name']}}</h3>
          </div>
          <div class="row">
             @foreach($data['products'] as $a)
               @if(a->blockId === substr(m['bs-target'], 1))
                 <div class="col-lg-4 menu-item">
                   <a href="{{$a->src}}" class="glightbox">
                     <img src="{{$a->src}}" class="menu-img img-
fluid" alt="{{$a->title}}">
                   <h4>{{$a->title}}</h4>
                   {{$a->ingredients}}
                   ${{$a->price}}
                 </div>
               @endif
             @endforeach
          </div>
        </div>
      @endforeach
    </div>
  </div>
 /section>
```

Gallery.blade.php

contact.blade.php

```
<htmL lang="en">
@include('fixed.head')
<body>
(a)include('fixed.header')
section id="contact" class="contact">
    <div class="container" data-aos="fade-up">
      <div class="section-header">
         <h2>Contact</h2>
         Need Help? <span>Contact Us</span>
      </div>
      <div class="mb-3">
         <iframe style="border:0; width: 100%; height: 350px;"</pre>
src="https://www.google.com/maps/embed?pb=!1m14!1m8!1m3!1d1209
7.433213460943!2d-
74.0062269!3d40.7101282!3m2!1i1024!2i768!4f13.1!3m3!1m2!1s0x0%
3A0xb89d1fe6bc499443!2sDowntown+Conference+Center!5e0!3m2!1s
mk!2sbg!4v1539943755621" frameborder="0"
allowfullscreen></iframe>
      </div><!-- End Google Maps -->
      <div class="row gy-4">
         <div class="col-md-6">
           <div class="info-item d-flex align-items-center">
             <i class="icon bi bi-map flex-shrink-0"></i>
             <div>
```

```
<h3>Our Address</h3>
                Zdravka Celara 22
              </div>
           </div>
         </div><!-- End Info Item -->
         <div class="col-md-6">
           <div class="info-item d-flex align-items-center">
              <i class="icon bi bi-envelope flex-shrink-0"></i>
              <div>
                <h3>Email Us</h3>
                vladimir.lobanov.84.21@ict.edu.rs
           </div>
         </div><!-- End Info Item -->
         <div class="col-md-6">
           <div class="info-item d-flex align-items-center">
              <i class="icon bi bi-telephone flex-shrink-0"></i>
             <div>
                <h3>Call Us</h3>
                +381 60 155 555
              </div>
           </div>
         </div><!-- End Info Item -->
         <div class="col-md-6">
           <div class="info-item d-flex align-items-center">
              <i class="icon bi bi-share flex-shrink-0"></i>
              <div>
                <h3>Opening Hours</h3>
                <div><strong>Mon-Sat:</strong> 11AM - 23PM;
                  <strong>Sunday:</strong> Closed
                </div>
              </div>
           </div>
         </div>
       </div>
       <form action="{{route('message')}}" method="post"</pre>
id="contactForm" role="form" class="php-email-form p-3 p-md-4">
         @csrf
         <div class="row">
           <div class="col-xl-6 form-group">
             <input type="text" name="name" class="form-control"</pre>
id="name" placeholder="Your Name" required>
           </div>
```

```
<div class="col-xl-6 form-group">
              <input type="email" class="form-control" name="email"</pre>
id="email" placeholder="Your Email" required>
            </div>
         </div>
         <div class="form-group">
            <input type="text" class="form-control" name="subject"</pre>
id="subject" placeholder="Subject" required>
         </div>
         <div class="form-group">
            <textarea class="form-control" name="message" rows="5"
placeholder="Message" required></textarea>
         </div>
         <div class="my-3">
            <div class="loading">Loading</div>
            <div class="alert alert-success sent-message" style="display:</pre>
none;">Your message has been sent. Thank you!</div>
            <div class="alert alert-danger error-message" style="display:</pre>
none;">An error occurred. Please try again later.</div>
         </div>
         <div class="text-center"><button type="submit">Send
Message</button></div>
       </form><!--End Contact Form -->
    </div>
  </section><!-- End Contact Section -->
@include('fixed.footer')
<script
src="https://ajax.googleapis.com/ajax/libs/jquery/3.5.1/jquery.min.js"></
script>
<script
src="{{asset('assets/vendor/bootstrap/js/bootstrap.bundle.min.js')}}"></s
cript>
<script src="{{asset('assets/vendor/aos/aos.js')}}"></script>
src="{{asset('assets/vendor/glightbox/js/glightbox.min.js')}}"></script>
src="{{asset('assets/vendor/purecounter/purecounter vanilla.js')}}"></scr
ipt>
<script src="{{asset('assets/vendor/swiper/swiper-</pre>
bundle.min.js')}}"></script>
<script src="{{asset('assets/js/main.js')}}"></script>
<script>
 $(document).ready(function() {
```

```
$('#contactForm').submit(function(e) {
       e.preventDefault();
       var formData = $(this).serialize();
       $.ajax({
          type: 'POST',
          url: '/message',
          data: formData.
          dataType: 'json',
          success: function(response) {
             if (response.success) {
               $('.sent-message').text(response.success).show();
               $('.error-message').hide();
               $('#contactForm')[0].reset();
             } else {
               $('.error-message').text('An error occurred. Please try
again later.').show();
               $('.sent-message').hide();
          error: function(xhr, status, error) {
            $('.error-message').text('An error occurred. Please try again
later.').show();
            $('.sent-message').hide();
       });
     });
  });
</script>
</body>
</htmL>
```

Author.blade.php

```
VISOKA SKOLA STRUKOVNIH STUDIJA ZA INFORMACIONE I KOMUNIKACIONE TEHNOLOGIJE
         aos-delay="100">My name is Vladimir Lobanov and i am the owner of
this website and the only author.
        I enjoy coding and mastering my skills through making
websites, and also debugging them. I do want to expertise in SQL
databases
         and to keep my way to complete back-end developer. I am at
3rd year of Vocational studies at ICT, web development course.
         In my free time i love playing video games, watching
entertaining videos and training. My passion is kickbox training. </br>
         <mark>Vladimir Lobanov</mark></br>
         <mark>Broj indeksa: <b>84/21</b></mark>
        <div class="d-flex" data-aos="fade-up" data-aos-delay="200">
         </div>
      </div>
      <div class="col-lg-5 order-1 order-lg-2 text-center text-lg-start">
         <img src="{{asset('assets/img/author.jpg')}}" class="img-</pre>
fluid" alt="" data-aos="zoom-out" data-aos-delay="300">
      </div>
```

</div>

</div>

Head.blade.php

```
<head>
  <meta charset="utf-8">
  <meta content="width=device-width, initial-scale=1.0"</pre>
name="viewport">
  <title>@yield('title')</title>
  <meta content="" name="@yield('description')">
  <meta content="" name="@yield('keywords')">
  <link href="{{asset('assets/img/favicon.png')}}" rel="icon">
  <link href="{{asset('assets/img/apple-touch-icon.png')}}" rel="apple-</pre>
touch-icon">
  <!-- Google Fonts -->
  <link rel="preconnect" href="https://fonts.googleapis.com">
  <link rel="preconnect" href="https://fonts.gstatic.com" crossorigin>
  link
href="https://fonts.googleapis.com/css2?family=Open+Sans:ital,wght@0,
300;0,400;0,500;0,600;0,700;1,300;1,400;1,600;1,700&family=Amatic+
SC:ital,wght@0,300;0,400;0,500;0,600;0,700;1,300;1,400;1,500;1,600;1,
700&family=Inter:ital,wght@0,300;0,400;0,500;0,600;0,700;1,300;1,400;
1,500;1,600;1,700&display=swap" rel="stylesheet">
  <!-- Vendor CSS Files -->
  <link href="{{asset('assets/vendor/bootstrap/css/bootstrap.min.css')}}"</pre>
rel="stylesheet">
  <link href="{{asset('assets/vendor/bootstrap-icons/bootstrap-</pre>
icons.css')}}" rel="stylesheet">
  <link href="{{asset('assets/vendor/aos/aos.css')}}" rel="stylesheet">
  <link href="{{asset('assets/vendor/glightbox/css/glightbox.min.css')}}'</pre>
rel="stylesheet">
  <link href="{{asset('assets/vendor/swiper/swiper-bundle.min.css')}}"</pre>
rel="stylesheet">
  <!-- Template Main CSS File -->
  <link href="{{asset('assets/css/main.css')}}" rel="stylesheet">
</head>
```

Header.blade.php

```
<h1>Yummy<span>.</span></h1>
    <nav id="navbar" class="navbar">
        (a)php
          $\sisLoggedIn = \Illuminate\Support\Facades\Auth::check();
        @endphp
        @foreach($data['menu'] as $item)
          (a)php
            $generatedUrl = route($item->route);
          @endphp
          @if($generatedUrl == route('login') || $generatedUrl ==
route('register'))
            @if(!$isLoggedIn)
              <a href="{{ $generatedUrl }}"</a>
@endif
          @elseif($generatedUrl == route('logout'))
          @else
            <a href="{{ $generatedUrl }}">{{ $item-}}"</a>
>name }}</a>
          @endif
        @endforeach
        @if($isLoggedIn)
            <?php $user =
\Illuminate\Support\Facades\Auth::user() ?>
          @if(\$user->role\ id == '2')
            <a href="{{route('dashboard')}}}"
style="color:darkred"><b>Dashboard</b></a>
            @endif
          <form action="{{ route('logout') }}" method="get"</pre>
id="logoutForm">
              <a class="nav-link" href="#"
onclick="event.preventDefault();
document.getElementById('logoutForm').submit();">
                 {{ \Illuminate\Support\Facades\Auth::user()-
>fullName }} (Log out)
              </a>
```

Scripts.blade.php

Footer.blade.php

```
<h4>Address</h4>
              Zdravka Celara 22 <br>
              Serbia, Belgrade 11000, RS < br>
         </div>
      </div>
      <div class="col-lg-3 col-md-6 footer-links d-flex">
         <i class="bi bi-telephone icon"></i>
         <div>
           <h4>Reservations</h4>
              <strong>Phone:strong> +381 60 145 1381<bre>
             <strong>Email:</strong>
vladimir.lobanov.84.21ict.edu.rs<br>
           </div>
      </div>
      <div class="col-lg-3 col-md-6 footer-links d-flex">
         <i class="bi bi-clock icon"></i>
         <div>
           <h4>Opening Hours</h4>
              <strong>Mon-Sat: 11AMstrong> - 23PM<br/>br>
             Sunday: Closed
           </div>
      </div>
      <div class="col-lg-3 col-md-6 footer-links">
         <h4>Follow Us</h4>
         <div class="social-links d-flex">
           <a href="#" class="twitter"><i class="bi bi-
twitter"></i></a>
           <a href="#" class="facebook"><i class="bi bi-
facebook"></i>>/a>
           <a href="#" class="instagram"><i class="bi bi-
instagram"></i>>/a>
           <a href="#" class="linkedin"><i class="bi bi-
linkedin"></i></a>
           <a href="/sitemap.xml" class="sitemap"><i class="bi bi-
broadcast"></i>>/a>
         </div>
```

```
</div>
</div>
</div>
</div class="container">
</div class="copyright">

&copy; Copyright <strong><span>Vladimir

Lobanov</span></strong>. All Rights Reserved

</div>
</div>
</footer><!-- End Footer -->
```

About-us.blade.php

```
section id="about" class="about">
  <div class="container" data-aos="fade-up">
    <div class="section-header">
      <h2>About Us</h2>
      Learn More <span>About Us</span>
    </div>
    <div class="row gy-4">
      <div class="col-lg-7 position-relative about-img"</pre>
style="background-image: url(assets/img/about.jpg);" data-aos="fade-
up" data-aos-delay="150">
         <div class="call-us position-absolute">
           <h4>Book a Table</h4>
           +1 5589 55488 55
         </div>
      <div class="col-lg-5 d-flex align-items-end" data-aos="fade-up"</pre>
data-aos-delay="300">
         <div class="content ps-0 ps-lg-5">
           Discover the essence of fine dining with us. Our passion
for creating memorable culinary experiences drives everything we do.
           <u1>
             <i class="bi bi-check2-all"></i> Indulge in exquisite
flavors crafted by our expert chefs.
             <i class="bi bi-check2-all"></i> Immerse yourself in
the cozy ambiance of our restaurant, perfect for any occasion.
```

```
i class="bi bi-check2-all"></i> Experience
hospitality at its finest with our attentive staff ready to cater to your every
need.
           Whether it's a romantic dinner for two or a celebration
with family and friends, let us elevate your dining experience to new
heights.
           <div class="position-relative mt-4">
              <img src="assets/img/about-2.jpg" class="img-fluid"</pre>
alt="">
href="https://www.youtube.com/watch?v=LXb3EKWsInQ"
class="glightbox play-btn"></a>
           </div>
         </div>
      </div>
    </div>
  </div>
 /section><!-- End About Section -->
```

Admin-blocks.blade.php

```
'icons' => 'fas fa-comments fa-2x text-gray-300',
    'color' => 'text-warning'
@endphp
@foreach($nizAdminBlokova as $index => $n)
  (a)php
    $link = ";
    switch($index) {
       case 0:
         $link = route('showUsers');
         break;
       case 1:
         $link = route('showMenu');
         break;
       case 2:
         $link = route('showMessages');
         break;
       case 3:
         $link = route('bookedTables');
         break:
       default:
         $link = route('dashboard');
  @endphp
  <div class="col-xl-3 col-md-6 mb-4">
    <a href="{{ $link }}" class="card border-left-primary shadow h-100"
py-2 text-decoration-none">
       <div class="card-body">
         <div class="row no-gutters align-items-center">
            <div class="col mr-2">
              <div class="text-xs font-weight-bold {{$n['color']}} text-</pre>
uppercase mb-1">
                 { {$n['title']} } </div>
              <div class="h5 mb-0 font-weight-bold text-gray-800">
                 (a) if (s index === 0)
                    {{$registeredUsers}}
                 \textcircled{a}elseif (\$index === 1)
                    {{$totalPriceOfFood}}
                 @elseif ($index === 2)
                    {{$messages}}
                 (a)elseif (sindex === 3)
                   {{$bookedTables}}
```

```
@endif
</div>
</div>
<div class="col-auto">
<i class="{{$n['icons']}}}"></i>
</div>
</div>
</div>
</div>
</div>
</div>
@endforeach
```

Book-table.blade.php

```
@extends('layouts.layout')
  <section id="book-a-table" class="book-a-table">
    <div class="container" data-aos="fade-up">
       <div class="section-header">
         <h2>Book A Table</h2>
         Sook <span>Your Stay</span> With Us
       </div>
       <div class="row g-0">
         <div class="col-lg-4 reservation-img" style="background-</pre>
image: url(assets/img/reservation.jpg);" data-aos="zoom-out" data-aos-
delay="200"></div>
         (a) if (\$errors-\rightarrowany())
            <div class="alert alert-danger">
              <111>
                 @foreach ($errors->all() as $error)
                   {| $error } }
                @endforeach
              </div>
         @endif
         <div class="col-lg-8 d-flex align-items-center reservation-form-</pre>
bg">
            <form action="{{route('bookTable')}}" method="post"</pre>
role="form" class="php-email-form" data-aos="fade-up" data-aos-
delay="100">
              @csrf
```



```
>user()->id }}">
              <div class="row gy-4">
                 <div class="col-lg-4 col-md-6">
                   <input type="text" name="name" class="form-</pre>
control" id="name" placeholder="Your Name" data-rule="minlen:4"
data-msg="Please enter at least 4 chars">
                   <div class="validate"></div>
                 </div>
                 <div class="col-lg-4 col-md-6">
                   <input type="text" class="form-control"</pre>
name="phone" id="phone" placeholder="Your Phone" data-
rule="minlen:4" data-msg="Please enter at least 4 chars">
                   <div class="validate"></div>
                 <div class="col-lg-4 col-md-6">
                   <input type="date" name="date" class="form-</pre>
control" id="date" placeholder="Date" data-rule="minlen:4" data-
msg="Please enter at least 4 chars">
                   <div class="validate"></div>
                </div>
                <div class="col-lg-4 col-md-6">
                   <input type="text" class="form-control"</pre>
name="time" id="time" placeholder="Time" data-rule="minlen:4" data-
msg="Please enter at least 4 chars">
                   <div class="validate"></div>
                </div>
                <div class="col-lg-4 col-md-6">
                   <input type="number" class="form-control"</pre>
name="people" id="people" placeholder="# of people" data-
rule="minlen:1" data-msg="Please enter at least 1 chars">
                   <div class="validate"></div>
                </div>
              </div>
              <div class="form-group mt-3">
                <textarea class="form-control" name="message"
rows="5" placeholder="Message(If you want to add
something)"></textarea>
                 <div class="validate"></div>
              </div>
              <div class="mb-3">
                <div class="loading">Loading</div>
                <div class="error-message"></div>
```

```
<div class="sent-message">Your booking request was
sent. We will call back or send an Email to confirm your reservation.
Thank you!</div>
               <div class="text-center"><button type="button" id="book-</pre>
table-btn">Book a Table</button></div>
            </form>
          </div>
       </div>
    </div>
  </section><!-- End Book A Table Section -->
  <script src="https://code.jquery.com/jquery-3.6.0.min.js"></script>
  <script>
    $(document).ready(function() {
       $('#book-table-btn').click(function(e) {
          e.preventDefault();
          var form = $('form[action="{{ route('bookTable') }}"]');
          var csrfToken = '{{ csrf token() }}';
          $.ajax({
            type: form.attr('method'),
            url: form.attr('action'),
            data: form.serialize(),
            headers: {
               'X-CSRF-TOKEN': csrfToken
            },
            success: function(response) {
               $('.sent-message').css('display',
'block').text(response.success);
               $('.error-message').css('display', 'none');
               $('.loading').css('display', 'none');
               form[0].reset();
            },
            error: function(response) {
               if (response.status === 422) {
                 var errors = response.responseJSON.errors;
                 var errorMessages = Object.values(errors).flat();
                 $('.error-message').css('display',
'block').html(errorMessages.join('<br>'));
               } else {
                 $('.error-message').css('display', 'block').text('Error!
Please try again later.');
               $('.sent-message').css('display', 'none');
```

```
$('.loading').css('display', 'none');
}
});
});
});
</script>
```

Chefs.blade.php

```
@foreach($data['chefs'] as $n)
  <div class="col-lg-4 col-md-6 d-flex align-items-stretch" data-</pre>
aos="fade-up" data-aos-delay="{{$n['delay']}}}">
    <div class="chef-member">
       <div class="member-img">
         <img src="{{asset('assets/img/chefs/')}}/{{$n['img']}}"</pre>
class="img-fluid" alt="{{$n['name']}}">
         <div class="social">
           <a href=""><i class="bi bi-twitter"></i></a>
           <a href=""><i class="bi bi-facebook"></i></a>
           <a href=""><i class="bi bi-instagram"></i></a>
           <a href=""><i class="bi bi-linkedin"></i></a>
         </div>
       </div>
       <div class="member-info">
         <h4>{{$n['name']}}</h4>
         <span>{{$n['jobDesc']}}</span>
         {{$n['about']}}
       </div>
    </div>
  </div><!-- End Chefs Member -->
@endforeach
```

Choose-us-blocks.blade.php

```
Yummi restaurant is established in 2006th as the young
owner chef decided to make intense tastes from all kind of foods around
              the world. It started with great envision and courage, so
now Yummi is one of the most popular restaurant in our area. It
              servers interational dishes with slightly differential taste
made by the greatest chefs that are working here. If you want
              to dine well, even drink coffee or some juice, you should
come and book table so you grab that bite of magic!
            <div class="text-center">
              <a href="#" class="more-btn">Learn More <i class="bx"
bx-chevron-right"></i>/a>
            </div>
         </div>
       </div><!-- End Why Box -->
       <div class="col-lg-8 d-flex align-items-center">
         <div class="row gy-4">
            @foreach($blocks as $blok)
              <div class="col-xl-4" data-aos="fade-up" data-aos-</pre>
delay="{{ $blok['delayTime'] }}">
                 <div class="icon-box d-flex flex-column justify-</pre>
content-center align-items-center">
                   <i class="{{ $blok['icon'] }}"></i>
                   <h4>{{ $blok['title'] }}</h4>
                   {{ $blok['text'] }}
                 </div>
              </div><!-- End Icon Box -->
            @endforeach
         </div>
       </div>
    </div>
  </div>
 </section><!-- End Why Us Section -->
```

Counter-stats.blade.php

VISOKA SKOLA STRUKOVNIH STUDIJA ZA INFORMACIONE I KOMUNIKACIONE TEHNOLOGIJE $<\!/\mathrm{div}\!>$

Gallery.blade.php

```
<?php
$gallery = [
     'name' => 'Custom Parties',
     'price' => '99',
     'desc' => 'You can always book a party celebration at our place',
     'img' => 'assets/img/events-1.jpg'
  ],
     'name' => 'Birthday Parties',
     'price' => '499'.
     'desc' => 'Celebrate birthday parties with your loving ones',
     'img' => 'assets/img/events-2.jpg'
  ],
     'name' => 'private parties',
     'price' => '700',
     'desc' => 'Check in our restaurant for private celebration',
     'img' => 'assets/img/events-3.jpg'
@foreach($gallery as $g)
  <div class="swiper-slide event-item d-flex flex-column justify-content-</pre>
end" style="background-image: url({{$g['img']}})">
    <h3>{{$g['name']}}</h3>
    <div class="price align-self-start">${{$g['price']}}</div>
    {{$g['desc']}}
  </div><!-- End Event item -->
@endforeach
```

Gallery-pictures.blade.php

```
<div class="container" data-aos="fade-up">
  <div class="section-header">
    <h2>gallery</h2>
    Check <span>Our Gallery</span>
  </div>
  <div class="gallery-slider swiper">
    <div class="swiper-wrapper align-items-center">
       (a) for ($i = 0; $i < count($pictures); $i++)
         <div class="swiper-slide"><a class="glightbox" data-</pre>
gallery="images-gallery" href="{{$pictures[$i]}}"><img
src="{{$pictures[$i]}}" class="img-fluid" alt=""></a></div>
       @endfor
    </div>
    <div class="swiper-pagination"></div>
  </div>
</div>
```

Hero-section.blade.php

```
<div class="container">
  <div class="row justify-content-between gy-5">
    <div class="col-lg-5 order-2 order-lg-1 d-flex flex-column justify-</pre>
content-center align-items-center align-items-lg-start text-center text-lg-
start">
      <h2 data-aos="fade-up">Enjoy Your Healthy<br>Delicious
Food</h2>
      delay="100">Breakfast,Lunch,Dinner at our fine restaurant. Come join us
and check it out.
      <div class="d-flex" data-aos="fade-up" data-aos-delay="200">
         <a href="https://www.youtube.com/watch?v=kRCH8kD1GD0"
class="glightbox btn-watch-video d-flex align-items-center"><i class="bi
bi-play-circle"></i><span>Watch Video</span></a>
      </div>
    </div>
    <div class="col-lg-5 order-1 order-lg-2 text-center text-lg-start">
      <img src="{{asset('assets/img/hero-img.png')}}" class="img-</pre>
fluid" alt="" data-aos="zoom-out" data-aos-delay="300">
    </div>
  </div>
</div>
```

Testimonials.blade.php

```
<div class="container" data-aos="fade-up">
  <div class="section-header">
    <h2>Testimonials</h2>
    What Are They <span>Saying About Us</span>
  </div>
  <div class="slides-1 swiper" data-aos="fade-up" data-aos-</pre>
delay="100">
    <div class="swiper-wrapper">
       @foreach($data['testimonials'] as $t)
         <div class="swiper-slide">
            <div class="testimonial-item">
              <div class="row gy-4 justify-content-center">
                 <div class="col-lg-6">
                   <div class="testimonial-content">
                        <i class="bi bi-quote quote-icon-left"></i>
                        {{$t['quotation']}}
                        <i class="bi bi-quote quote-icon-right"></i>
                      <h3>{{$t['name']}}</h3>
                      < h4 > { \{ \{ t['role'] \} \} < /h4 > 
                      <div class="stars">
                        <i class="bi bi-star-fill"></i><i class="bi bi-
star-fill"></i><i class="bi bi-star-fill"></i><i class="bi bi-star-
fill"></i><i class="bi bi-star-fill"></i>
                      </div>
                   </div>
                 </div>
                 <div class="col-lg-2 text-center">
                   <img src="{{$t['img']}}" class="img-fluid
testimonial-img" alt="{{$t['name']}}">
                 </div>
              </div>
            </div>
         </div><!-- End testimonial item -->
       @endforeach
    </div>
    <div class="swiper-pagination"></div>
  </div>
```

</div>

AUTH

Login.blade.php

```
@extends('layouts.layout')
@section('content')
<style>
  .about .about-img{
    min-height: 200px;
</style>
  <section id="about" class="about" >
    <div class="container" data-aos="fade-up">
       <div class="align-content-center" style="text-align:</pre>
center;padding: 50px;">
         <h4>Log in to book a table!</h4>
       <div class="row gy-4" style="flex-direction:column; flex-wrap:</pre>
wrap; align-content: center;">
         <div class="col-lg-7 position-relative about-img" data-</pre>
aos="fade-up" data-aos-delay="150">
            <div class="call-us position-absolute"</pre>
style="bottom:1%;position:relative;">
              @if(session('error-msg'))
                 <div class="alert alert-danger">
                    {\{session('error-msg')\}} 
                </div>
              @endif
              @if(session('success'))
                 <div class="alert alert-success">
                   {{session('success')}}
                </div>
              @endif
              <form action="{{route('loginUser')}}" method="post"</pre>
enctype="multipart/form-data">
                @csrf
                <div class="form-row">
                   <div class="form-group col-md-6"</pre>
style="width:100%;">
                     <label for="inputEmail4">Email</label>
```

```
<input type="email" class="form-control"</pre>
name="email" id="inputEmail4" placeholder="Email">
                   </div>
                   <div class="form-group col-md-6"</pre>
style="width:100%;">
                      <label for="inputPassword4">Password</label>
                     <input type="password" class="form-control"</pre>
name="password" id="inputPassword4" placeholder="Password">
                   </div>
                </div>
                <div class="form-group">
                <button type="submit" class="btn btn-primary"</pre>
style="margin-top:20px;">Log in</button>
              </form>
            </div>
         </div>
       </div>
    </div>
  </section><!-- End About Section -->
@endsection
```

Register.blade.php

```
@extends('layouts.layout')
@section('content')
  <section id="about" class="about" style="padding:67px 0px">
    <div class="container" data-aos="fade-up">
       <div class="align-content-center" style="text-align: center;">
         <h4>Register now and book table online!</h4>
       <div class="row gy-4" style="flex-direction:column; flex-wrap:</pre>
wrap; align-content: center;">
         <div class="col-lg-7 position-relative about-img" data-</pre>
aos="fade-up" data-aos-delay="150">
           <div class="call-us position-absolute" style="bottom:1%;">
              <form action="{{route('registerUser')}}" method="post">
                @csrf
                <div class="form-row">
                   <div class="form-group col-md-6"</pre>
style="width:100%;">
```

```
<label for="fullName">Full Name</label>
                      <input type="text" class="form-control"</pre>
name="fullName" value="{{old('fullName')}}" id="fullName"
placeholder="Full-name">
                 </div>
                 <div class="form-row">
                    <div class="form-group col-md-6"</pre>
style="width:100%;">
                      <label for="inputEmail4">Email</label>
                      <input type="email" class="form-control"</pre>
name="email" value="{{old('email')}}" id="inputEmail4"
placeholder="Email">
                    </div>
                    <div class="form-group col-md-6"</pre>
style="width:100%;">
                      <label for="inputPassword4">Password</label>
                      <input type="password" class="form-control"</pre>
name="password" value="{{old('password')}}" id="inputPassword4"
placeholder="Password">
                    </div>
                    <div class="form-group col-md-6"</pre>
style="width:100%;">
                      <label for="inputPassword4">Confirm
Password</label>
                      <input type="password" class="form-control"</pre>
name="password confirmation"
value="{{old('password confirmation')}}" id="inputPassword5"
placeholder="Confirm password">
                    </div>
                 </div>
                 <div class="form-group">
                    <label for="inputAddress">Address</label>
                    <input type="text" class="form-control"</pre>
name="address" id="inputAddress" value="{{old('address')}}"
placeholder="1234 Main St">
                 </div>
                 <div class="form-row">
                    <a href="div class="form-group col-md-6""><div class="form-group col-md-6"</a>
style="width:100%;">
                      <label for="inputCity">City</label>
                      <input type="text" class="form-control"</pre>
name="city" value="{{old('city')}}" id="inputCity">
```

```
</div>
                </div>
                <div class="form-group">
                <button type="submit" class="btn btn-primary"</pre>
style="margin-top:20px;">Register</button>
              </form>
              (@if (\$errors-\rightarrors)
                <div class="alert alert-danger">
                     @foreach ($errors->all() as $error)
                        {| $error } }
                     @endforeach
                   </div>
              @endif
           </div>
         </div>
       </div>
    </div>
  </section><!-- End About Section -->
@endsection
```

adminLogout.blade.php

```
<a href="dialog" div class="modal fade" id="logoutModal" tabindex="-1" role="dialog"</a>
aria-labelledby="exampleModalLabel"
   aria-hidden="true">
  <div class="modal-dialog" role="document">
    <div class="modal-content">
       <div class="modal-header">
         <h5 class="modal-title" id="exampleModalLabel">Ready to
Leave?</h5>
         <button class="close" type="button" data-dismiss="modal"</pre>
aria-label="Close">
            <span aria-hidden="true">x</span>
         </button>
       </div>
       <div class="modal-body">Select "Go back to Website" below if
you are ready to end your current session.</div>
       <div class="modal-footer">
         <button class="btn btn-secondary" type="button" data-</pre>
dismiss="modal">Cancel</button>
```

```
<a class="btn btn-primary" href="{{route('home')}}}">Go back to Website</a>
</div>
</div>
</div>
</div>
</div>
```

allUsers.blade.php

```
@extends('admin.layouts.adminLayout')
<!-- Page Wrapper -->
@section('content')
  <div id="wrapper">
    <!-- Sidebar -->
    @include('admin.fixed.adminSideBar')
    <div id="content-wrapper" class="d-flex flex-column">
       <div id="content">
         @include('admin.fixed.adminTopBar')
         <div class="container-fluid">
            <div class="d-sm-flex align-items-center justify-content-</pre>
between mb-4">
              <h1 class="h3 mb-0 text-gray-800">Users</h1>
           @include('admin.allUsersIncludes.head')
           <div class="container-lg">
              <div class="table-responsive">
                <div class="table-wrapper">
                   <div class="table-title">
                     <div class="row">
                        <div class="col-sm-8"><h2>Users
b>Details</b></h2></div>
                        <div class="col-sm-4">
                          <button type="button" class="btn btn-info</pre>
add-new"><i class="fa fa-plus"></i> Add New</button>
                        </div>
                     </div>
                     <!-- Modal -->
                     <a href="div class="modal fade" id="addUserModal"</a>
tabindex="-1" aria-labelledby="addUserModalLabel" aria-
hidden="true">
                        <div class="modal-dialog">
                          <a href="modal-content">
                            <div class="modal-header">
```

```
<h5 class="modal-title"
id="addUserModalLabel">Add New User</h5>
                               <button type="button" class="close"</pre>
data-dismiss="modal" aria-label="Close">
                                 <span aria-
hidden="true">×</span>
                               </button>
                            </div>
                            <div class="modal-body">
                               <form id="addUserForm"</pre>
action="{{route('storeUsers')}}" method="post">
                                 @csrf
                                 <div class="form-row">
                                    <div class="form-group col-md-6"</pre>
style="width:100%;">
                                      <a href="fullName">Full</a>
Name</label>
                                      <input type="text" class="form-</pre>
control" name="fullName" value="{{old('fullName')}}" id="fullName"
placeholder="Full-name">
                                    </div>
                                 </div>
                                 <div class="form-row">
                                   <div class="form-group col-md-6"</pre>
style="width:100%;">
                                      <label
for="inputEmail4">Email</label>
                                      <input type="email" class="form-</pre>
control" name="email" value="{{old('email')}}" id="inputEmail4"
placeholder="Email">
                                    </div>
                                   <div class="form-group col-md-6"
style="width:100%;">
                                      <label
for="inputPassword4">Password</label>
                                      <input type="password"</pre>
class="form-control" name="password" value="{{old('password')}}}"
id="inputPassword4" placeholder="Password">
                                   </div>
                                 </div>
                                 <div class="form-group">
                                    <label
for="inputAddress">Address</label>
```

```
VISOKA SKOLA STRUKOVNIH STUDIJA ZA INFORMACIONE I KOMUNIKACIONE TEHNOLOGIJE
                                     <input type="text" class="form-</pre>
control" name="address" id="inputAddress" value="{{old('address')}}"
placeholder="1234 Main St">
                                   </div>
                                   <div class="form-row">
                                     <div class="form-group col-md-6"</pre>
style="width:100%;">
                                       <label
for="inputCity">City</label>
                                        <input type="text" class="form-</pre>
control" name="city" value="{{old('city')}}" id="inputCity">
                                     </div>
                                   </div>
                                   <div class="form-group">
                                   </div>
                                </form>
                                <div class="alert alert-success"</pre>
style="display: none;" id="successMessage">
                                   User added successfully!
                                </div>
                                <div class="alert alert-danger"</pre>
style="display: none;" id="errorMessage">
                                   Error: Please check your inputs and try
again.
                                </div>
                              </div>
                              <div class="modal-footer">
                                <button type="button" class="btn btn-</pre>
secondary" data-dismiss="modal">Close</button>
                                <button type="button" class="btn btn-</pre>
primary" id="addUserButton">Add User</button>
                              </div>
                           </div>
                         </div>
                      </div>
                   </div>
                    <div class="table-responsive">
                      <table id="usersTable" class="table table-
bordered">
                        <thead>
                           <th>Id
```

Full Name

```
Email
                      Address
                      City
                      Actions
                    </thead>
                    @foreach($allUsers as $a)
                        {{$a->id}}
                        {{$a->fullName}}
                        {{$a->email}}
                        {{$a->address}}
                        {{$a->city}}
                        <a class="add" title="Add" data-
toggle="tooltip"><i class="material-icons">&#xE03B;</i>
                          <a class="edit" title="Edit" data-
toggle="tooltip" href="{{route('editUser', ['id'=>$a->id])}}"><i
class="material-icons"></i></a>
                          <a class="delete" title="Delete" data-
toggle="tooltip" href="{{route('deleteUser', ['id' => $a->id])}}"
onclick="return confirm('Do you want to delete user?')"><i
class="material-icons">&#xE872:</i>
                        @endforeach
                    </div>
              </div>
            </div>
          </div>
       </div>
      </div>
      <!-- Footer -->
      @include('admin.fixed.adminFooter')
   </div>
 </div>
 @include('admin.adminLogout')
@endsection
<div class="alert alert-success" id="successMessage" style="display:</pre>
none: position: fixed: bottom: 20px: right: 20px:">
```

```
User added successfully!
</div>
<script
src="https://ajax.googleapis.com/ajax/libs/jquery/3.6.0/jquery.min.js"></
script>
<script>
  $(document).ready(function() {
    $('.add-new').click(function() {
       $('#addUserModal').modal('show');
     });
    $('#addUserButton').click(function(event) {
       event.preventDefault();
       $.ajax({
          url: '{{ route("storeUsers") }}',
         type: 'POST',
          data: $('#addUserForm').serialize(),
         dataType: 'json',
          success: function(response){
            $('#addUserModal').modal('hide');
            $('#addUserForm')[0].reset();
            $('#addUserModal .modal-body').html('<div class="alert
alert-success">' + response.message + '</div>');
            $('#addUserModal').modal('show');
            $('#successMessage').show();
            setTimeout(function() {
               $('#successMessage').hide();
            }, 3000);
            $('#usersTable').load(location.href + ' #usersTable');
          error: function(xhr, status, error){
            console.error(xhr.responseText);
            var errors = xhr.responseJSON.errors;
            var errorString = '<div class="alert alert-danger">';
            $.each(errors, function (key, value) {
               errorString += value + '<br';
            });
            errorString += '</div>':
            $('#errorMessage').html(errorString);
            $('#errorMessage').show();
            $('#successMessage').hide();
```

```
});
});
</script>
```

Dashboard.blade.php

```
@extends('admin.layouts.adminLayout')
<!-- Page Wrapper -->
@section('content')
<div id="wrapper">
  <!-- Sidebar -->
  (@include('admin.fixed.adminSideBar')
  <div id="content-wrapper" class="d-flex flex-column">
    <div id="content">
       (a)include('admin.fixed.adminTopBar')
       <!-- End of Topbar -->
       <div class="container-fluid">
         <div class="d-sm-flex align-items-center justify-content-</pre>
between mb-4">
           <h1 class="h3 mb-0 text-gray-800">Dashboard</h1>
         </div>
         <div class="row">
           (a)include('components.admin-blocks')
         </div>
         <!-- Content Row -->
         @include('admin.progressBar')
       </div>
    </div>
    <!-- Footer -->
    (a)include('admin.fixed.adminFooter')
  </div>
</div>
@include('admin.adminLogout')
@endsection
```

editFoodForm.blade.php

```
<div id="content-wrapper" class="d-flex flex-column">
       <div id="content">
          (a)include('admin.fixed.adminTopBar')
          <!-- End of Topbar -->
          <div class="container-fluid">
            <div class="d-sm-flex align-items-center justify-content-</pre>
between mb-4">
               <h1 class="h3 mb-0 text-gray-800">Edit Product</h1>
            </div>
            <!-- Blade template -->
            <div id="errorMessages" class="alert alert-danger"</pre>
style="display: none;"></div>
            <div id="successMessage" class="alert alert-success"</pre>
style="display: none;"></div>
            @if(session('success'))
              <div class="alert alert-success">
                 {{ session('success') }}
              </div>
            @endif
            @if(session('error'))
              <div class="alert alert-danger">
                 {{ session('error') }}
              </div>
            @endif
            <form action="{{route('updateProduct', ['id' => $product-
>id])}}" method="post" enctype="multipart/form-data">
              @csrf
              @method('PUT')
              <div class="form-group" style="width:50%;">
                 <label for="title">Title</label>
                 <input type="text" class="form-control" name="title"</pre>
value="{{$product->title}}" id="title" placeholder="Title">
              </div>
              <div class="form-group" style="width:50%;">
                 <label for="ingredients">Ingredients</label>
                 <input type="text" class="form-control"</pre>
name="ingredients" value="{{$product->ingredients}}"
id="ingredients" placeholder="Lettuce, Tomato...">
              </div>
              <input type="file" class="form-control" name="img"</pre>
id="img" style="width: 50%;">
              @if ($product->src)
```

```
Trenutna slika: <img src="{{ $product->src }}"
alt="{{$product->src}}" width="50">
             @else
                Trenutno nema izabrane slike.
             <div class="form-group" style="width:50%;">
               <label for="price">Price</label>
               $:<input type="text" class="form-control"
name="price" value="{{$product->price}}" id="price">
             </div>
             <div class="form-group" style="width: 50%">
                <label for="ddl">Block</label>
               <select id="ddl" name="ddl1" class="form-control">
                  <option value="0">Choose Block to show</option>
                  <option value="menu-starters" {{ $product->blockId}
 = 'menu-starters' ? 'selected' : " }}>Menu-Starters</option>
                  <option value="menu-breakfast" {{ $product-</pre>
blockId == 'menu-breakfast' ? 'selected' : " }}>Menu-
Breakfast</option>
                  <option value="menu-lunch" {{ $product->blockId
== 'menu-lunch' ? 'selected' : " }}>Menu-Lunch</option>
                  = 'menu-dinner' ? 'selected' : " }}>Menu-Dinner</option>
                </select>
             </div>
             <div class="form-group" style="width: 50%">
                <label for="ddl2">Category</label>
               <select id="ddl2" name="ddl2" class="form-control">
                  <option value="0">Choose Category for
Product</option>
                  @foreach($categories as $c)
                    <option value="{{ $c->id }}" {{ $product-
category id == $c->id ? 'selected' : " }}>{{ $c->name }}</option>
                  @endforeach
               </select>
             <button type="submit" class="btn btn-</pre>
primary">Edit</button>
           </form>
         </div>
      </div>
      <!-- Footer -->
      @include('admin.fixed.adminFooter')
```

```
</div>
</div>
@include('admin.adminLogout')
@endsection
```

editUserForm.blade.php

```
@extends('admin.layouts.adminLayout')
<!-- Page Wrapper -->
@section('content')
  <div id="wrapper">
    <!-- Sidebar -->
    (a)include('admin.fixed.adminSideBar')
    <div id="content-wrapper" class="d-flex flex-column">
       <div id="content">
         @include('admin.fixed.adminTopBar')
         <div class="container-fluid">
            <div class="d-sm-flex align-items-center justify-content-</pre>
between mb-4">
              <h1 class="h3 mb-0 text-gray-800">Edit User</h1>
            </div>
            <div class="container-lg">
              <div class="table-responsive">
                <div class="table-wrapper">
                   <div class="table-title">
                     <div class="row">
                        <div class="col-sm-8"><h2>Users
 b>Details</b></h2></div>
                     <form action="{{route('updateUser', ['id'=> $user-
>id])}}" method="post">
                        @csrf
                        @method('PUT')
                        <div class="form-row">
                          <div class="form-group col-md-6"</pre>
style="width:100%;">
                            <label for="fullName">Full Name</label>
                            <input type="text" class="form-control"</pre>
name="fullName" value="{{$user->fullName}}" id="fullName"
placeholder="Full-name">
                          </div>
                        </div>
                        <div class="form-row">
```

```
<div class="form-group col-md-6"</pre>
style="width:100%;">
                             <label for="inputEmail4">Email</label>
                             <input type="email" class="form-control"</pre>
name="email" value="{{$user->email}}" id="inputEmail4"
placeholder="Email">
                           </div>
                        </div>
                        <div class="form-group">
                           <label for="inputAddress">Address</label>
                          <input type="text" class="form-control"</pre>
name="address" id="inputAddress" value="{{$user->address}}"
placeholder="1234 Main St">
                        </div>
                        <div class="form-row">
                           <div class="form-group col-md-6"</pre>
style="width:100%;">
                             <label for="inputCity">City</label>
                             <input type="text" class="form-control"</pre>
name="city" value="{{$user->city}}" id="inputCity">
                           </div>
                        </div>
                        <div class="form-group">
                           <button type="submit" class="btn btn-</pre>
primary">Edit</button>
                        </div>
                        @if(session('success'))
                           <div class="alert alert-success">
                             {{ session('success') }}
                           </div>
                        @endif
                        @if(session('error'))
                           <div class="alert alert-danger">
                              {{ session('error') }}
                           </div>
                        @endif
                      </form>
                   </div>
                 </div>
              </div>
            </div>
         </div>
```

```
</div>
<!-- Footer -->
@include('admin.fixed.adminFooter')
</div>
</div>
@include('admin.adminLogout')
@endsection
```

```
progressBar.blade.php
<a href="class="row">
  <div class="col-lg-6 mb-4">
    <div class="card shadow mb-4">
       <div class="card-header py-3">
         <h6 class="m-0 font-weight-bold text-primary">Stats</h6>
       </div>
       <div class="card-body">
         <h4 class="small font-weight-bold">Total Users Registered
<span class="float-right"</pre>
id="registeredUsersValue">{{$registeredUsers}}</span></h4>
         <div class="progress mb-4">
           <div id="registeredUsersProgressBar" class="progress-bar</pre>
bg-danger" role="progressbar" aria-valuemin="0" aria-
valuemax="100"></div>
         </div>
         <h4 class="small font-weight-bold">Total menu price <span
class="float-right"
id="totalPriceOfFoodValue">{{$totalPriceOfFood}}</span></h4>
         <div class="progress mb-4">
            <div id="totalPriceOfFoodProgressBar" class="progress-bar</pre>
bg-warning" role="progressbar" aria-valuemin="0" aria-
valuemax="100"></div>
         </div>
         <h4 class="small font-weight-bold">Total Booked tables <span
class="float-right"
id="bookedTablesValue">{{$bookedTables}}</span></h4>
         <div class="progress mb-4">
            <div id="bookedTablesProgressBar" class="progress-bar bg-</pre>
info" role="progressbar" aria-valuemin="0" aria-valuemax="100"></div>
         </div>
         <h4 class="small font-weight-bold">Messages <span
class="float-right" id="messagesValue">{{$messages}}</span></h4>
         <div class="progress">
```

```
<div id="messagesProgressBar" class="progress-bar bg-</pre>
success" role="progressbar" aria-valuemin="0" aria-
valuemax="100"></div>
         </div>
       </div>
    </div>
  </div>
</div>
 script>
  function updateProgressBar(progressBarId, value, maxValue) {
    var progressBar = document.getElementById(progressBarId);
    var percentage = (value / maxValue) * 100;
    progressBar.style.width = percentage + '%';
    progressBar.setAttribute('aria-valuenow', percentage);
  updateProgressBar('registeredUsersProgressBar', {{$registeredUsers}}
100);
  updateProgressBar('totalPriceOfFoodProgressBar',
{{$totalPriceOfFood}}, 1000);
  updateProgressBar('bookedTablesProgressBar', {{$bookedTables}},
50);
  updateProgressBar('messagesProgressBar', 10, 100);
</script>
```

resetPassword.blade.php

```
<!DOCTYPE html>
<a href="html">html lang="en">
  @include('admin.fixed.adminHead')
body class="bg-gradient-primary">
<div class="container">
  <div id="successMessage" class="alert alert-success" style="display:</pre>
none;"></div>
  <div id="errorMessage" class="alert alert-danger" style="display:</pre>
none:"></div>
  <!-- Outer Row -->
  <div class="row justify-content-center">
    <div class="col-xl-10 col-lg-12 col-md-9">
       <div class="card o-hidden border-0 shadow-lg my-5">
         <div class="card-body p-0">
            <!-- Nested Row within Card Body -->
            <div class="row">
```

```
<div class="col-lg-6 d-none d-lg-block bg-password-</pre>
image"></div>
              <div class="col-lg-6">
                <div class="p-5">
                   <div class="text-center">
                     <h1 class="h4 text-gray-900 mb-2">Change your
password</h1>
                     Enter your current password then
enter new one!
                   </div>
                   <form id="changePasswordForm" class="user"</pre>
method="POST">
                     @csrf
                     <div class="form-group">
                       <input type="password" class="form-control</pre>
form-control-user" id="currPass" name="currPass" placeholder="Enter
current password...">
                     </div>
                     <div class="form-group">
                       <input type="password" class="form-control</pre>
form-control-user" id="newPass" name="newPass" placeholder="Enter
new password...">
                     </div>
                     <button type="button" id="changePasswordBtn"</pre>
class="btn btn-primary btn-user btn-block">Change Password</button>
                   </form>
                   <hr>>
                </div>
              </div>
            </div>
         </div>
       </div>
    </div>
  </div>
@include('admin.fixed.adminScripts')
</body>
</html>
 <script>
  $(document).ready(function() {
    $('#changePasswordBtn').click(function() {
       var formData = $('#changePasswordForm').serialize();
       $.ajax({
```

```
type: 'POST',
        url: '/newPassword',
        data: formData,
        success: function(response) {
           if (response.success) {
             $('#successMessage').text(response.success);
             $('#errorMessage').hide();
             $('#successMessage').show();
             window.location.href = '/dashboard';
           } else {
             var errorsHtml = '';
             $.each(response.errors, function(index, error) {
                errorsHtml += '' + error + '';
             });
             errorsHtml += '';
             $('#errorMessage').html(errorsHtml).show();
             $('#successMessage').hide();
        error: function(xhr, status, error) {
           console.error('Error changing password:', error);
      });
    });
 });
</script>
```

showBookedTables.blade.php

```
@extends('admin.layouts.adminLayout')

<!-- Page Wrapper -->
@section('content')

<div id="wrapper">

<!-- Sidebar -->
@include('admin.fixed.adminSideBar')

<div id="content-wrapper" class="d-flex flex-column">

<div id="content">

@include('admin.fixed.adminTopBar')

<div id="content">

@include('admin.fixed.adminTopBar')

<!-- End of Topbar -->

<div class="container-fluid">

<div class="d-sm-flex align-items-center justify-content-between mb-4">
```

```
<h1 class="h3 mb-0 text-gray-800">Booked Tables</h1>
        </div>
       </div>
       <form action="{{ route('filteredTable') }}" method="GET"</pre>
class="form-inline">
        <div class="form-group mr-2">
          <label for="filter" class="mr-2">Sortiraj po:</label>
          <select name="filter" id="filter" class="form-control">
            <option value="oldest date">Najstariji datum</option>
            <option value="newest date">Najnoviji
datum</option>
            <option value="earliest time">Najranije
vreme</option>
            <option value="latest time">Najkasnije
vreme</option>
          </select>
        </div>
        <button type="submit" class="btn btn-</pre>
primary">Filtriraj</button>
       </form>
       <thead>
          #
          Name
          Phone
          Date
          Time
          No. of People
          Additional Message
        </thead>
        @foreach($reservations as $r)
            {{$r->id}}
            {{$r->name}}
            {{$r->phone}}
            {{$r->date}}
            {{$r->time}}
            {{$r->peopleNumber}}
            @if(r->message === null)
```

```
No additional notes 

@else

{td>{{$r->message}}

@endif

@endforeach

</div>

<!-- Footer -->

@include('admin.fixed.adminFooter')

</div>

</div>

@include('admin.adminLogout')

@endsection
```

showMenu.blade.php

```
@extends('admin.layouts.adminLayout')
<!-- Page Wrapper -->
@section('content')
 <div id="wrapper">
   <!-- Sidebar -->
   @include('admin.fixed.adminSideBar')
   <div id="content-wrapper" class="d-flex flex-column">
     <div id="content">
       (@include('admin.fixed.adminTopBar')
       <!-- End of Topbar -->
       <div class="container-fluid">
         <div class="d-sm-flex align-items-center justify-content-</pre>
between mb-4">
           <h1 class="h3 mb-0 text-gray-800">Menu</h1>
           <a href="{{route('addNewProduct')}}" class="btn btn-
primary">Add New</a>
         </div>
       </div>
       <thead>
           #
           Recipe name
           Image
           Ingredients
```

```
Price
          blockId
          Category
          Actions
        </thead>
        @foreach(\$food as \$f)
            {{$f->id}}
            {{$f->title}}
            <img src="{{$f->src}}" alt="{{$f->src}}"
width = "50" height = "50" > 
            {{$f->ingredients}}
            {{$f->price}}
            {{$f->blockId}}
            {{$f->categories->name}}
            <a class="edit btn btn-warning" title="Edit" data-
toggle="tooltip" href="{{ route('editProduct', ['id' => $f-
<a href="\{\} route('deleteProduct', \$f->id) \}\"
class="btn btn-danger" onclick="return confirm('Are you sure you want
to delete this product?')">Delete</a>
            @endforeach
        </div>
     <!-- Footer -->
     (a)include('admin.fixed.adminFooter')
   </div>
 </div>
 @include('admin.adminLogout')
@endsection
```

showMessages.blade.php

```
<!-- Sidebar -->
   @include('admin.fixed.adminSideBar')
   <div id="content-wrapper" class="d-flex flex-column">
     <div id="content">
       @include('admin.fixed.adminTopBar')
       <!-- End of Topbar -->
       <div class="container-fluid">
         <div class="d-sm-flex align-items-center justify-content-</pre>
between mb-4">
           <h1 class="h3 mb-0 text-gray-800">Messages from Users
<span id="unreadMessagesCounter" class="badge badge-</pre>
danger"></span></h1>
         </div>
       </div>
       <thead>
          #
          Name
          Email
          Subject
          Message
          Actions
         </thead>
         @foreach($messages as $m)
           id}}"
@if(isset($ COOKIE['readMessage '. $m->id])) style="background-
color: lightgreen;" @endif>
            {{$m->id}}
            {{$m->name}}
            {{$m->email}}
            {{$m->subject}}
            {{$m->message}}
            <button class="btn btn-success mark-as-read" data-</pre>
message-id="{{$m->id}}">Mark as Read</button>
              <button class="btn btn-danger delete-message" data-</pre>
message-id="{{$m->id}}">Delete</button>
            @endforeach
```

```
<script>
           document.querySelectorAll('.mark-as-
read').forEach(function(button) {
              button.addEventListener('click', function() {
                var messageId = button.getAttribute('data-message-id');
                var messageRow =
document.getElementById('message ' + messageId);
                messageRow.style.backgroundColor = 'lightgreen';
                document.cookie = 'readMessage ' + messageId + '=true;
expires=Fri, 31 Dec 9999 23:59:59 GMT';
                updateUnreadMessagesCounter();
              });
           });
           document.querySelectorAll('.delete-
message').forEach(function(button) {
              button.addEventListener('click', function() {
                var messageId = button.getAttribute('data-message-id');
                var messageRow =
document.getElementById('message ' + messageId);
                messageRow.remove();
                document.cookie = 'readMessage ' + messageId + '=;
expires=Thu, 01 Jan 1970 00:00:00 GMT';
                updateUnreadMessagesCounter();
              });
           });
           function updateUnreadMessagesCounter() {
              var unreadMessagesCount =
document.querySelectorAll('tr[id^="message "]:not([style*="lightgreen"]
)').length;
              document.getElementById('unreadMessagesCounter').inne
rText = unreadMessagesCount > 0 ? unreadMessagesCount : ";
             if (unreadMessagesCount > 0) {
                document.getElementById('unreadMessagesCounter').cl
assList.add('text-white');
              } else {
                document.getElementById('unreadMessagesCounter').cl
assList.remove('text-white');
           updateUnreadMessagesCounter();
```

```
</script>
    </div>
    <!-- Footer -->
        @include('admin.fixed.adminFooter')
        </div>
    </div>
    @include('admin.adminLogout')

@endsection
```

showNewProduct.blade.php

```
@extends('admin.layouts.adminLayout')
<!-- Page Wrapper -->
@section('content')
  <div id="wrapper">
    <!-- Sidebar -->
    @include('admin.fixed.adminSideBar')
    <div id="content-wrapper" class="d-flex flex-column">
       <div id="content">
         @include('admin.fixed.adminTopBar')
         <!-- End of Topbar -->
         <div class="container-fluid">
            <div class="d-sm-flex align-items-center justify-content-</pre>
between mb-4">
              <h1 class="h3 mb-0 text-gray-800">Add new
product</h1>
            </div>
            <!-- Blade template -->
            <div id="errorMessages" class="alert alert-danger"</pre>
style="display: none;"></div>
            <div id="successMessage" class="alert alert-success"</pre>
style="display: none;"></div>
            <form id="addProductForm"</pre>
action="{{route('storeProduct')}}" method="post"
enctype="multipart/form-data">
              @csrf
              <div class="form-group" style="width:50%;">
                 <label for="title">Title</label>
                 <input type="text" class="form-control" name="title"</pre>
value="{{ old('title') }}" id="title" placeholder="Title">
              </div>
              <div class="form-group" style="width:50%;">
                 <label for="ingredients">Ingredients</label>
```

```
<input type="text" class="form-control"</pre>
name="ingredients" value="{{ old('ingredients') }}" id="ingredients"
placeholder="Lettuce, Tomato...">
             </div>
             <div class="form-group" style="width:50%;">
                <label for="img">Image</label>
                <input type="file" class="form-control" name="img"</pre>
id="img">
             </div>
             <div class="form-group" style="width:50%;">
                <label for="price">Price</label>
                $:<input type="text" class="form-control"
</div>
             <div class="form-group" style="width: 50%">
                <label for="ddl">Block</label>
                <select id="ddl" name="blokDodavanja" class="form-</pre>
control">
                  <option value="0">Choose Block to show</option>
                  <option value="menu-starters">Menu-
Starters</option>
                  <option value="menu-breakfast">Menu-
Breakfast</option>
                  <option value="menu-lunch">Menu-Lunch</option>
                  <option value="menu-dinner">Menu-
Dinner</option>
                </select>
             </div>
             <div class="form-group" style="width: 50%">
                <select id="ddl2" name="Kategorija" class="form-</pre>
control">
                  <option value="0">Choose Category for
Product</option>
                  @foreach($categories as $c)
                    <option value="{{ $c->id }}">{{ $c-
>name }}</option>
                  @endforeach
                </select>
             </div>
             <button type="submit" class="btn btn-</pre>
primary">Add</button>
           </form>
         </div>
```

```
</div>
       <!-- Footer -->
       @include('admin.fixed.adminFooter')
  </div>
  @include('admin.adminLogout')
@endsection
 script
src="https://ajax.googleapis.com/ajax/libs/jquery/3.5.1/jquery.min.js"></
script>
<script>
  $(document).ready(function(){
    $('#addProductForm').submit(function(e){
       e.preventDefault();
       var formData = new FormData(this);
       $.ajax({
         url: "{{ route('storeProduct') }}",
         method: "POST",
         data: formData.
         processData: false,
         contentType: false,
         success: function(response){
            console.log(response);
            $('#successMessage').html('<div class="alert alert-
success">Product added successfully!</div>').show();
            $('#errorMessages').hide();
            window.location.href = "{{ route('showMenu') }}";
          \},
         error: function(xhr, status, error){
            console.error(xhr.responseText);
            var errors = xhr.responseJSON.errors;
            var errorMessage = '';
            $.each(errors, function(key, value){
              errorMessage += '' + value + '';
            });
            errorMessage += '':
            $('#errorMessages').html('<div class="alert alert-danger">' +
errorMessage + '</div>').show();
            $('#successMessage').hide();
```

```
});
</script>
```

Admin/layouts/adminLayout.blade.php

```
<!DOCTYPE html>
<html lang="en">
@include('admin.fixed.adminHead')
<body id="page-top">
@yield('content')
@include('admin.fixed.adminScripts')
</body>
</html>
```

adminFooter.blade.php

adminHead.blade.php

```
href="https://fonts.googleapis.com/css?family=Nunito:200,200i,300, 300i,400,400i,600,600i,700,700i,800,800i,900,900i"
rel="stylesheet">
<!-- Custom styles for this template-->
href="{{asset('assets/admin/css/sb-admin-2.min.css')}}"
rel="stylesheet">
</head>
```

adminScripts.blade.php

```
<script
src="{{asset('assets/admin/vendor/jquery/jquery.min.js')}}"></script>
<script
src="{{asset('assets/admin/vendor/bootstrap/js/bootstrap.bundle.min.js')}}
"></script>
<!-- Core plugin JavaScript-->
<script src="{{asset('assets/admin/vendor/jquery-
easing/jquery.easing.min.js')}}"></script></script>
```

```
<!-- Custom scripts for all pages-->
<script src="{{asset('assets/admin/js/sb-admin-2.min.js')}}"></script>
<!-- Page level plugins -->
<script
src="{{asset('assets/admin/vendor/chart.js/Chart.min.js')}}"></script>
<!-- Page level custom scripts -->
<script src="{{asset('assets/admin/js/demo/chart-area-demo.js')}}"></script>
<script src="{{asset('assets/admin/js/demo/chart-pie-demo.js')}}"></script>
<script src="{{asset('assets/admin/js/demo/chart-pie-demo.js')}}"></script>
```

adminSideBar.blade.php

```
<hr class="sidebar-divider my-0">
  <!-- Nav Item - Dashboard -->
  <a class="nav-link" href="{{route('dashboard')}}}">
      <i class="fas fa-fw fa-tachometer-alt"></i>
      <span>Dashboard/a>
  <hr class="sidebar-divider">
  <div class="sidebar-heading">
    Interface
  </div>
  <!-- Nav Item - Pages Collapse Menu -->
  <a class="nav-link collapsed" href="#" data-toggle="collapse" data-
target="#collapseTwo"
      aria-expanded="true" aria-controls="collapseTwo">
      <i class="fas fa-fw fa-cog"></i>
      <span>Components
    <div id="collapseTwo" class="collapse" aria-</pre>
labelledby="headingTwo" data-parent="#accordionSidebar">
      <div class="bg-white py-2 collapse-inner rounded">
        <h6 class="collapse-header">Custom Components:</h6>
        <a class="collapse-item"
href="{{route('showUsers')}}">Users</a>
         <a class="collapse-item"
href="{{route('showMenu')}}">Food</a>
         <a class="collapse-item" href="#">Messages</a>
      </div>
    </div>
  <!-- Nav Item - Utilities Collapse Menu -->
  <a class="nav-link collapsed" href="#" data-toggle="collapse" data-
target="#collapseUtilities"
      aria-expanded="true" aria-controls="collapseUtilities">
      <i class="fas fa-fw fa-wrench"></i>
      <span>Pages</span>
    <div id="collapseUtilities" class="collapse" aria-</pre>
labelledby="headingUtilities"
       data-parent="#accordionSidebar">
      <div class="bg-white py-2 collapse-inner rounded">
```

adminTopBar.blade.php

```
<a href="navbar"><nav class="navbar navbar-expand navbar-light bg-white topbar mb-4">mb-4</a>
static-top shadow">
  <!-- Sidebar Toggle (Topbar) -->
  <button id="sidebarToggleTop" class="btn btn-link d-md-none</pre>
rounded-circle mr-3">
    <i class="fa fa-bars"></i>
  </button>
  ul class="navbar-nav ml-auto">
    <!-- Nav Item - Alerts -->
    <a class="nav-link dropdown-toggle" href="#"
id="alertsDropdown" role="button"
        data-toggle="dropdown" aria-haspopup="true" aria-
expanded="false">
         <i class="fas fa-sign-out-alt fa-fw"></i>
      <!-- Dropdown - Alerts -->
      <div class="dropdown-list dropdown-menu dropdown-menu-right</pre>
shadow animated--grow-in"
         aria-labelledby="alertsDropdown">
         <a class="dropdown-header" href="{{route('home')}}}">Back
to website </a>
      </div>
    </1i>
    <!-- Nav Item - Messages -->
```

```
<div class="topbar-divider d-none d-sm-block"></div>
    <!-- Nav Item - User Information -->
    <a class="nav-link dropdown-toggle" href="#"
id="userDropdown" role="button"
        data-toggle="dropdown" aria-haspopup="true" aria-
expanded="false">
         <span class="mr-2 d-none d-lg-inline text-gray-600"</pre>
small">{{$adminUsername}}</span>
         <img class="img-profile rounded-circle"</pre>
            src="{{asset('assets/admin/img/undraw profile.svg')}}}">
      <!-- Dropdown - User Information -->
      <div class="dropdown-menu dropdown-menu-right shadow</pre>
animated--grow-in"
         aria-labelledby="userDropdown">
         <a class="dropdown-item" href="{{route('resetPassword')}}}">
           <i class="fas fa-user fa-sm fa-fw mr-2 text-gray-400"></i>
           Reset password
         <div class="dropdown-divider"></div>
         <a class="dropdown-item" href="#" data-toggle="modal" data-
target="#logoutModal">
           <i class="fas fa-sign-out-alt fa-sm fa-fw mr-2 text-gray-</pre>
400"></i>
           Go back to Website
      </div>
    </1i>
  /nav>
```

Admin/allUsersIncludes/head.blade.php

```
<link rel="stylesheet"</pre>
href="https://stackpath.bootstrapcdn.com/bootstrap/4.5.0/css/bootstrap.mi
n.css">
  link rel="stylesheet"
href="https://fonts.googleapis.com/icon?family=Material+Icons">
  <link rel="stylesheet" href="https://maxcdn.bootstrapcdn.com/font-</pre>
awesome/4.7.0/css/font-awesome.min.css">
  <script src="https://code.jquery.com/jquery-3.5.1.min.js"></script>
  <script
src="https://cdn.jsdelivr.net/npm/popper.js@1.16.0/dist/umd/popper.min.
js"></script>
  <script
src="https://stackpath.bootstrapcdn.com/bootstrap/4.5.0/js/bootstrap.min.j
s"></script>
  <style>
    body {
       color: #404E67;
       background: #F5F7FA;
       font-family: 'Open Sans', sans-serif;
     .table-wrapper {
       width: 700px;
       margin: 30px auto;
       background: #fff;
       padding: 20px;
       box-shadow: 0 1px 1px rgba(0,0,0,0.05);
     .table-title {
       padding-bottom: 10px;
       margin: 0 0 10px;
     .table-title h2 {
       margin: 6px 0 0;
       font-size: 22px;
     .table-title .add-new {
       float: right;
       height: 30px;
       font-weight: bold;
       font-size: 12px;
       text-shadow: none;
       min-width: 100px;
       border-radius: 50px;
```

```
line-height: 13px;
.table-title .add-new i {
  margin-right: 4px;
table.table {
  table-layout: fixed;
table.table tr th, table.table tr td {
  border-color: #e9e9e9;
table.table th i {
  font-size: 13px;
  margin: 0 5px;
  cursor: pointer;
table.table th:last-child {
  width: 100px;
table.table td a {
  cursor: pointer;
  display: inline-block;
  margin: 0 5px;
  min-width: 24px;
table.table td a.add {
  color: #27C46B;
table.table td a.edit {
  color: #FFC107;
table.table td a.delete {
  color: #E34724;
table.table td i {
  font-size: 19px;
table.table td a.add i {
  font-size: 24px;
  margin-right: -1px;
  position: relative;
  top: 3px;
```

```
table.table .form-control {
    height: 32px;
    line-height: 32px;
    box-shadow: none;
    border-radius: 2px;
}

table.table .form-control.error {
    border-color: #f50000;
}

table.table td .add {
    display: none;
}

.table td {
    word-wrap: break-word;
}

</style>
</head>
```

ROUTES

Web.php

```
Route::get('/showUsers',
[\App\Http\Controllers\AdminController::class, 'showUsers'])-
>name('showUsers');
  Route::post('/showUsers',
[\App\Http\Controllers\AdminController::class, 'storeUsers'])-
>name('storeUsers');
  Route::get('/deleteUser{id}',
[\App\Http\Controllers\AdminController::class, 'deleteUser'])-
>name('deleteUser');
  Route::get('/editUser/{id}',
[\App\Http\Controllers\AdminController::class, 'editUser'])-
>name('editUser');
  Route::put('/editUser/{id}',
[\App\Http\Controllers\AdminController::class, 'updateUser'])-
>name('updateUser');
  Route::get('/showMenu',
[\App\Http\Controllers\AdminController::class, 'showMenu'])-
>name('showMenu');
  Route::get('/addNewProduct',
[\App\Http\Controllers\AdminController::class, 'addNewProduct'])-
>name('addNewProduct');
  Route::post('/storeProduct',
[\App\Http\Controllers\AdminController::class, 'storeProduct'])-
>name('storeProduct');
  Route::get('/deleteProduct/{id}',
[\App\Http\Controllers\AdminController::class, 'deleteProduct'])-
>name('deleteProduct');
  Route::get('/editProduct{id}',
[\App\Http\Controllers\AdminController::class, 'showEditForm'])-
>name('editProduct');
  Route::put('/updateProduct/{id}',
[\App\Http\Controllers\AdminController::class, 'updateProduct'])-
>name('updateProduct');
  Route::get('/bookedTables',
[\App\Http\Controllers\AdminController::class, 'showBookedTables'])-
>name('bookedTables');
  Route::get('/bookedTables/filter',
[\App\Http\Controllers\AdminController::class, 'filterTable'])-
>name('filteredTable');
  Route::get('/showMessages',
[\App\Http\Controllers\AdminController::class, 'showMessages'])-
>name('showMessages');
}):
```

```
Route::get('/home', [\App\Http\Controllers\HomeController::class,
'index'])->name('home');
Route::get('/', [\App\Http\Controllers\HomeController::class, 'index'])-
>name('home');
Route::get('/menu', [\App\Http\Controllers\MenuController::class,
'index'])->name('menu');
Route::get('/gallery', [\App\Http\Controllers\GalleryController::class,
'index'])->name('gallery');
Route::get('/contact', [\App\Http\Controllers\ContactController::class,
'index'])->name('contact');
Route::get('/author', [\App\Http\Controllers\AuthorController::class,
'index'])->name('author');
Route::get('/bookTable', [\App\Http\Controllers\HomeController::class,
'showFormBookTable'])->name('bookTable');
Route::post('/bookTable', [\App\Http\Controllers\HomeController::class,
'bookTable'])->name('bookTable');
Route::get('/register', [\App\Http\Controllers\AuthController::class,
'showRegisterForm'])->name('register')->middleware('guest');
Route::get('/login', [\App\Http\Controllers\AuthController::class,
'showLoginForm'])->name('login')->middleware('guest');
Route::post('/login', [\App\Http\Controllers\AuthController::class,
'loginUser'])->name('loginUser');
Route::get('/logout', [\App\Http\Controllers\AuthController::class,
'logout'])->name('logout');
Route::post('/register', [\App\Http\Controllers\AuthController::class,
'registerUser'])->name('registerUser');
Route::post('/message', [\App\Http\Controllers\ContactController::class,
'message'])->name('message');
```

CONTROLLERS

AdminController.php

```
<?php

namespace App\Http\Controllers;
use App\Models\Category;
use App\Models\Message;
use App\Models\Product;
use App\Models\Reservations;
use App\Models\User;</pre>
```

```
use Illuminate\Http\Request;
use Illuminate\Support\Facades\Auth;
use Illuminate\Support\Facades\Hash;
use Illuminate\Support\Facades\Validator;
class AdminController extends BaseController
  public function index()
    $registeredUsers = User::count();
    $products = Product::all();
    $totalPriceOfFood = $products->sum('price');
    $bookedTables = Reservations::count();
    $admin = User::where('role id', '2')->first();
    $adminUsername = $admin->fullName;
    $messages = Message::count();
    return view('admin.dashboard', compact('registeredUsers', 'messages'
'totalPriceOfFood', 'bookedTables', 'adminUsername'));
  public function resetPassword()
    return view('admin.resetPassword');
  public function newPassword(Request $request)
    $validator = Validator::make($request->all(), [
       'currPass' => 'required',
       'newPass' => 'required|min:6',
    ], [
       'currPass.required' => 'Current password is required.',
       'newPass.required' => 'New password is required.',
       'newPass.min' => 'New password must be at least :min characters
long.',
    if ($validator->fails()) {
       return response()->json(['success' => false, 'errors' => $validator-
>errors()->all()]);
    if (!Hash::check($request->currPass, auth()->user()->password)) {
       return response()->json(['success' => false, 'errors' => ['Incorrect
current password.']]);
    auth()->user()->update([
       'password' => Hash::make($request->newPass),
```

```
return response()->json(['success' => 'Password successfully
changed.']);
  public function showUsers()
    $admin = User::where('role id', '2')->first();
    $adminUsername = $admin->fullName;
    $allUsers = User::all();
    return view('admin.allUsers', compact('adminUsername', 'allUsers'));
  public function storeUsers(Request $request)
    $validatedData = $request->validate([
       'fullName' => 'required|string|max:255',
       'email' => 'required|email|unique:users',
       'password' => 'required|string|min:8',
       'address' => 'required|string|max:255',
       'city' => 'required|string|max:255',
    ]);
    try {
       $user = User::create([
          'fullName' => $validatedData['fullName'],
         'email' => $validatedData['email'],
         'password' => Hash::make($validatedData['password']),
          'address' => $validatedData['address'],
         'city' => $validatedData['city'],
       ]);
       return response()->json(['success' => true, 'message' => 'User
added successfully'], 200);
     } catch (\Exception $e) {
       return response()->json(['success' => false, 'message' => 'Failed to
add user: '. $e->getMessage()], 500);
  public function deleteUser($id)
    suser = User::find(sid);
```

```
if ($user) {
    $user->delete();
    return redirect()->back()->with('success', 'User succefully
deleted!');
```

```
} else {
       return redirect()->back()->with('error', 'User not found.');
  public function editUser($id)
    $admin = User::where('role id', '2')->first();
    $adminUsername = $admin->fullName;
    \$userId = \$id:
    $user = User::findOrFail($id);
    return view('admin.editUserForm', compact('userId',
'adminUsername', 'user'));
  public function updateUser($id, Request $request)
    try {
       suser = User::find(sid);
       $validatedData = $request->validate([
         'fullName' => 'required|string|max:255',
         'email' => 'required|string|email|max:255|unique:users,email,'.
$id
       $user->fullName = $validatedData['fullName'];
       $user->email = $validatedData['email'];
       $user->save();
       return redirect()->back()->with('success', 'Succefully updated.');
     } catch (\Exception $e) {
       return redirect()->back()->with('error', 'Error while updating
user.');
  public function showMenu()
    $admin = User::where('role id', '2')->first();
    $adminUsername = $admin->fullName;
    $food = Product::has('categories')->get();
    $categories = Category::all();
    return view('admin.showMenu', compact('adminUsername', 'food',
categories'));
  public function addNewProduct()
    $admin = User::where('role id', '2')->first();
```

```
$adminUsername = $admin->fullName;
    $food = Product::has('categories')->get();
    $categories = Category::all();
    return view('admin.showNewProduct', compact('adminUsername',
'food', 'categories'));
  public function storeProduct(Request $request)
    $validator = Validator::make($request->all(), [
       'title' => 'required|string|min:3',
       'ingredients' => 'required|string',
       'img' => 'required|file|mimes:jpeg,png,jpg,gif|max:2048',
       'price' => 'required|string',
       'blokDodavanja' => ['required', 'in:menu-starters,menu-
breakfast,menu-lunch,menu-dinner'],
       'Kategorija' => ['required', 'integer', 'not in:0'],
    |);
    if ($validator->fails()) {
       $errors = $validator->errors()->all();
       return response()->json(['success' => false, 'errors' => $errors],
422);
    try {
       $imagePath = 'assets/img/menu/' . $request->file('img')-
>getClientOriginalName();
       Product::create([
          'title' => $request->title,
          'ingredients' => $request->ingredients,
         'src' => $imagePath,
          'price' => $request->price,
          'blockId' => $request->blokDodavanja,
         'category id' => $request->Kategorija,
       $request->file('img')->storeAs('public/assets/img/menu', $request-
>file('img')->getClientOriginalName());
       return response()->json(['success' => true, 'message' => 'Product
added successfully!']);
     } catch (\Exception $e) {
       $errorMessage = 'Error adding product: ' . $e->getMessage();
       return response()->json(['success' => false, 'message' =>
$errorMessage], 500);
```

```
public function deleteProduct($id)
    $product = Product::find($id);
    if ($product) {
       $product->delete();
       return redirect()->back()->with('success', 'User succefully
deleted.');
     } else {
       return redirect()->back()->with('error', 'User not found.');
  public function showEditForm($id)
    $product = Product::find($id);
    if (!$product) {
       return redirect()->back()->with('error', 'Product not found.');
    $admin = User::where('role id', '2')->first();
    $adminUsername = $admin->fullName;
    $categories = Category::all();
    return view('admin.editFoodForm', compact('adminUsername',
'product', 'categories'));
  public function updateProduct(Request $request, $id)
    $validator = Validator::make($request->all(), [
       'title' => 'required|string|min:3',
       'ingredients' => 'required|string',
       'img' => 'nullable|file|mimes:jpeg,png,jpg,gif|max:2048',
       'price' => 'required|string',
       'ddl1' => ['required', 'in:menu-starters,menu-breakfast,menu-
unch,menu-dinner'],
       'ddl2' => ['required', 'integer', 'not in:0'],
     ]);
    if ($validator->fails()) {
       return redirect()->back()->withErrors($validator)->withInput();
    try {
       $product = Product::findOrFail($id);
       $product->title = $request->title;
       $product->ingredients = $request->ingredients;
       $product->price = $request->price;
```

```
$product->blockId = $request->ddl1;
       $product->category id = $request->ddl2;
       if ($request->hasFile('img')) {
         $imagePath = 'assets/img/menu/' . $request->file('img')-
>getClientOriginalName();
         $product->src = $imagePath;
         $request->file('img')->storeAs('public', $imagePath);
       $product->save();
       return redirect()->route('showMenu')->with('success', 'Product
updated successfully!');
     } catch (\Exception $e) {
       $errorMessage = 'Error updating product: ' . $e->getMessage();
       return redirect()->back()->with('error', $errorMessage);
  public function showBookedTables()
    $reservations = Reservations::all();
    $admin = User::where('role id', '2')->first();
    $adminUsername = $admin->fullName;
    $categories = Category::all();
    return view('admin.showBookedTables', compact('adminUsername',
categories', 'reservations'));
  public function filterTable(Request $request)
    $admin = User::where('role id', '2')->first();
    $adminUsername = $admin->fullName;
    $\dateType = \$request-\sinput('filter');
    $orderBy = 'date';
    $orderDirection = 'asc';
    if ($dateType === 'newest date') {
       $orderBy = 'date';
       $orderDirection = 'desc';
     } elseif ($dateType === 'earliest time') {
       $orderBy = 'time';
       $orderDirection = 'asc';
     } elseif ($dateType === 'latest time') {
       $orderBy = 'time';
       $orderDirection = 'desc';
```


AuthController.php

```
<?php
namespace App\Http\Controllers;
use App\Models\Role;
use App\Models\User;
use Illuminate\Http\Request;
use Illuminate\Support\Facades\Auth;
use Illuminate\Support\Facades\Hash;
use Illuminate\Support\Facades\Validator;
use Illuminate\Testing\Fluent\Concerns\Has;
class AuthController extends BaseController
  public function showRegisterForm(){
    return view('auth.register', ['data' => $this->data]);
  public function registerUser(Request $request)
    $validator = Validator::make($request->all(), [
       'fullName' => ['required', 'string', 'max:255', function ($attribute,
$value, $fail) {
         if (!preg_match('/([A-Z][a-z]+)\s([A-Z][a-z]+)$/', $value)) {
            $fail("Incorrect name. It should be in format: Vladimir
Lobanov.");
       'email' => 'required|email|unique:users',
       'password' => 'required|string|min:8|confirmed',
       'address' => 'required|string|max:255'.
```

```
'city' => 'required|string|max:255',
    ], [
       'required' => 'Field :attribute is required.',
       'email' => 'You need to enter valid email.'
@gmail.com/ict.edu.rs).',
       'unique' => 'Email already registered.',
       'min' => 'Field :attribute must have :min characters.',
       'confirmed' => 'Confirmed password doesn't match the original
one.',
       'fullName.string' => 'Name cannot contain special chars.
(@,\%,^{,}\$,\&,^{*})'
    ]);
    if ($validator->fails()) {
       return redirect()->back()
          ->withErrors($validator)
         ->withInput();
    $defaultRole = Role::where('role', 'user')->first();
    $newUser = User::create([
       'fullName' => $request->input('fullName'),
       'email' => $request->input('email'),
       'password' => Hash::make($request->input('password')),
       'address' => $request->input('address'),
       'city' => $request->input('city'),
       'role id' => $defaultRole->id
    if(!$newUser){
       return redirect()->back()->with('error', 'Error occuried while
registering new user.');
    return redirect()->route('login')->with('success', 'Succefully
registered! Now you can login.');
  public function showLoginForm(){
    return view('auth.login', ['data' => $this->data]);
  public function loginUser(Request $request){
    $email = $request->email;
    $password = $request->password;
    $user = User::where('email',$email)->first();
    if(!$user){
       return redirect()->back()->with('error-msg', 'No user found!');
```

```
if(!Hash::check($password,$user->password)){
    return redirect()->back()->with('error-msg', 'Wrong password!');
}
Auth::login($user);
return redirect()->route('home');
}
public function logout(){
    Auth::logout();
    return redirect()->route('login');
}
```

AuthorController.php

```
<?php

namespace App\Http\Controllers;
use Illuminate\Http\Request;
class AuthorController extends BaseController
{
   public function index() {
     return view('author', ["data" => $this->data]);
   }
}
```

BaseController.php

```
<!php

namespace App\Http\Controllers;
use App\Models\Navigation;
use Illuminate\Http\Request;
class BaseController extends Controller
{
    public $data;
    public function __construct()
    {
        $this->data['menu'] = Navigation::all();
    }
}
```

```
ContactController.php
```

```
<?php
```

```
namespace App\Http\Controllers;
use App\Models\Message;
use Illuminate\Http\Request;
use Illuminate\Support\Facades\Validator;
class ContactController extends BaseController
  public function index(){
    return view('contact', ["data" => $this->data]);
  public function message(Request $request){
    $validator = Validator::make($request->all(), [
       'name' => 'required',
       'email' => 'required|email',
       'subject' => 'required',
       'message' => 'required',
    if ($validator->fails()) {
       return response()->json(['errors' => $validator->errors()->all()],
422);
     Message::create([
       'name' => $request->name,
       'email' => $request->email,
       'subject' => $request->subject,
       'message' => $request->message,
     ]);
    return response()->json(['success' => 'Your message has been sent.
Thank you!']);
```

GalleryController.php

```
<?php

namespace App\Http\Controllers
use Illuminate\Http\Request;
class GalleryController extends BaseController
{
   public function index(){
     return view('gallery', ["data" => $this->data]);
   }
}
```

HomeController.php

```
<?php
namespace App\Http\Controllers;
use App\Models\Chef;
use App\Models\ChooseUs;
use App\Models\CustomerCounter;
use App\Models\Reservations;
use App\Models\Testimonial;
use App\Models\User;
use Illuminate\Http\Request;
use Illuminate\Support\Facades\Auth;
use Illuminate\Support\Facades\Validator;
class HomeController extends BaseController
  public function index(){
    $whyYummiBlocks = ChooseUs::all();
    $this->data['counter'] = CustomerCounter::all();
    $this->data['testimonials'] = Testimonial::all();
    $this->data['chefs'] = Chef::all();
    return view('home', ["data" => $this->data], ["blocks" =>
$whyYummiBlocks]);
  public function showFormBookTable(){
    if(Auth::check()){
       return view('components.book-table',['data'=> $this->data]);
    return redirect()->route('login')->with('error-msg', 'Login first or
create account to book table!');
  public function bookTable(Request $request)
    $validator = Validator::make($request->all(), [
       'name' => 'required|min:4',
       'phone' => 'required|min:4',
       'date' => 'required|date',
       'time' => 'required|min:4',
       'people' => 'required|numeric|min:1',
       'message' => 'nullable|string',
    1):
```

```
if ($validator->fails()) {
    return response()->json(['errors' => $validator->errors()], 422);
}
$user = auth()->user();
$reservationData = [
    'name' => $request->input('name'),
    'phone' => $request->input('phone'),
    'date' => $request->input('date'),
    'time' => $request->input('time'),
    'peopleNumber' => $request->input('people'),
    'message' => $request->input('message'),
    'user_id' => $user->id,
];
$reservation = Reservations::create($reservationData);
    return response()->json(['success' => 'Your reservation has been successfully booked!'], 200);
}
}
```

MenuController.php

```
ramespace App\Http\Controllers;
use App\Models\Category;
use App\Models\Product;
use App\Models\Product;
use Illuminate\Http\Request;
class MenuController extends BaseController
{
    public function index()
    {
        $this->data['products'] = Product::all();
        $this->data['menuProducts'] = Menu::all();
        return view('menu', ["data" => $this->data]);
    }
}
```

MIDDLEWARES IsAdmin.php

```
<?php
```

```
namespace App\Http\Middleware;
use Closure;
use Illuminate\Http\Request;
use Illuminate\Support\Facades\Auth;
use Symfony\Component\HttpFoundation\Response;
class isAdmin
{
    /**
    * Handle an incoming request.
    *
    * @param \Closure(\Illuminate\Http\Request):
    (\Symfony\Component\HttpFoundation\Response) \$next
    */
public function handle(Request \$request, Closure \$next): Response
    {
        if(Auth::check() && Auth::user()->role_id == '2') {
            return \$next(\$request);
        }
        return redirect()->route('home')->with('error', 'Unauthorized access.');
    }
}
```

NoCacheMiddleware.php

```
<?php
namespace App\Http\Middleware;</pre>
```

```
$response->headers->set('Cache-Control', 'no-store, no-cache, must-
revalidate, max-age=0');
    $response->headers->set('Pragma', 'no-cache');
    $response->headers->set('Expires', 'Fri, 01 Jan 1990 00:00:00
GMT');
    return $response;
}
```

PreventLogout.php

MODELS

Category.php

```
<?php

namespace App\Models;
use Illuminate\Database\Eloquent\Factories\HasFactory;
use Illuminate\Database\Eloquent\Model;</pre>
```

```
class Category extends Model
{
    protected $table = 'categories';
    protected $fillable = ['name'];
    use HasFactory;
    public function products() {
        return $this->hasMany(Product::class);
    }
}
```

Chef.php

```
<?php

namespace App\Models;
use Illuminate\Database\Eloquent\Factories\HasFactory;
use Illuminate\Database\Eloquent\Model;
class Chef extends Model
{
   protected $table = 'chefs';
   protected $fillable = ['delay', 'img', 'name', 'jobDesc', 'about'];
   use HasFactory;
}</pre>
```

ChooseUs.php

```
<?php

namespace App\Models;
use Illuminate\Database\Eloquent\Factories\HasFactory;
use Illuminate\Database\Eloquent\Model
class ChooseUs extends Model
{
   protected $table = 'chooseUsBlocks';
   protected $fillable = ['icon', 'title', 'text', 'delayTime'];
   use HasFactory;
}</pre>
```

CustomerCounter.php

```
<?php
namespace App\Models;
```

```
use Illuminate\Database\Eloquent\Factories\HasFactory;
use Illuminate\Database\Eloquent\Model;
class CustomerCounter extends Model
{
    protected $table = 'customersCounters';
    protected $fillable= ['statCounter', 'title'];
    use HasFactory;
}
```

Menu..php

```
<?php

namespace App\Models;
use Illuminate\Database\Eloquent\Factories\HasFactory;
use Illuminate\Database\Eloquent\Model;
class Menu extends Model
{
   protected $table = 'menus';
   protected $fillable = ['bs-target', 'name'];
   use HasFactory;
}</pre>
```

Message.php

```
<?php

namespace App\Models;
use Illuminate\Database\Eloquent\Factories\HasFactory;
use Illuminate\Database\Eloquent\Model;
class Message extends Model
{
   protected $table = 'messages';
   protected $fillable= ['name', 'email', 'subject', 'message'];
   use HasFactory;
}</pre>
```

Navigation.php

```
<?php

namespace App\Models;
use Illuminate\Database\Eloquent\Factories\HasFactory;
use Illuminate\Database\Eloquent\Model;</pre>
```

```
class Navigation extends Model
{
   protected $table = 'navigations';
   protected $fillable = ['route', 'name'];
   use HasFactory;
}
```

Product.php

```
namespace App\Models;
use Illuminate\Database\Eloquent\Factories\HasFactory;
use Illuminate\Database\Eloquent\Model;
class Product extends Model

{
    protected $table = 'products';
    protected $fillable = ['blockId', 'src', 'title', 'price', 'ingredients',
'category_id'];
    use HasFactory;
    public function categories() {
        return $this->belongsTo(Category::class, 'category_id');
    }
}
```

Reservation.php

```
namespace App\Models;
use Illuminate\Database\Eloquent\Factories\HasFactory;
use Illuminate\Database\Eloquent\Model;
class Reservations extends Model
{
    protected $table = 'reservations';
    protected $fillable = ['name', 'phone', 'date', 'time', 'peopleNumber',
'message', 'user_id'];
    use HasFactory;
    public function users() {
        return $this->belongsTo(User::class);
     }
}
```

Role.php

```
rnamespace App\Models;
use Illuminate\Database\Eloquent\Factories\HasFactory;
use Illuminate\Database\Eloquent\Model;
class Role extends Model
{
    protected $table = 'roles';
    protected $fillable = ['role'];
    use HasFactory;
    public function users() {
        return $this->hasMany(User::class);
    }
}
```

Testimonial.php

```
<?php

namespace App\Models
use Illuminate\Database\Eloquent\Factories\HasFactory;
use Illuminate\Database\Eloquent\Model;
class Testimonial extends Model
{
    protected $table = 'testimonials';
    protected $fillable= ['quotation', 'name', 'role', 'img'];
    use HasFactory;
}</pre>
```

User.php

```
<?php

namespace App\Models;
// use Illuminate\Contracts\Auth\MustVerifyEmail;
use Illuminate\Database\Eloquent\Factories\HasFactory;
use Illuminate\Foundation\Auth\User as Authenticatable;
use Illuminate\Notifications\Notifiable;
use Laravel\Sanctum\HasApiTokens;</pre>
```

```
class User extends Authenticatable
{
    use HasApiTokens, HasFactory, Notifiable;
    protected $fillable = ['fullName', 'email', 'password', 'address', 'city'];
    protected $hidden = ['password'];
    public function roles() {
        return $this->belongsTo(Role::class);
    }
    public function reservations() {
        return $this->hasMany(Reservations::class);
    }
}
```

MIGRATIONS

Create_users_table.php

```
<?php
use Illuminate\Database\Migrations\Migration;
use Illuminate\Database\Schema\Blueprint;
use Illuminate\Support\Facades\Schema;
return new class extends Migration
   * Run the migrations.
  public function up(): void
    Schema::create('users', function (Blueprint $table) {
       $table->id();
       $table->string('fullName');
       $table->string('email')->unique();
       $table->string('password');
       $table->string('address');
       $table->string('city');
       $table->foreignId('role id')->constrained('roles');
       $table->rememberToken();
       $table->timestamps();
    });
   * Reverse the migrations.
```

```
public function down(): void
{
    Schema::dropIfExists('users');
    }
};
```

Create navigations table.php

```
<?php
use Illuminate\Database\Migrations\Migration;
use Illuminate\Database\Schema\Blueprint;
use Illuminate\Support\Facades\Schema;
return new class extends Migration
   * Run the migrations.
  public function up(): void
    Schema::create('navigations', function (Blueprint $table) {
       $table->id();
       $table->string('route');
       $table->string('name');
       $table->timestamps();
     });
   * Reverse the migrations.
  public function down(): void
    Schema::dropIfExists('navigations');
```

Create_choose_us_blocks_table.php

```
<?php
use Illuminate\Database\Migrations\Migration;
use Illuminate\Database\Schema\Blueprint;
use Illuminate\Support\Facades\Schema;</pre>
```

Create customers table.php

```
$table->string('title');
    $table->timestamps();
});

* Reverse the migrations.

*/
public function down(): void
{
    Schema::dropIfExists('customersCounters');
}
```

Create testimonials table.php

```
<?php
use Illuminate\Database\Migrations\Migration;
use Illuminate\Database\Schema\Blueprint;
use Illuminate\Support\Facades\Schema;
return new class extends Migration
   * Run the migrations.
  public function up(): void
    Schema::create('testimonials', function (Blueprint $table) {
       $table->id();
       $table->string('quotation');
       $table->string('name');
       $table->string('role');
       $table->string('img');
       $table->timestamps();
     });
   * Reverse the migrations.
  public function down(): void
    Schema::dropIfExists('testimonials');
```

};

Create_chefs_table.php

```
<?php
use Illuminate\Database\Migrations\Migration;
use Illuminate\Database\Schema\Blueprint;
use Illuminate\Support\Facades\Schema;
return new class extends Migration
   * Run the migrations.
  public function up(): void
    Schema::create('Chefs', function (Blueprint $table) {
       $table->id();
       $table->string('delay');
       $table->string('img');
       $table->string('name');
       $table->string('jobDesc');
       $table->string('about');
       $table->timestamps();
     });
   * Reverse the migrations.
  public function down(): void
    Schema::dropIfExists('Chefs');
```

Create menus table.php

```
<?php
use Illuminate\Database\Migrations\Migration;
use Illuminate\Database\Schema\Blueprint;
use Illuminate\Support\Facades\Schema;</pre>
```

```
/**
 * Reverse the migrations.
 */
public function down(): void
 {
    Schema::dropIfExists('Menus');
    }
};
```

Create categories table.php

```
}
/**

* Reverse the migrations.

*/
public function down(): void
{
    Schema::dropIfExists('categories');
}
};
```

Create products table.php

```
<?php
use Illuminate\Database\Migrations\Migration;
use Illuminate\Database\Schema\Blueprint;
use Illuminate\Support\Facades\Schema;
return new class extends Migration
   * Run the migrations.
  public function up(): void
    Schema::create('products', function (Blueprint $table) {
       $table->id();
       $table->string('title');
       $table->string('blockId');
       $table->unsignedBigInteger('category id');
       $table->string('src');
       $table->string('ingredients');
       $table->string('price');
       $table->foreign('category_id')->references('id')->on('categories');
       $table->timestamps();
     });
   * Reverse the migrations.
  public function down(): void
    Schema::dropIfExists('products');
```

};

Create_roles_table.php

```
<?php
use Illuminate\Database\Migrations\Migration;
use Illuminate\Database\Schema\Blueprint;
use Illuminate\Support\Facades\Schema;
return new class extends Migration
   * Run the migrations.
  public function up(): void
    Schema::create('roles', function (Blueprint $table) {
       $table->id():
       $table->string('role');
       $table->timestamps();
     });
   * Reverse the migrations.
  public function down(): void
    Schema::dropIfExists('roles');
```

Create_reservations_table.php

```
<?php
use Illuminate\Database\Migrations\Migration;
use Illuminate\Database\Schema\Blueprint;
use Illuminate\Support\Facades\Schema;
return new class extends Migration
{
    /**
    * Run the migrations.
    */</pre>
```

```
public function up(): void
    Schema::create('reservations', function (Blueprint $table) {
       $table->id();
       $table->foreignId('user id')->constrained('users')-
>onDelete('cascade');
       $table->string('name');
       $table->string('phone');
       $table->date('date');
       $table->string('time');
       $table->integer('peopleNumber');
       $table->text('message')->nullable();
       $table->timestamps();
    });
  * Reverse the migrations.
  public function down(): void
    Schema::dropIfExists('reservations');
```

Create messages table

```
$table->string('message');
$table->timestamps();
});

* Reverse the migrations.

*/
public function down(): void
{
    Schema::dropIfExists('messages');
}
};
```

SEEDERS

CategorySeeder.php

ChefSeeder.php

```
<?php
namespace Database\Seeders;
```

```
use App\Models\Chef;
use Illuminate\Database\Console\Seeds\WithoutModelEvents;
use Illuminate\Database\Seeder;
class ChefSeeder extends Seeder
   * Run the database seeds.
  private $nizChefs = [
       "delay" => "300",
       "img" => "chefs-1.jpg",
       "name" => "William Anderson",
       "jobDesc" => "cook",
       "about" => "I love to cook, im the main chef of the kitchen."
       "delay" => "200",
       "img" => "chefs-2.jpg",
       "name" => "Mendela Kerson",
       "jobDesc" => "executive chef",
       "about" => "I can prepare any kind of meal you wish."
       "delay" => "100",
       "img" => "chefs-3.jpg",
       "name" => "Steve Maken ",
       "jobDesc" => "salad chef",
       "about" => "Any kind of salads you like, i do."
  ];
  public function run(): void
    foreach($this->nizChefs as $n){
       Chef::create([
         'delay' => $n['delay'],
         'img' => n['img'],
         'name' => n['name'],
         'jobDesc' => $n['jobDesc'],
         'about' => n['about']
       ]);
```

```
    TORA SKOLA STROKOVNIT STODIJA ZA INI OKIMACIONE TROMONIKACIONE TETINOLOGIJE

}
}
```

ChooseUsSeeder.php

```
<?php
namespace Database\Seeders;
use App\Models\ChooseUs;
use Illuminate\Database\Console\Seeds\WithoutModelEvents;
use Illuminate\Database\Seeder;
class ChooseUsSeeder extends Seeder
   * Run the database seeds.
  private $nizBlokova = [
       "icon" => "bi bi-clipboard-data",
       "title" => "Nice place for dinning",
       "text" => "One of the reasons to take over your girl or family and
have a beautifull enterier while dinning",
       "delayTime" => "200"
    ],
       "icon" => "bi bi-gem",
       "title" => "best Service".
       "text" => "If you want to enjoy with classy service and our top tier
bartenders, with good quality food, this is
       right place for You!",
       "delayTime" => "300"
    ],
       "icon" => "bi bi-inboxes",
       "title" => "Always keeping fresh",
       "text" => "Everything we serve and each meal is story for itself,
we do have 1 michelin star and growing up more!",
       "delayTime" => "400"
  public function run(): void
    foreach ($this->nizBlokova as $n) {
```

CustomerCounterSeeder.php

```
<?php
namespace Database\Seeders;
use App\Models\CustomerCounter;
use Illuminate\Database\Console\Seeds\WithoutModelEvents;
use Illuminate\Database\Seeder:
class CustomerCounterSeeder extends Seeder
   * Run the database seeds.
  private $nizCounter = [
       "statCounter" => '232',
       "title" => "Clients"
    ],
       "statCounter" => '521',
       "title" => 'Projects'
    ],
       "statCounter" => '1453',
       "title" => "Hours of Support"
    ],
       "statCounter" => '200',
       "title" => 'Different dishes'
  ];
  public function run(): void
```

MenuSeeder.php

```
<?php
namespace Database\Seeders;
use App\Models\Menu;
use Illuminate\Database\Console\Seeds\WithoutModelEvents;
use Illuminate\Database\Seeder;
class MenuSeeder extends Seeder
   * Run the database seeds.
  private $menu = [
       'bs-target' => '#menu-starters',
       'name' => 'Starters'
       'bs-target' => '#menu-breakfast',
       'name' => 'Breakfast'
    ],
       'bs-target' => '#menu-lunch',
       'name' => 'Lunch'
    ],
       'bs-target' => '#menu-dinner',
       'name' => 'Dinner'
  public function run(): void
    foreach($this->menu as $m){
```

NavigationSeeder.php

```
<?php
namespace Database\Seeders;
use App\Models\Navigation;
use Illuminate\Database\Console\Seeds\WithoutModelEvents;
use Illuminate\Database\Seeder:
class NavigationSeeder extends Seeder
   * Run the database seeds.
  private $routes = ['home', 'menu', 'gallery', 'contact', 'author', 'register',
'login'];
  private $names = ['Home', 'Menu', 'Gallery', 'Contact', 'Author',
'Register', 'Login'];
  public function run(): void
     for(\$i = 0; \$i < count(\$this - > names); \$i + +)
       Navigation::create([
          'route' => $this->routes[$i],
          'name' => $this->names[$i]
       ]);
```

ProductSeeder.php

```
<?php

namespace Database\Seeders;
use App\Models\Category;
use App\Models\Product;</pre>
```

```
use Illuminate\Database\Console\Seeds\WithoutModelEvents;
use Illuminate\Database\Seeder;
class ProductSeeder extends Seeder
   * Run the database seeds.
  private $articles = [
       'blockId' => 'menu-starters',
       'category' => 'Starters',
       'src' => 'assets/img/menu/menu-item-1.png',
       'title' => 'Caesar Salad',
       'ingredients' => 'Lettuce, Parmesan Cheese, Croutons, Caesar
Dressing',
       'price' => '5.95'
       'blockId' => 'menu-breakfast',
       'category' => 'Breakfast',
       'src' => 'assets/img/menu/menu-item-2.png',
       'title' => 'Pancakes',
       'ingredients' => 'Flour, Milk, Eggs, Butter, Maple Syrup',
       'price' => '6.50'
    ],
       'blockId' => 'menu-lunch',
       'category' => 'Lunch',
       'src' => 'assets/img/menu/menu-item-3.png',
       'title' => 'Spaghetti Bolognese',
       'ingredients' => 'Spaghetti, Ground Beef, Tomato Sauce, Onion,
Garlic',
       'price' => '7.25'
       'blockId' => 'menu-dinner',
       'category' => 'Dinner',
       'src' => 'assets/img/menu/menu-item-4.png',
       'title' => 'Chicken Tikka Masala',
       'ingredients' => 'Chicken, Yogurt, Tomato Sauce, Cream, Spices',
       'price' => '8.75'
```

RoleSeeder.php

TestimonialsSeeder.php

```
<?php
namespace Database\Seeders;
use App\Models\Testimonial;
use Illuminate\Database\Console\Seeds\WithoutModelEvents;
use Illuminate\Database\Seeder;
class TestimonialsSeeder extends Seeder
   * Run the database seeds.
  private $testimonials = [
       "quotation" => "Such a great atmosphere and very fine place for
eating!".
       "name" => "Saul Goodman",
       "role" => "Ceo & Founder",
       "img" => "assets/img/testimonials/testimonials-1.jpg"
    ],
       "quotation" => "I was there couple of times and everything is
great, starting from food all the way to service",
       "name" => "Maya Shirel",
       "role" => "Bank associate",
       "img" => "assets/img/testimonials/testimonials-2.jpg"
    ],
       "quotation" => "I enjoyed eating food and specialities, especially
Italian kitchen",
       "name" => "Nebojsa Dobic",
       "role" => "Programmer",
       "img" => "assets/img/testimonials/testimonials-3.jpg"
    ],
       "quotation" => "Best restaurant ever!",
       "name" => "Nina Badic",
       "role" => "Barista",
       "img" => "assets/img/testimonials/testimonials-4.jpg"
  ];
  public function run(): void
```

```
foreach($this->testimonials as $t) {
    Testimonial::create([
          'quotation' => $t['quotation'],
          'name' => $t['name'],
          'role' => $t['role'],
          'img' => $t['img']
          ]);
}
```