Ravindra's Blog

Let's Secure Everything

Share

f ¥ G+ in

CURL Cheatsheet

0 Comments



Change system wide user agent

Create .curlrc in \$HOME directory and add this line

user-agent = "Mozilla/5.0 (Windows NT 10.0; Win64; x64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/71.0.3578.98 Safari/537.36"

to suppress this file use

curl -q example.com

Include the header response in output

curl -i

Head request

curl -I

get request and header in the response

curl -D

Verbose

```
curl -v
```

Follow redirects

```
curl -L
```

Save cookies to a file

```
curl -b cookiesfile <url>
```

NOTE: cookiesfile is a file in which cookeis are saved

User saved cookies

```
curl -c cookiesfile <url>
```

Make POST request

```
curl -XPOST <url>
```

Note: change POST to PUT, PATCH or whatever you need except HEAD, use -I for HEAD

Make POST request with data

```
curl --data "param1=value1&param2=value2" <url>
```

List Input Field

```
curl website | gunzip | sed -n '/<form/,/<\/form/p' | grep '<input'</pre>
```

List Input Field Uncompressed


```
curl website | sed -n '/<form/,/<\/form/p' | grep '<input'</pre>
```

Original: 01 Jan 2019 Updated: Mar 6, 2019

<u>curl</u>

« ADB Cheatsheet

Docker Cheatsheet »

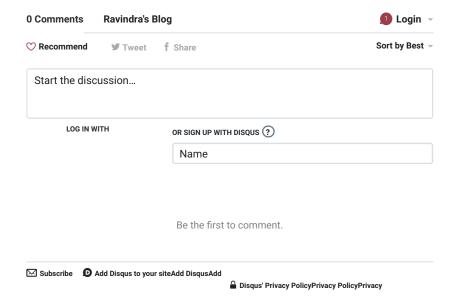

नोट: यहाँ पीको फॉल किया जाता है।

<u>Mediumish Theme</u> by WowThemes.net