

JavaScript

classList

Methods in DOM

A yellow square containing the letters 'JS' in a bold, black, sans-serif font, representing the JavaScript logo.

JS

Mallikarjun | @CodeBustler



classList Methods DOM

- `elmnt.classList.add(CName)`
- `elmnt.classList.remove(CName)`
- `elmnt.classList.contains(CName)`
- `elmnt.classList.toggle(CName)`
- `elmnt.classList.item(index)`
- `elmnt.classList.length`
- `elmnt.classList.replace(oldCName, newCName)`

- **elmnt.classList.add(CName)**

Adds one or more class names to the element's class list.

Multiple class names can be pass space-separated string.

- **elmnt.classList.remove(CName)**

Removes one or more class names from the element's class list.

Multiple class names can be removed | space-separated string.

- **elmnt.classList.toggle(CName)**

Toggles the presence of a class name in the element's class list.

If the class name is present, it is removed; otherwise, it is added.

- **elmnt.classList.contains(CName)**

Checks if the element's class list contains a particular class name and returns a boolean value.

- **elmnt.classList.item(index)**

Retrieves the class name at the specified index in the element's class list.

Indexing starts from 0.

- **elmnt.classList.length**

Returns the number of class names in the element's class list.

- **element.classList.replace**
(oldClassName, newClassName)

Replaces an existing class name with a new class name in the element's class list.

- **element.classList.value(CName)**


Returns the token list as a string

Other Posts



To learn **HTML CSS & JavaScript** or
Front-End Projects, Visit my page all
concepts & Projects codes are
available 🔥

@CodeBustler

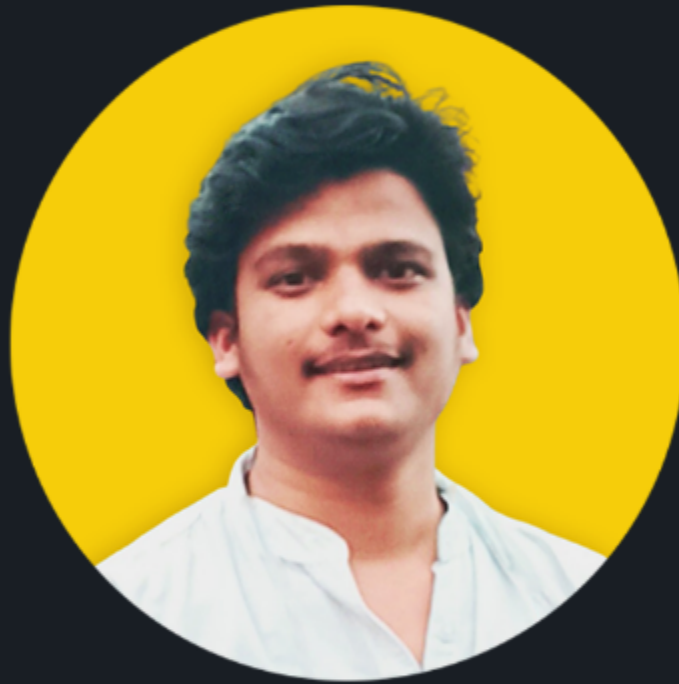

@CodeBustler

Mallikarjun | Web Developer

Follow For More !

And i need dopamine ⚡

