Analysis report for sample: 67ddc01312be3e5028a0eb7855626c93

This report has been generated by a set of tools for semi-supervised behavioral analysis of executables.

More information about these reports at **http://www.vallejo.cc**.

This work is licensed under a Creative Commons Attribution 4.0 International License. To view a copy of this license visit http://creativecommons.org/licenses/by/4.0/.

Report classification: 1752 (indicates the level of interest of the report, based on the amount of information collected about the sample).

Index

- Sample
- AV detections
- Original source url
- Virustotal url
- Yara matches
- Snapshot
- Threads tree
- Running processes
- Most interesting actions
- Most interesting strings
- Involved hosts
- Dns queries
- Connections and readable network traffic
- Threads behavioural information
- Malware processes' network events
- Sample's unpacked / injected modules

Sample

•md5: 67ddc01312be3e5028a0eb7855626c93

AV detections

- Microsoft:
- Kaspersky: Trojan-Ransom.Win32.Foreign.nmsg
- Symantec: Trojan.Gen.8!cloud
- Malwarebytes: Backdoor.Bot

Original source url

- hxxp://bankofarmenia.at/bong.bin?GYczXjV

Virustotal url

- https://virustotal.com/es/file/82eb636d9a27fdaa885dda10a11e47c5d776a00dab05b04dfe3ab1534c8fe48e/analysis

Yara matches

The following yara rules have matched injected or unpacked modules's code or data areas.

- Microsoft_Visual_Cpp_8_additional ()
- Microsoft_Visual_Cpp_8 ()
- IsPE32 ()
- IsWindowsGUI ()
- IsPacked (Entropy Check)
- HasOverlay (Overlay Check)
- HasRichSignature (Rich Signature Check)
- DebuggerCheck__QueryInfo ()
- win_registry (Affect system registries)
- win_token (Affect system token)
- win_files_operation (Affect private profile)
- without_attachments (Rule to detect the no presence of any attachment)
- without_images (Rule to detect the no presence of any image)
- without_urls (Rule to detect the no presence of any url)
- contentis_base64 (This rule finds for base64 strings)
- CRC32_poly_Constant (Look for CRC32 [poly])

Snapshot

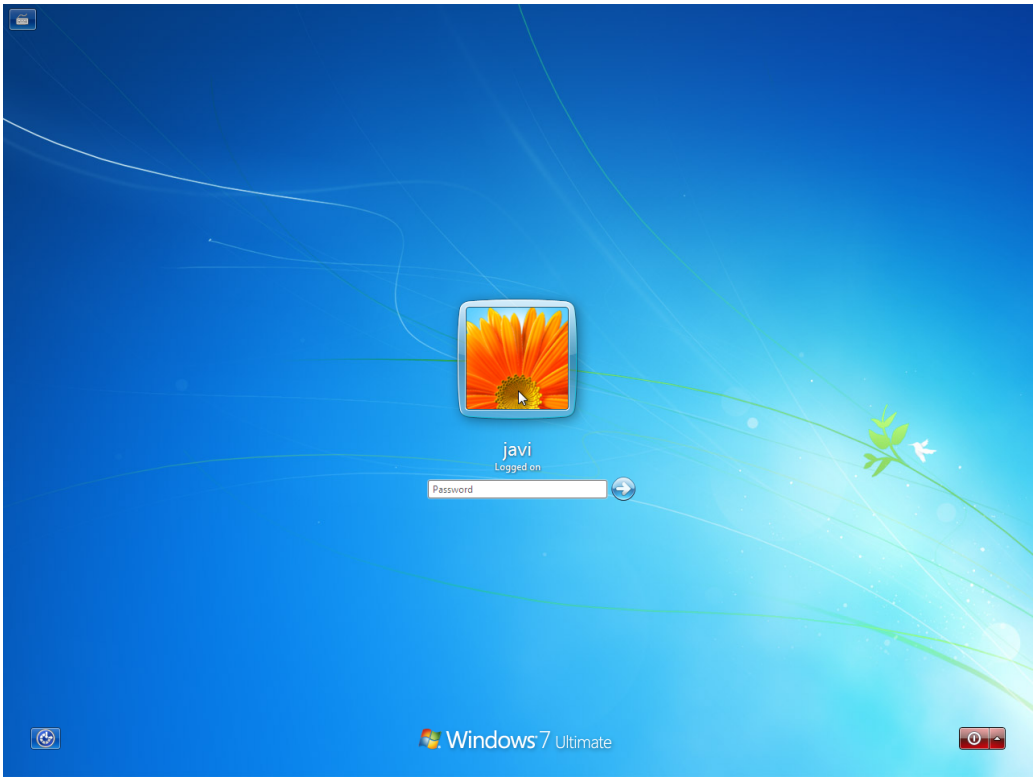

Threads tree

The following tree represents sample's threads. T<index> is an alias for sample's threads (numeration is done in the order of threads creation). P<index> is an alias for processes owning sample's threads.

Running processes

Here it is the list of running processes after sample execution.

Processes with sample' threads

Other processes

- Name System
- Name smss.exe
- Name csrss.exe
- Name wininit.exe
- Name csrss.exe
- Name winlogon.exe
- Name services.exe
- Name lsass.exe
- Name lsm.exe
- Name svchost.exe
- Name svchost.exe
- Name svchost.exe
- Name svchost.exe
- Name svchost.exe
- Name audiodg.exe
- Name TrustedInstaller.exe
- Name svchost.exe
- Name svchost.exe
- Name spoolsv.exe
- Name svchost.exe
- Name svchost.exe
- Name vmtoolse.exe
- Name svchost.exe
- Name dllhost.exe
- Name msdtc.exe
- Name sppsvc.exe
- Name taskhost.exe
- Name dwm.exe
- Name explorer.exe
- Name vmtoolse.exe
- Name SearchIndexer.exe
- Name svchost.exe
- Name wmpnetwk.exe
- Name WmiPrvSE.exe
- Name chrome.exe
- Name WmiPrvSE.exe
- Name SearchFilterHost.exe
- Name taskhost.exe
- Name SearchProtocolHost.exe
- Name cmd.exe
- Name conhost.exe
- Name UI0Detect.exe
- Name UI0Detect.exe
- Name pxxx.exe
- Name dllhost.exe
- Name cmd.exe
- Name conhost.exe

- Name cmd.exe
- Name conhost.exe
- Name int3.exe
- Name explorer.exe
- Name explorer.exe
- Name cebo.exe
- Name smss.exe
- Name csrss.exe
- Name winlogon.exe
- Name LogonUI.exe
- Name cmd.exe
- Name conhost.exe
- Name cmd.exe
- Name conhost.exe
- Name cmd.exe
- Name conhost.exe
- Name explorer.exe
- Name cmd.exe
- Name conhost.exe
- Name cmd.exe
- Name conhost.exe
- Name int3.exe

Most interesting actions

The following list it's a collection of the most interesting events captured. This list is ordered by the score assigned to the event. In the section "Threads behavioural information" it's possible to find all the actions performed by each sample's thread ordered chronologically.

Most interesting strings

The following list it's a collection of the most interesting strings found in the sample's modules code or data. A complete list of strings for each sample's module can be found in the section "Sample's unpacked / injected modules."

- url | valid domains | tlds: ch.ru
- url | valid domains | tlds: !ShF>.Bj
- url | valid domains | tlds: 3.vI"-v
- api | frequently used by malware: OpenProcessToken
- api | frequently used by malware: VirtualProtectEx
- api | frequently used by malware: QueryPerformanceCounter
- api | frequently used by malware: WriteFile
- api | frequently used by malware: DeviceIoControl
- api | frequently used by malware: GetVersion
- api | frequently used by malware: OpenProcess
- api | frequently used by malware: CreateThread
- api | frequently used by malware: ResumeThread
- api | frequently used by malware: SuspendThread
- api | frequently used by malware: ZwQueryInformationProcess
- api | frequently used by malware: NtQuerySystemInformation
- api | frequently used by malware: ZwOpenProcess
- api | frequently used by malware: RegCloseKey
- api | frequently used by malware: GetProcAddress
- api | frequently used by malware: GetTickCount
- api | frequently used by malware: ExitProcess
- api | ntdll: NtAllocateVirtualMemory
- api | user32: IsMenu
- api | ntdll: NtQueryVirtualMemory
- api | kernel32: RtlUnwind
- api | ntdll: _aulldiv
- api | kernel32: RegDeleteValueW
- api | kernel32: RegEnumKeyExA
- api | advapi32: RegOpenKeyW
- api | advapi32: GetTokenInformation
- api | advapi32: GetSidSubAuthorityCount
- api | advapi32: GetSidSubAuthority
- api | kernel32: RegSetValueExW
- api | advapi32: RegOpenKeyA
- api | advapi32: RegCreateKeyA
- api | kernel32: RegQueryValueExA
- api | kernel32: RegSetValueExA
- api | advapi32: ConvertStringSecurityDescriptorToSecurityDescriptorA
- api | user32: wsprintfW
- api | user32: wsprintfA
- api | user32: DestroyWindow
- api | user32: UnregisterClassW
- api | user32: SetParent
- api | user32: RegisterClassExW
- api | user32: GetWindowLongW
- api | user32: GetAncestor
- api | user32: SetClassLongW
- api | user32: SetWindowLongW
- api | user32: SetMenu
- api | user32: CreateWindowExW
- api | user32: DefWindowProcW
- api | kernel32: lstrcmpA

- api | kernel32: GetTempPathA
- api | kernel32: GetTempFileNameA
- api | kernel32: CreateDirectoryA
- api | kernel32: GetFileSize
- api | kernel32: lstrcpynA
- api | kernel32: GetFileTime
- api | kernel32: FindNextFileA
- api | kernel32: FindClose
- api | kernel32: FindFirstFileA
- api | kernel32: CompareFileTime
- api | kernel32: QueryPerformanceFrequency
- api | kernel32: GetModuleFileNameA
- api | kernel32: lstrcmpiA
- api | kernel32: SetLastError
- api | kernel32: GetModuleFileNameW
- api | kernel32: SetFilePointer
- api | kernel32: lstrcpyW
- api | kernel32: FlushFileBuffers
- api | kernel32: CreateFileW
- api | kernel32: CreateDirectoryW
- api | kernel32: SetEndOfFile
- api | kernel32: LocalFree
- api | kernel32: ExpandEnvironmentStringsW
- api | kernel32: ExpandEnvironmentStringsA
- api | kernel32: lstrcpyA
- api | kernel32: lstrcatA
- api | kernel32: lstrlenA
- api | kernel32: GetLongPathNameW
- api | kernel32: GetVersionExW
- api | kernel32: GetModuleHandleW
- api | kernel32: GetCurrentProcess
- api | kernel32: SwitchToThread
- api | kernel32: GetCurrentProcessId
- api | kernel32: SetThreadAffinityMask
- api | kernel32: FindNextFileW
- api | kernel32: IsWow64Process
- api | kernel32: EnterCriticalSection
- api | kernel32: VirtualAlloc
- api | kernel32: SetThreadPriority
- api | kernel32: LeaveCriticalSection
- api | kernel32: TerminateThread
- api | kernel32: LoadLibraryW
- api | kernel32: InitializeCriticalSection
- api | kernel32: VirtualFree
- api | kernel32: GetCurrentThread
- api | kernel32: LoadLibraryExW
- api | kernel32: FindFirstFileW
- api | ntdll: NtCreateSection
- api | ntdll: NtUnmapViewOfSection
- api | ntdll: NtMapViewOfSection
- api | ntdll: RtlNtStatusToDosError
- api | ntdll: ZwQueryInformationToken
- api | ntdll: ZwClose
- api | ntdll: ZwOpenProcessToken
- api | ntdll: mbstowcs
- api | ntdll: memset
- api | ntdll: wcslen

- api | ntdll: memcpy
- api | kernel32: RegOpenKeyExA
- api | kernel32: RegQueryValueExW
- api | user32: GetCursorInfo
- api | kernel32: SetFileAttributesW
- api | kernel32: CreateWaitableTimerA
- api | kernel32: DeleteFileW
- api | kernel32: lstrcatW
- api | kernel32: lstrcmpiW
- api | kernel32: LoadLibraryA
- api | kernel32: ResetEvent
- api | kernel32: GetLastError
- api | kernel32: lstrlenW
- api | kernel32: CreateProcessA
- api | kernel32: GetExitCodeProcess
- api | kernel32: CreateEventA
- api | kernel32: SetEvent
- api | kernel32: HeapFree
- api | kernel32: SetWaitableTimer
- api | kernel32: HeapAlloc
- api | kernel32: GetModuleHandleA
- api | kernel32: HeapCreate
- api | kernel32: HeapDestroy
- api | kernel32: GetCommandLineW
- api | kernel32: CloseHandle
- api | kernel32: ReadFile
- api | kernel32: GetSystemTimeAsFileTime
- api | kernel32: WaitForSingleObject
- api | kernel32: CreateFileA
- api | ntdll: RtlFreeUnicodeString
- api | ntdll: RtlUpcaseUnicodeString

Involved hosts

- 192.168.133.1:5355
- 192.168.133.228:62157

Dns queries

Connections and readable network traffic

The analysis environment captures network traffic happened while sample execution. It classifies the traffic and tries to extract the most significant parts from the communications data.

In this section it's possible to find parts of the communication data that are easier to be read.

- **udp 192.168.133.1:5355 ---> 192.168.133.228:62157**

  in-addr[...]in-addr

Threads behavioural information

In this section it's possible to find information about sample's threads, such as the actions performed by each sample's thread ordered chronologically.

Malware processes' network events

The analysis environment tries to capture and collect network actions performed by sample's threads.

Sample's unpacked / injected modules

In this section it's possible to find information about sample's modules, such as the rich signatures, strings, yara rules matching the module,...

The analysis environment performs an heuristic search trying to find sample's injected or unpacked modules in memory, dumping and analyzing them.

• Module 1 (probably unpacked / injected by the sample)

• Module 1 rich signatures

• 44616e5300000000000000000000000097895000100000027c66d000200000027c67b00120000000000000100be000000c30f5d0003000000c30f5f0001000000c30f0f0003000000097889001f0000001e52940001000000097891 00

• Module 1 yara matches

• Microsoft_Visual_Cpp_8_additional ()
• Microsoft_Visual_Cpp_8 ()
• IsPE32 ()
• IsWindowsGUI ()
• IsPacked (Entropy Check)
• HasOverlay (Overlay Check)
• HasRichSignature (Rich Signature Check)
• DebuggerCheck__QueryInfo ()
• win_registry (Affect system registries)
• win_token (Affect system token)
• win_files_operation (Affect private profile)
• without_attachments (Rule to detect the no presence of any attachment)
• without_images (Rule to detect the no presence of any image)
• without_urls (Rule to detect the no presence of any url)
• contentis_base64 (This rule finds for base64 strings)
• CRC32_poly_Constant (Look for CRC32 [poly])

• Module 1 strings

• Module 1 most interesting strings

• url | valid domains | tlds: ch.ru
• url | valid domains | tlds: !ShF>.Bj
• url | valid domains | tlds: 3.vI"-v
• api | frequently used by malware: OpenProcessToken
• api | frequently used by malware: VirtualProtectEx
• api | frequently used by malware: QueryPerformanceCounter
• api | frequently used by malware: WriteFile
• api | frequently used by malware: DeviceIoControl
• api | frequently used by malware: GetVersion
• api | frequently used by malware: OpenProcess
• api | frequently used by malware: CreateThread
• api | frequently used by malware: ResumeThread
• api | frequently used by malware: SuspendThread
• api | frequently used by malware: ZwQueryInformationProcess
• api | frequently used by malware: NtQuerySystemInformation
• api | frequently used by malware: ZwOpenProcess
• api | frequently used by malware: RegCloseKey
• api | frequently used by malware: GetProcAddress
• api | frequently used by malware: GetTickCount

- api | frequently used by malware: ExitProcess
- api | ntdll: NtAllocateVirtualMemory
- api | user32: IsMenu
- api | ntdll: NtQueryVirtualMemory
- api | kernel32: RtlUnwind
- api | ntdll: _aulldiv
- api | kernel32: RegDeleteValueW
- api | kernel32: RegEnumKeyExA
- api | advapi32: RegOpenKeyW
- api | advapi32: GetTokenInformation
- api | advapi32: GetSidSubAuthorityCount
- api | advapi32: GetSidSubAuthority
- api | kernel32: RegSetValueExW
- api | advapi32: RegOpenKeyA
- api | advapi32: RegCreateKeyA
- api | kernel32: RegQueryValueExA
- api | kernel32: RegSetValueExA
- api | advapi32: ConvertStringSecurityDescriptorToSecurityDescriptorA
- api | user32: wsprintfW
- api | user32: wsprintfA
- api | user32: DestroyWindow
- api | user32: UnregisterClassW
- api | user32: SetParent
- api | user32: RegisterClassExW
- api | user32: GetWindowLongW
- api | user32: GetAncestor
- api | user32: SetClassLongW
- api | user32: SetWindowLongW
- api | user32: SetMenu
- api | user32: CreateWindowExW
- api | user32: DefWindowProcW
- api | kernel32: lstrcmpA
- api | kernel32: GetTempPathA
- api | kernel32: GetTempFileNameA
- api | kernel32: CreateDirectoryA
- api | kernel32: GetFileSize
- api | kernel32: lstrcpynA
- api | kernel32: GetFileTime
- api | kernel32: FindNextFileA
- api | kernel32: FindClose
- api | kernel32: FindFirstFileA
- api | kernel32: CompareFileTime
- api | kernel32: QueryPerformanceFrequency
- api | kernel32: GetModuleFileNameA
- api | kernel32: lstrcmpiA
- api | kernel32: SetLastError
- api | kernel32: GetModuleFileNameW
- api | kernel32: SetFilePointer
- api | kernel32: lstrcpyW
- api | kernel32: FlushFileBuffers
- api | kernel32: CreateFileW
- api | kernel32: CreateDirectoryW
- api | kernel32: SetEndOfFile
- api | kernel32: LocalFree
- api | kernel32: ExpandEnvironmentStringsW
- api | kernel32: ExpandEnvironmentStringsA
- api | kernel32: lstrcpyA

- api | kernel32: lstrcatA
- api | kernel32: lstrlenA
- api | kernel32: GetLongPathNameW
- api | kernel32: GetVersionExW
- api | kernel32: GetModuleHandleW
- api | kernel32: GetCurrentProcess
- api | kernel32: SwitchToThread
- api | kernel32: GetCurrentProcessId
- api | kernel32: SetThreadAffinityMask
- api | kernel32: FindNextFileW
- api | kernel32: IsWow64Process
- api | kernel32: EnterCriticalSection
- api | kernel32: VirtualAlloc
- api | kernel32: SetThreadPriority
- api | kernel32: LeaveCriticalSection
- api | kernel32: TerminateThread
- api | kernel32: LoadLibraryW
- api | kernel32: InitializeCriticalSection
- api | kernel32: VirtualFree
- api | kernel32: GetCurrentThread
- api | kernel32: LoadLibraryExW
- api | kernel32: FindFirstFileW
- api | ntdll: NtCreateSection
- api | ntdll: NtUnmapViewOfSection
- api | ntdll: NtMapViewOfSection
- api | ntdll: RtlNtStatusToDosError
- api | ntdll: ZwQueryInformationToken
- api | ntdll: ZwClose
- api | ntdll: ZwOpenProcessToken
- api | ntdll: mbstowcs
- api | ntdll: memset
- api | ntdll: wcslen
- api | ntdll: memcpy
- api | kernel32: RegOpenKeyExA
- api | kernel32: RegQueryValueExW
- api | user32: GetCursorInfo
- api | kernel32: SetFileAttributesW
- api | kernel32: CreateWaitableTimerA
- api | kernel32: DeleteFileW
- api | kernel32: lstrcatW
- api | kernel32: lstrcmpiW
- api | kernel32: LoadLibraryA
- api | kernel32: ResetEvent
- api | kernel32: GetLastError
- api | kernel32: lstrlenW
- api | kernel32: CreateProcessA
- api | kernel32: GetExitCodeProcess
- api | kernel32: CreateEventA
- api | kernel32: SetEvent
- api | kernel32: HeapFree
- api | kernel32: SetWaitableTimer
- api | kernel32: HeapAlloc
- api | kernel32: GetModuleHandleA
- api | kernel32: HeapCreate
- api | kernel32: HeapDestroy
- api | kernel32: GetCommandLineW
- api | kernel32: CloseHandle

- api | kernel32: ReadFile
- api | kernel32: GetSystemTimeAsFileTime
- api | kernel32: WaitForSingleObject
- api | kernel32: CreateFileA
- api | ntdll: RtlFreeUnicodeString
- api | ntdll: RtlUpcaseUnicodeString

• Module 1 other strings

- NuH4Lo
- b7d2ca
- ak'm@i
- '/w2y0
- o<R<-7
- dyB(7E
- g)WI!o
- kR16KJ
- Hu09^2
- RLE<Ep
- fN@F+Uu
- 2i.)dR
- T@=kC(ou
- t?ibv
- amJcDi(
- }Zu4S)4
- 9:31XO
- a%Fol%
- 3mb~e+Vs6
- BUr`Cach
- QueryInf8oA
- ("A@#0
- 6$..7)p9C
- fD[24z?
- 0`e`2X
- 5-20=}
- right q9
- Software
- 3456789+H/
- vwxyz012
- nopqrstu
- XYZabcde
- VERSIONJ0c
- HLWAPI
- ET.8dl
-]ozd:o
- e0"UV.
- 2D-,7`
- @s>gE0
- 622X)`
- H1uD0-
- 9#sI@N
- UXEo]T
- ')o3aH
- O*cONa
- K.6BO"
- ao$]|#

- l3gX"U
- 3]L*\j2
- <}3;8#s
- 3/@~x2
- 62Xw?9
- odk[@eLD
- u-@W9x
- A4Phd~
- 0QRArP
- hDc2]1
- UA&_t24
- <E_ek(
- ="bR3I
- >jbN9
- fwl2 I
- ?o@xBo
- !6sZK2
- L/i&6bAe
- GHp91|sXg6
- 0 4@@D
- I#oQ(<
- </u*Zi
- N8;HiVd
- 3QHMK8
- 2YI}?A
- F"aX9Z
- 9/3uqJ
- O;A)_w/V
- }hx1k(0c,
- a,lqo0
- /Ho(I
- r^J8_8
- H-4L4x
- K`D9{TAei;"
- 5(%B7w
- U@O%Y-W
- I9aX/d
- 5H=+2?
- uK C;0
- \\%i0Rfv
- &WT-u;/o
- [32CjvQ/
- E$\\@,ef
- DPe=7F
- I)M)1)
- pAUfO>
- 42Kvi08
- W25L%aB
- @1s7H%
- OeTE4t(
- a>-Kw8
- v9OLKT
- A #Z2I
- 3OR;aF
- A6/u/SU&
-]"A0A|1\'
-)t7P@3[

- 5FiA}D@
- 0,o2(Q
- "e\\W2~
-]b2l{z;%u
- >x42j\\T
- 55@;!)
- 2_NpC3O
- 9s 4[!J
- "TE 1$$
- EFA](L
- udKQSV2'C
- R562u#o
- IcR<M9Q
- /52}{T
- uG Lj:<3
- >islIℜ
- K3W =!/Ict
- uS&}NA
- xFEIxP
- "!IU2Q
- 14+\\TU
- E1^5X=(
- !!$MYIu
- w8Lc3Z
- 'txO$9
- o_ o!h
- ?u!5E]>$b
- EIJ,)C
- 1wAmIeb
- ~kIFE}
- 8ch9un2
- fE +"0o
- hL<bCa/4
- va9i@?
- 0'<|AS
- l|3(uf)
- QIFJ:2Ih
- cul_(4
- ej'3Uy
- 1ugCFnn
- k8dY%E
- $2\\SvSi
- pKA`E%
- V7@jf8
- kZ2xp$0
- N[(4UOV
- ,'@D,D08
- 3edx+S
- zd2u7;
- 7%btX1@
- fu-ZQ2|
- }0ZD+\\A
- L$`!14uacf
- v5o,:U
- 8H+"oE
- WAT'U
- reloc'U2 Q

- P.t9ex
- 0RicQhX
- proggam
- NuH4o0
- k'm@i-te
- y0ke>X
- @.Yj`Op9
- <K9:W:ipd
- 8X%<a^Ut
- 64<N;_<
- 92"%)A
- 9;!:I;O<
- BE=_ix
- 99(:@;I<r={>
- 41'JGPg`
- 8t3v9xdzj|
- &:r1tGvax
- ;!<,=7>B?`?i?o?
- H3Mfyu
- bOKn7A
- y26\\#Q
- (;3G8BOf
- Ocr<80`
- fN`F+Uu
- 4tbBYQ.eW
- s+2s4zC
- 1)xwi|
- E4Pold
- [V!A!&h;:OP
-]xU{1E
- GuidTS
- a%FolT
- dCiR1CR
- D=upW*4N
- Ht@pQuery
- lo=up<G
- _AJean
- 9C5-20
- 56789+/r
- *uvwx0yz
- WXYZabc0xf
- KLMNOPQq70
- CDEFGHIJ
- h@d1I0
- 7n5d#
- cr3ypLE
- pheRichaZ
- SHLWA!PIo
- +uI`?
- ^_dU)
- VC20XN}/
- AP]YUr
- QRPh04
- 1:cUN.
- 4IS|'L
- 2LuT(T
- J$ O0H@

- EVI1GLU
- b4DU109
- 'g<3}8
- P?F8p8:
- 52w-L<
- .J90=;
- |3b9tt7
- jH2l2|j
- th9Dduc
- 3d)VP4 /
- $sR=%EI
- `e8I"S
- xuSRl$9w3
- ~sq2$7
- *8#(u~xC+!
- $(]ONE<x
- O^)n8m
- 2/),]iGr
- 3ud~v`269|Y
- !JoEYhX
- 2D)Sy5
- |-je(8
- tBW1h3
- h7Y5GS
-)!~blQuo
- p9>I_uN
- 50*tvR/j
- u3`c<|h
- =9<:3A
- 1uMj.!f
- pM0F?7
- /C5T1bL
- O u^N_
- 7T1GF'@
- KV"U0h~+
- '0+dv$AW
- IB9qD'c
- t?M;(IDJ6
- PA(oRf
- h8r|1E
- 7iE!\\'eR
- O5oNRb
- @jh&0u
- hXt4A.
- u!2X
-)N16fu
- UEn8iU[@$
- V2$7s(J
- Bu\\Ur{5}
- MFd|9L,%2W
- f]t"uO
- K{TE3&2&A.Ed;
- ue%/!k
- f9@5}[
- ?"0U@z
- uXZ1\\TF;p
- AE$2b@

- j;IPE8
- u3V0G8
- 7Et*Bv
- 8ch9un2
- WQ59H'
- I`iH `P
- `U9>/vMpa
- A0F u_!
- aD-jBqIX/
- .E6h<r6
- N5DnhA
- Han292v
- 7+2zjX
- [vtaLo
- mBiI,3&
- %h EA%
- 4h]H2,
- otv1j:
- P.t9ex
- This pr9og
- RU, 8EN81`
- CI;iA;;,AU)#A;
- I;Go;;;UG)
- konpE:(
- 64E2ablKWow!4F
- Pro?ess.M
- Is'ow6
- T64rDLL.exp{orey.e
- PrAgMay
- Xmwaee
- u&tnpe;
- =%uzid=
- %08o%0
- %u&)ser
- eat9ProMessVsUsnrA
- rea(ePrAcesdA
- cat5on
- fic=tio@
- kKrne{basn
- drLAadD{l
- eTFreas
- EngUnmapFontFileFD
- HA_A^A]A_^][
- SUVWATAUAVAWH
- ole32.dll
- CoInitializeEx
- CoUninitialize
- SHELL32.dll
- ShellExecuteW
- ShellExecuteExW
- SHGetFolderPathW
- GDI32.dll
- RemoveFontResourceExW
- AddFontResourceExW
- PathFindFileNameA
- PathCombineW
- PathFindExtensionA

- PathFindFileNameW
- PathFindExtensionW
- ADVAPI32.dll
- USER32.dll
- KERNEL32.dll
- SETUPAPI.dll
- SetupDiGetDeviceRegistryPropertyA
- SetupDiEnumDeviceInfo
- SetupDiDestroyDeviceInfoList
- SetupDiGetClassDevsA
- StrStrIA
- May 9 2017
- UNKNOWN
- IEEE 1394
- Direct Access Device
- Tape Device
- Printer Device
- Processor Device
- WORM Device
- CDROM Device
- Scanner Device
- Optical Disk
- Media Changer
- Comm. Device
- ASCIT8
- Array Device
- Enclosure Device
- RBC Device
- Unknown Device
- -v6A/v
- ,vej/v_i/v
- VC20XC00U
- :4321u
- h4321j
-]AYAXZY
- 0QRAPAQUH
- @.data
- `.rdata
- !This program cannot be run in DOS mode.
- MyMainWnd_56
- WndClass_56
- WndClass2_56
- WndClass1_56
- MyMainWnd_56
- MyMainWnd_56
- win32k.sys
- win32kfull.sys
- GDI32.dll
- USER32.dll
- WndClass_56
- WndClass_56
- cga80850.fon
- 0123456789ABCDEF
- WndClass2_56
- WndClass2_56
- WndClass1_56
- WndClass1_56

- USER32.dll
- |%*YN+V;
- @f0~`Mh4?x&
- ; <(=0>8?@?H?P?X?`?h?x?
- < =(>@L
- t(v0xPzX|p~
- :8;P<h=
- c1pk+J
- >HVO$L
- dCrg9+
- G("4ST`"dpWdn
- (z)~H!(
- wplSOn
- n_({\\!'c
- rdL<w~u
- .<csFe@X
- et$M%^$
- m),BIW
- ?$>H:r
- e$dH`r.(
- XL Gs1tS
- K"JFH7
- #"+D3;
- =dE[(b
- lat|J'
- bsn4b%S
- pCpBfmEz
- \\]^_`}u#
- fghijklm
- GHIJKLMN
- h}qD%O
- |FbOLF
- "u!Cn#<B
- V LJ';
- 'XrL%_I
- RGgE#<
- Q,<Bw!
- R9\\>tVJ[
- Y)VHHTL
- Y$ M;&
- DsJ3'H
- kSjkJtq
- Rf-+Q,
- Yp'_lX
- z.s~1Z^
- pRDk}yC
- L!VhT3
- .JL0NBt`,#
- %HXK[m
- Wg(byXV
- :"+}eK+\'/P
- P"Jh.@
- rXQ$Wh
- ,#}clQt
- jPp'b>
- x tdp*
- {pTZ|S

- C:9{("
- E"MZ$V
- ~A^\\@X
- S%x8'?
- $ y>k%T
- ehR'YD,}]
- lG$"I*
- mL\\H $
- f{$Gp8
- }MV'WO
- Ws',mO
-)7wQ]$
- "U-Xj%
- =W`^s!af
- LBh>)bGu
- `p-C[@
- s^R_|\\V
- w`vids)!
- `(Q;w@vI?w
- G+}^i]"
- f_BE#%
- VIFP".
- P% EQL'
- k4R$gk
- v2B?&]
- iQV~Ps
- ->t3:.>/<~>+>_-'p
- xZ|?Daz
- cPH<fO
- It|p]]
- C+p$,>
- ^ybt/W
- 1pFF% ;k
- tWS|%}
- (HE\\SP
- 'g8w:g
- `t'lrjA[
- D<~|7=
- @_H-Qo
- @)9LLv
- QcBt q(
- ?t_/&M;
- KDrt`[
- q?2dTS
- <OF%Py
- "tUzX^
- :[I]\\a
- (G$)Ve d
- =Bp"S]9
- 2zr,j,H
- "wNiTD{
- %D*p 5*e[}"
- v)Z_"Q
- }%t!`@
- xLQ2 Nd
- hXf{<sc
- ga{/S<)

- #Lb([J,
- tk[*-I
- "LZ!6!
- &xRyg;%
- Y\\LX6f
-]^Hf#/.
- h*K^!kV
- b~FLm"b
- m_xQ)+
- YtkKJW
- Nd,F8R
- ^)b:pE
- FPNyh.
- uJBK\\j
- c"N1>R
- /#p.?lk4CV
- [XsEwC
- ry6F{#=
- (g%v]~
- A%+\\="
- Q=8f<*
- M+v%jNB
- S)`kt/V
- F\\xYm,D
- pv> L/@
- ?KxV_?
- !H(*nN=
- t6!=Qb
- fYGEmW
- :AhtQ/
- !k$dyv
- >MIP,t
- ^Jv7$|
- `T!q=@}
- /g<DVI`V
- *p%,1pv
- RD hy%
- {YvLX=4-P
- ZDfh8)
- &W;"dfBM
- h"Mp1`
- J`2dX$@R?
- KwSxWsi
- b@,t2\\
- vd?H~Y>x
- HW4: ,
- k@(s@8
- Tx\\~p~t~
- V(D?j?t?~?
- (!c0:.
- Ldaxlxv%
- ^x&z;,|2[:
- ~J~R~Z~`
- ~f~s~{~
- ~g]l~?
- K=rRN]
- t/vJxszyJ

- q2sHTp
- P(x$_.
- (?rHtNvYIz
- "z;@-G
- tHvRI\\
- B9:<;D<`=
- tWvrx~z
- V<d$|<
- ;r,t2v[xhzz|
- 2r+t?v[xkHsb
- TRT;p<
- :*;1<B%G
- v=xENM
- :(;D<J=g>n?s?
- '<6=]>d?
- R9:.;]<n=v>
- vV]n`>
- '$G=gF
- h~K~O~S~W~[~_~c~g~k~o~s~w~{~
- zK|c~i~
- v'x?zc|
- t;vixnz
- 9<':/;5<N=[>m?r?
- :";*<0=J>
- :G;`<j=t>z?
- ~e;DFxxWx5x
- _xL{@(
- -0`PpD
- u B-:L
- l"bDXN
- k"aDWM
- }"sDi_
- d {Ub`
- TD!hy>
- "9DD%Cf
- (J`)5&
- f;Adkb
- T atzT
- SplSJn
- EZb.P|
- Mx,X(jV
- mre%cp
- hArgvW
- dL<w~u
- <y`|an
- pV%fH/
- t$M%^$
- $~JflfHA@\\
- b"LD6$
- PMa?rk
- pyright
- N[(bd8%@
- [\\]^_W`m
- W}"?{R
- ghijklmn
- l.S(f2
- Uq)xRT

- 6hlM<r
- CRY)PT
- x"lDXB
- n"RDH>
- D"RDl|
- B"XDjx
- 2">DJ^
- UQPXYr]K[
- 5?xTH<
- !|dx,t
-).HL&ZT;
- pl!APdr>
- #ddho#`V
- rY%&:,P
- <S}DJ?8
- tdxr;V
- <p'^_E
- h`=%i.RX
- XHr\\XJS
- 1Td0`LHD)^p
- |PBNDFSC
- FT.^L!
- (L{gJL
- ~<$<r8
- 9`%tk@
- ^<tn9P
- cXbJ<b
- bxL_rE
- fF3b_F
- t)`[~
- _<j6Pf
- r@Yk)3
- twQa-rB
- :?hB:@
- j-&RB;{
- hl#uL&
- t"c)_~
- F0$Nn%wD
- (1+RW(C^nQ
- z^/(x%,
- f(<N-S
- %0t,nw)
- Hcj xF
- ^8W%[yr
- ;C@ Xj
- P,)QVS
- eL,%Bx
- YaqSVz
- k:a]N&
- "xQaGT
- V(ZuxZ
- bWs^[B
- 4gRHh(
- 3B%d+S
- i?kttr
- T%"m$X
- 1Ddb*f

- tSz}!m
- A;TMl|[
- [JS2lw
- Z.'t*c
- 'Q n!\\
- mh!?N^{
- k+@},XU
- %5~<m@
- 7wX\\FT
- z#"\'^e
- b[^_W$
- |h0!lp
- &BC;+VYK
- QWiKNPbz
-]"4#%G
- nKY=gs
- =lP@qh,
- |n~T_$
- pnV*QP
- SX#[kE
- %jdY]R
- ^}dC [
- d"<Lh9@
- h!V!s2
- ;p<t':7
- qd{(+L
- K;)f]#
- j(^BZdf
- lxP><`D
- G$Z#=P!
- B5!,VH
- R<l)Lt
- K|h^J
- N:R*H[
- $B0 (H
- G&@cj,JP
- Y@B %:
- yuh%WL
- C;;K@N)
- R%\\<nw
- StrRChrA
- StrChrA
- SHLWAPI.dll
- StrChrW
- StrTrimW
- ntdll.dll
- =v@F>v
- #-v%9-v
- -vM7.v
- S.vuG-vQ3.v
- -v&<.v
- .v]7.v
- g.vO!.v|
- -v{=,v
- -v\\9.v
- UQPXY]Y[
- ;t$(v(

- +D$$][
-]_^ZY[
- SQRVWU
-]_^ZY[
- SQRVWU
- t"FVUW
- QQSVW3
- t=VVSP
- D$$SWP
- t6=P=*
- |*Rich
- &z; \\uy
- yntdll.dll
- ntdll.dll
- jjjjjjjj
- jjjjjjjj
- jjjjjjjj
- jjjjjjjj
- jjjjjjjj