Analysis report for sample: ccc77d6b955172a89be82ff2a3f86ccd

This report has been generated by a set of tools for semi-supervised behavioral analysis of executables.

More information about these reports at **http://www.vallejo.cc**.

This work is licensed under a Creative Commons Attribution 4.0 International License. To view a copy of this license visit http://creativecommons.org/licenses/by/4.0/.

Report classification: 2296 (indicates the level of interest of the report, based on the amount of information collected about the sample).

Index

- Sample
- AV detections
- Original source url
- Virustotal url
- Yara matches
- Snapshot
- Threads tree
- Running processes
- Most interesting actions
- Most interesting strings
- Involved hosts
- Dns queries
- Connections and readable network traffic
- Threads behavioural information
- Malware processes' network events
- Sample's unpacked / injected modules

Sample

•md5: ccc77d6b955172a89be82ff2a3f86ccd

AV detections

- Microsoft:
- Kaspersky: Trojan.Win32.VBKryjetor.alrd
- Symantec: Trojan.Klonzyrat
- Malwarebytes:

Original source url

- hxxp://185.165.29.36/phone.jpg

Virustotal url

- https://virustotal.com/es/file/2a61232392dc6330dcfbde61e5b1e1a453033774b0f74a2a4b5ab14c4c4a28c0/analysis

Yara matches

The following yara rules have matched injected or unpacked modules's code or data areas.

- IsPE32 ()
- IsWindowsGUI ()
- HasOverlay (Overlay Check)
- IsBeyondImageSize (Data Beyond ImageSize Check)
- HasRichSignature (Rich Signature Check)
- ThreadControl__Context ()
- anti_dbg (Checks if being debugged)
- inject_thread (Code injection with CreateRemoteThread in a remote process)
- escalate_priv (Escalade priviledges)
- win_mutex (Create or check mutex)
- win_registry (Affect system registries)
- win_token (Affect system token)
- win_files_operation (Affect private profile)
- without_attachments (Rule to detect the no presence of any attachment)
- without_images (Rule to detect the no presence of any image)
- without_urls (Rule to detect the no presence of any url)
- maldoc_find_kernel32_base_method_1 ()
- contentis_base64 (This rule finds for base64 strings)
- Crypt32_CryptBinaryToString_API (Looks for crypt32 CryptBinaryToStringA function)
- suspicious_packer_section (The packer/protector section names/keywords)
- UPX ()
- IsConsole ()
- HasDebugData (DebugData Check)

Snapshot

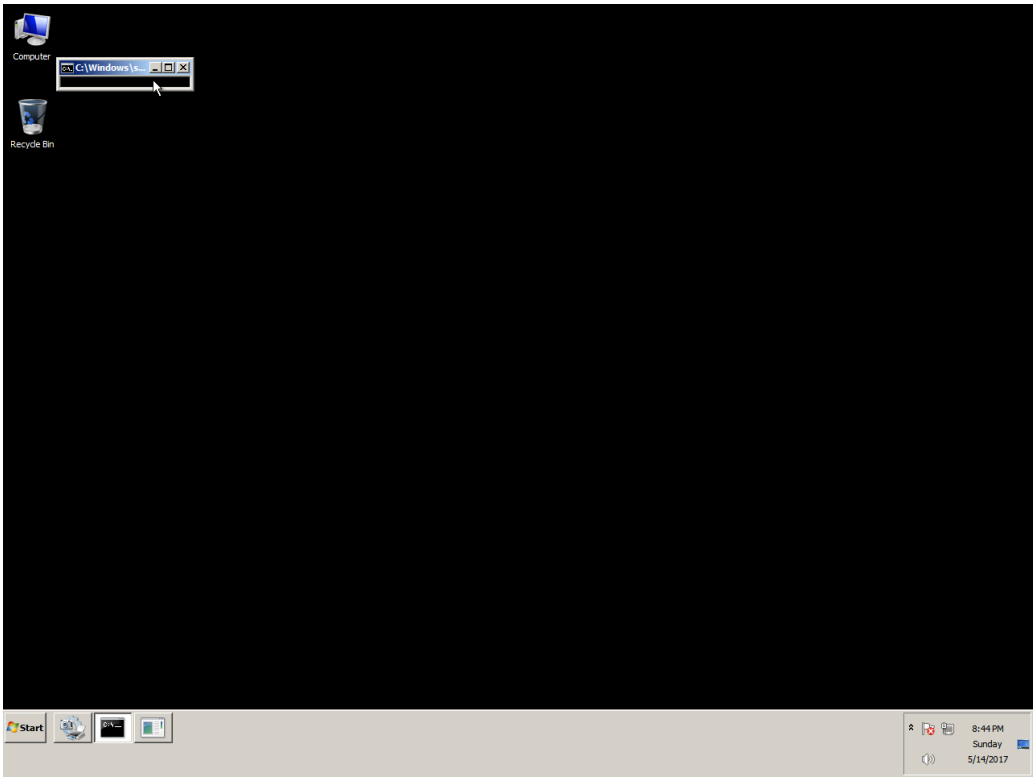
Computer
C:\Windows\s...
Recycle Bin
Start
8:44 PM
Sunday
5/14/2017

Threads tree

The following tree represents sample's threads. T<index> is an alias for sample's threads (numeration is done in the order of threads creation). P<index> is an alias for processes owning sample's threads.

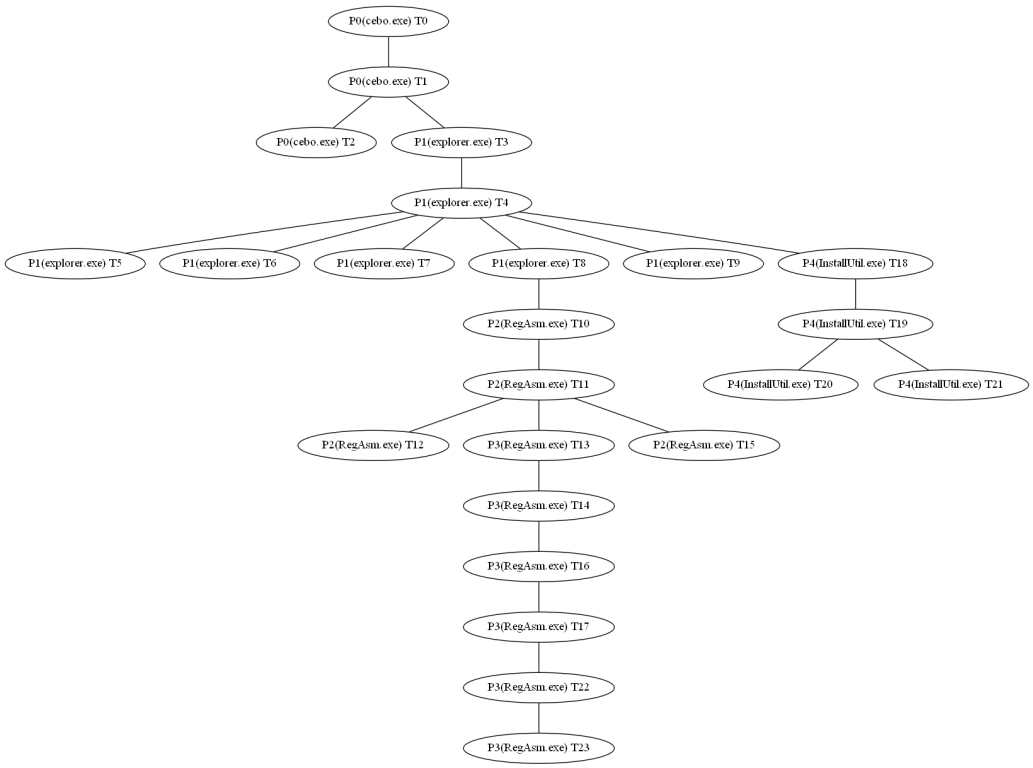

Running processes

Here it is the list of running processes after sample execution.

Processes with sample' threads

- Name cebo.exe Alias P0
- Name explorer.exe Alias P1
- Name RegAsm.exe Alias P2
- Name RegAsm.exe Alias P3
- Name InstallUtil.exe Alias P4

Other processes

- Name System
- Name smss.exe
- Name csrss.exe
- Name wininit.exe
- Name csrss.exe
- Name winlogon.exe
- Name services.exe
- Name lsass.exe
- Name lsm.exe
- Name svchost.exe
- Name svchost.exe
- Name svchost.exe
- Name svchost.exe
- Name svchost.exe
- Name audiodg.exe
- Name TrustedInstaller.exe
- Name svchost.exe
- Name svchost.exe
- Name spoolsv.exe
- Name svchost.exe
- Name svchost.exe
- Name vmtoolse.exe
- Name svchost.exe
- Name dllhost.exe
- Name msdtc.exe
- Name sppsvc.exe
- Name taskhost.exe
- Name dwm.exe
- Name explorer.exe
- Name vmtoolse.exe
- Name SearchIndexer.exe
- Name svchost.exe
- Name wmpnetwk.exe
- Name WmiPrvSE.exe
- Name chrome.exe
- Name WmiPrvSE.exe
- Name SearchFilterHost.exe
- Name taskhost.exe
- Name SearchProtocolHost.exe
- Name cmd.exe
- Name conhost.exe
- Name UI0Detect.exe

- Name UI0Detect.exe
- Name pxxx.exe
- Name dllhost.exe
- Name cmd.exe
- Name conhost.exe
- Name cmd.exe
- Name conhost.exe
- Name int3.exe
- Name explorer.exe
- Name explorer.exe
- Name WmiPrvSE.exe
- Name conhost.exe
- Name cmd.exe
- Name conhost.exe
- Name UI0Detect.exe
- Name cmd.exe
- Name conhost.exe
- Name cmd.exe
- Name conhost.exe
- Name explorer.exe
- Name explorer.exe
- Name cmd.exe
- Name conhost.exe
- Name taskkill.exe
- Name mode.com
- Name conhost.exe
- Name WmiPrvSE.exe
- Name svchost.exe
- Name cmd.exe
- Name conhost.exe
- Name cmd.exe
- Name conhost.exe
- Name UI0Detect.exe
- Name int3.exe

Most interesting actions

The following list it's a collection of the most interesting events captured. This list is ordered by the score assigned to the event. In the section "Threads behavioural information" it's possible to find all the actions performed by each sample's thread ordered chronologically.

- Process Create (C:\\Windows\\Microsoft.NET\\Framework\\v4.0.30319\\InstallUtil.exe PID: P4, Command line: "C:\\Windows\\Microsoft.NET\\Framework\\v4.0.30319\\InstallUtil.exe")
- Process Create (C:\\Windows\\Microsoft.NET\\Framework\\v4.0.30319\\RegAsm.exe PID: P2, Command line: "C:\\Windows\\Microsoft.NET\\Framework\\v4.0.30319\\RegAsm.exe" "C:\\Users\\javi\\AppData\\Roaming\\itunes.exe" OQsbBGdftE mdtMMiIUok)
- Process Create (C:\\Windows\\Microsoft.NET\\Framework\\v4.0.30319\\RegAsm.exe PID: P3, Command line: "C:\\Windows\\Microsoft.NET\\Framework\\v4.0.30319\\RegAsm.exe" "C:\\Users\\javi\\AppData\\Roaming\\itunes.exe" OQsbBGdftE mdtMMiIUok)
- RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Run\\itunes Type: REG_SZ, Length: 86, Data: "C:\\Users\\javi\\AppData\\Roaming\\itunes.exe")
- RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\RunOnce*itunes Type: REG_SZ, Length: 86, Data: "C:\\Users\\javi\\AppData\\Roaming\\itunes.exe")
- Process Create (C:\\Windows\\explorer.exe PID: P1, Command line: "C:\\Windows\\explorer.exe")
- RegCreateKey (HKLM\\Software\\Microsoft\\WBEM\\CIMOM Desired Access: Query Value, Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegCreateKey (HKLM\\Software\\Microsoft\\WBEM\\CIMOM Desired Access: Read/Write, Disposition: REG_OPENED_EXISTING_KEY)
- RegCreateKey (HKLM\\Software\\Microsoft\\Tracing Desired Access: Query Value, Set Value, Disposition: REG_OPENED_EXISTING_KEY)

Most interesting strings

The following list it's a collection of the most interesting strings found in the sample's modules code or data. A complete list of strings for each sample's module can be found in the section "Sample's unpacked / injected modules."

- url | valid domains | tlds: oI(.wF
- url | valid domains | tlds: :5).CW
- url | valid domains | tlds: :.bL%Aj
- url | valid domains | tlds: _SM\\.gn
- url | valid domains | tlds: d.vA#-v
- api | frequently used by malware: WideCharToMultiByte
- api | frequently used by malware: IsDebuggerPresent
- api | frequently used by malware: AdjustTokenPrivileges
- api | frequently used by malware: OpenProcessToken
- api | frequently used by malware: RegCloseKey
- api | frequently used by malware: ResumeThread
- api | frequently used by malware: SetThreadContext
- api | frequently used by malware: GetThreadContext
- api | frequently used by malware: CreateToolhelp32Snapshot
- api | frequently used by malware: GetNativeSystemInfo
- api | frequently used by malware: OpenProcess
- api | frequently used by malware: LoadResource
- api | frequently used by malware: CreateThread
- api | frequently used by malware: ExitProcess
- api | frequently used by malware: WriteProcessMemory
- api | frequently used by malware: VirtualAllocEx
- api | frequently used by malware: WriteFile
- api | frequently used by malware: GetProcAddress
- api | frequently used by malware: CreateRemoteThread
- api | crypt32: CryptBinaryToStringW
- api | crypt32: CryptBinaryToStringA
- api | crypt32: CryptStringToBinaryW
- api | crypt32: CryptStringToBinaryA
- api | kernel32: WriteConsoleW
- api | kernel32: SetFilePointerEx
- api | kernel32: SetStdHandle
- api | kernel32: GetConsoleMode
- api | kernel32: GetConsoleCP
- api | kernel32: FlushFileBuffers
- api | kernel32: LCMapStringW
- api | kernel32: OutputDebugStringW
- api | kernel32: LoadLibraryExW
- api | kernel32: GetStringTypeW
- api | kernel32: GetStdHandle
- api | kernel32: MultiByteToWideChar
- api | kernel32: GetModuleHandleExW
- api | kernel32: GetCurrentThreadId
- api | kernel32: GetCPInfo
- api | kernel32: GetOEMCP
- api | kernel32: GetACP
- api | kernel32: IsValidCodePage
- api | kernel32: TlsSetValue
- api | kernel32: TlsGetValue
- api | kernel32: InitializeCriticalSectionAndSpinCount
- api | kernel32: SetLastError
- api | kernel32: SetUnhandledExceptionFilter

- api | kernel32: UnhandledExceptionFilter
- api | kernel32: DeleteCriticalSection
- api | kernel32: LeaveCriticalSection
- api | kernel32: EnterCriticalSection
- api | kernel32: DecodePointer
- api | kernel32: EncodePointer
- api | kernel32: RtlUnwind
- api | kernel32: IsProcessorFeaturePresent
- api | kernel32: RaiseException
- api | advapi32: LookupPrivilegeValueW
- api | kernel32: RegSetValueExW
- api | kernel32: RegSetValueExA
- api | kernel32: RegQueryValueExW
- api | kernel32: RegQueryValueExA
- api | kernel32: RegOpenKeyExW
- api | kernel32: RegOpenKeyExA
- api | kernel32: RegNotifyChangeKeyValue
- api | kernel32: RegCreateKeyExW
- api | kernel32: RegCreateKeyExA
- api | user32: MessageBoxW
- api | user32: wsprintfA
- api | user32: wsprintfW
- api | kernel32: LocalFree
- api | kernel32: GetSystemDirectoryW
- api | kernel32: TerminateProcess
- api | kernel32: Process32NextW
- api | kernel32: Process32FirstW
- api | kernel32: CreateProcessW
- api | kernel32: OpenMutexW
- api | kernel32: ReleaseMutex
- api | kernel32: GetCurrentProcess
- api | kernel32: CreateEventW
- api | kernel32: lstrlenW
- api | kernel32: lstrlenA
- api | kernel32: WaitForSingleObject
- api | kernel32: LoadLibraryA
- api | kernel32: GetWindowsDirectoryW
- api | kernel32: DeleteFileW
- api | kernel32: FindResourceW
- api | kernel32: ExpandEnvironmentStringsW
- api | kernel32: GetModuleFileNameW
- api | kernel32: CreateMutexW
- api | kernel32: lstrcatW
- api | kernel32: lstrcpyW
- api | kernel32: SizeofResource
- api | kernel32: GetLastError
- api | kernel32: LockResource
- api | kernel32: VirtualProtect
- api | kernel32: GetFileAttributesW
- api | kernel32: CreateFileW
- api | kernel32: CloseHandle
- api | kernel32: ReadFile
- api | kernel32: GetFileSize
- api | kernel32: GetCurrentProcessId
- api | kernel32: GetProcessHeap
- api | kernel32: HeapFree
- api | kernel32: HeapAlloc

- api | kernel32: GetModuleHandleA
- api | kernel32: VirtualFree
- api | kernel32: VirtualAlloc
- api | user32: GetProcessWindowStation
- api | user32: GetUserObjectInformationW
- api | user32: GetLastActivePopup
- api | user32: GetActiveWindow
- api | ntdll: NtClose
- api | ntdll: NtUnmapViewOfSection
- api | ntdll: NtMapViewOfSection
- api | ntdll: NtCreateSection
- api | kernel32: IsWow64Process
- api | kernel32: >IsWow64Process
- api | ntdll: RtlDecompressBuffer

Involved hosts

- belegost.csail.mit.edu:9101
- faravahar.rabbani.jp:https
- javi-PC:49196
- javi-PC:49199
- javi-PC:9050
- javi-PC:dynport
- myexternalip.com:http
- 192.168.133.176:49195
- 192.168.133.176:50102
- 192.168.133.176:68
- 192.168.133.1:5355
- 192.168.133.254:67
- 78.47.139.102:80 (myexternalip.com)

Dns queries

- 0.localdomain ---> no answers
- 254.133.168.192.in-addr.arpa ---> no answers
- myexternalip.com ---> 78.47.139.102
- 102.139.47.78.in-addr.arpa ---> no answers
- 5.32.35.154.in-addr.arpa ---> no answers
- dns.msftncsi.com ---> 131.107.255.255
- 39.0.31.128.in-addr.arpa ---> no answers

Connections and readable network traffic

The analysis environment captures network traffic happened while sample execution. It classifies the traffic and tries to extract the most significant parts from the communications data.

In this section it's possible to find parts of the communication data that are easier to be read.

• tcp 192.168.133.176:49195 ---> 78.47.139.102 (myexternalip.com) :80

GET /raw HTTP/1.1[...]Host: myexternalip.com[...]Connection: Keep-Alive

• tcp 78.47.139.102 (myexternalip.com) :80 ---> 192.168.133.176:49195

HTTP/1.1 200 OK[...]Server: nginx/1.10.3[...]Date: Mon, 15 May 2017 03:43:32 GMT[...]Content-Type: text/plain[...]Content-Length: 14[...]Connection: keep-alive[...]Expires: Mon, 15 May 2017 03:43:31 GMT[...]Cache-Control: no-cache[...]46.25.110.246[...]HTTP/1.1 200 OK[...]Server: nginx/1.10.3[...]Date: Mon, 15 May 2017 03:43:32 GMT[...]Content-Type: text/plain[...]Content-Length: 14[...]Connection: keep-alive[...]Expires: Mon, 15 May 2017 03:43:31 GMT[...]Cache-Control: no-cache[...]46.25.110.246

• udp 192.168.133.1:5355 ---> 192.168.133.176:50102

in-addr[...]in-addr

• udp 192.168.133.254:67 ---> 192.168.133.176:68

localdomain

Threads behavioural information

In this section it's possible to find information about sample's threads, such as the actions performed by each sample's thread ordered chronologically.

- **Thread T0 (in process P0, cebo.exe) description**
  - **Thread's childs**
    - Thread T1 (in process P0, cebo.exe)
  - **Thread' events**
    - Thread Create (Thread ID: T1)
- **Thread T1 (in process P0, cebo.exe) description**
  - **Thread's childs**
    - Thread T2 (in process P0, cebo.exe)
    - Thread T3 (in process P1, explorer.exe)
  - **Thread' events**
    - Thread Create (Thread ID: T2)
    - Process Create (C:\\Windows\\explorer.exe PID: P1, Command line: "C:\\Windows\\explorer.exe")
- **Thread T2 (in process P0, cebo.exe) description**
  - **Thread's childs**
  - **Thread' events**
    - Thread Create (Thread ID: TUNKALIAS)
- **Thread T3 (in process P1, explorer.exe) description**
  - **Thread's childs**
    - Thread T4 (in process P1, explorer.exe)
  - **Thread' events**
    - Thread Create (Thread ID: T4)
- **Thread T4 (in process P1, explorer.exe) description**
  - **Thread's childs**
    - Thread T5 (in process P1, explorer.exe)
    - Thread T6 (in process P1, explorer.exe)
    - Thread T7 (in process P1, explorer.exe)

- Thread T8 (in process P1, explorer.exe)
- Thread T9 (in process P1, explorer.exe)
- Thread T18 (in process P4, InstallUtil.exe)

• Thread' events

- Thread Create (Thread ID: TUNKALIAS)
- Thread Create (Thread ID: T5)
- Thread Create (Thread ID: TUNKALIAS)
- Thread Create (Thread ID: T6)
- Thread Create (Thread ID: T7)
- Thread Create (Thread ID: TUNKALIAS)
- RegCreateKey (HKLM\\Software\\Microsoft\\WBEM\\CIMOM Desired Access: Query Value, Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegCreateKey (HKLM\\Software\\Microsoft\\WBEM\\CIMOM Desired Access: Read/Write, Disposition: REG_OPENED_EXISTING_KEY)
- Thread Create (Thread ID: TUNKALIAS)
- Thread Create (Thread ID: TUNKALIAS)
- Thread Create (Thread ID: TUNKALIAS)
- Thread Create (Thread ID: TUNKALIAS)
- Thread Create (Thread ID: T8)
- Thread Create (Thread ID: TUNKALIAS)
- Thread Create (Thread ID: T9)
- Thread Create (Thread ID: TUNKALIAS)
- Thread Create (Thread ID: TUNKALIAS)
- Thread Create (Thread ID: TUNKALIAS)
- Thread Create (Thread ID: TUNKALIAS)
- Thread Create (Thread ID: TUNKALIAS)
- RegCreateKey (HKLM\\Software\\Microsoft\\Tracing Desired Access: Query Value, Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- Thread Create (Thread ID: TUNKALIAS)
- Thread Create (Thread ID: TUNKALIAS)
- Process Create (C:\\Windows\\Microsoft.NET\\Framework\\v4.0.30319\\InstallUtil.exe PID: P4, Command line: "C:\\Windows\\Microsoft.NET\\Framework\\v4.0.30319\\InstallUtil.exe")

• Thread T5 (in process P1, explorer.exe) description

• Thread's childs

• Thread' events

- Thread Create (Thread ID: TUNKALIAS)

• Thread T6 (in process P1, explorer.exe) description

• Thread's childs

• Thread' events

- Thread Create (Thread ID: TUNKALIAS)

• Thread T7 (in process P1, explorer.exe) description

• Thread's childs

- **Thread' events**

  - Thread Create (Thread ID: TUNKALIAS)

• Thread T8 (in process P1, explorer.exe) description

- **Thread's childs**

  - Thread T10 (in process P2, RegAsm.exe)

- **Thread' events**

  - Process Create (C:\\Windows\\Microsoft.NET\\Framework\\v4.0.30319\\RegAsm.exe PID: P2, Command line: "C:\\Windows\\Microsoft.NET\\Framework\\v4.0.30319\\RegAsm.exe" "C:\\Users\\javi\\AppData\\Roaming\\itunes.exe" OQsbBGdftE mdtMMiIUok)

• Thread T9 (in process P1, explorer.exe) description

- **Thread's childs**

- **Thread' events**

  - RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Run\\itunes Type: REG_SZ, Length: 86, Data: "C:\\Users\\javi\\AppData\\Roaming\\itunes.exe")
  - RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\RunOnce*itunes Type: REG_SZ, Length: 86, Data: "C:\\Users\\javi\\AppData\\Roaming\\itunes.exe")

• Thread T10 (in process P2, RegAsm.exe) description

- **Thread's childs**

  - Thread T11 (in process P2, RegAsm.exe)

- **Thread' events**

  - Thread Create (Thread ID: T11)

• Thread T11 (in process P2, RegAsm.exe) description

- **Thread's childs**

  - Thread T12 (in process P2, RegAsm.exe)
  - Thread T13 (in process P3, RegAsm.exe)
  - Thread T15 (in process P2, RegAsm.exe)

- **Thread' events**

  - Thread Create (Thread ID: TUNKALIAS)
  - Thread Create (Thread ID: TUNKALIAS)
  - Thread Create (Thread ID: T12)

- Process Create (C:\\Windows\\Microsoft.NET\\Framework\\v4.0.30319\\RegAsm.exe PID: P3, Command line: "C:\\Windows\\Microsoft.NET\\Framework\\v4.0.30319\\RegAsm.exe" "C:\\Users\\javi\\AppData\\Roaming\\itunes.exe" OQsbBGdftE mdtMMiIUok)
- Thread Create (Thread ID: TUNKALIAS)
- Thread Create (Thread ID: T15)
- Thread Create (Thread ID: TUNKALIAS)

• Thread T12 (in process P2, RegAsm.exe) description

• Thread's childs

• Thread' events

- Thread Create (Thread ID: TUNKALIAS)

• Thread T13 (in process P3, RegAsm.exe) description

• Thread's childs

- Thread T14 (in process P3, RegAsm.exe)

• Thread' events

- Thread Create (Thread ID: T14)

• Thread T14 (in process P3, RegAsm.exe) description

• Thread's childs

- Thread T16 (in process P3, RegAsm.exe)

• Thread' events

- Thread Create (Thread ID: TUNKALIAS)
- Thread Create (Thread ID: T16)

• Thread T15 (in process P2, RegAsm.exe) description

• Thread's childs

• Thread' events

- Thread Create (Thread ID: TUNKALIAS)

• Thread T16 (in process P3, RegAsm.exe) description

• Thread's childs

- Thread T17 (in process P3, RegAsm.exe)

• Thread' events

- Thread Create (Thread ID: T17)

• Thread T17 (in process P3, RegAsm.exe) description

• Thread's childs

- Thread T22 (in process P3, RegAsm.exe)

• Thread' events

- Thread Create (Thread ID: T22)

• Thread T18 (in process P4, InstallUtil.exe) description

• Thread's childs

- Thread T19 (in process P4, InstallUtil.exe)

• Thread' events

- Thread Create (Thread ID: T19)

• Thread T19 (in process P4, InstallUtil.exe) description

• Thread's childs

- Thread T20 (in process P4, InstallUtil.exe)
- Thread T21 (in process P4, InstallUtil.exe)

• Thread' events

- Thread Create (Thread ID: T20)
- Thread Create (Thread ID: T21)
- Thread Create (Thread ID: TUNKALIAS)
- Thread Create (Thread ID: TUNKALIAS)

• Thread T20 (in process P4, InstallUtil.exe) description

• Thread's childs

• Thread' events

- Thread Create (Thread ID: TUNKALIAS)

• Thread T21 (in process P4, InstallUtil.exe) description

• Thread's childs

• Thread' events

- Thread Create (Thread ID: TUNKALIAS)

• Thread T22 (in process P3, RegAsm.exe) description

• Thread's childs

- Thread T23 (in process P3, RegAsm.exe)

• Thread' events

- Thread Create (Thread ID: T23)

• Thread T23 (in process P3, RegAsm.exe) description

• Thread's childs

• Thread' events

- Thread Create (Thread ID: TUNKALIAS)

Malware processes' network events

The analysis environment tries to capture and collect network actions performed by sample's threads.

Process P1 (explorer.exe)'s network events

- TCP Connect (javi-PC.localdomain:dynport-> myexternalip.com:http (0))
- TCP Send (javi-PC.localdomain:dynport-> myexternalip.com:http (69))
- TCP Receive (javi-PC.localdomain:dynport-> myexternalip.com:http (227))

Process P4 (InstallUtil.exe)'s network events

- TCP Connect (javi-PC:dynport-> javi-PC:49196 (0))
- TCP Accept (javi-PC:49196 -> javi-PC:dynport (0))
- TCP Reconnect (javi-PC.localdomain:dynport-> faravahar.rabbani.jp:https (0))
- TCP Reconnect (javi-PC.localdomain:dynport-> faravahar.rabbani.jp:https (0))

Process P1 (explorer.exe)'s network events

- TCP Connect (javi-PC:dynport-> javi-PC:9050 (0))

Process P4 (InstallUtil.exe)'s network events

- TCP Accept (javi-PC:9050 -> javi-PC:dynport (0))
- TCP Receive (javi-PC:dynport-> javi-PC:49199 (4))

Process P1 (explorer.exe)'s network events

- TCP Send (javi-PC:dynport-> javi-PC:9050 (4))
- TCP Receive (javi-PC:dynport-> javi-PC:9050 (2))

Process P4 (InstallUtil.exe)'s network events

- TCP Send (javi-PC:dynport-> javi-PC:49199 (2))
- TCP Receive (javi-PC:dynport-> javi-PC:49199 (29))

Process P1 (explorer.exe)'s network events

- TCP Send (javi-PC:dynport-> javi-PC:9050 (29))
- TCP Receive (javi-PC:dynport-> javi-PC:9050 (4))
- TCP Receive (javi-PC:dynport-> javi-PC:9050 (6))

Process P4 (InstallUtil.exe)'s network events

- TCP Send (javi-PC:dynport-> javi-PC:49199 (10))

Process P1 (explorer.exe)'s network events

- TCP Disconnect (javi-PC:dynport-> javi-PC:9050 (0))

Process P4 (InstallUtil.exe)'s network events

- TCP Disconnect (javi-PC:dynport-> javi-PC:49199 (0))
- TCP Reconnect (javi-PC.localdomain:dynport-> belegost.csail.mit.edu:9101 (0))
- TCP Reconnect (javi-PC.localdomain:dynport-> belegost.csail.mit.edu:9101 (0))

Sample's unpacked / injected modules

In this section it's possible to find information about sample's modules, such as the rich signatures, strings, yara rules matching the module,...

The analysis environment performs an heuristic search trying to find sample's injected or unpacked modules in memory, dumping and analyzing them.

• Module 1 (probably unpacked / injected by the sample)

• Module 1 rich signatures

• 44616e5300000000000000000000000000d52e1001f0000000d52df00100000000d52e000630000004651e100040000000097893000f000000000001009100
00007d79e1000f0000007d79de00

• Module 1 yara matches

• Module 1 strings

• Module 1 most interesting strings

• url | valid domains | tlds: oI(.wF
• url | valid domains | tlds: :5).CW
• url | valid domains | tlds: :.bL%Aj
• url | valid domains | tlds: _SM\\.gn
• url | valid domains | tlds: d.vA#-v
• api | frequently used by malware: WideCharToMultiByte
• api | frequently used by malware: IsDebuggerPresent
• api | frequently used by malware: AdjustTokenPrivileges
• api | frequently used by malware: OpenProcessToken
• api | frequently used by malware: RegCloseKey
• api | frequently used by malware: ResumeThread
• api | frequently used by malware: SetThreadContext
• api | frequently used by malware: GetThreadContext
• api | frequently used by malware: CreateToolhelp32Snapshot
• api | frequently used by malware: GetNativeSystemInfo
• api | frequently used by malware: OpenProcess
• api | frequently used by malware: LoadResource
• api | frequently used by malware: CreateThread
• api | frequently used by malware: ExitProcess
• api | frequently used by malware: WriteProcessMemory
• api | frequently used by malware: VirtualAllocEx
• api | frequently used by malware: WriteFile
• api | frequently used by malware: GetProcAddress
• api | frequently used by malware: CreateRemoteThread
• api | crypt32: CryptBinaryToStringW
• api | crypt32: CryptBinaryToStringA
• api | crypt32: CryptStringToBinaryW
• api | crypt32: CryptStringToBinaryA
• api | kernel32: WriteConsoleW
• api | kernel32: SetFilePointerEx
• api | kernel32: SetStdHandle
• api | kernel32: GetConsoleMode
• api | kernel32: GetConsoleCP
• api | kernel32: FlushFileBuffers
• api | kernel32: LCMapStringW

- api | kernel32: OutputDebugStringW
- api | kernel32: LoadLibraryExW
- api | kernel32: GetStringTypeW
- api | kernel32: GetStdHandle
- api | kernel32: MultiByteToWideChar
- api | kernel32: GetModuleHandleExW
- api | kernel32: GetCurrentThreadId
- api | kernel32: GetCPInfo
- api | kernel32: GetOEMCP
- api | kernel32: GetACP
- api | kernel32: IsValidCodePage
- api | kernel32: TlsSetValue
- api | kernel32: TlsGetValue
- api | kernel32: InitializeCriticalSectionAndSpinCount
- api | kernel32: SetLastError
- api | kernel32: SetUnhandledExceptionFilter
- api | kernel32: UnhandledExceptionFilter
- api | kernel32: DeleteCriticalSection
- api | kernel32: LeaveCriticalSection
- api | kernel32: EnterCriticalSection
- api | kernel32: DecodePointer
- api | kernel32: EncodePointer
- api | kernel32: RtlUnwind
- api | kernel32: IsProcessorFeaturePresent
- api | kernel32: RaiseException
- api | advapi32: LookupPrivilegeValueW
- api | kernel32: RegSetValueExW
- api | kernel32: RegSetValueExA
- api | kernel32: RegQueryValueExW
- api | kernel32: RegQueryValueExA
- api | kernel32: RegOpenKeyExW
- api | kernel32: RegOpenKeyExA
- api | kernel32: RegNotifyChangeKeyValue
- api | kernel32: RegCreateKeyExW
- api | kernel32: RegCreateKeyExA
- api | user32: MessageBoxW
- api | user32: wsprintfA
- api | user32: wsprintfW
- api | kernel32: LocalFree
- api | kernel32: GetSystemDirectoryW
- api | kernel32: TerminateProcess
- api | kernel32: Process32NextW
- api | kernel32: Process32FirstW
- api | kernel32: CreateProcessW
- api | kernel32: OpenMutexW
- api | kernel32: ReleaseMutex
- api | kernel32: GetCurrentProcess
- api | kernel32: CreateEventW
- api | kernel32: lstrlenW
- api | kernel32: lstrlenA
- api | kernel32: WaitForSingleObject
- api | kernel32: LoadLibraryA
- api | kernel32: GetWindowsDirectoryW
- api | kernel32: DeleteFileW
- api | kernel32: FindResourceW
- api | kernel32: ExpandEnvironmentStringsW
- api | kernel32: GetModuleFileNameW

- api | kernel32: CreateMutexW
- api | kernel32: lstrcatW
- api | kernel32: lstrcpyW
- api | kernel32: SizeofResource
- api | kernel32: GetLastError
- api | kernel32: LockResource
- api | kernel32: VirtualProtect
- api | kernel32: GetFileAttributesW
- api | kernel32: CreateFileW
- api | kernel32: CloseHandle
- api | kernel32: ReadFile
- api | kernel32: GetFileSize
- api | kernel32: GetCurrentProcessId
- api | kernel32: GetProcessHeap
- api | kernel32: HeapFree
- api | kernel32: HeapAlloc
- api | kernel32: GetModuleHandleA
- api | kernel32: VirtualFree
- api | kernel32: VirtualAlloc
- api | user32: GetProcessWindowStation
- api | user32: GetUserObjectInformationW
- api | user32: GetLastActivePopup
- api | user32: GetActiveWindow
- api | user32: MessageBoxW
- api | ntdll: NtClose
- api | ntdll: NtUnmapViewOfSection
- api | ntdll: NtMapViewOfSection
- api | ntdll: NtCreateSection
- api | kernel32: IsWow64Process
- api | kernel32: >IsWow64Process
- api | ntdll: RtlDecompressBuffer

• Module 1 other strings

- @7S4~i
- 6vD-#79
- U5?-V_
- k!6e5,
- I2W#@
- -Vyu/5
- I1|.H6%
- LieM1@y
- Z0v_II
- D1Q8,@:&
- HeS9gG0
- nus3I"N
- Y99x1=
- v>`mi'9g
- dwaY0B
- 1Oa;N~
- I7'f#x
- lEZkE0
- h^yA$4
- +L7OnSE
- A}C1>i%
- 8~QM1n

- ibOpaX
- y-lK2OD
- i..8ga
- HEYEap
- JoC9b_,'
- 3I=RFL/
- M3;Yr4.S!H
- l{e4VP49C
- HJ-OQ4
- pY5OnOx
- begjBf?a
- 8cYo-1
- %c)9yE4[|u
- Z2:O5}
- 4C8"1>IIvnw
- |12- b
- 6Ds#i>
- +R2@&4W
- BM9:Du\\
- 3L]!#
- z{#Vi4g
- 43/4Y(B
- -26h>V\\
- js0eV]
- U&M53bHCQ;
- Sl0o(cR
- n{<aI9A@
- T4//Iyx"
- _yT4vf%o
- uZe.`iJs
- %W#78%
- i+=C*EkQ
- Q=O bc}<65
- |G7aT|
- *$TS99VQQ
- &o;|)Xa
- O+LiLED
- m25+ol
- 9l7V<7cr
- :}9_Ij
- VF!04I
- oU>?Gd
- "~x0#5
- Ufk241
- }KMa4V3
- 3O2t}J
- xKo46<
- &PfLUG2;
- 0A/mWC
- OqYIR7
- go4K<n
- v]r1eW
- aY1=S?
- M:3rRIG
- Q/30%4{m
- `vuMV9f
- II!=5a

- X{3akl
- o=Xwfy\\E
- j8*9Tz
- 7/FEe=
- E96)ro
- uRcNE"-x_
- b27m)3
- 2]\\r.
- FLCIecg2
- N4u)#,Q
- nj9li,(x
- e+9v{j
- ;g!AY2
- $tuCS0
- ;OnOX
- h-ei5,U
- 1UR}y{
- #2_oN8
- j:23(d
- 'Yi&U;#
- 7W*2=w
- jF~L15
- _|Eh5s
- \\oGo3Hi
- 73l%B_
- oNO.7Ve
- AB7ks@
- cq=i+4Tj
- $DO?[SI
- =WEI=t
- l4>G6^q8.k
- 9(Q^3`
- &E6ibzn;
- Ji>"pE
- 6,cI`aE
- 6yVu2F
- :m68D-
- oqY8+:
- gIAb={U
- CiP]2c!
- =FR79[
- %<Xb3ue
- ;IOlLO
- %/w9>|1}
- Xxj7_\\}US
- xotkiB
- i'40.s$
- <UJ"[6
- "He|3r
- If;~x1
- Nh1IRD
- $%aEfS9 ~
- -Eu>m3
- aNG9JRP$
- |5z4,&
- Ac5|:1
- g$U90"R

- M[o@b0}y
- ~j^$0E!
- 0(++dEWS
- d_#I1F]
- z)e9rq
- _YiTfl
- 1,FXo{
- S:Uug_
- ~v4,l
- :v87(t
- :4<uFl!@f
- FoM3Pn
- CnEr&l;
- QES}ux
- }9w3(/
- P)18M
- a:s3&"
- :\\1Okzb
- -mum6'o
- fl@E-o
- aF[G85
- x6Id`
- lc48qA
- Q?x|guU
-]c*.Ice?
- "]1vM[O
- Xo|}Is9
- NQ8(kik
- l1r/M5b
- oIf,$X
- (Af%`Qi
- iG-He:
- uNVcyA
- i VYEQ
-][E1$G
- >AD|uh
- SUTii(U
- *Az"y2t
- |$Ol.7v
- #'J98q%N?s
- <d*a0F
- 0XS,id
- QEz46`
- ^6adJ~
- A^jR5G]Z
- Y5WN`\\H/4
- m3.c?"O
- l5!IL[
- bnxF:*Oe
- @a}Z4F
- ;UNi8{
- 01#t!"
- |/m60!d_z
- 6An)Eu
- _C\\0aP
- 1{VtWo
- 5UJqhd

- v-c`uOj
- S 'ITS1
- t_*80d
- U?P{A/
- IhK>E6v
- ze;I%9
- %nUZ2Y
- zaY'1;O
- cToOt04T
- 4s:^3S
- !cm7I7
- ,0LZO4
- gm7G0Y
- AINIE'|*6,
- @4J|i@
- #|omt8
- 8_:x5i
- :8{vv2
- =xi74V
- 0n5th8/0
- 8/ABX#
- "ss6*8
- O5&?~
- Co7NDF
- $=T0T4
- 3`gO&}
- >*Jb8`7
- |ToUCF
- [hEeH:
- |G2A"-
- 8pV=T
- FI +iT
- Mo,Jre
- _/2#ab
- PO[3|L
- 0PPcHqOG}
- 2.Pu3<
- nVZa5{
- TzPRu6}y
- [J3rxoe
- `NB@772)
- ;Y0XL4Q
- gOxFPcOd
- Lc=v93
- 3hX;8R
- axo~gN
- ?U0O8B
- $p}1cOt
- GzJNia
- |+M+I
- T/ro6.
- c-5*^I
- GW{8Et
- xp0,*J3J
- I9\\,I8
-)eu-P
- oz+:0bL

- gE{\\"oWY
- 5_FT{yA]h
- }9Ua\\kw
- EAWO`;
- AZ;h2s
- aI,]l}
- L)?"U
- 4c5DxEE}
- l(>C/=49u
-)G*?4UCF
- oE@!:%;
- A}LA-*kB
- u ?Gc^5
- 04vI#InGH'
- @3s8&oO7;
- ;]5@nxE*
- l[AR 1TD)O%
- e%9:9i
- IF9 n]
- HE[or]}
- /uU~kL
- 1t`4eC
- 3Q Q1^
- 'q1(o+
- G2zeu6%$
- 5E=+ p
- 7U+1(<
- y5e*RQ
- gIzhiTM
- 1tF5fl
- kWArIn~
- +RM*a3
- *Ak9MoL
- uO?`k
- U33K-3h
- F<zi,8
- yyF64:
- ofj5^;b2
- <ZFE<8d
- VCa)IC
- uSkUHwIt
- U],9eX
- 49~<M%Gd
- G(z27
- PKMI7_Bm
- UI&~ueK
- l3zzE}`
- 95#wTU
- %o^XoX
- pT:@A
- hx1aq?B
- 7@};|i
- $9]`2X
- E|=y`8
- 8WE+W/N
- >w2L'U
- !#<w4a

- ?VTya-6
- 4E5_m
- 9+EeI\\
- QwiZ1Ht
- G6Xy1z
- Ews2z\\
- o\\8b_j
- 3a;Fn\\~>
- a.3jQM
- g9jA1B
- #T9%8}j
- B|W0N0
- (+FAe"
- a3kUMm
- QE9NOx
- V-jQ6="c8\\
- p AHI>
- EBCZ)%a
- (^y1$I
- ?91r)g
- k)72Y_eh
- 9MlU1z
- A`>6>p
- "W}kAz|AQ
- {3[`O'>/
- up7FQ`
- {_'8I)
- 7@#zA1X
- AQz1.\\
- 0,{-sma
- 5ZI_q:l
- >C~Io8#
- ;LS;.Oe
- YYKz49
- Ep8f?A
- {IOS%H
- 2HA}fKt
- +5o)tZ
- 8hjIyi`
- *[0dO2-
- jsXa4SY
- `73F.2
- W!ju'I
- R9oBjA
- 3pOF<q
- B9*qZnIp
- }L7l>8
- c0!uHd
- 8T5CNvzz|
- M!0=8v
- 50q{eR
- z:95z_
- 4igw_Ec&S;
- ~X45?C1
- 1yOm^7
- YI q8Jx
- xshouY,

- y@XUYi?umS
- v`RUOt
- /}&90 v'
- <,UhLI
- }f*:Ee!)
- "#uk>A
- @TT8o>
- DmzOi[
- f-EcHUJ
- !`q4os
- 3(=NW9
- iOC6~V
- h8O2f2
- ?lJ]r1
- q6}4Cn
- XeRgRI,
- |wA;q4
- !6jeg&A;
- 7_5Z?o;Q
- O9aZg?
- }#>:O3%
- o;jE,sd4
- 6^8r<v1
- {Ys]AA
- u3 PiP
- Ia7WtRA>
- ojib=U
- (LaN&2
- NaPkHyI
- SmE9[c<
- roURjnh
- @uXFmi
- YE1{H,AK
- Z,e8nf
- 'MIeuV
- ^!w,u-iIL
- ivo,WS
- L9[*AoI
- 4il^oh
- %089QiaZ
- 3azwQr
- v5UaTn
- ^7o4jq3
- 40uj,Q
- Z7VE8x;
- }`9=3sy
- Bge*A`
- 6#oD+^
- &a;=82l
- VqOT0-
- 4m:Qi=
- EAv&|<
- ,Aa@;z"
- uMJh;7
- \\H#EoL
- U9R55&
- 41]\\jy

- >si7FS
- 07T1H;
- OD}:#5
-)9%d30e
- poL\\EQEe
- (N5Cne
- {7{)R.8
- xoj7p]1
- ',2}7Y
- W/d4K1Rd7
- 30z&*:
- \\J3 Nq4
- sW4EV%
- Kt^4I[z
- uVXRT4
- N6E+J//e
- q0-KJ6
- _f]AUy]!
- iUalMA
- -1.P6g
- RAjNw9
- eIwU$a
- i+rr98^
- bW15<4Y
- <TMAiZ,<
- ':g1U
- ^FA|3^I
- <1OTv.Q
- a"y~aO
- LCU 5J#$
- fCN2rI
- WyixU'
- 1_+hUF
- 7)|8].F
- AEHfR}
- <P@ E3
- 2RX2Mh
- 5ZsVALs
- ~@9?Q2
- 0CD@]8
- 9O'STNp'7
- 5Uf<)m
- u8PRv/3
- =de'uT
- 8_"{Uni3
- EB7R8
- >~YA;EE*
- |+UMs`5&
- U9\\itLM
- @}wA8g
- wnugt0
- ^eSb*U
- <.ZF0{a
- 7zfNe!
- 3kY6Th
- lv-Aya
-)@qh998

• {/Ux4%Y
• xp'44Z
• e"Sixf<Kg
• 0/EzRI
• B8yY08
• *c^1o2
• Y6itoA
• \\Jkip70
• 2lW9:^
• {2$@g,0
• ammwT5Y
• NJFe1N
• USxf~fa
• M>w#49
• . %7)PuE&>
• 6@qCi;
• 8"k0Fs2=
• S\\4w2a
• 7:<A_M
• s<J9$9Y
• qzDMK~2'8
• A3O\\2?
• joFE}'NC/_
• fI3>u0{yjA-]
• 4yK%74
• -/E!OT]
• zE~3bR
• Xk6)O7;F#
•]1&8`1
• y:OXVat
• 3mjyA72bXu9
• %|CO5.
• Ud<o`^
• -h[jU
• 79Zpr"
• ebzpARDN
• oQqZ7c
• 12Q7Vj(-
• 5ww34{
•]vnuv4
• 1RH7D?
• '/3ch
• K^7gu?@
• E5s^2p
• 3Ms2rz
• DZV"YUoq
• {Go4^$
• jnx3%uP
• 30P6b)
• 9k=l&3
• 1d}~+-,/I
• X5AyVA
• "c{Uwo
• PADPADP,c
• lSystem.Resources.ResourceReader, mscorlib, Version=4.0.0.0, Culture=neutral, PublicKeyToken=b77a5c561934e089#System.Resources.RuntimeResourceSet
• -@2M[uN

- ~49-bc
- Yw>mIi
- [1u<OW
- vI&zO8;'d
- OMP@fyle
- rE,,S2Y
- -b3$%&uA;
- 2qo8Yq
- C-zeb
- RELcm6
- '3)IhJ
- e#Nb)e
- +_+`oi
- +5+:+?+D+I
- +-+.+/+0+1
- +4+5+:(
- +6+7+8
- %+,+1+2+7+8X}
- +4+5+:(
- ,F+a+e+i+m8n
- +2+3+8+9+>+?
- +,+-+2+3
- ,F+a+e+i+m8n
- +-+.+3+4+5+6
- +,+1+2+7
- +1+2+7+8
- +1+2+7+8
- +,+-+2+7+8
- ,++.+/+4+5
- +h+i+m8r
- +h+i+m8r
- OerD
- I5%,9a%
- Z 8\\F1a8
- ;%,jZa8
- 2LQa(
- I:%,da%8E
- VLJZa8
- GYY2Z
- Z 2}P=a8
- TU8|Z
- U&_m%
- ,6&+6-
- Z ::JLa8v
- Z qti0a8#
- >8jQZ
- Z2s<(
- 5cb=%&8
- 3@_a%8
- LLDa8{
- 0v3Z f
- Z ;3#Va
- OZ C|;)a8
- O,A%&8
- uastrings
- config
- *{<a8j

- NtCoT
- NtCoT
- Z rFPta8
- E_q%&8
- 9c a(
- /}H5(
- 1]3a8*
- Z `qh/a86
- 1.A3Z 0:
- 5Ka%8U
- +'+,+1+6
- ;s:a81
- +H Z Ie
-]xZa8Z
- Z <G|Ma8(
- 3BZ Od
- 5e7a8p
- 6'E%,+a%
- ~"Z o2a
- BLca8+
- v@_u(
- *5Z 1%
- FZ +Dl@a8
- Z jC5-a+
- /}H5(
- Xm?%&8E
- wIea8}
- YEa%+A
- + +T+Uo
- '9|a8r
- daT N9oj8
- uZO%&8
- Z :6bza8
- 1x%,tZ ,6nCa+
- y6%&8X
- [Z Ti2=a8p
- t48a8o
- ?}Ra%8
- fR?a8+
- >e!HZ uE
- Vo7Za8a
- h#1e8T
- %,Ia%8q
- %,U.?8r
- 6-G5Z
- gr2G%&8J
- B)eZa8[
- rA5a%8
- +4+9+>{T
- +3+8{T
- IOx=8*
- +6+7+8
- +\\+`8e
- +5+6+7+<+=+>
- JXa%8|
- a .,V;a%8
- Z -I|Ha+

- x9>Z c\\O
- u3iZ @
- 5'B_(
- W9%uZ |
- K2%,ja8
- +0+1{$
- L 5Ab4a%
- +=&+A+Bo
- Z xM!La8
- ;!Ia8(
- dMQa8[
- Z -Y(qa8
- ,A+T8q
- A%,Ha%8
- +2+7+8+= oJ
- Z 5vGPa+
- Guj3Z
- Z zL~!a8
- 6Z]sdAa+
- +<+A&+E
- EZ A[e
- >=2kZa8
- J5_((
- aa%,na8_
- w8>\\a%8
- cQa%8b
- x7BA q
- -2+`8a
- %,6a8$
- +`+d8i
- -H_,K aE
- @Wf%&82
- -6 umi
- *L09Za+
- Z Yw5'a8
- Z T=*ga8
- oG]%&8`
- Z +1zIa8e
- SXia8!
- 1Gl%&8
- cA1Za8}
- g"4AZ 1J
- ,OHa82
- qGuAZ
- !sra%8
- Z a~{Ba8
- S4~jZ
- u%UZ H
- a1Z /Lu=a8o
- 9xD%&8n
- *+8+9,
- zG ya8
- ~EZ 5+
- 1?,y
- -K&& u84
- YK=w8
- %,-a8j

- Jt0%&8v
- '/X2Z
- T\\?A
- BZl8/
- SW[a8X
- ^ 9%&8
- "NVa%8V
- [T6a%8/
- Z CO$;a8
- Z 68GOa8[
- T7h%&8
- h'/a%8
- Z)n#Ja8$
-)AY%&8
- &0qZa8E
- Z tpO{a8
- KZCa84
- ,U miK
- u^8x.xtYW
- q2mLAr]
- eUU[sD)
- e`CP"1
- `t`_U-a
- !N8f13
- @.reloc
- !This program cannot be run in DOS mode.
- .?AVtype_info@@
- .?AV_com_error@@
- OLEAUT32.dll
- SHELL32.dll
- SHGetSpecialFolderPathW
- SHGetFolderPathW
- ADVAPI32.dll
- USER32.dll
- KERNEL32.dll
- StrCmpNIA
- !"#$%&\'()*+,-./0123456789:;<=>?@abcdefghijklmnopqrstuvwxyz[\\]^_`abcdefghijklmnopqrstuvwxyz{|}~
- 1#QNAN
- 1#SNAN
- CorExitProcess
- A A(A0A8A@APA`ApA
- CONOUT$
- uz-uz-latn
- uz-uz-cyrl
- sr-ba-latn
- sma-se
- sma-no
- quz-pe
- quz-ec
- quz-bo
- kok-in
- bs-ba-latn
- az-az-latn
- az-az-cyrl
- sma-SE
- sma-NO
- sr-BA-Latn

- bs-BA-Latn
- quz-PE
- quz-EC
- uz-UZ-Cyrl
- az-AZ-Cyrl
- quz-BO
- kok-IN
- uz-UZ-Latn
- az-AZ-Latn
- USER32.DLL
- Microsoft Visual C++ Runtime Library
- <program name unknown>
- Program:
- Runtime Error!
- runtime error
- TLOSS error
- SING error
- DOMAIN error
- - inconsistent onexit begin-end variables
- This indicates a bug in your application. It is most likely the result of calling an MSIL-compiled (/clr) function from a native constructor or from DllMain.
- - Attempt to use MSIL code from this assembly during native code initialization
- - not enough space for locale information
- This indicates a bug in your application.
- - Attempt to initialize the CRT more than once.
- - CRT not initialized
- - unable to initialize heap
- - not enough space for lowio initialization
- - not enough space for stdio initialization
- - pure virtual function call
- - not enough space for _onexit/atexit table
- - unable to open console device
- - unexpected heap error
- - unexpected multithread lock error
- - not enough space for thread data
- - abort() has been called
- - not enough space for environment
- - not enough space for arguments
- - floating point support not loaded
- AR6002
- mscoree.dll
- December
- November
- October
- September
- August
- February
- January
- Saturday
- Friday
- Thursday
- Wednesday
- Tuesday
- Monday
- Sunday
- December
- November
- October

- September
- August
- February
- January
- Saturday
- Friday
- Thursday
- Wednesday
- Tuesday
- Monday
- Sunday
- Complete Object Locator'
- Class Hierarchy Descriptor'
- Base Class Array'
- Base Class Descriptor at (
- Type Descriptor'
- `local static thread guard'
- `managed vector copy constructor iterator'
- `vector vbase copy constructor iterator'
- `vector copy constructor iterator'
- `dynamic atexit destructor for '
- `dynamic initializer for '
- `eh vector vbase copy constructor iterator'
- `eh vector copy constructor iterator'
- `managed vector destructor iterator'
- `managed vector constructor iterator'
- `placement delete[] closure'
- `placement delete closure'
- `omni callsig'
- delete[]
- new[]
- `local vftable constructor closure'
- `local vftable'
- `udt returning'
- `copy constructor closure'
- `eh vector vbase constructor iterator'
- `eh vector destructor iterator'
- `eh vector constructor iterator'
- `virtual displacement map'
- `vector vbase constructor iterator'
- `vector destructor iterator'
- `vector constructor iterator'
- `scalar deleting destructor'
- `default constructor closure'
- `vector deleting destructor'
- `vbase destructor'
- `local static guard'
- `typeof'
- `vbtable'
- `vftable'
- operator
- delete
- restrict(
- __unaligned
- __restrict
- __ptr64
- __eabi

- __vectorcall
- __fastcall
- __thiscall
- __pascal
- __based(
- N!d"N1u
- E#+E/^ZY
- -v99.vp
- E.v+E.v`
- ,vO!.v]7.v
- PP9E u
- URPQQh0I@
- @.reloc
- @.data
- `.rdata
- !This program cannot be run in DOS mode.
- XABlAHgAcABsAG8AcgBlAHIALgBlAHgAZQA=
- XABlAHgAcABsAG8AcgBlAHIALgBlAHgAZQA=
- kernel32.dll
- kernel32.dll
- SeDebugPrivilege
- We should start the process!
- kernel32.dll
- aF~-$>
- |Rp&9<
- zEzMy{
- TTObnV=`
- j}z+6%
- >[EKRf
- F!-p!B
- BF:C]uG\\Z,
- g+~+:)7D
- :qn$Y SH
- y cDCkfFu
- B<p,sU
- f%=[=e
- V[^8>J
- i}^r(D
- ZF8,!;
- \\W`#.!
- zn!X~i
- [lQdb4
- <Jm,kH
- |[K9n=
- YNdJ'c,)
- |AM|jN
- fL2f/Lm
- k]A??:
- !~l0(vHN
- ^BBL?g
- ^*$,0'C
- n^kjJS
- |X(=^b
- hX[v]_
-]]elyG
- KmMX1s
- \\GzdlzP

- gXpcec
- Z(TC@"
- zs@j+Z
- w{7.(l
- wHj)8v
- K(,:w[
- 'om^gH
- pP+U?T
- J#c`B%"
- W0Z~Fn
- @ZIBJT
- IZW+fV
- a+BcRw\\
- N>[Tvn
- {GSV[o
- l^v:>j
- d>! js
- GaS;!F
- Ch=!^!
- R\\jVHI
- wSQcHn[2&`
- [:w)6m
- P> l`LK
- 'j{w|$_
- ~%*@p^
- SIw<dd(
- *cTHRS
- /`pXel~
- "BcY)z
- H['NlPL
- y{P VJk
- |@+#~p
- 0@)dQz
- @`=d$}
- S## C2K
- C'sf}@c S
- TCmWKiG
- m*F]>&*i&
- %YWq(4
- \\^K^u;
- ?<Q'vR
- 7$lBC?r
- V1+mC$
- }"Y8n_
- N0y=>lR
- wT&ga; b
- VE#!]]
- W]TL{h
- zLJZ.=
- f>Rq"
- 9mJF"Dc
- $9:l]T
- @Nr"U)
- ?X'qzC?#
- yXTj>8
- j>RxKc)jr
- Hz<LRs

- ^TKO?t
- U\\&;-;
- :1[|-/"
- G"6~={
- MBY)_F
- ^,+~S\\U
- _OMMxy
- DsXtQ#,J
- }(H|GY
- f~ed'L
- @y}hvj5
- q8q-rk
- &)/y5NK
- F$*,$v
- S:K/'Jh6%
- w}<!O"
- lL L_n
- m%; ;*J!
- N<I&hG;<Jaw,r
- PJ#h1yp
- h.aK/X
- @*`Z|%
-)i.|XGv,
- khuKmZr
- 5_pv<t
- N2CtLh
- ,$~M,(M
- k5;Z_+
- }NRD5f
-)FSt%d
- %@!dL"
- \\/hGY(
- ^VB 4w
- qt}4)n
- [k]_2t
- +rzK~N
- S@?z9sy
- k*WTtM
- _d0SF~
- Q*)["S
- :"UX&&
- ?},C>S;
- M?]_p!
- gF.?h\\
- rbK!-J
- T|`r/v
- +y"~y~
- R8VFR|L
- 5H"Jw?^
- <NIsx@
- /JlzXF
- MPKYjeg[
- T:'A?$
- MXh8qG
- \\HD$q?
- NHv(+w]
- Rq|<{,

- #!P'vs@Q
- pmF@Cah
- "sQ .r
- c::b6C
- q^(9&{
- R\\1(BN
- Z^t@YdNwcN
- 7-<Nz&z;
- ["/+9(G
- YLWP#P
- k%uNQm
- C{ygC=
- M:JyvT
- ?afQr`
- l|y.Gk
- FpNzV&[1Q
- Rs%Vy/
- *<_3fR
- ?=R':Up
- tH.MGjnF
- Qeww%>m
- *|sYgC
- 'T@7B/-<
- [1{%r[
- TQgU(m<
- Lv{[7:
- -FZ/^K
-)\\{-#|o]]
- vh@fls
- km8tgb
- %mFTs;
- KG7#bf
- fa=\\BJ
- e!wQKM[
- GPY=|sM=
- l,FcrN.
- }WkOPy
- ?;|rM?n)
- hsH,Mu
- dzpB}u
- m=F~QK
- l+be[Q}
-]rFr'~Uw
- "#F?PHr
- GT#sV/
- Z)>^hK
- rG/aM`
- Yy=dHG
- #H|z5_
- HPQOQP
- ^4nDC$
- B'n?E!
- PcCG)g2
- ,\\Jcf7z
- @[,Di<
- aq|&v;[
- K&[GO,

- @`AqN$#=&
- h_@c{s
- nL[Z[#
- TvMUywc<
- {fWn}wH
- J~Vmn5]Zp
- z.kPtGf4
- OY_YR{
- $jkJ.0
- T=@jtW
- CA/Rv_w
- NV#2vDr
- `ZtL\\f
- NkVSH0.
- bA_PqYX
- \\`ThgB
- :zq7*
- ^==WQ/O_j
- D2Z,N,y
- fmv@PI
- ZqkYL=f(
- zr[cWI!
- pVqTi\\
- 1Qg+V-L=
- whFVKX
- ~V_Q}J
- $qpS6?
- *j8c\\@
- pcz>-=
- MZ+Ecv
- */EH"ksQ
- _p{hg7^
- wPil[qB
- Pc#QP*`Es
- p&[sS+h
- I?H#f]
- vhN\\J2
- &"f8`S|
- @CCg^A
- c|b4I.
- z(Obh"^>
- [s"-s$Lj
- &T;#a~s
- :KQgK&
-)zfSm(L]
- a"!:\\vSC
- "@2xV/
- RRV^iq]
- RShH"[
- <|<OV+S
- P(D "Li
- QnSrT3
- {a+$<'
- q@ey'.M
- {{,(@M
- -y;y.\\
- nwnQ X

- F["d=@
- R? 0xf;
- BG7rTw
- Ur{Y^x(
- FM&$TQ
- -[dj.b
- 2`lyvy
- ~)L%9~
- C>=?t*
- iq\\ldy
- Mc5<<;
- }n;&|n
- F+^TqG
- KIwF-:
- %h%5zd
- !x6wcN
- /]QW$:a
- j"_xU)
- -sP>%9
- \'nK!"6N:y
- S>tq#}
- Q{q,O-
- |_hCBC
- WAu*b)Y t%_zj
- (c9X@&b;
- g V]mFT
- 6TX@,;
- +;5:c:
- ?]TrsV
- w`DJwU
- ^-~nHn
- NF~'lX
- k[S!bBU:f
- j0hxFm
- J-Nb:q
- ?pBSlu
- _dFy<J
- W,{ff%
- $x~C+[g
- BX-rX:
- :t^ PW2
- ~9_$q.
- .%%"rQ
- KZ \\^]
- B$\\vof$
- 'AyB!P
- .H WFZ
- :,`&(G~
- X=Xs `b
- DghlWxRF
- !8NTdZ
- ",z6~L
- prNfU.
- :6vhFnvJH
- leZ:#n
- pL[7mw
- K}@b"..

- gNG9\\q
- ZDTR&'
- JX7jl@
- cH%",P
- 6{vnMQ
- }J=8pp
- Ns(#Qa
- W^7mg[
- BaWV]v:
- c6)QnP'
- ljkGZW
- >q<g!:
- ;=o`(P
- TqWv3~<
- -}\\z%l
- nK,Oxp
- =]+Ky*
- s,sFRk8
- nkKi*k
- @tL:>N
- ^B,Ywm,
- O?nv#`
- 6]%qSPgl;
- jPH~`Z
- ZqEBkn
- [$>sz,
- aGZ^RM
- MKd>{YU$
- @-=h5C
- 7#Mm\\(>
- 5ygmy`)
- }<xd-*Y//
- {]H]SL
- h+HQdl
- &Tc5;?r
- c;)uT`
- mb]Tcx
- !gm}5qh
- bsu{Y]
- &2ND{T::
- %6Kf=Q
- _,<F7P
- K=-_l"5
- l|\\]; \\
- XGHUL,
- C|prY5
- %A%}CD
- j~STGY
- mml]cB
- Ukm<S#]z
- 5d&JkM;
- p(l9x]k
- \\h}xJ/+{
- B6@J{?
- *3]\\G.
- c.ghFw)
- (VX9@+

- 1W`Z~D%
- #3\\TDL
- cwtTnp
- !&C3F;& Q
- ,HEZyQ]
- `$Pp+[
- j<BUQQ
- BYf&MO;
- 4<^g(~
- JtA pC
- _{;/n%
- IR&!FC
- Ybs<tdM
- $IB^z|
- Y/5h:$
- 1PX_.<!
- ,[SodV
- G8'/Qn
- vyj)cH$
- '.~m8n:b
- <Dv*)0>|
- @zgH"h
- ^q^0Bm
- LsTrwW
- '$x&!2_
- om_xsR
- c$(dFI
- J_\\@|-
- &"Sx^?c
- B*dlk8
- 1~G`kG
- _Bt=]<p
- 6Ty</$#
- d>dc_f
- dwP>q2gx
- Fxq0YC
- kBy}w0
- S_Zl}Ag
- .&W;>#?<
- PoLLvB
- P0V(gh
- Wlrxtz
- ;`g 1x
- jcsmRz4
- TY +ZL;
- .tgX4@/
- j<[ca^]
- |!*vb}
- LViw:?
- feKg|)
- *7QZlB
- dNQuTLX
- !~(vn?
- @F]nd&f;
- p!F=_Z
- VZ@JX{
- s"\'Uj;

- Zl4Cp{
- WH|~bl
- Bl
- gM4jxb"}
- aFDD~/
- V>x1H:]
- 'a~@g~
- ~5_?nH
- o,pr!v>
- Dj\\lMF
- y?2K,<
- +Tp-NN
- ++F@%EP
- TKHZg2
- "gsa;&]
- dEpHQ H
- GfY{gFd0
- $TtJH`
- k"ewT,!
- p$4+F.g
- r:|%d]YaC
- ^\\0kpF
- \\NKufT
- *4k$jB
- oF$BRt_h
- a%Gv,j
- p\\Ep!Z
- fvPk3>
- lk&TXb;
- Z:y:&yCZl.;/
- -Gm!nf
- mrg(.>
- &:cUwh
- \\oQ<JXT
- `-Xe~*
- n#|UgP
- tw>)$M(5z
- yHW<{>
- h,gkw%
-]\\Sxvx
- \\PZDN?/
- Kt*kq>
- $rlj/G
- P+&:ux
- Y7n]v{=
- g.rVV:
- <{J.G2
- !@d{Ba
- *GpE)L
- @j;OqK]h
- \\H~rl'
- dT}Rt!0
- Ft 6cP
- (%-K.v
- t\\pbG^
- jCFp?>(
- ,?lrA&-yv

- %]GQUy
- !usVC;
- v"j,F`@
-],:O(y
- G]}cbJx
- 1~y(M$
- {%OSq,
- qgOP!fq
- Wvs@)aZ
- wFDz+&
- [/lP%9
- wl$}Y>%
- d0p,Y/
- rcSN1z
- u]#YzD
- -rzS#A
- p`7~\\V
- hNe:X~)
- PT!!0}
- ^s/<@W
- Rh<zjT
- &~%hDx
- 4(,xbR
- ;LfMTnA
- {mJf"5YD\\:
- ;ycw*F"
- D#rglDVT
- YBS!=+
- ({_.2#
- <bS'1C
- =b{|C!_
- `pCoYyX
- RJnBL)
- 8}WYb<|/
- @#5'X'
- :>dbf]G
- .qgP.H
- \\mzGN
- Gjax FL:
- `{yphyI
- NUzv-q
- f#Bbv9
- DkcX`\\Y
- qVyKqI
- +sFcol;
- vSn.4=
- `n&$Z*j
- So^fZtH
- J3#D'l
-]3Z F(
- K,Es{.>
- z4yxf\\
- n\'f"~~M.
- 'f?5Wb
- sNjJK.\\
- h- :zRG
- (f*a"<

- L_-~j$
- nYh&]]
- O>'{w|
- GhKkVa@
- Y\\,sUq
- Yw5]>m
- ,#Il?H
- [hQHU'j
- J.?u~x}
- !lGZni
- rH1@@@lK
- \\?qXsk
- OQ#$HB
- Qf-QlR^
- *bo.&C;]WqW,
- XnJ&!XJA
- zm9?HL
- Klxprj
- 7~?b|D
- t)p)Te*
- *?[p#5
- RJV3'B#
- @[ci$|?
- GHZLFq
- y=#K-G
- zu^p=&
- bPPY9X
- rv"/*G
- &=:u}-
- X'pOhlT
- q $Fo_R
- Lx.l*qcXz
- /Xx&fV;
-)-nYgq
- qZ+<k2
- J"x~(u
- jvlqWMO
- %mBiZP
- =!)Gb2
- ;MR%bI
- }4@x/c
- !'k[(((
- T#Xn3v
- `1R`GV
- ,]R%:L|sh{F(S
- |?1rWd
- w<|FvSnF
- mgq3)w
- D0J!d<
- d]P=]Z|+
- tJ+_x.
- %NWr2y
-)Zk "o
- CmnW;#
- Q#KJ !
- nd6)Z:
- B9xg x

- W`D8M}
- P:5<.[
- 3sVtlY`
- yPr]O[
- \\Qvj<i
- [)*/$u[
- p-P=@s
- 9JYJVR
- \\]&zs7;
- d+Gp^7
- r?HZ?6
- 6HD~R))
- A)H.)Q
- BL{u-+R
- |8!xT>
- /X=\\1`
- RsCQO_
- zF|8"Pd
- Q6RgT%b
- qgO,Zq
- V6b(PK:
- G(c(~p"
- V^jAv-
- pxh3L(
- ~9d+@j
- Pn?umY
- k!6JZ`
- ;#u$*?N
- {Bsq{o
- smY,S1
- 'hs:$D
- [,[_:|
- w` k@2
- 6rbmY}>
- >&Ic;`d
- |t=hHk$uJ
- =!-_'G
- /=%7H<v
- jH=9H=
- tSx$B%
- 3[(@!/
- #h%)x2
- |M[~g7
- Z`;(Nv&w;
- 1mFHh~
- wS</D&
- B<e=Z}hf
- :(s)M7Q
- _YoV^p
- .KH7dtl
- nZT&)3R
- UhlN^fwF
- GD|-`AL
- 3*[J$&
-]=],*1
- #UZfCk
- vd'szz

- *[<]vMB
- @Kx<4Y
- f,6b*wk
- #Sb,XR
- Tr&D8T;
- }Sw~Prw
- OR$Svx
- {E{+C`J
- ?$CsrH
- DCr_0#
- aj\\w_%
- H2rFtX(
- Ssoh.R
- V3Jf!*^
- K+:iZx
- $xFg_y
- #C6Kk)
- @BPYjZ
- _#ZZ<mE+
- T~O!Xk
- oP`,sv
- #CtZ}l
- qu&d;/JrT
- N"l*2
- rd^Si?~"
- #P^x"A
- :lZrq~
- \\VtQBZq
- KM/xlu
- JV=@}9;r
- %m+ge\\
- ="3Y@w
- (^-cvp
- +GD<T8
- ,LFZjN
- x}EW* ?
- pT fhN|Cp`
- J-{%5/
- &;hw<h]P[
- em:~S#
- dbYp)q
- FS{_Pz$
- p{_-!De
- dSB'j
- bHG*GK
- +&+++,+1+6*
- + +!+&,
- +K+Pz+T+U+Z,
- +#+$+)z
- +"z+&+\'}
- + +!+"
- +$+)+.+
- +U+V-.
- +J+K+P+Q+Y
- +@+A+B+G+H+I+JT
- +>+?+@+E+F+G+HT
- ,M&+M+N+O+T+U{

- +M+Nt.
- +!&+%{
- +/&+3{
- +G+HT+L
- -?+E+F+Gt
- + +!+&&
- +'+(+-
- +"+#+$+)+
- T+0+\\+]J
- +N+S+[8\\
- -(+Grl
- +?+@+E+F+G+H
- +]+^+c+d
- +]+^+c+d
- +.+/+4(<
- +9+:+?
- -)&+)-
- +;+<+A+B
- +;+<+A+B&+F
- +G+H+MX
- +=+>+C+D
- +!+&+'+,
- +I+J-%
- +>+?+D+E+J+K
- +R+S+T+Y+ZT+a
- +R+S+T+Y+ZT+a
- +V+W+\\+]
- + +%+*+/
- OqhZ K
- +&+'+,+-*
- +/*+/ c
- %,LY8p
- +_+d W
- r7)Z {
- rZ lQi
- &&&&&8n
- x!w!Z
- +X+]{H
- +R+S}_
- :fnX(
- jP-&Z;
- +>+?+@+A+B+Ct
- +)+*+/
- +b Vm\\
- zrZ 5^d
- wkB/(
- +_+d+e
- #HG%&8
- +>+?+@+A+B+Ct
- +5+W+Xl#
- -H hkqhZ
- S(Z Wz
- !z?%&8.
- C`Z :E
- rf/Z 1=
- X l.dlT
- ntdlT

- @XJXGR
- d=eKZ W
- X l.dlT
- ntdlT
- Q2!Z t
- DXJXGR
- XJXGR
- X ntinT
- X ntinT
- jp2Z >@
- **m+ QA
- zcZ =]
- AphZ <
- @(sZ ,
- WC8Z Hz
- _#@%&8
- +H+l{Z
- +A+V+W{Y
- +U+V+W+X+Yo
- *xDZ z
- +>+?+@+A+B+Ct
- ,)&+)+.
- z:"P
- NZ "Nt
- YDn%&8`
- 7+K}%&
- PZ :GZ
- vKdZ =
- MQj" =
- +)YdZ y!V
- iv)Z l
- 3k~{%+
- kDwvZ
- +|j{(
- SZ @wS
- +B+_{]
- A\\,m%&
- vk%^ u
- XF,yrR
- tm$Z [
- -/+G+L
- %k|WZ r
- +1+<+=t
- ,y+x8y
- +>+?+@+A+B+Ct
- B%,zZ
- rS_[8p
- +_+d+e+f
- ,hqZ =
- |Z JX-
- t$ %&8
- N"Z D}
- G{Z p`
- ,_&+_ T
- +Q+V+[
- J.]*%+
- +(+)+.o

- +(+)+.+/
- ?Z p5S
- ,(+Z+b+f+j& ~V!r+
- +Y+Z+_
- jpHZ HJ
- +-+2{P
- +Xz+\\{
- +%+*+++0
- T+N+O&
- +;+N+O
- lQZ ^p`
- Z B^"@%9
- sYZ _o
- FJWVZ
- wpun%+
- Z $vV;a
- , +6 K
- -)+?+@+E{
- q_Z `xs
- Yz*7%+
- +>+?+@+A+B+Ct
- , +O+P{*
- +V+[+\\+a
- XJZjX(X
- ,1jX(X
- YZ,.%&
- +?+@}*
- o<Z %Nl
- +@+[+\\
- T Z dgv
- f8\\Z YV
- ,h 9MW
- Z S.&da;+
- &<Z 4.W
- +&+8+=
- +L+Q+V F
- +A+B{}
- ,T+S{}
- +>+?+@+A+B+Ct
- mv\\%&8|
- d7hFZ X
- n[]Z *
- XT C};
- +>+a{!
- +k+o-=
- +h+i+n
- z+ +!}
- *Z F2t
- X'Z W4
- +P aMw
- T^B+Z z~
- +,+-+2{
- 6%&+Y |
- X+@+A+F
- -'+;+<+A
- ,>&+>-
- +\\+a+b

- >eMZ H
- z+#+$}
- +++G+HQ+H 5
- ,Q+g8h
- |%Z [n
- yQ'-Z
- $XKnXU
- ,XKT m
- +>+?+@+A+B+Ct
- (XJT+H
- +T+U+Z
- &0~Z P#
- @wKA[#
- & r#Hx
- s%,la%
- (_;!Z
- F(Z \\a
- +C+D{k
- AZ HP)
- GLEkZ v[
- TZQmZ
- S$%&8s
- T vqLwa%
- ; vqLwa%
- XK`T8!
- +=+>`+B+C
- %,1b+F{%
- 4t~(%+
- E^x#%+
- +Y E^x#
- YwLZ Q
- 'nZ YY
- .w|ta%+N
- ALy=:C
- W!B[US
- ^Ke"{&
-]lxQ_is
- `.rsrc
- ABCDEFGHIJKLMNOPQRSTUVWXYZ
- abcdefghijklmnopqrstuvwxyz
-
- ABCDEFGHIJKLMNOPQRSTUVWXYZ
- abcdefghijklmnopqrstuvwxyz
-
- SHLWAPI.dll
- StrCmpNIW
- CRYPT32.dll
- !"#$%&\'()*+,-./0123456789:;<=>?@ABCDEFGHIJKLMNOPQRSTUVWXYZ[\\]^_`ABCDEFGHIJKLMNOPQRSTUVWXYZ{|}~
- !"#$%&\'()*+,-./0123456789:;<=>?@ABCDEFGHIJKLMNOPQRSTUVWXYZ[\\]^_`abcdefghijklmnopqrstuvwxyz{|}~
- HH:mm:ss
- zh-cht
- zh-chs
- syr-sy
- sr-sp-latn
- sr-sp-cyrl
- sr-ba-cyrl
- sms-fi

- smn-fi
- smj-se
- smj-no
- div-mv
- zh-CHT
- smn-FI
- sms-FI
- sr-BA-Cyrl
- smj-SE
- smj-NO
- sr-SP-Cyrl
- sr-SP-Latn
- div-MV
- syr-SY
- zh-CHS
-
- (((((H
- (((((H
- HH:mm:ss
- dddd, MMMM dd, yyyy
- MM/dd/yy
- dddd, MMMM dd, yyyy
- MM/dd/yy
- `string'
- `vcall'
- __clrcall
- __stdcall
- __cdecl
- cYLFc]LFc^LXc^LYcTL
- ntdll.dll
- =vEG>v
- -v9>-v
- k,vuG-v
- ,v1#-v
- .vM)v1
- -v\\9.v
- F-va>-vb
- *-v&<.v
- ~';_t|%3
- jA[jZZ+
- +t"HHt
- PSSSSV
- PWWWWV
- ~pjCXf
- tf=hZA
- UQPXY]Y[
- ;t$,v-
- Wj0XPV
- ,SVWj0X
- @ja-JP
- ntdll.dll
- %s-lock

• Module 2 (probably unpacked / injected by the sample)

• Module 2 rich signatures

- 44616e530000000000000000000000000d52e1001f0000000d52df00100000000d52e000630000004651e100040000000097893000f000000000001009100
00007d79e1000f0000007d79de00

• Module 2 yara matches

- IsPE32 ()
- IsWindowsGUI ()
- HasOverlay (Overlay Check)
- IsBeyondImageSize (Data Beyond ImageSize Check)
- HasRichSignature (Rich Signature Check)
- ThreadControl__Context ()
- anti_dbg (Checks if being debugged)
- inject_thread (Code injection with CreateRemoteThread in a remote process)
- escalate_priv (Escalade priviledges)
- win_mutex (Create or check mutex)
- win_registry (Affect system registries)
- win_token (Affect system token)
- win_files_operation (Affect private profile)
- without_attachments (Rule to detect the no presence of any attachment)
- without_images (Rule to detect the no presence of any image)
- without_urls (Rule to detect the no presence of any url)
- maldoc_find_kernel32_base_method_1 ()
- contentis_base64 (This rule finds for base64 strings)
- Crypt32_CryptBinaryToString_API (Looks for crypt32 CryptBinaryToStringA function)

• Module 2 strings

• Module 2 most interesting strings

- url | valid domains | tlds: d.vA#-v
- api | frequently used by malware: WideCharToMultiByte
- api | frequently used by malware: IsDebuggerPresent
- api | frequently used by malware: AdjustTokenPrivileges
- api | frequently used by malware: OpenProcessToken
- api | frequently used by malware: RegCloseKey
- api | frequently used by malware: ResumeThread
- api | frequently used by malware: SetThreadContext
- api | frequently used by malware: GetThreadContext
- api | frequently used by malware: CreateToolhelp32Snapshot
- api | frequently used by malware: GetNativeSystemInfo
- api | frequently used by malware: OpenProcess
- api | frequently used by malware: LoadResource
- api | frequently used by malware: CreateThread
- api | frequently used by malware: ExitProcess
- api | frequently used by malware: WriteProcessMemory
- api | frequently used by malware: VirtualAllocEx
- api | frequently used by malware: WriteFile
- api | frequently used by malware: GetProcAddress
- api | frequently used by malware: CreateRemoteThread
- api | crypt32: CryptBinaryToStringW
- api | crypt32: CryptBinaryToStringA
- api | crypt32: CryptStringToBinaryW
- api | crypt32: CryptStringToBinaryA
- api | kernel32: WriteConsoleW

- api | kernel32: SetFilePointerEx
- api | kernel32: SetStdHandle
- api | kernel32: GetConsoleMode
- api | kernel32: GetConsoleCP
- api | kernel32: FlushFileBuffers
- api | kernel32: LCMapStringW
- api | kernel32: OutputDebugStringW
- api | kernel32: LoadLibraryExW
- api | kernel32: GetStringTypeW
- api | kernel32: GetStdHandle
- api | kernel32: MultiByteToWideChar
- api | kernel32: GetModuleHandleExW
- api | kernel32: GetCurrentThreadId
- api | kernel32: GetCPInfo
- api | kernel32: GetOEMCP
- api | kernel32: GetACP
- api | kernel32: IsValidCodePage
- api | kernel32: TlsSetValue
- api | kernel32: TlsGetValue
- api | kernel32: InitializeCriticalSectionAndSpinCount
- api | kernel32: SetLastError
- api | kernel32: SetUnhandledExceptionFilter
- api | kernel32: UnhandledExceptionFilter
- api | kernel32: DeleteCriticalSection
- api | kernel32: LeaveCriticalSection
- api | kernel32: EnterCriticalSection
- api | kernel32: DecodePointer
- api | kernel32: EncodePointer
- api | kernel32: RtlUnwind
- api | kernel32: IsProcessorFeaturePresent
- api | kernel32: RaiseException
- api | advapi32: LookupPrivilegeValueW
- api | kernel32: RegSetValueExW
- api | kernel32: RegSetValueExA
- api | kernel32: RegQueryValueExW
- api | kernel32: RegQueryValueExA
- api | kernel32: RegOpenKeyExW
- api | kernel32: RegOpenKeyExA
- api | kernel32: RegNotifyChangeKeyValue
- api | kernel32: RegCreateKeyExW
- api | kernel32: RegCreateKeyExA
- api | user32: MessageBoxW
- api | user32: wsprintfA
- api | user32: wsprintfW
- api | kernel32: LocalFree
- api | kernel32: GetSystemDirectoryW
- api | kernel32: TerminateProcess
- api | kernel32: Process32NextW
- api | kernel32: Process32FirstW
- api | kernel32: CreateProcessW
- api | kernel32: OpenMutexW
- api | kernel32: ReleaseMutex
- api | kernel32: GetCurrentProcess
- api | kernel32: CreateEventW
- api | kernel32: lstrlenW
- api | kernel32: lstrlenA
- api | kernel32: WaitForSingleObject

• api | kernel32: LoadLibraryA
• api | kernel32: GetWindowsDirectoryW
• api | kernel32: DeleteFileW
• api | kernel32: FindResourceW
• api | kernel32: ExpandEnvironmentStringsW
• api | kernel32: GetModuleFileNameW
• api | kernel32: CreateMutexW
• api | kernel32: lstrcatW
• api | kernel32: lstrcpyW
• api | kernel32: SizeofResource
• api | kernel32: GetLastError
• api | kernel32: LockResource
• api | kernel32: VirtualProtect
• api | kernel32: GetFileAttributesW
• api | kernel32: CreateFileW
• api | kernel32: CloseHandle
• api | kernel32: ReadFile
• api | kernel32: GetFileSize
• api | kernel32: GetCurrentProcessId
• api | kernel32: GetProcessHeap
• api | kernel32: HeapFree
• api | kernel32: HeapAlloc
• api | kernel32: GetModuleHandleA
• api | kernel32: VirtualFree
• api | kernel32: VirtualAlloc
• api | user32: GetProcessWindowStation
• api | user32: GetUserObjectInformationW
• api | user32: GetLastActivePopup
• api | user32: GetActiveWindow
• api | user32: MessageBoxW
• api | ntdll: NtClose
• api | ntdll: NtUnmapViewOfSection
• api | ntdll: NtMapViewOfSection
• api | ntdll: NtCreateSection
• api | kernel32: IsWow64Process
• api | kernel32: >IsWow64Process
• api | ntdll: RtlDecompressBuffer

• Module 2 other strings

• PADPADP,c
• lSystem.Resources.ResourceReader, mscorlib, Version=4.0.0.0, Culture=neutral, PublicKeyToken=b77a5c561934e089#System.Resources.RuntimeResourceSet
• -@2M[uN
• ~49-bc
• Yw>mIi
• [1u<OW
• vI&zO8;'d
• OMP@fyle
• rE,,S2Y
• -b3$%&uA;
• 2qo8Yq
• C-zeb
• RELcm6
• '3)IhJ
• e#Nb)e

- +_+`oi
- +5+:+?+D+I
- +-+.+/+0+1
- +4+5+:(
- +6+7+8
- %+,+1+2+7+8X}
- +4+5+:(
- ,F+a+e+i+m8n
- +2+3+8+9+>+?
- +,+-+2+3
- ,F+a+e+i+m8n
- +-+.+3+4+5+6
- +,+1+2+7
- +1+2+7+8
- +1+2+7+8
- +,+-+2+7+8
- ,++.+/+4+5
- +h+i+m8r
- +h+i+m8r
- OerD
- I5%,9a%
- Z 8\\F1a8
- ;%,jZa8
- 2LQa(
- I:%,da%8E
- VLJZa8
- GYY2Z
- Z 2}P=a8
- TU8|Z
- U&_m%
- ,6&+6-
- Z ::JLa8v
- Z qti0a8#
- >8jQZ
- Z2s<(
- 5cb=%&8
- 3@_a%8
- LLDa8{
- 0v3Z f
- Z ;3#Va
- OZ C|;)a8
- O,A%&8
- uastrings
- config
- *{<a8j
- NtCoT
- NtCoT
- Z rFPta8
- E_q%&8
- 9c a(
- /}H5(
- 1]3a8*
- Z `qh/a86
- 1.A3Z 0:
- 5Ka%8U
- +'+,+1+6
- ;s:a81

- +H Z Ie
-]xZa8Z
- Z <G|Ma8(
- 3BZ Od
- 5e7a8p
- 6'E%,+a%
- ~"Z o2a
- BLca8+
- v@_u(
- *5Z 1%
- FZ +Dl@a8
- Z jC5-a+
- /}H5(
- Xm?%&8E
- wIea8}
- YEa%+A
- + +T+Uo
- '9|a8r
- daT N9oj8
- uZO%&8
- Z :6bza8
- 1x%,tZ ,6nCa+
- y6%&8X
- [Z Ti2=a8p
- t48a8o
- ?}Ra%8
- fR?a8+
- >e!HZ uE
- Vo7Za8a
- h#1e8T
- %,Ia%8q
- %,U.?8r
- 6-G5Z
- gr2G%&8J
- B)eZa8[
- rA5a%8
- +4+9+>{T
- +3+8{T
- IOx=8*
- +6+7+8
- +\\+`8e
- +5+6+7+<+=+>
- JXa%8|
- a .,V;a%8
- Z -I|Ha+
- x9>Z c\\O
- u3iZ @
- 5'B_(
- W9%uZ |
- K2%,ja8
- +0+1{$
- L 5Ab4a%
- +=&+A+Bo
- Z xM!La8
- ;!Ia8(
- dMQa8[
- Z -Y(qa8

- ,A+T8q
- A%,Ha%8
- +2+7+8+= oJ
- Z 5vGPa+
- Guj3Z
- Z zL~!a8
- 6Z]sdAa+
- +<+A&+E
- EZ A[e
- >=2kZa8
- J5_((
- aa%,na8_
- w8>\\a%8
- cQa%8b
- x7BA q
- -2+`8a
- %,6a8$
- +`+d8i
- -H_,K aE
- @Wf%&82
- -6 umi
- *L09Za+
- Z Yw5'a8
- Z T=*ga8
- oG]%&8`
- Z +1zIa8e
- SXia8!
- 1Gl%&8
- cA1Za8}
- g"4AZ 1J
- ,OHa82
- qGuAZ
- !sra%8
- Z a~{Ba8
- S4~jZ
- u%UZ H
- a1Z /Lu=a8o
- 9xD%&8n
- *+8+9,
- zG ya8
- ~EZ 5+
- 1?,y
- -K&& u84
- YK=w8
- %,-a8j
- Jt0%&8v
- '/X2Z
- T\\?A
- BZl8/
- SW[a8X
- ^ 9%&8
- "NVa%8V
- [T6a%8/
- Z CO$;a8
- Z 68GOa8[
- T7h%&8
- h'/a%8

- Z)n#Ja8$
-)AY%&8
- &0qZa8E
- Z tpO{a8
- KZCa84
- ,U miK
- u^8x.xtYW
- q2mLAr]
- eUU[sD)
- e`CP"1
- `t`_U-a
- !N8f13
- @.reloc
- !This program cannot be run in DOS mode.
- .?AVtype_info@@
- .?AV_com_error@@
- OLEAUT32.dll
- SHELL32.dll
- SHGetSpecialFolderPathW
- SHGetFolderPathW
- ADVAPI32.dll
- USER32.dll
- KERNEL32.dll
- StrCmpNIA
- !"#$%&\'()*+,-./0123456789:;<=>?@abcdefghijklmnopqrstuvwxyz[\\]^_`abcdefghijklmnopqrstuvwxyz{|}~
- 1#QNAN
- 1#SNAN
- CorExitProcess
- A A(A0A8A@APA`ApA
- CONOUT$
- uz-uz-latn
- uz-uz-cyrl
- sr-ba-latn
- sma-se
- sma-no
- quz-pe
- quz-ec
- quz-bo
- kok-in
- bs-ba-latn
- az-az-latn
- az-az-cyrl
- sma-SE
- sma-NO
- sr-BA-Latn
- bs-BA-Latn
- quz-PE
- quz-EC
- uz-UZ-Cyrl
- az-AZ-Cyrl
- quz-BO
- kok-IN
- uz-UZ-Latn
- az-AZ-Latn
- USER32.DLL
- Microsoft Visual C++ Runtime Library
- <program name unknown>

- Program:
- Runtime Error!
- runtime error
- TLOSS error
- SING error
- DOMAIN error
- - inconsistent onexit begin-end variables
- This indicates a bug in your application. It is most likely the result of calling an MSIL-compiled (/clr) function from a native constructor or from DllMain.
- - Attempt to use MSIL code from this assembly during native code initialization
- - not enough space for locale information
- This indicates a bug in your application.
- - Attempt to initialize the CRT more than once.
- - CRT not initialized
- - unable to initialize heap
- - not enough space for lowio initialization
- - not enough space for stdio initialization
- - pure virtual function call
- - not enough space for _onexit/atexit table
- - unable to open console device
- - unexpected heap error
- - unexpected multithread lock error
- - not enough space for thread data
- - abort() has been called
- - not enough space for environment
- - not enough space for arguments
- - floating point support not loaded
- AR6002
- mscoree.dll
- December
- November
- October
- September
- August
- February
- January
- Saturday
- Friday
- Thursday
- Wednesday
- Tuesday
- Monday
- Sunday
- December
- November
- October
- September
- August
- February
- January
- Saturday
- Friday
- Thursday
- Wednesday
- Tuesday
- Monday
- Sunday
- Complete Object Locator'

- Class Hierarchy Descriptor'
- Base Class Array'
- Base Class Descriptor at (
- Type Descriptor'
- `local static thread guard'
- `managed vector copy constructor iterator'
- `vector vbase copy constructor iterator'
- `vector copy constructor iterator'
- `dynamic atexit destructor for '
- `dynamic initializer for '
- `eh vector vbase copy constructor iterator'
- `eh vector copy constructor iterator'
- `managed vector destructor iterator'
- `managed vector constructor iterator'
- `placement delete[] closure'
- `placement delete closure'
- `omni callsig'
- delete[]
- new[]
- `local vftable constructor closure'
- `local vftable'
- `udt returning'
- `copy constructor closure'
- `eh vector vbase constructor iterator'
- `eh vector destructor iterator'
- `eh vector constructor iterator'
- `virtual displacement map'
- `vector vbase constructor iterator'
- `vector destructor iterator'
- `vector constructor iterator'
- `scalar deleting destructor'
- `default constructor closure'
- `vector deleting destructor'
- `vbase destructor'
- `local static guard'
- `typeof'
- `vbtable'
- `vftable'
- operator
- delete
- restrict(
- __unaligned
- __restrict
- __ptr64
- __eabi
- __vectorcall
- __fastcall
- __thiscall
- __pascal
- __based(
- N!d"N1u
- E#+E/^ZY
- -v99.vp
- E.v+E.v`
- ,vO!.v]7.v
- PP9E u
- URPQQh0I@

- @.reloc
- @.data
- `.rdata
- !This program cannot be run in DOS mode.
- XABlAHgAcABsAG8AcgBlAHIALgBlAHgAZQA=
- XABlAHgAcABsAG8AcgBlAHIALgBlAHgAZQA=
- kernel32.dll
- kernel32.dll
- SeDebugPrivilege
- We should start the process!
- kernel32.dll
- ="3Y@w
- (^-cvp
- +GD<T8
- ,LFZjN
- x}EW* ?
- pT fhN|Cp`
- J-{%5/
- &;hw<h]P[
- em:~S#
- dbYp)q
- FS{_Pz$
- p{_-!De
- dSB'j
- bHG*GK
- +&+++,+1+6*
- + +!+&,
- +K+Pz+T+U+Z,
- +#+$+)z
- +"z+&+\'}
- + +!+"
- +$+)+.+
- +U+V-.
- +J+K+P+Q+Y
- +@+A+B+G+H+I+JT
- +>+?+@+E+F+G+HT
- ,M&+M+N+O+T+U{
- +M+Nt.
- +!&+%{
- +/&+3{
- +G+HT+L
- -?+E+F+Gt
- + +!+&&
- +'+(+-
- +"+#+$+)+
- T+0+\\+]J
- +N+S+[8\\
- -(+Grl
- +?+@+E+F+G+H
- +]+^+c+d
- +]+^+c+d
- +.+/+4(<
- +9+:+?
- -)&+)-
- +;+<+A+B
- +;+<+A+B&+F
- +G+H+MX

- +=+>+C+D
- +!+&+'+,
- +I+J-%
- +>+?+D+E+J+K
- +R+S+T+Y+ZT+a
- +R+S+T+Y+ZT+a
- +V+W+\\+]
- + +%+*+/
- OqhZ K
- +&+'+,+-*
- +/*+/ c
- %,LY8p
- +_+d W
- r7)Z {
- rZ lQi
- &&&&&8n
- x!w!Z
- +X+]{H
- +R+S}_
- :fnX(
- jP-&Z;
- +>+?+@+A+B+Ct
- +)+*+/
- +b Vm\\
- zrZ 5^d
- wkB/(
- +_+d+e
- #HG%&8
- +>+?+@+A+B+Ct
- +5+W+Xl#
- -H hkqhZ
- S(Z Wz
- !z?%&8.
- C`Z :E
- rf/Z 1=
- X l.dlT
- ntdlT
- @XJXGR
- d=eKZ W
- X l.dlT
- ntdlT
- Q2!Z t
- DXJXGR
- XJXGR
- X ntinT
- X ntinT
- jp2Z >@
- **m+ QA
- zcZ =]
- AphZ <
- @(sZ ,
- WC8Z Hz
- _#@%&8
- +H+I{Z
- +A+V+W{Y
- +U+V+W+X+Yo
- *xDZ z

- +>+?+@+A+B+Ct
- ,)&+)+.
- z:"P
- NZ "Nt
- YDn%&8`
- 7+K}%&
- PZ :GZ
- vKdZ =
- MQj" =
- +)YdZ y!V
- iv)Z l
- 3k~{%+
- kDwvZ
- +|j{(
- SZ @wS
- +B+_{]
- A\\,m%&
- vk%^ u
- XF,yrR
- tm$Z [
- -/+G+L
- %k|WZ r
- +1+<+=t
- ,y+x8y
- +>+?+@+A+B+Ct
- B%,zZ
- rS_[8p
- +_+d+e+f
- ,hqZ =
- |Z JX-
- t$ %&8
- N"Z D}
- G{Z p`
- ,_&+_ T
- +Q+V+[
- J.]*%+
- +(+)+.o
- +(+)+.+/
- ?Z p5S
- ,(+Z+b+f+j& ~V!r+
- +Y+Z+_
- jpHZ HJ
- +-+2{P
- +Xz+\\{
- +%+*+++0
- T+N+O&
- +;+N+O
- lQZ ^p`
- Z B^"@%9
- sYZ _o
- FJWVZ
- wpun%+
- Z $vV;a
- , +6 K
- -)+?+@+E{
- q_Z `xs
- Yz*7%+

- +>+?+@+A+B+Ct
- , +O+P{*
- +V+[+\\+a
- XJZjX(X
- ,1jX(X
- YZ,.%&
- +?+@}*
- o<Z %NI
- +@+[+\\
- T Z dgv
- f8\\Z YV
- ,h 9MW
- Z S.&da;+
- &<Z 4.W
- +&+8+=
- +L+Q+V F
- +A+B{}
- ,T+S{}
- +>+?+@+A+B+Ct
- mv\\%&8|
- d7hFZ X
- n[]Z *
- XT C};
- +>+a{!
- +k+o-=
- +h+i+n
- z+ +!}
- *Z F2t
- X'Z W4
- +P aMw
- T^B+Z z~
- +,+-+2{
- 6%&+Y |
- X+@+A+F
- -'+;+<+A
- ,>&+>-
- +\\+a+b
- >eMZ H
- z+#+$}
- +++G+HQ+H 5
- ,Q+g8h
- |%Z [n
- yQ'-Z
- $XKnXU
- ,XKT m
- +>+?+@+A+B+Ct
- (XJT+H
- +T+U+Z
- &0~Z P#
- @wKA[#
- & r#Hx
- s%,la%
- (_;!Z
- F(Z \\a
- +C+D{k
- AZ HP)
- GLEkZ v[

• TZQmZ
• S$%&8s
• T vqLwa%
• ; vqLwa%
• XK`T8!
• +=+>`+B+C
• %,1b+F{%
• 4t~(%+
• E^x#%+
• +Y E^x#
• YwLZ Q
• 'nZ YY
• .w|ta%+N
• ALy=:C
• W!B[US
• ^Ke"{&
•]lxQ_is
• `.rsrc
• ABCDEFGHIJKLMNOPQRSTUVWXYZ
• abcdefghijklmnopqrstuvwxyz
•
• ABCDEFGHIJKLMNOPQRSTUVWXYZ
• abcdefghijklmnopqrstuvwxyz
•
• SHLWAPI.dll
• StrCmpNIW
• CRYPT32.dll
• !"#$%&\'()*+,-./0123456789:;<=>?@ABCDEFGHIJKLMNOPQRSTUVWXYZ[\\]^_`ABCDEFGHIJKLMNOPQRSTUVWXYZ{|}~
• !"#$%&\'()*+,-./0123456789:;<=>?@ABCDEFGHIJKLMNOPQRSTUVWXYZ[\\]^_`abcdefghijklmnopqrstuvwxyz{|}~
• HH:mm:ss
• zh-cht
• zh-chs
• syr-sy
• sr-sp-latn
• sr-sp-cyrl
• sr-ba-cyrl
• sms-fi
• smn-fi
• smj-se
• smj-no
• div-mv
• zh-CHT
• smn-FI
• sms-FI
• sr-BA-Cyrl
• smj-SE
• smj-NO
• sr-SP-Cyrl
• sr-SP-Latn
• div-MV
• syr-SY
• zh-CHS
•
• (((((H
• (((((H
• HH:mm:ss
• dddd, MMMM dd, yyyy

- MM/dd/yy
- dddd, MMMM dd, yyyy
- MM/dd/yy
- `string'
- `vcall'
- __clrcall
- __stdcall
- __cdecl
- cYLFc]LFc^LXc^LYcTL
- ntdll.dll
- =vEG>v
- -v9>-v
- k,vuG-v
- ,v1#-v
- .vM)v1
- -v\\9.v
- F-va>-vb
- *-v&<.v
- ~';_t|%3
- jA[jZZ+
- +t"HHt
- PSSSSV
- PWWWWV
- ~pjCXf
- tf=hZA
- UQPXY]Y[
- ;t$,v-
- Wj0XPV
- ,SVWj0X
- @ja-JP
- ntdll.dll
- %s-lock

• Module 3 (probably unpacked / injected by the sample)

• Module 3 rich signatures

• Module 3 yara matches

- suspicious_packer_section (The packer/protector section names/keywords)
- UPX ()
- IsPE32 ()
- IsConsole ()
- IsBeyondImageSize (Data Beyond ImageSize Check)
- without_attachments (Rule to detect the no presence of any attachment)
- without_images (Rule to detect the no presence of any image)
- without_urls (Rule to detect the no presence of any url)

• Module 3 strings

• Module 3 most interesting strings

• Module 3 other strings

- 3S\\3CX
- f9J>ue
- T$09T$,
- D$09D$4t8
- T$<9T$0
- 8L$$u)9\\$,~
- L$49AX
- I89M8t3
- D$49P,
- F;t$8u
- T$X9V8
- D$49D$0
- 3D$(3D$$
- 3D$(3D$$
- D$89Cpu
- T$89Spu
- L$49L$8~8
- C;\\$0u
- [<9]pu
- D$,3D$(3D$03D$43D$8
- D$L3D$H3D$P3D$T3D$X
- D$L3D$H3D$P3D$T3D$X
- !This program cannot be run in DOS mode.
- D$0+D$(
- f;D$Nt
- f;D$Lu
- G;|$$u
- G;|$$u
- ;D$@u@
- ;|$4|y
- D$,+C(
- 8L$$t_
- F;t$,u
- @;D$$u
- B;T$$u
- F;t$$u
- t$(9t$,v
- |$(9|$$v
- \\$,9\\$$
- D$<#D$X
- I$(9\\$$
- FH9CHt
- D$\\C;\\$4
- f;FpuG
- F4;D$dt
- D$(;C8
- D$?:D$?
- t1F;t$
- D$X9D$,}
- M&8K&v;
- D$/8C&
- D$/8C%
- D$,}-h
- D$(9Xp
- |$(f9{z

- T$\\9T$X
- L$H9L$@
- PHf9V>
- D$H+D$X
- D$H+D$LP
- I$d+k(
- D$d+C$
- I$d+k,
- C;\\$(u
- !/dv\\
- C0`Bg]
- <[^_]`<C
- =hut&)
- g+pR^e

• Module 4 (probably unpacked / injected by the sample)

• Module 4 rich signatures

• Module 4 yara matches

- IsPE32 ()
- IsWindowsGUI ()
- HasDebugData (DebugData Check)
- IsBeyondImageSize (Data Beyond ImageSize Check)
- without_attachments (Rule to detect the no presence of any attachment)
- without_images (Rule to detect the no presence of any image)
- without_urls (Rule to detect the no presence of any url)

• Module 4 strings

• Module 4 most interesting strings

• Module 4 other strings

- @.reloc
- `.sdata
- !This program cannot be run in DOS mode.

• Module 5 (probably unpacked / injected by the sample)

• Module 5 rich signatures

• Module 5 yara matches

- IsPE32 ()
- IsWindowsGUI ()
- HasDebugData (DebugData Check)
- IsBeyondImageSize (Data Beyond ImageSize Check)
- without_attachments (Rule to detect the no presence of any attachment)
- without_images (Rule to detect the no presence of any image)

- without_urls (Rule to detect the no presence of any url)

• Module 5 strings

• Module 5 most interesting strings

• Module 5 other strings

- @.reloc
- `.sdata
- !This program cannot be run in DOS mode.